

Catalog  
Extract  
LV 10

Edition  
04/2022

SENTRON • SIVACON • ALPHA

# Low-Voltage Power Distribution and Electrical Installation Technology

Residual Current Protective Devices/  
Arc Fault Detection Devices (AFDDs)


[siemens.com/lowvoltage](https://www.siemens.com/lowvoltage)

# Innovative solutions for industrial controls and power distribution

In ensuring smooth operation of digital production environments and in the construction and operation of industrial or commercial buildings, the underlying power distribution and industrial controls are decisive:

SIRIUS, SENTRON, SIVACON and ALPHA provide a broad portfolio of systems and components for this purpose that can be used for standard-compliant, requirement-based electrification.

Efficient engineering tools and cloud-based solutions are part of the portfolio, which you can flexibly adapt to your specific requirements over the entire value-added process.

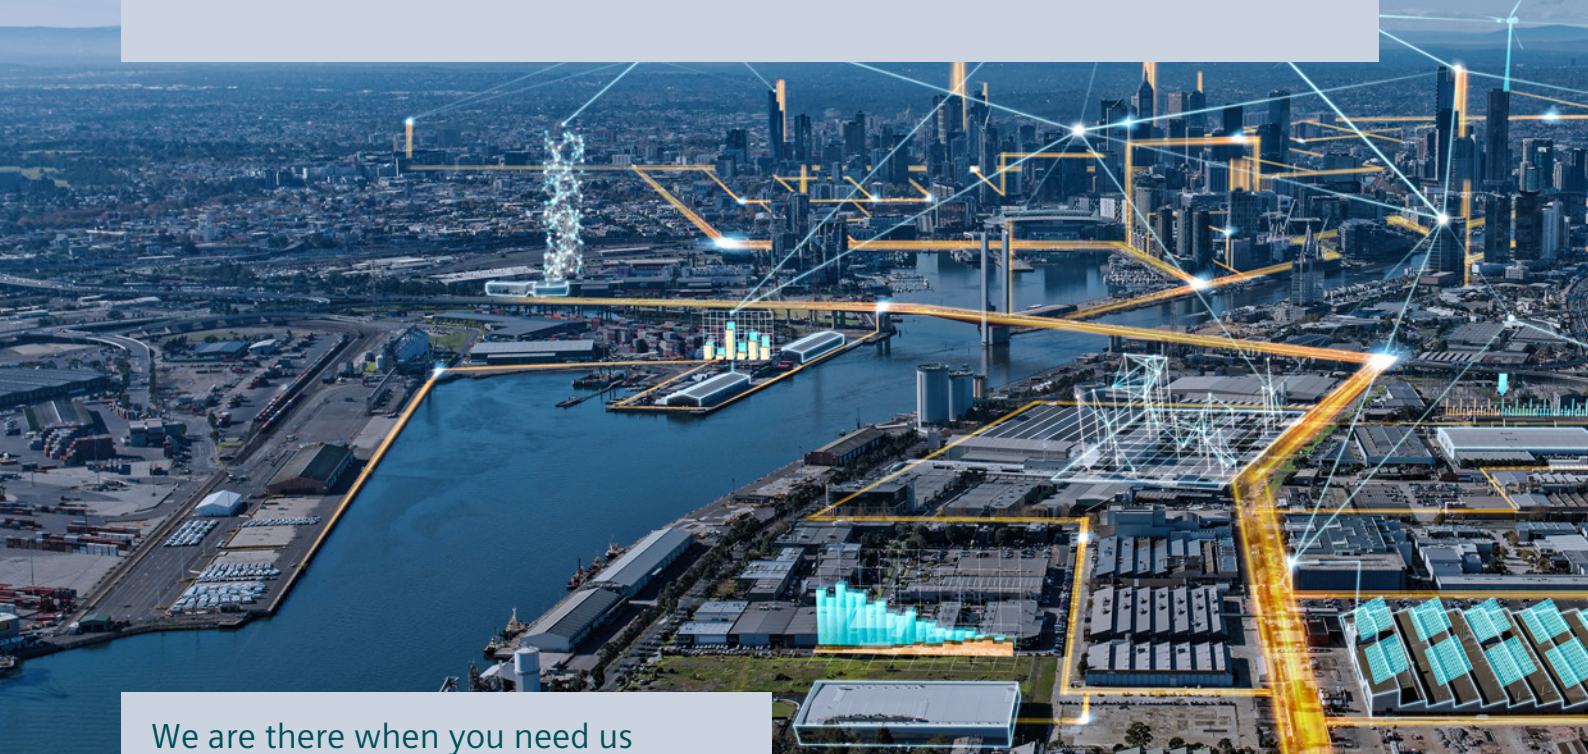

## We are there when you need us

Your personal contact can be found at  
[www.siemens.de/lowvoltage/kontakt](http://www.siemens.de/lowvoltage/kontakt)

## Catalog LV 10 · 04/2022

You will find the latest edition and all future editions in the Siemens Industry Online Support at  
[www.siemens.com/lowvoltage/catalogs](http://www.siemens.com/lowvoltage/catalogs)

Refer to the Industry Mall for current prices  
[www.siemens.de/lowvoltage/mall](http://www.siemens.de/lowvoltage/mall)



The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with EN ISO 9001 (for the Certified Registration Nos., see [www.siemens.com/system-certificates/ep](http://www.siemens.com/system-certificates/ep)). The certificate is recognized by all IQNet countries.

### Technical specifications

The technical specifications are for general information purposes only. Always heed the operating instructions and notices on individual products during assembly, operation and maintenance.

All illustrations are not binding.

# Low-Voltage Power Distribution and Electrical Installation Technology

	Introduction	1/2
Protecting	Air Circuit Breakers	1/1
	Molded Case Circuit Breakers	2/1
	Miniature Circuit Breakers	3/1
	<b>Residual Current Protective Devices/Arc Fault Detection Devices (AFDDs)</b>	<b>4/1</b>
	Switching Devices	5/1
	Overvoltage Protection Devices	6/1
	Fuse Systems	7/1
Protecting, Switching and Isolating	Switch Disconnectors	8/1
Switching and Isolating	Transfer Switching Equipment and Load Transfer Switches	9/1
Measuring and Monitoring	Measuring Devices, Power Monitoring and Digitalization Solutions	10/1
	Monitoring Devices	11/1
Distribution	Transformers, Power Supply Units and Socket Outlets	12/1
	Busbar Systems	13/1
	Terminal Blocks	14/1
	Power Distribution Boards, Motor Control Centers and Distribution Boards	15/1
	Busbar Trunking Systems	16/1
	System Cubicles, System Lighting and System Air-Conditioning	17/1
	Appendix	A/1

I

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

A



## More safety for humans, plants and assets

The number of electrical consumers in residential homes and commercial buildings has increased dramatically in recent decades.

Modern appliances often have quite different characteristics in terms of current consumption than earlier equipment due, for example, to the use of frequency converters in washing machines, or switched-mode power supply units in TVs, PCs or LED lights.

There are also decentralized power generators like photovoltaic systems or charging devices for electric vehicles.

All of this requires new protection strategies for electrical installations. This also includes appropriate residual current protection devices or residual current circuit breakers that will cut the current immediately and safely in the event of a fault.

# Residual Current Protective Devices/ Arc Fault Detection Devices (AFDDs)

All the information you need	4/2
System overview	4/4
Introduction	4/5
Quick selection guide	4/6
RCCBs	4/6
RC units	4/8
RCBOs	4/10
Arc fault detection devices (AFDD)	4/12
Basic units	4/14
5SV RCCBs, type A, F and AC	4/14
5SV3 RCCBs, type B and B+ (SIQUENCE)	4/26
5SM3 RCCBs, type A and AC	4/30
5SM2 RC units, type A, F and AC	4/32
5SU1 RCBOs, type A, F, AC, B and B+	4/38
5SV1 RCBOs (1 MW), type A, F and AC	4/50
5SM6 arc fault detection units	4/52
5SV6 arc fault detection devices (1 MW)	4/53
5SV6 COM AFDD/MCB with communication and measuring function	4/54
Accessories	4/56
Overview of modular system	4/56
Electrical accessories	4/58
Mechanical accessories	4/67
RCCB protective socket outlets	4/68
Standard busbars	4/70
Compact busbars	4/75

# A multitude of additional information ...

## Information + ordering

### All the important things at a glance

For information about residual current protective devices/arc fault detection devices, please visit our websites

[www.siemens.com/rccb](http://www.siemens.com/rccb)

[www.siemens.com/protection-concept](http://www.siemens.com/protection-concept)

### Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information

[www.siemens.com/lowvoltage/product-support](http://www.siemens.com/lowvoltage/product-support)

- Technical basic information
  - SENTRON protection concept (**109767456**)
- Technology primer
  - Residual current protective devices (**109482301**)

The relevant tender specifications can be found at [www.siemens.com/lowvoltage/tenderspecifications](http://www.siemens.com/lowvoltage/tenderspecifications)

Use our conversion tool for quick and easy conversion to Siemens products [www.siemens.com/conversion-tool](http://www.siemens.com/conversion-tool)

### Siemens YouTube channel

- Residual current protective devices (general)  
[bit.ly/2YuWkNc](https://bit.ly/2YuWkNc)

### Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Residual current protective devices/arc fault detection devices [sie.ag/2m55Y7j](http://sie.ag/2m55Y7j)

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number [www.siemens.com/product?Article No.](http://www.siemens.com/product?Article No.)

## The fast track to the experts

### Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at

[www.siemens.com/lowvoltage/components/contact](http://www.siemens.com/lowvoltage/components/contact)

You can find further information on services at [www.siemens.com/service-catalog](http://www.siemens.com/service-catalog)

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at [www.siemens.com/support-request](http://www.siemens.com/support-request)

# ... can be found in our online services

## Commissioning + operation

### Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information

[www.siemens.com/lowvoltage/product-support](http://www.siemens.com/lowvoltage/product-support)

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the [App Store](#) and [Play Store](#)

You will find further information under:

[www.siemens.com/support-app](http://www.siemens.com/support-app)

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall  
[www.siemens.com/lowvoltage/mall](http://www.siemens.com/lowvoltage/mall)
- Image database  
[www.siemens.com/lowvoltage/picturedb](http://www.siemens.com/lowvoltage/picturedb)

Engineering data for CAD or CAE systems are available in the CAx Download Manager at [www.siemens.com/cax](http://www.siemens.com/cax)

### Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at [www.siemens.com/lowvoltage/manuals](http://www.siemens.com/lowvoltage/manuals)

- Configuration manual
  - Residual current protective devices/arc fault detection devices (**45303255**)
- Installation manual
  - Circuit protection devices with communication and measuring function (**109791805**)
- System manual
  - Circuit protection devices with communication and measuring function (**109791806**)

### Face-to-face or online training

Our training courses can be found at [www.siemens.com/sitrain-lowvoltage](http://www.siemens.com/sitrain-lowvoltage)

- 5SM6/5SV6 arc fault detection devices (WT-LVBAFDD)
- SENTRON circuit protection devices with measuring and communication function (WT-LVB.COM)
- Basic principles of electrical engineering (WT-LVBGET)
- Protection concept (WT-LVBPC)

### Technical overview – Residual current protective devices/arc fault detection devices



#### The fast way to get you to our online services

This page provides you with comprehensive information and links on residual current protective devices/arc fault detection devices

[www.siemens.com/lowvoltage/product-support](http://www.siemens.com/lowvoltage/product-support) (**109769082**)

# System overview

## Basic devices and accessories

### Basic units



5SV3 RCCBs



5SM3 RCCBs



5SM2 RC units



5SU1 RCBOs



5SV1 RCBOs

5SM6 arc fault detection units and  
5SV6 AFDD/MCB and  
5SV6 COM AFDD/MCB

4

### Electrical accessories



Auxiliary switches (AS)

Fault signal contacts  
(FC)Auxiliary switches and  
fault signal contacts  
(AS+FC)/(AS+FC) COM

Shunt trips (ST)

Undervoltage releases  
(UR)Remote control  
mechanisms (RC)

### Mechanical accessories



Locking devices



Handle couplers



Touch protection



Wall enclosures

Molded-plastic  
enclosures

Terminal covers

### Busbars and accessories



Compact busbars



Standard busbars



Terminals



Touch protection



End caps

### RCCB protective socket outlets

In molded-plastic  
enclosureFor mounting  
on device box

#### Note:

You will find a detailed range of accessories with the basic units and in the Accessories section.



# Introduction

## Residual current protective devices

Selection criteria

**Equipment, power, ambient conditions**

### Design

RCCBs  
RCBOs  
RC units

### Number of pole

1P+N  
2P  
3P  
3P+N  
4P

### Rated current $I_n$

0.3 ... 125 A

### Types and waveform



Type AC		■	-	-	-	-	-
Type A		■	■	■	■	-	-
Type F		■	■	■	■	■	-
Type B		■	■	■	■	■	■
Type B+		■	■	■	■	■	■

### Version

SIGRES	With active condensation protection for use in severe ambient conditions
[G]/[K]	Super resistant, 10 ms short-term delayed devices with increased immunity to false triggering due to transient disruptions
[S]	As an upstream group switch for selective shutdown against downstream RCCBs
500 V	With their creepage distances and clearances designed for power grids up to 500 V alternating voltage
50 ... 400 Hz	Meet the triggering conditions up to 400 Hz due to low decrease in sensitivity with increasing frequency

**Protection objective, equipment directives**  
VDE 0100-410,  
VDE 0100-530,  
VDE 0100-7xx,  
VDS 3501,  
shutdown conditions according to VDE 0100-410

### Rated residual current $I_{\Delta n}$ (protection objective)

Additional protection  $I_{\Delta n} \leq 30$  mA  
Error protection  $I_{\Delta n} > 30$  mA  
Fire protection  $I_{\Delta n} \leq 300$  mA

### Characteristic CB (for residual current operated circuit breakers)

A  
B  
C  
D

# RCCBs



## 5SV

Types		Instantaneous	SIGRES, instantaneous	Short-time delayed [G]
Type AC		■	–	–
Type A		■	■	■
Type F		–	–	–
Type B/B+		–	–	–
<b>Surge current withstand capability 8/20 μs</b>				
Type A	kA		>1	>3
Type F	kA	–	–	>3
Type B/B+	kA	–	–	–
<b>Minimum operational voltage for test function operation</b>				
30-mA devices	V AC		195	
Non-30-mA devices	V AC		100	
24 V devices	V AC		20	
<b>Terminal conductor cross-sections</b>				
1 conductor	Solid/stranded	mm <sup>2</sup>	0.75 ... 35	
	Finely stranded with end sleeve	mm <sup>2</sup>	0.75 ... 25	
	Finely stranded without end sleeve	mm <sup>2</sup>	1 ... 35	
2 conductors, same cross-section, same conductor type	Solid/stranded	mm <sup>2</sup>	0.75 ... 10	
	Finely stranded with end sleeve	mm <sup>2</sup>	0.75 ... 4	
	Finely stranded without end sleeve	mm <sup>2</sup>	1 ... 4	
1 conductor + busbar (pin thickness 1.5 mm)	Solid/stranded	mm <sup>2</sup>	10 ... 25	
	Finely stranded with non-insulated end sleeve	mm <sup>2</sup>	6 ... 25	
	Finely stranded with insulated end sleeve	mm <sup>2</sup>	6 ... 16	
Terminal tightening torque	Nm		2.5... 3.5	
<b>Poles</b>				
Number of poles			1P+N   3P+N	
Rated voltage $U_n$	V AC		24 ... 125   230   400   500	
Operating frequency	Hz		50   50 ... 400   50/60	
<b>Standards</b>				
			IEC/EN 61008 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40), ÖVE EN 61008, ÖVE/ÖNORM E 8601	
Rated residual current $I_{\Delta n}$	mA		10, 30, 100, 300, 500, 1000	
Rated current $I_n$	A		16 ... 80	
Rated breaking capacity $I_{cn}$	kA		–	
Connection			N right   N left	
Service life	Average number of operating cycles		>10000	
Test button Test cycles			Half-yearly <sup>1)</sup>   SIGRES annually <sup>2)</sup>	
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, if the distribution board is installed, with connected conductors	
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe	
Temperatures	Storage temperature	°C	–40 ... +75 °C	
	Ambient temperature	°C	–25 ... +45, marked with	
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. air humidity)	
CFC and silicone-free			■	
Mains connection			Top   bottom   SIGRES on top only	
Overvoltage category   Pollution degree			III   2	
<b>More information</b>				

[See page 4/14](#)

<sup>1)</sup> Extension to annual test interval under certain conditions

<sup>2)</sup> Extension to four-yearly test interval under certain conditions



### 5SV

### SIQUENCE 5SV3

### 5SM3

Super resistant [K]	Selective [S]	SIGRES, selective [S]	SIGRES, super resistant [K]	SIGRES, selective [S]	Instantaneous	Selective [S]
–	–	–	–	–	■	■
■	■	■	–	–	■	■
■	■	–	–	–	–	–
–	–	–	■	■	–	–
>3		>5	–	–	>1	>5
>3	–	–	–	–	–	–
–	–	–	>3	>5	–	–
	195		70		195	
	100		70		195	
	20		–		–	
	0.75 ... 35		0.75 ... 35		1.5 ... 50 (2 MW)   2.5 ... 50 (4 MW)	
	0.75 ... 25		0.75 ... 25		–	
	1 ... 35		1 ... 35		–	
	0.75 ... 10		0.75 ... 10		–	
	0.75 ... 4		0.75 ... 4		–	
	1 ... 4		1 ... 4		–	
	10 ... 25		0.75 ... 35		–	
	6 ... 25		0.75 ... 25		–	
	6 ... 16		1 ... 35		–	
	2.5... 3.5		2.5 ... 3.0		3.0... 3.5	
	1P+N   3P+N		1P+N   3P+N		1P+N   3P+N	
	24 ... 125   230   400   500		230   400		230   400	
	50/60		50/60		50	
	IEC/EN 61008 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40), ÖVE EN 61008, ÖVE/ÖNORM E 8601		IEC/EN 62423 (VDE 0664-40), IEC/EN 61543 (VDE 0664-30), DIN VDE 0664-40 (Type B+ only)		IEC/EN 61008-1 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)	
	10, 30, 100, 300, 500, 1000		30, 300, 500		30, 100, 300, 500	
	16 ... 80		16 ... 80		100 ... 125	
	–		–		–	
	N right   N left		N right		N right	
	>10000		>10000		>10000	
	Half-yearly <sup>1)</sup>   SIGRES annually <sup>2)</sup>		Annually <sup>2)</sup>		Half-yearly	
	IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors	
	Finger and back-of-hand safe		Finger and back-of-hand safe		Finger and back-of-hand safe	
	-40 ... +75 °C		-40 ... +75 °C		-40 ... +75 °C	
	-25 ... +45, marked with		-25 ... +45, marked with		-25 ... +45, marked with	
	28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)	
	■		■		■	
	Top   bottom   SIGRES on top only		Top   bottom   SIGRES on top only		Top   bottom	
	III   2		III   2		III   2	
	<a href="#">See page 4/14</a>		<a href="#">See page 4/26</a>		<a href="#">See page 4/30</a>	

# RC units



## 5SM2 (0.3 ... 63 A)

Types		Instantaneous
Type AC		■
Type A		■
Type F		–
Surge current withstand capability 8/20 μs		
Type A	kA	>1
Type F	kA	–
Minimum operational voltage for test equipment		
30-mA devices	V AC	195
Non-30-mA devices	V AC	100
Terminal conductor cross-sections		
Solid/stranded	mm <sup>2</sup>	1.0 ... 25
Terminal tightening torque	Nm	2.5 ... 3.0
Poles		
Number of poles		2P   3P   4P
Rated voltage $U_n$	V AC	230   400
Operating frequency	Hz	50   50/60
Standards		
		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)
Rated residual current $I_{\Delta n}$	mA	10, 30, 100, 300, 500, 1000
Rated current $I_n$	A	0.3 ... 63
Service life	Average number of operating cycles	>10000
Test button Test cycles		Half-yearly <sup>1)</sup>
Degree of protection	Acc. to EN 60529 (VDE 0470-1)	IP20, if the distribution board is installed, with connected conductors
Touch protection	Acc. to EN 50274 (VDE 0660-514)	Finger and back-of-hand safe
Temperatures	Storage temperature	–40 ... +75 °C
	Ambient temperature	–25 ... +45, marked with
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles (55 °C; 95% rel. air humidity)
CFC and silicone-free		■
Mains connection		Top   bottom
Overvoltage category   Pollution degree		III   2

See page 4/32

<sup>1)</sup> Extension to annual test interval under certain conditions

<sup>2)</sup> Extension to four-yearly test interval under certain conditions



### 5SM2 (0.3 ... 63 A)

### 5SM2 (80 ... 100 A)

Super resistant [K]	Selective [S]	SIGRES, instantaneous <span style="background-color: #ff9900; color: white; padding: 2px;">new</span>	Instantaneous	Selective [S]
■	■	–	■	■
■	■	■	■	■
■	–	–	–	–
>3	>5	>1	>1	>5
>3	–	–	–	–
	195		195	
	100		100	
	1.0 ... 25		6.0 ... 50	
	2.5 ... 3.0		2.5 ... 3.0	
2P   3P   4P		4P		2P   4P
	230   400			230   400
	50   50/60			50   50/60
IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		
30	300, 500, 1000	30, 300	30, 300	300, 1000
	0.3 ... 63			80 ... 100
	>10000			>10000
	Half-yearly <sup>1)</sup>			Half-yearly <sup>1)</sup>
IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors		
Finger and back-of-hand safe		Finger and back-of-hand safe		
-40 ... +75 °C		-40 ... +75 °C		
-25 ... +45, marked with		-25 ... +45, marked with		
28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)		
	■			■
	Top   bottom			Top   bottom
	III   2			III   2
<a href="#">See page 4/32</a>		<a href="#">See page 4/32</a>		

# RCBOs



## 5SU1 (up to 40 A)

Types		Instantaneous	Short-time delayed/ Super resistant	Selective [S]
Type AC		■	■	–
Type A		■	■	■
Type B		–	–	–
Type B+		–	–	–
Type F		–	■	–
<b>Surge current withstand capability 8/20 μs</b>				
Type A	kA	>1	>3	>5
Type F	kA	–	>3	–
<b>Minimum voltage for operation of the test equipment</b>				
30-mA devices	AC V		195	
Non-30-mA devices	AC V		100	
<b>Terminal conductor cross-sections</b>				
1 conductor at front + busbar at rear	Solid/stranded	mm <sup>2</sup>		0.75 ... 35
	Finely stranded with end sleeve	mm <sup>2</sup>		0.75 ... 25
	Finely stranded without end sleeve	mm <sup>2</sup>		1 ... 25
2 conductors at rear	Solid/stranded	mm <sup>2</sup>		0.75 ... 6
	Finely stranded with non-insulated end sleeve	mm <sup>2</sup>		0.75 ... 4
	Finely stranded with insulated end sleeve	mm <sup>2</sup>		0.75 ... 4
	Finely stranded without end sleeve	mm <sup>2</sup>		1 ... 4
Terminal tightening torque		Nm		2.5 ... 3.0
<b>Poles</b>				
Number of poles				1P+N   2P
Rated voltage $U_n$	AC V			110   230
Operating frequency	Hz			50   50/60
<b>Standards</b>				
IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)				
Rated residual current $I_{\Delta n}$	mA			10, 30, 100, 300
Rated current $I_n$	A			6 ... 40
Rated breaking capacity $I_{cn}$	kA			4.5   6   10
Connection				N right   N left
Service life	Average number of operating cycles			>10000
Test button Test cycles				Half-yearly <sup>1)</sup>
Degree of protection	Acc. to EN 60529 (VDE 0470-1)			IP20, if the distribution board is installed, with connected conductors
Touch protection	Acc. to EN 50274 (VDE 0660-514)			Finger and back-of-hand safe
Temperatures	Storage temperature	°C		-40 ... +75 °C
	Ambient temperature	°C		-25 ... +45, marked with
Resistance to climate	Acc. to IEC 60068-2-30			28 cycles (55 °C; 95% rel. air humidity)
CFC and silicone-free				■
Mains connection				Top   bottom
Energy limitation class				3
Overvoltage category   Pollution degree				III   2


See page 4/42

<sup>1)</sup> Extension to annual test interval under certain conditions



5SV1		5SU1 (up to 32 A)		5SU1 (125 A)		5SU1 (100 A, 125 A)	
Instantaneous	Short-time delayed/ Super resistant	Instantaneous	Short-time delayed/ Super resistant	Instantaneous	Short-time delayed/ Super resistant	Short-time delayed/ Super resistant	Selective [S]
■	-	-	-	■	■	-	-
■	■	■	■	■	■	-	-
-	-	-	-	-	-	■	■
-	-	-	-	-	-	■	■
-	■	-	-	-	-	-	-
>1	>3	>0.25	>3	>1	>3	>3	>5
-	>3	-	-	-	-	-	-
195		2P, 4P: 195 V   3P: 340 V		195		195	
100		2P, 4P: 195 V   3P: 340 V		100		100	
0.75 ... 16		1 ... 35		25 ... 50		20 ... 50	
0.75 ... 10		1 ... 35		25 ... 35		25 ... 35	
0.75 ... 16		-		-		-	
0.75 ... 4		-		-		-	
0.75 ... 2.5		-		-		-	
0.75 ... 1.5		-		-		-	
0.75 ... 4		-		-		-	
1.2 ... 2.0		2.0		3.0 ... 3.5		3.0 ... 3.5	
1P+N		2P   3P   4P		2P   4P		4P	
230		230 V   400 V		230   400		400   430	
50   50/60		50   50/60		50   50/60		50/60	
IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)	
30, 300		30, 300		30, 300, 1000		30, 300	
2 ... 16		6 ... 32		125		100, 125	
4.5   6		6   10		10		10	
N right		-		N right   N left		N right   N left	
>10 000		>10000		>10000		>10000	
Half-yearly <sup>1)</sup>		Monthly		Half-yearly <sup>1)</sup>		Half-yearly <sup>1)</sup>	
IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors	
Finger and back-of-hand safe		Finger and back-of-hand safe		Finger and back-of-hand safe		Finger and back-of-hand safe	
-40 ... +75 °C		-40 ... +70 °C		-40 ... +75 °C		-40 ... +75 °C	
-25 ... +45, marked with		-25 ... +40, marked with		-25 ... +45, marked with		-25 ... +45, marked with	
28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)	
■		-		■		■	
Top   bottom		Top   bottom		Top   bottom		Top   bottom	
3		3   1		3		3	
III   2		III   3		III   2		III   2	
See page 4/50		See page 4/44		See page 4/42		See page 4/49	

# Arc fault detection devices (AFDDs)

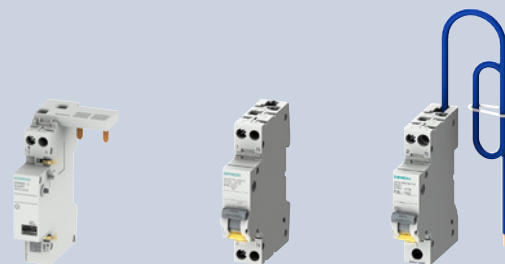

5SM6

5SV6

5SV6...KP..





Poles			5SM6	5SV6	5SV6...KP..
Number of poles			2P	1P+N	1P+N
Rated voltage $U_n$	V AC		230	230	230
Operating frequency	Hz		50	50	50
Terminal conductor cross-sections					
Solid and stranded	mm <sup>2</sup>		0.75 ... 16	0.75 ... 16	0.75 ... 16 (top) 0.75 ... 35 (bottom)
Finely stranded with end sleeve	mm <sup>2</sup>		0.75 ... 10	0.75 ... 10	0.75 ... 10 (top) 0.75 ... 25 (bottom)
Terminal tightening torque	Nm		2.0 ... 2.5	1.2 ... 2.0	1.2 ... 2.0 (top) 2.5 ... 3.5 (bottom)
Standards					
			IEC/EN 62606	IEC/EN 62606	IEC/EN 62606
Rated current $I_n$	A		Up to 16/40 A	6 ... 40	6 ... 40
Service life	Average number of operating cycles		>10000	>10000	>10000
Mounting position			Any	Any	Any
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, with connected conductors	IP20, with connected conductors	IP20, with connected conductors
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe	Finger and back-of-hand safe	Finger and back-of-hand safe
Temperatures	Storage temperature	°C	-40 ... +75 °C	-40 ... +75 °C	-40 ... +75 °C
	Ambient temperature	°C	-25 ... +45, marked with	-25 ... +45, marked with	-25 ... +45, marked with
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. air humidity)	28 cycles (55 °C; 95% rel. air humidity)	28 cycles (55 °C; 95% rel. air humidity)
CFC and silicone-free			■	■	■
Mains connection			Bottom	Top   bottom	Bottom
Overvoltage category   Pollution degree			III   2	III   2	III   2
Tripping in the event of overvoltage	V		>275	>285	>285
Additional functions					
Communication and measuring function			–	■	–
More information					
			See page 4/52	See page 4/53 und page 4/54	See page 4/53





# 5SV RCCBs

## Type A, 1P+N (2 MW)


N connection	Instantaneous		Instantaneous (only available in Belgium) <sup>2)</sup>	
	24 ... 125 V AC	230 V AC	230 V AC	230 V AC
	Right	Right	Left	Right
				

$I_{\Delta n}$	$I_n$	Thermal overload protection <sup>1)</sup>	Bulk packaging (36 units)				
<b>Type A</b>							
10 mA	16 A	–	–	–	5SV3111-6	5SV3111-6KL	–
	25 A	–	–	–	5SV3112-6 <b>new</b>	–	–
30 mA	16 A	–	–	–	5SV3311-6KK13	5SV3311-6	5SV3311-6KL
		–	■	–	–	5SV3311-6GV01	–
25 A	–	–	–	–	5SV3312-6KK13	5SV3312-6	5SV3312-6KL
	–	–	■	–	–	5SV3312-6GV01	–
40 A	–	–	–	–	5SV3314-6KK13	5SV3314-6	5SV3314-6KL
	–	–	■	–	–	5SV3314-6GV01	–
63 A	–	–	–	–	–	5SV3314-6LA	–
	–	■	–	–	5SV3314-6LA	–	–
80 A	–	–	–	–	5SV3316-6KK13	5SV3316-6	5SV3316-6KL
	–	–	–	–	–	5SV3316-6	5SV3316-6KL
100 mA	25 A	–	–	–	5SV3317-6	5SV3317-6	5SV3317-6KL
	40 A	–	–	–	5SV3412-6	5SV3412-6	5SV3412-6KL
	63 A	–	–	–	5SV3414-6	5SV3414-6	5SV3414-6KL
	80 A	–	–	–	5SV3416-6	5SV3416-6	5SV3416-6KL
300 mA	25 A	–	–	–	5SV3417-6	5SV3417-6	5SV3417-6KL
	40 A	–	–	–	5SV3612-6	5SV3612-6	5SV3612-6KL
	63 A	–	–	–	5SV3614-6	5SV3614-6	5SV3614-6KL
	80 A	–	–	–	5SV3616-6	5SV3616-6	5SV3616-6KL
					5SV3617-6	5SV3617-6	5SV3617-6KL

<sup>1)</sup> Thermal overload protection according to OVE E 8101 possible up to rated current of the RCCB (40 A, 63 A).

<sup>2)</sup> These products cannot be used in France according to NF C 15-100. Product complies with the specifications of the Belgian market only. (Simultaneous tripping of the 3 poles and the N conductor.) Available for the export market only.

## Mounting concept

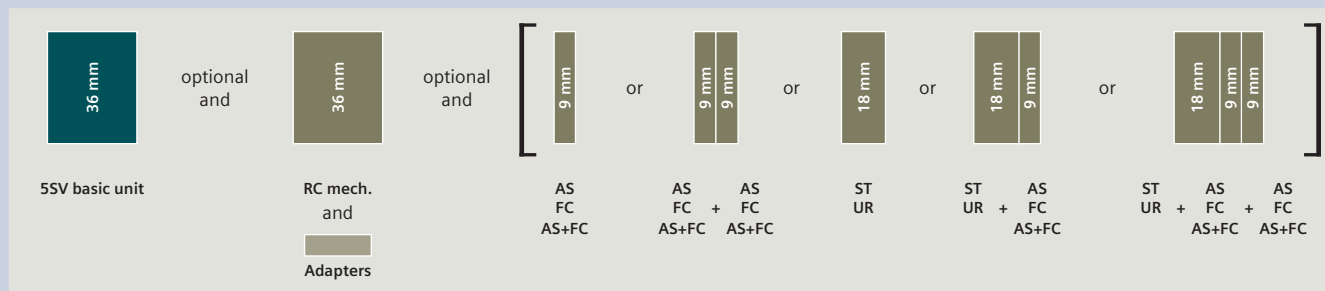

AS	Auxiliary switch	<a href="#">See page 4/58</a>
FC	Fault signal contact	<a href="#">See page 4/60</a>
AS+FC	Auxiliary switch and fault signal contact	<a href="#">See page 4/61</a>
ST	Shunt trips	<a href="#">See page 4/64</a>
UR	Undervoltage release	<a href="#">See page 4/65</a>
RC mech.	Remote control mechanism	<a href="#">See page 4/66</a>



SIGRES, instantaneous	Short-time delayed [G]	Super resistant [K]	Selective [S]	
230 V AC	230 V AC	230 V AC	230 V AC	
Right	Right	Right	Right	Left
				
-	-	-	-	-
-	-	-	-	-
5SV3311-6KK12	-	-	-	-
-	-	-	-	-
5SV3312-6KK12	-	5SV3312-6KK01	-	-
-	-	-	-	-
5SV3314-6KK12	-	5SV3314-6KK01	-	-
-	-	-	-	-
-	5SV3314-6LA01	-	-	-
5SV3316-6KK12	-	5SV3316-6KK01	-	-
-	-	5SV3317-6KK01	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	5SV3416-8	-
-	-	-	-	-
-	-	5SV3612-6KK01	5SV3612-8	-
-	-	5SV3614-6KK01	5SV3614-8	5SV3614-8KL
-	-	5SV3616-6KK01	5SV3616-8	5SV3616-8KL
-	-	5SV3617-6KK01	5SV3617-8	-

## Accessories


Auxiliary switches (AS)			Shunt trips (ST)		
		Article No.			Article No.
1 NO + 1 NC	Standard	5ST3010	110 ... 415 V AC, 110 ... 220 V DC		5ST3030
	For low power	5ST3013	24 ... 48 V AC/DC		5ST3031
	For low power (with diode)	5ST3013-0XX01	12 V DC		5ST3031-0XX01
2 NO	Standard	5ST3011	<b>Undervoltage releases (UR)</b>		
	For low power	5ST3014	With integrated auxiliary switch		Article No.
2 NC	Standard	5ST3012	230 V AC		5ST3040
	For low power	5ST3015	110 V DC		5ST3041
1 CO	Standard	5ST3016	24 V DC		5ST3042
			Without integrated auxiliary switch	230 V AC	
<b>Fault signal contacts (FC)</b>			110 V DC		5ST3044
1 NO + 1 NC		5ST3020	24 V DC		5ST3045
2 NO		5ST3021	<b>Remote control mechanisms (RC)</b>		
2 NC		5ST3022	Power		Article No.
<b>Auxiliary switches and fault signal contacts (AS+FC)</b>			12 ... 30 V AC, 12 ... 48 V DC		5ST3055
1 CO (AS) + 1 CO (FC)		5ST3062	177 ... 270 V AC		5ST3056
5ST3 COM (AS+FC)		5ST3062-0MC	Power with ARD		Article No.
			12 ... 30 V AC, 12 ... 48 V DC		5ST3057
			177 ... 270 V AC		5ST3058
			Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
			170 ... 277 V AC, 77 ... 286 V DC		5ST3071 <b>new</b>
<b>Adapters for remote control mechanisms (RC mech.)</b>			2 MW		Article No.
					5ST3820-6

# 5SV RCCBs

Type F, 1P+N (2 MW)

	N connection		Super resistant [K] 230 V AC	Selective [S] 230 V AC
	Right		Right	Right
				
$I_{\Delta n}$	$I_n$			
Type F				
30 mA	25 A	5SV3312-3	–	–
	40 A	5SV3314-3	–	–
	63 A	5SV3316-3	–	–
	80 A	5SV3317-3	–	–
300 mA	25 A	5SV3612-3	–	–
	40 A	5SV3614-3	5SV3614-7	–
	63 A	5SV3616-3	–	–
	80 A	5SV3617-3	5SV3617-7	–

## Mounting concept

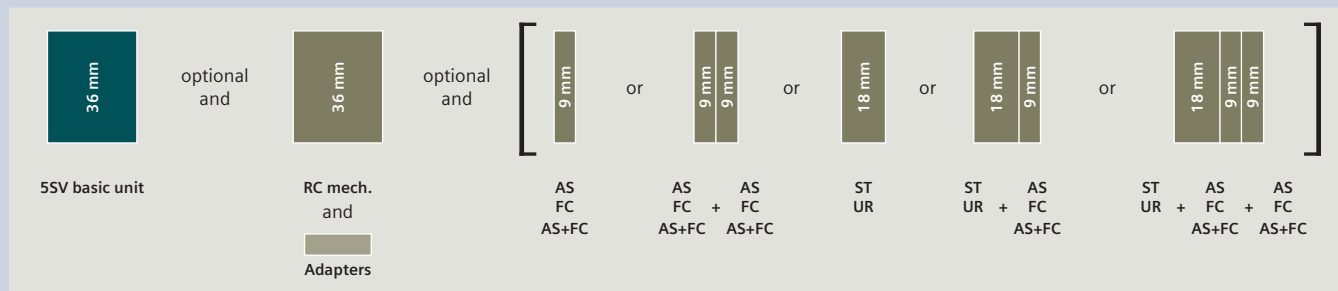

AS	Auxiliary switch	<a href="#">See page 4/58</a>
FC	Fault signal contact	<a href="#">See page 4/60</a>
AS+FC	Auxiliary switch and fault signal contact	<a href="#">See page 4/61</a>
ST	Shunt trips	<a href="#">See page 4/64</a>
UR	Undervoltage release	<a href="#">See page 4/65</a>
RC mech.	Remote control mechanism	<a href="#">See page 4/66</a>

## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
2 MW		5ST3820-6


# 5SV RCCBs

Type AC, 1P+N (2 MW)



$I_{\Delta n}$	$I_n$	Bulk packaging (36 units)	Right	Left	Right
<b>Type AC</b>					
10 mA	16 A	–	5SV4111-0	5SV4111-0KL	–
	25 A	–	5SV4112-0 <b>new</b>	–	–
30 mA	16 A	–	5SV4311-0	5SV4311-0KL	5SV4311-0KK13
	25 A	–	5SV4312-0	5SV4312-0KL	5SV4312-0KK13
		■	5SV4312-0GV01	–	–
	40 A	–	5SV4314-0	5SV4314-0KL	5SV4314-0KK13
		■	5SV4314-0GV01	5SV4314-0GV02	–
	63 A	–	5SV4316-0	5SV4316-0KL	5SV4316-0KK13
100 mA	80 A	–	5SV4317-0	5SV4317-0KL	–
	25 A	–	5SV4412-0	–	–
	40 A	–	5SV4414-0	5SV4414-0KL	–
	63 A	–	5SV4416-0	5SV4416-0KL	–
300 mA	80 A	–	5SV4417-0	–	–
	25 A	–	5SV4612-0	5SV4612-0KL	–
	40 A	–	5SV4614-0	5SV4614-0KL	–
	63 A	–	5SV4616-0	5SV4616-0KL	–
	80 A	–	5SV4617-0	5SV4617-0KL	–

## Mounting concept

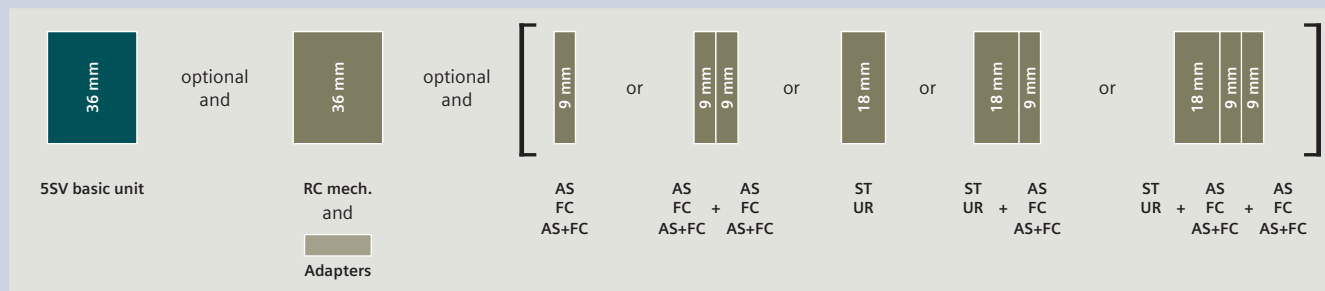

AS	Auxiliary switch	<a href="#">See page 4/58</a>
FC	Fault signal contact	<a href="#">See page 4/60</a>
AS+FC	Auxiliary switch and fault signal contact	<a href="#">See page 4/61</a>
ST	Shunt trips	<a href="#">See page 4/64</a>
UR	Undervoltage release	<a href="#">See page 4/65</a>
RC mech.	Remote control mechanism	<a href="#">See page 4/66</a>


## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
2 MW		5ST3820-6

# 5SV RCCBs

## Type A, 3P+N (4 MW)

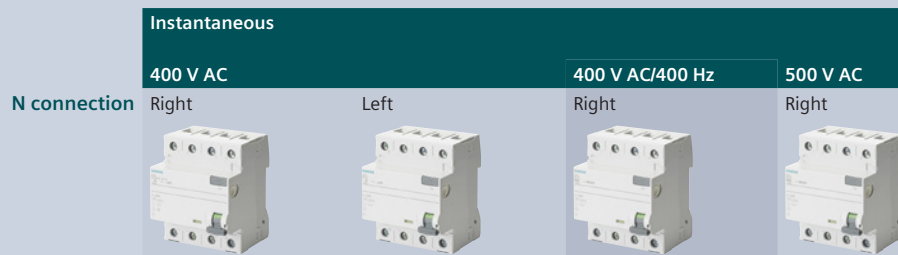


$I_{\Delta n}$	$I_n$	Thermal overload protection <sup>1)</sup>	Bulk packaging (18 units)	Instantaneous				
				400 V AC		400 V AC/400 Hz	500 V AC	
				Right	Left	Right	Right	
Type A	30 mA	25 A	–	5SV3342-6	5SV3342-6KL	5SV3342-6KK03	5SV3352-6	
		–	■	5SV3342-6GV01	–	–	–	
	40 A	–	–	5SV3344-6	5SV3344-6KL	5SV3344-6KK03	5SV3354-6	
		–	■	5SV3344-6GV01	5SV3344-6GV02	–	–	
		–	–	5SV3344-6LA	–	–	–	
	63 A	–	–	5SV3346-6	5SV3346-6KL	–	5SV3356-6	
		–	■	5SV3346-6GV01	–	–	–	
		–	–	5SV3346-6LA	–	–	–	
	100 mA	80 A	–	–	5SV3347-6	5SV3347-6KL	–	5SV3357-6
		25 A	–	–	5SV3442-6	–	–	–
–			–	5SV3444-6	–	–	–	
40 A		–	–	5SV3444-6LA	–	–	–	
		–	–	5SV3446-6	–	–	–	
300 mA	25 A	–	–	5SV3642-6	5SV3642-6KL	–	5SV3652-6	
		–	–	5SV3644-6	5SV3644-6KL	–	5SV3654-6	
	40 A	–	–	–	–	–	–	
		–	–	–	–	–	–	
	63 A	–	–	5SV3646-6	5SV3646-6KL	–	5SV3656-6	
500 mA	80 A	–	–	5SV3647-6	5SV3647-6KL	–	5SV3657-6	
		–	–	5SV3742-6	–	–	–	
	40 A	–	–	5SV3744-6	–	–	–	
		–	–	5SV3746-6	5SV3746-6KL	–	–	
1000 mA	63 A	–	–	5SV3746-6GV01	–	–	–	
		–	–	5SV3747-6	–	–	–	
	80 A	–	–	–	–	–	–	

<sup>1)</sup> Thermal overload protection according to OVE E 8101 possible up to rated current of the RCCB (40 A, 63 A).

<sup>2)</sup> These products cannot be used in France according to NF C 15-100. Product complies with the specifications of the Belgian market only. (Simultaneous tripping of the 3 poles and the N conductor.) Available for the export market only.

## Mounting concept

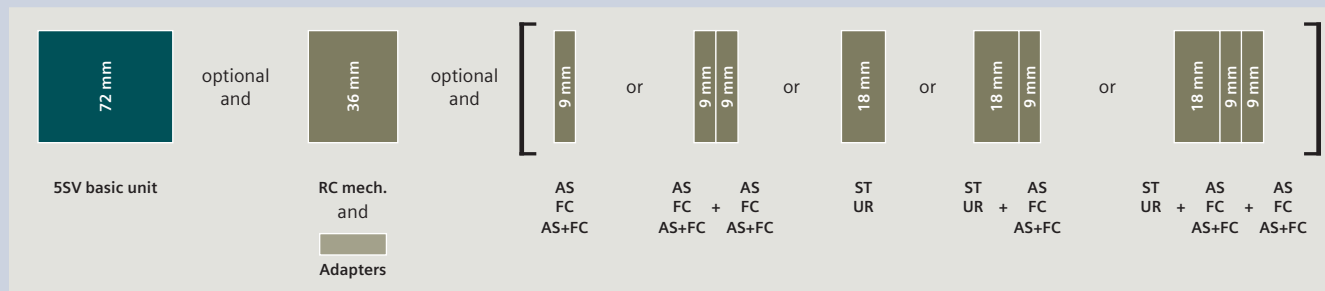








AS Auxiliary switch  
 FC Fault signal contact  
 AS+FC Auxiliary switch and fault signal contact

See page 4/58  
 See page 4/60  
 See page 4/61

ST Shunt trips  
 UR Undervoltage release  
 RC mech. Remote control mechanism

See page 4/64  
 See page 4/65  
 See page 4/66



Instantaneous (only available in Belgium) <sup>2)</sup> 400 V AC	SIGRES, instantaneous 400 V AC	Short-time delayed [G] 400 V AC	Super resistant [K] 400 V AC	Selective [S] 400 V AC		SIGRES, selective [S] 400 V AC
Right	Right	Right	Right	Right	Left	Right
						
5SV3342-6BA	5SV3342-6KK12	–	5SV3342-6KK01	–	–	–
–	–	–	–	–	–	–
5SV3344-6BA	5SV3344-6KK12	5SV3344-6LB01	5SV3344-6KK01	–	–	–
–	–	–	–	–	–	–
–	–	5SV3344-6LA01	–	–	–	–
5SV3346-6BA	5SV3346-6KK12	5SV3346-6LB01	5SV3346-6KK01	–	–	–
–	–	–	–	–	–	–
–	–	5SV3346-6LA01	–	–	–	–
–	5SV3347-6KK12	5SV3347-6LB01	5SV3347-6KK01	–	–	–
–	–	–	–	–	–	–
–	–	5SV3444-6LB01	–	5SV3444-8	–	–
–	–	5SV3444-6LA01	–	5SV3444-8LA	–	–
–	–	5SV3446-6LB01	–	5SV3446-8	–	–
–	–	5SV3446-6LA01	–	5SV3446-8LA	–	–
–	–	–	–	–	–	–
5SV3642-6BA	5SV3642-6KK12	–	5SV3642-6KK01	5SV3642-8	–	–
5SV3644-6BA	5SV3644-6KK12	–	5SV3644-6KK01	5SV3644-8	–	–
–	–	–	–	5SV3644-8LA	–	–
5SV3646-6BA	5SV3646-6KK12	–	5SV3646-6KK01	5SV3646-8	5SV3646-8KL	5SV3646-8KK12
–	–	–	–	5SV3646-8LA	–	–
–	5SV3647-6KK12	–	5SV3647-6KK01	5SV3647-8	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	5SV3846-8	–	–



## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
4 MW		5ST3820-6


# 5SV RCCBs

Type F, 3P+N (4 MW)

N connection	Super resistant [K] 400 V AC	Selective [S] 400 V AC
	Right	Right
		

$I_{\Delta n}$	$I_n$		
Type F			
30 mA	25 A	5SV3342-3	–
	40 A	5SV3344-3	–
	63 A	5SV3346-3	–
	80 A	5SV3347-3	–
300 mA	25 A	5SV3642-3	–
	40 A	5SV3644-3	5SV3644-7
	63 A	5SV3646-3	–
	80 A	5SV3647-3	5SV3647-7

## Mounting concept

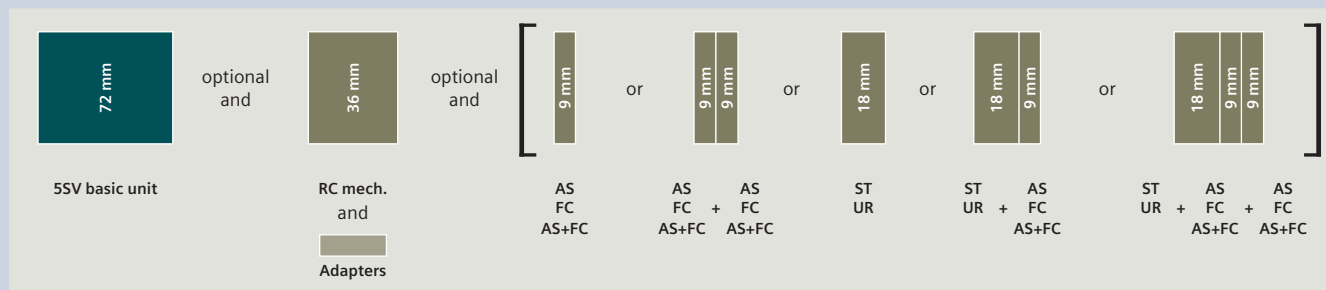

AS	Auxiliary switch	<a href="#">See page 4/58</a>
FC	Fault signal contact	<a href="#">See page 4/60</a>
AS+FC	Auxiliary switch and fault signal contact	<a href="#">See page 4/61</a>
ST	Shunt trips	<a href="#">See page 4/64</a>
UR	Undervoltage release	<a href="#">See page 4/65</a>
RC mech.	Remote control mechanism	<a href="#">See page 4/66</a>

## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
4 MW		5ST3820-6

# 5SV RCCBs

Type AC, 3P+N (4 MW)

Instantaneous  
400 V AC

N connection


Right

Left



$I_{\Delta n}$	$I_n$	Bulk packaging (18 units)		
<b>Type AC</b>				
30 mA	25 A	–	5SV4342-0	5SV4342-0KL
		■	5SV4342-0GV01	–
	40 A	–	5SV4344-0	5SV4344-0KL
		■	5SV4344-0GV01	–
		–	5SV4346-0	5SV4346-0KL
100 mA	80 A	–	5SV4347-0	5SV4347-0KL
	25 A	–	5SV4442-0	–
		–	5SV4444-0	–
		–	5SV4446-0	–
–		5SV4447-0	–	
300 mA	25 A	–	5SV4642-0	5SV4642-0KL
		–	5SV4644-0	5SV4644-0KL
		–	5SV4646-0	5SV4646-0KL
		–	5SV4647-0	5SV4647-0KL
500 mA	25 A	–	5SV4742-0	–
		–	5SV4744-0	–
		–	5SV4746-0	–
		–	5SV4747-0	–

## Mounting concept

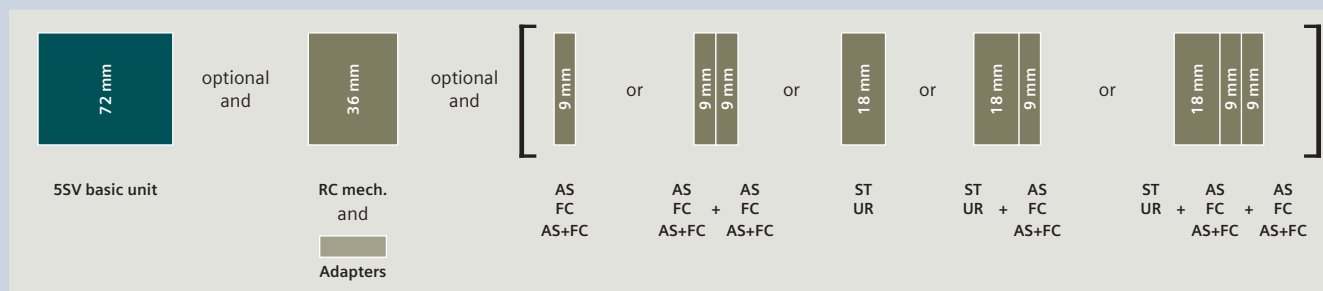

AS	Auxiliary switch	<a href="#">See page 4/58</a>
FC	Fault signal contact	<a href="#">See page 4/60</a>
AS+FC	Auxiliary switch and fault signal contact	<a href="#">See page 4/61</a>
ST	Shunt trips	<a href="#">See page 4/64</a>
UR	Undervoltage release	<a href="#">See page 4/65</a>
RC mech.	Remote control mechanism	<a href="#">See page 4/66</a>

## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-OXX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-OXX01
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
4 MW		5ST3820-6

# 5SV3 RCCBs (SIQUENCE)


Type B, 1P+N (4 MW)

SIGRES, super resistant [K]  
230 V AC  
N connection Right



$I_{\Delta n}$	$I_n$	Bulk packaging (18 units)	
<b>Type B</b>			
30 mA	16 A	–	5SV3321-4
	25 A	–	5SV3322-4
	40 A	–	5SV3324-4
		■	5SV3324-4GV01
	63 A	–	5SV3326-4
300 mA	16 A	–	5SV3621-4
	25 A	–	5SV3622-4
	40 A	–	5SV3624-4
	63 A	–	5SV3626-4

## Mounting concept

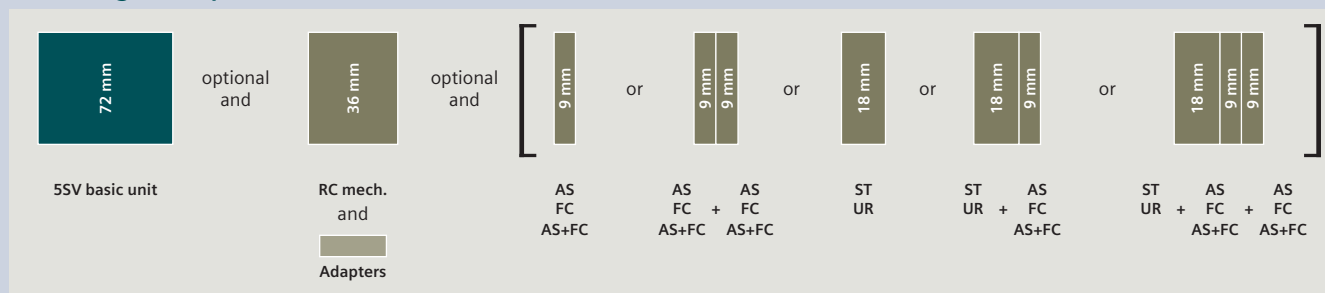

AS	Auxiliary switch	<a href="#">See page 4/58</a>
FC	Fault signal contact	<a href="#">See page 4/60</a>
AS+FC	Auxiliary switch and fault signal contact	<a href="#">See page 4/61</a>
ST	Shunt trips	<a href="#">See page 4/64</a>
UR	Undervoltage release	<a href="#">See page 4/65</a>
RC mech.	Remote control mechanism	<a href="#">See page 4/66</a>


## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
4 MW		5ST3820-6


# 5SV3 RCCBs (SIQUENCE)

Type B and B+, 3P+N (4 MW)

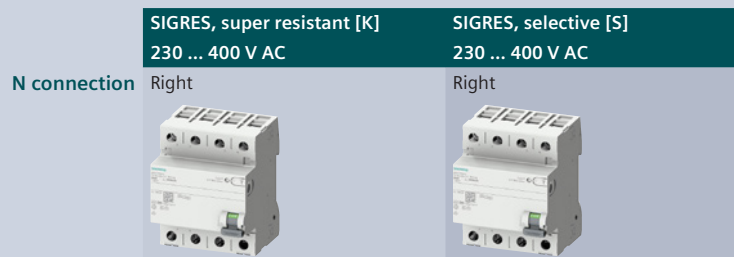

$I_{\Delta n}$	$I_n$	Bulk packaging (18 units)		
<b>Type B</b>				
30 mA	25 A	–	5SV3342-4	–
		■	5SV3342-4GV01	–
	40 A	–	5SV3344-4	–
		■	5SV3344-4GV01	–
	63 A	–	5SV3346-4	–
		■	5SV3346-4GV01	–
	80 A	–	5SV3347-4	–
300 mA	25 A	–	5SV3642-4	–
		■	5SV3642-4GV01	–
	40 A	–	5SV3644-4	–
		■	5SV3644-4GV01	–
	63 A	–	5SV3646-4	5SV3646-5
		■	5SV3646-4GV01	–
	80 A	–	5SV3647-4	5SV3647-5
500 mA	25 A	–	5SV3742-4	–
	40 A	–	5SV3744-4	–
	63 A	–	5SV3746-4	5SV3746-5
	80 A	–	5SV3747-4	5SV3747-5
	<b>Type B+</b>			
30 mA	25 A	–	5SV3342-4KK14	–
	40 A	–	5SV3344-4KK14	–
	63 A	–	5SV3346-4KK14	–
	80 A	–	5SV3347-4KK14	–
300 mA	25 A	–	5SV3642-4KK14	–
	40 A	–	5SV3644-4KK14	–
	63 A	–	5SV3646-4KK14	5SV3646-5KK14
	80 A	–	5SV3647-4KK14	5SV3647-5KK14

## Mounting concept

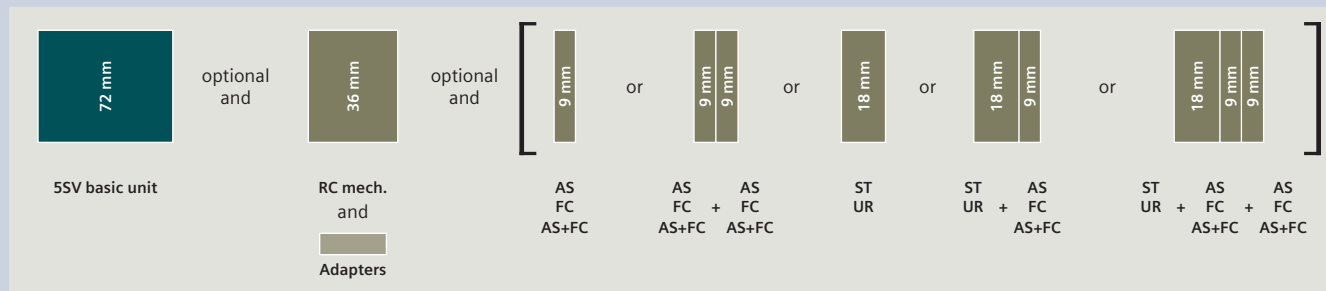

AS	Auxiliary switch	<a href="#">See page 4/58</a>
FC	Fault signal contact	<a href="#">See page 4/60</a>
AS+FC	Auxiliary switch and fault signal contact	<a href="#">See page 4/61</a>
ST	Shunt trips	<a href="#">See page 4/64</a>
UR	Undervoltage release	<a href="#">See page 4/65</a>
RC mech.	Remote control mechanism	<a href="#">See page 4/66</a>



## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
4 MW		5ST3820-6

# 5SM3 RCCBs

Type A and AC, 1P+N (2 MW), high-current



$I_{\Delta n}$	$I_n$	
<b>Type A</b>		
30 mA	100 A	5SM3318-6KK
	125 A	5SM3315-6KK
100 mA	100 A	5SM3418-6KK
	125 A	5SM3415-6KK
300 mA	100 A	5SM3618-6KK
	125 A	5SM3615-6KK
<b>Type AC</b>		
30 mA	100 A	5SM3318-0KK
	125 A	5SM3315-0KK
100 mA	100 A	5SM3418-0KK
	125 A	5SM3415-0KK
300 mA	100 A	5SM3618-0KK
	125 A	5SM3615-0KK

## Type A and AC, 3P+N (4 MW), high-current



$I_{\Delta n}$	$I_n$		
<b>Type A</b>			
30 mA	100 A	5SM3348-6	–
	125 A	5SM3345-6	–
100 mA	100 A	5SM3448-6	–
	125 A	5SM3445-6	–
300 mA	100 A	5SM3648-6	5SM3648-8
	125 A	5SM3645-6	5SM3645-8
500 mA	100 A	5SM3748-6	–
	125 A	5SM3745-6	5SM3745-8
<b>Type AC</b>			
30 mA	100 A	5SM3348-0	–
	125 A	5SM3345-0	–
100 mA	100 A	5SM3448-0	–
	125 A	5SM3445-0	–
300 mA	100 A	5SM3648-0	5SM3648-2
	125 A	5SM3645-0	–
500 mA	100 A	5SM3748-0	–
	125 A	5SM3745-0	–

4

### Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5SW3330

# 5SM2 RC units

Type A, F and AC, 2-pole

For 5SY miniature circuit breakers<sup>1)</sup>  
230 V AC


Version Instantaneous Super resistant [K] Selective [S]  
Mounting width 2 MW 2 MW 2 MW



$I_{\Delta n}$	$I_n$			
<b>Type A</b>				
10 mA	0.3 ... 16 A	5SM2121-6	–	–
30 mA	0.3 ... 40 A	5SM2322-6	5SM2322-6KK01	–
	0.3 ... 63 A	5SM2325-6	5SM2325-6KK01	–
100 mA	80 ... 100 A	–	–	–
	0.3 ... 63 A	5SM2425-6	–	–
300 mA	0.3 ... 40 A	5SM2622-6	–	5SM2622-8
	0.3 ... 63 A	5SM2625-6	–	5SM2625-8
	80 ... 100 A	–	–	–
500 mA	0.3 ... 63 A	5SM2725-6	–	–
1000 mA	0.3 ... 40 A	–	–	5SM2822-8
	0.3 ... 63 A	–	–	5SM2825-8
	80 ... 100 A	–	–	–
<b>Type F</b>				
30 mA	0.3 ... 40 A	–	5SM2322-3	–
	0.3 ... 63 A	–	5SM2325-3	–
<b>Type AC</b>				
10 mA	0.3 ... 40 A	5SM2121-0	–	–
30 mA	0.3 ... 40 A	5SM2322-0	–	–
	0.3 ... 63 A	5SM2325-0	–	–
	80 ... 100 A	–	–	–
300 mA	0.3 ... 40 A	5SM2622-0	–	5SM2622-2
	0.3 ... 63 A	5SM2625-0	–	5SM2625-2
	80 ... 100 A	–	–	–
500 mA	0.3 ... 63 A	5SM2725-0	–	–
1000 mA	0.3 ... 63 A	5SM2825-0	–	–

<sup>1)</sup> Not suitable for use with 5SY5 and type A + type F not suitable for use with 5SY8



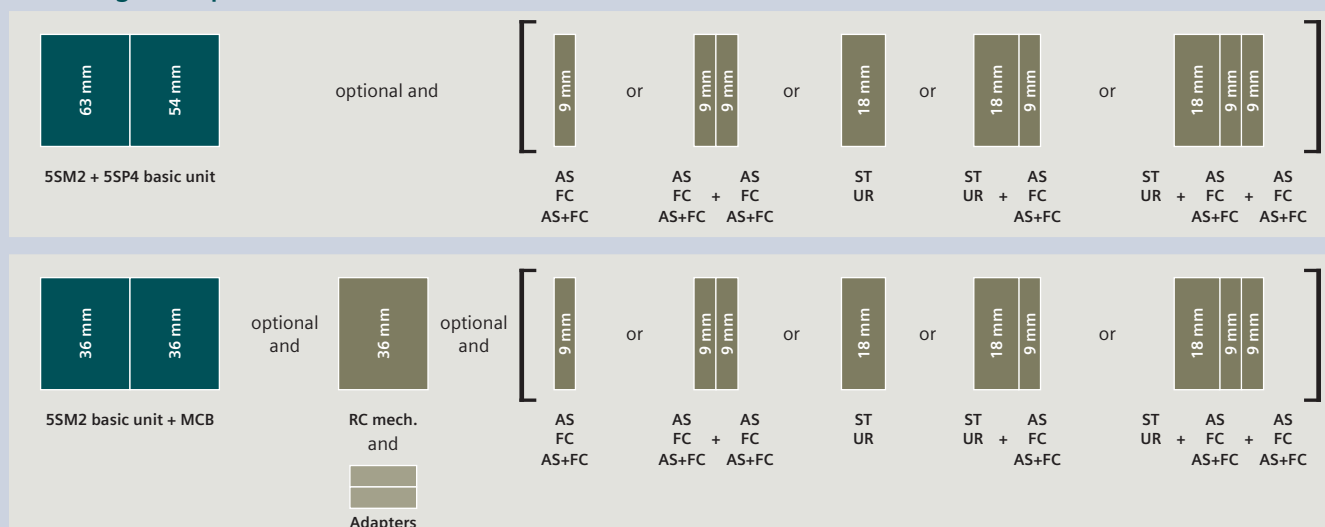

## Mounting concept



MCB Miniature circuit breaker [See page 3/1](#)  
AS Auxiliary switch [See page 4/58](#)  
FC Fault signal contact [See page 4/60](#)

AS+FC Auxiliary switch and  
fault signal contact [See page 4/61](#)  
ST Shunt trips [See page 4/64](#)

UR Undervoltage release [See page 4/65](#)  
RC mech. Remote control mechanism [See page 4/66](#)






For 5SL4 miniature circuit breakers 230 V AC		For 5SP4 miniature circuit breakers (B and C characteristics) 230 V AC	
Instantaneous	Selective [S]	Instantaneous	Selective [S]
2 MW	2 MW	3.5 MW	3.5 MW
			
–	–	–	–
5SM2323-6	–	–	–
5SM2326-6	–	–	–
–	–	5SM2327-6	–
–	–	–	–
5SM2623-6	5SM2623-8	–	–
5SM2626-6	5SM2626-8	–	–
–	–	5SM2627-6	5SM2627-8
–	–	–	–
–	–	–	–
–	–	–	5SM2827-8
–	–	–	–
–	–	–	–
–	–	–	–
5SM2323-0	–	–	–
5SM2326-0	–	–	–
–	–	–	–
5SM2623-0	5SM2623-2	5SM2327-0	–
5SM2626-0	5SM2626-2	5SM2627-0	–
–	–	–	–
–	–	–	–
–	–	–	–

## Accessories

Auxiliary switches (AS)			Article No.			Undervoltage releases (UR)			Article No.		
1 NO + 1 NC	Standard	5ST3010	With integrated auxiliary switch	230 V AC	5ST3040	Without integrated auxiliary switch	110 V DC	5ST3041	230 V AC	110 V DC	5ST3043
	For low power	5ST3013		24 V DC	5ST3042		110 V DC	5ST3044			
	For low power (with diode)	5ST3013-0XX01		24 V DC	5ST3045						
2 NO	Standard	5ST3011	Remote control mechanisms (RC)			Article No.					
	For low power	5ST3014	Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057	177 ... 270 V AC	5ST3056	177 ... 270 V AC
2 NC	Standard	5ST3012	Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070	Adapters for remote control mechanisms (RC mech.)			Article No.		
	For low power	5ST3015	5SM2 with 5SY (2P)	5ST3820-3 + 5ST3820-1	5SM2 with 5SL (2P)	5ST3820-3 + 5ST3820-6					
1 CO	Standard	5ST3016									
Fault signal contacts (FC)			Article No.								
1 NO + 1 NC		5ST3020									
2 NO		5ST3021									
2 NC		5ST3022									
Auxiliary switches and fault signal contacts (AS+FC)			Article No.								
1 CO (AS) + 1 CO (FC)		5ST3062									
5ST3 COM (AS+FC)		5ST3062-0MC									
Shunt trips (ST)			Article No.								
110 ... 415 V AC, 110 ... 220 V DC		5ST3030									
24 ... 48 V AC/DC		5ST3031									
12 V DC		5ST3031-0XX01									

# 5SM2 RC units


## Type A and AC, 3-pole

Version Mounting width	For 5SY miniature circuit breakers <sup>1)</sup> 400 V AC			For 5SL4 miniature circuit breakers 400 V AC	
	Instantaneous	Super resistant [K]	Selective [S]	Instantaneous	Selective [S]
3 MW					

$I_{\Delta n}$	$I_n$	For 5SY miniature circuit breakers <sup>1)</sup> 400 V AC		For 5SL4 miniature circuit breakers 400 V AC		
<b>Type A</b>						
30 mA	0.3 ... 40 A	5SM2332-6	5SM2332-6KK01	–	5SM2333-6	–
	0.3 ... 63 A	5SM2335-6	5SM2335-6KK01	–	5SM2336-6	–
100 mA	0.3 ... 63 A	5SM2435-6	–	–	–	–
	0.3 ... 40 A	5SM2632-6	–	–	5SM2633-6	–
300 mA	0.3 ... 63 A	5SM2635-6	–	5SM2635-8	5SM2636-6	5SM2636-8
	0.3 ... 40 A	5SM2735-6	–	5SM2735-8	–	–
500 mA	0.3 ... 40 A	–	–	5SM2832-8	–	–
	0.3 ... 63 A	–	–	5SM2835-8	–	–
<b>Type AC</b>						
30 mA	0.3 ... 40 A	5SM2332-0	–	–	5SM2333-0	–
	0.3 ... 63 A	5SM2335-0	–	–	5SM2336-0	–
300 mA	0.3 ... 40 A	5SM2632-0	–	–	5SM2633-0	–
	0.3 ... 63 A	5SM2635-0	–	–	5SM2636-0	–
500 mA	0.3 ... 40 A	5SM2735-0	–	–	–	–
	0.3 ... 63 A	–	–	–	–	–

<sup>1)</sup> Not suitable for use with 5SY5 and type A not suitable for use with 5SY8

## Mounting concept

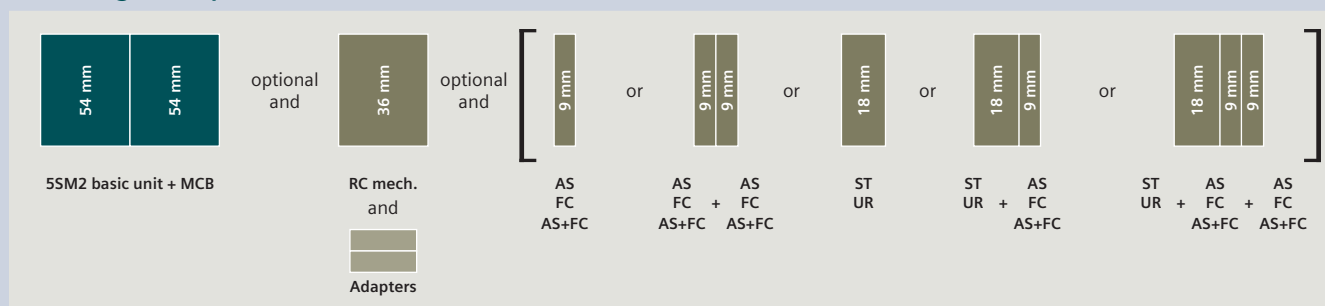

MCB Miniature circuit breaker

AS Auxiliary switch

FC Fault signal contact

AS+FC Auxiliary switch and fault signal contact

[See page 3/1](#)

[See page 4/58](#)

[See page 4/60](#)

[See page 4/61](#)

ST Shunt trips

UR Undervoltage release

RC mech. Remote control mechanism

[See page 4/64](#)

[See page 4/65](#)

[See page 4/66](#)

## Accessories





Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote control mechanisms (RC mech.)		Article No.
5SM2 with 5SY (2P)		5ST3820-3 + 5ST3820-1
5SM2 with 5SL (2P)		5ST3820-3 + 5ST3820-6

# 5SM2 RC units

## Type A and AC, 4-pole


For 5SY miniature circuit breakers<sup>1)</sup>  
400 V AC

Version	Instantaneous	Super resistant [K]	Selective [S]	SIGRES, instantaneous <b>new</b>
Mounting width	3 MW	3 MW	3 MW	3 MW
				

$I_{\Delta n}$	$I_n$				
<b>Type A</b>					
30 mA	0.3 ... 40 A	5SM2342-6	5SM2342-6KK01	–	–
	0.3 ... 63 A	5SM2345-6	5SM2345-6KK01	–	5SM2345-6KK12
	80 ... 100 A	–	–	–	–
100 mA	0.3 ... 63 A	5SM2445-6	–	–	–
	80 ... 100 A	–	–	–	–
300 mA	0.3 ... 40 A	5SM2642-6	–	–	–
	0.3 ... 63 A	5SM2645-6	–	5SM2645-8	5SM2645-6KK12
	80 ... 100 A	–	–	–	–
500 mA	0.3 ... 63 A	5SM2745-6	–	5SM2845-8	–
1000 mA	0.3 ... 40 A	–	–	5SM2842-8	–
	0.3 ... 63 A	–	–	5SM2845-8	–
	80 ... 100 A	–	–	–	–
<b>Type AC</b>					
30 mA	0.3 ... 40 A	5SM2342-0	–	–	–
	0.3 ... 63 A	5SM2345-0	–	–	–
	80 ... 100 A	–	–	–	–
300 mA	0.3 ... 40 A	5SM2642-0	–	–	–
	0.3 ... 63 A	5SM2645-0	–	5SM2645-2	–
	80 ... 100 A	–	–	–	–
500 mA	0.3 ... 63 A	5SM2745-0	–	–	–
1000 mA	0.3 ... 63 A	–	–	5SM2845-2	–

<sup>1)</sup> Not suitable for use with 5SY5 and type A not suitable for use with 5SY8

## Mounting concept

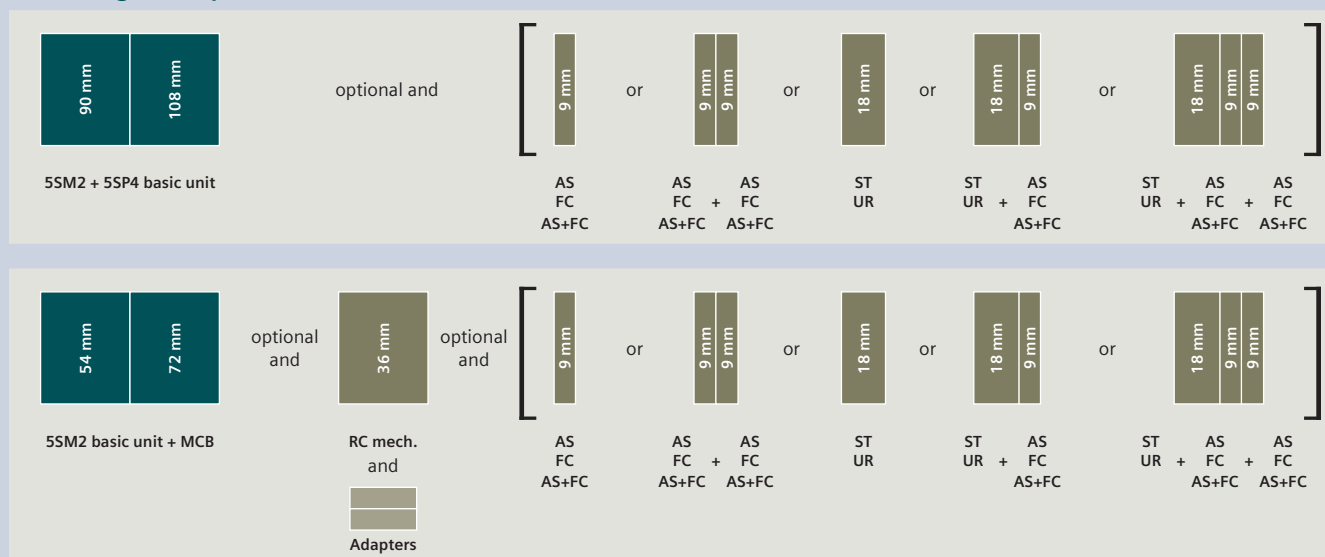

MCB Miniature circuit breaker [See page 3/1](#)  
AS Auxiliary switch [See page 4/58](#)  
FC Fault signal contact [See page 4/60](#)

AS+FC Auxiliary switch and fault signal contact [See page 4/61](#)  
ST Shunt trips [See page 4/64](#)

UR Undervoltage release [See page 4/65](#)  
RC mech. Remote control mechanism [See page 4/66](#)



**For 5SL4 miniature circuit breakers  
400 V AC**

Instantaneous

3 MW



Selective [S]

3 MW


**For 5SP4 miniature circuit breakers (B and C characteristics)  
400 V AC**

Instantaneous

5 MW



Selective [S]

5 MW



5SM2343-6	–	–	–
5SM2346-6	–	–	–
–	–	5SM2347-6	–
–	–	–	–
5SM2643-6	–	–	–
5SM2646-6	5SM2646-8	–	–
–	–	5SM2647-6	5SM2647-8
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	5SM2847-8
5SM2343-0	–	–	–
5SM2346-0	–	–	–
–	–	5SM2347-0	–
5SM2643-0	–	–	–
5SM2646-0	5SM2646-2	–	–
–	–	5SM2647-0	–
–	–	–	–
–	–	–	–

4

## Accessories

Auxiliary switches (AS)		Article No.	Undervoltage releases (UR)		Article No.
1 NO + 1 NC	Standard	5ST3010	With integrated auxiliary switch	230 V AC	5ST3040
	For low power	5ST3013		110 V DC	5ST3041
	For low power (with diode)	5ST3013-0XX01		24 V DC	5ST3042
2 NO	Standard	5ST3011	Without integrated auxiliary switch	230 V AC	5ST3043
	For low power	5ST3014		110 V DC	5ST3044
2 NC	Standard	5ST3012		24 V DC	5ST3045
	For low power	5ST3015			
1 CO	Standard	5ST3016	<b>Remote control mechanisms (RC)</b>		<b>Article No.</b>
<b>Fault signal contacts (FC)</b>			Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
1 NO + 1 NC		5ST3020		177 ... 270 V AC	5ST3056
2 NO		5ST3021	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
2 NC		5ST3022		177 ... 270 V AC	5ST3058
<b>Auxiliary switches and fault signal contacts (AS+FC)</b>			Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
1 CO (AS) + 1 CO (FC)		5ST3062	<b>Adapters for remote control mechanisms (RC mech.)</b>		<b>Article No.</b>
5ST3 COM (AS+FC)		5ST3062-0MC	5SM2 with 5SY (4P)		5ST3820-3 + 5ST3820-2
<b>Shunt trips (ST)</b>			5SM2 with 5SL (4P)		5ST3820-3 + 5ST3820-7
110 ... 415 V AC, 110 ... 220 V DC		5ST3030			
24 ... 48 V AC/DC		5ST3031			
12 V DC		5ST3031-0XX01			

# 5SU1 RCBOs


## Type A, 1P+N

	Instantaneous 230 V AC		
Mounting width	2 MW	2 MW	2 MW
Short-circuit breaking capacity	4.5 kA	4.5 kA	6 kA
N connection	Right	Left	Right



$I_{\Delta n}$	$I_n$	Bulk packaging (36 units)	Characteristic C	Characteristic C	Characteristic B	Characteristic C	
<b>Type A</b>							
10 mA	6 A	–	–	–	–	–	
	10 A	–	–	–	–	–	
	13 A	–	–	–	–	–	
	16 A	–	–	–	–	–	
30 mA	6 A	– ■	5SU1353-7KK06	5SU1353-7KL06	5SU1356-6KK06 5SU1356-6GV06	5SU1356-7KK06 5SU1356-7GV06	
	8 A	–	5SU1353-7KK08	–	–	5SU1356-7KK08	
	10 A	– ■	5SU1353-7KK10	5SU1353-7KL10	5SU1356-6KK10 5SU1356-6GV10	5SU1356-7KK10 5SU1356-7GV10	
	13 A	–	5SU1353-7KK13	–	5SU1356-6KK13	5SU1356-7KK13	
	16 A	– ■	5SU1353-7KK16	5SU1353-7KL16	5SU1356-6KK16 5SU1356-6GV16	5SU1356-7KK16 5SU1356-7GV16	
	20 A	–	5SU1353-7KK20	5SU1353-7KL20	5SU1356-6KK20	5SU1356-7KK20	
	25 A	–	5SU1353-7KK25	5SU1353-7KL25	5SU1356-6KK25	5SU1356-7KK25	
	32 A	–	5SU1353-7KK32	5SU1353-7KL32	5SU1356-6KK32	5SU1356-7KK32	
	40 A	–	5SU1353-7KK40	5SU1353-7KL40	5SU1356-6KK40	5SU1356-7KK40	
	300 mA	6 A	–	5SU1653-7KK06	–	5SU1656-6KK06	5SU1656-7KK06
		10 A	–	5SU1653-7KK10	–	5SU1656-6KK10	5SU1656-7KK10
		13 A	–	5SU1653-7KK13	–	5SU1656-6KK13	5SU1656-7KK13
16 A		–	5SU1653-7KK16	–	5SU1656-6KK16	5SU1656-7KK16	
20 A		–	5SU1653-7KK20	–	5SU1656-6KK20	5SU1656-7KK20	
25 A		–	5SU1653-7KK25	–	5SU1656-6KK25	5SU1656-7KK25	
32 A		–	5SU1653-7KK32	–	5SU1656-6KK32	5SU1656-7KK32	
40 A		–	5SU1653-7KK40	–	5SU1656-6KK40	5SU1656-7KK40	

### Mounting concept

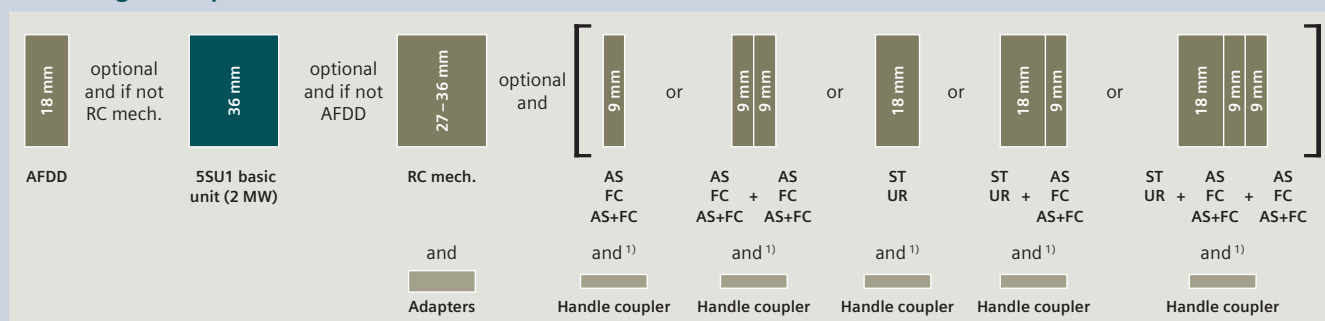



<sup>1)</sup> Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RC mech.

AFDD Arc fault detection unit  
 AS Auxiliary switch  
 FC Fault signal contact  
 AS+FC Auxiliary switch and fault signal contact

[See page 4/52](#)  
[See page 4/58](#)  
[See page 4/60](#)  
[See page 4/61](#)

ST Shunt trips  
 UR Undervoltage release  
 RC mech. Remote control mechanism

[See page 4/64](#)  
[See page 4/65](#)  
[See page 4/66](#)

Instantaneous 230 V AC		Short-time delayed [G], super resistant [K] 230 V AC	
2 MW		2 MW	
10 kA		10 kA	
Right		Right	
			
Characteristic	Characteristic	Characteristic	Characteristic
B	C	B	C
5SU1154-6KK06	5SU1154-7KK06	–	–
5SU1154-6KK10	5SU1154-7KK10	–	–
5SU1154-6KK13	5SU1154-7KK13	–	–
5SU1154-6KK16	5SU1154-7KK16	–	–
5SU1354-6KK06	5SU1354-7KK06	–	–
5SU1354-6GV06	5SU1354-7GV06	–	–
–	5SU1354-7KK08	–	–
5SU1354-6KK10	5SU1354-7KK10	5SU1354-6LB10	5SU1354-7LB10
5SU1354-6GV10	5SU1354-7GV10	–	–
5SU1354-6KK13	5SU1354-7KK13	5SU1354-6LB13	5SU1354-7LB13
5SU1354-6KK16	5SU1354-7KK16	5SU1354-6LB16	5SU1354-7LB16
5SU1354-6GV16	5SU1354-7GV16	–	–
5SU1354-6KK20	5SU1354-7KK20	5SU1354-6LB20	5SU1354-7LB20
5SU1354-6KK25	5SU1354-7KK25	5SU1354-6LB25	5SU1354-7LB25
5SU1354-6KK32	5SU1354-7KK32	5SU1354-6LB32	5SU1354-7LB32
5SU1354-6KK40	5SU1354-7KK40	5SU1354-6LB40	5SU1354-7LB40
5SU1654-6KK06	5SU1654-7KK06	–	–
5SU1654-6KK10	5SU1654-7KK10	–	–
5SU1654-6KK13	5SU1654-7KK13	–	–
5SU1654-6KK16	5SU1654-7KK16	–	–
5SU1654-6KK20	5SU1654-7KK20	–	–
5SU1654-6KK25	5SU1654-7KK25	–	–
5SU1654-6KK32	5SU1654-7KK32	–	–
5SU1654-6KK40	5SU1654-7KK40	–	–

## Accessories

Auxiliary switches (AS)		Article No.	Undervoltage releases (UR)		Article No.
1 NO + 1 NC	Standard	5ST3010	With integrated	230 V AC	5ST3040
	For low power	5ST3013	auxiliary switch	110 V DC	5ST3041
	For low power (with diode)	5ST3013-0XX01		24 V DC	5ST3042
2 NO	Standard	5ST3011	Without integrated	230 V AC	5ST3043
	For low power	5ST3014	auxiliary switch	110 V DC	5ST3044
2 NC	Standard	5ST3012		24 V DC	5ST3045
	For low power	5ST3015			
1 CO	Standard	5ST3016	<b>Handle couplers for AS, FC, AS+FC, ST and UR</b>		<b>Article No.</b>
<b>Fault signal contacts (FC)</b>			1 set = 5 units		5ST3805-1
1 NO + 1 NC		5ST3020	<b>Remote control mechanisms (RC)</b>		<b>Article No.</b>
2 NO		5ST3021	Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
2 NC		5ST3022		177 ... 270 V AC	5ST3054
<b>Auxiliary switches and fault signal contacts (AS+FC)</b>			Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
1 CO (AS) + 1 CO (FC)		5ST3062		177 ... 270 V AC	5ST3056
5ST3 COM (AS+FC)		5ST3062-0MC	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
<b>Shunt trips (ST)</b>				177 ... 270 V AC	5ST3058
110 ... 415 V AC, 110 ... 220 V DC		5ST3030	Power with ext. function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
24 ... 48 V AC/DC		5ST3031		170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
12 V DC		5ST3031-0XX01	<b>Adapters for remote control mechanisms (RC mech.)</b>		<b>Article No.</b>
			2 MW		5ST3820-5
			<b>Arc fault detection units (AFDD)</b>		<b>Article No.</b>
			For 5SU1 basic units	$I_n$ up to 16 A	5SM6021-2
				$I_n$ up to 40 A	5SM6024-2

# 5SU1 RCBOs


## Type F, 1P+N

	<b>Super resistant [K]</b>
	<b>230 V AC</b>
<b>Mounting width</b>	2 MW
<b>Short-circuit breaking capacity</b>	10 kA
<b>N connection</b>	Right



$I_{\Delta n}$	$I_n$	Characteristic	
		B	C
<b>Type F</b>			
30 mA	6 A	5SU1354-3KK06	5SU1354-4KK06
	10 A	5SU1354-3KK10	5SU1354-4KK10
	13 A	5SU1354-3KK13	5SU1354-4KK13
	16 A	5SU1354-3KK16	5SU1354-4KK16
	20 A	5SU1354-3KK20	5SU1354-4KK20
	25 A	5SU1354-3KK25	5SU1354-4KK25
	32 A	5SU1354-3KK32	5SU1354-4KK32
	40 A	5SU1354-3KK40	5SU1354-4KK40

### Mounting concept

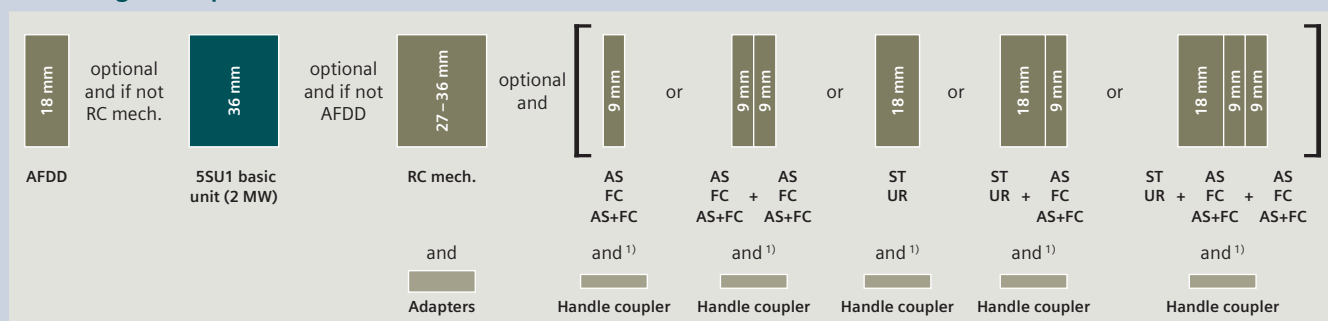

<sup>1)</sup> Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RC mech.

AFDD Arc fault detection unit [See page 4/52](#)  
 AS Auxiliary switch [See page 4/58](#)  
 FC Fault signal contact [See page 4/60](#)  
 AS+FC Auxiliary switch and fault signal contact [See page 4/61](#)

ST Shunt trips [See page 4/64](#)  
 UR Undervoltage release [See page 4/65](#)  
 RC mech. Remote control mechanism [See page 4/66](#)


Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Handle couplers for AS, FC, AS+FC, ST and UR		Article No.
1 set = 5 units		5ST3805-1
Remote control mechanisms (RC)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with ext. function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	AC 170 ... 277 V, DC 77 ... 286 V	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
2 MW		5ST3820-5
Arc fault detection units (AFDD)		Article No.
For 5SU1 basic units	$I_n$ up to 16 A	5SM6021-2
	$I_n$ up to 40 A	5SM6024-2

# 5SU1 RCBOs


## Type AC, 1P+N

Mounting width Short-circuit breaking capacity N connection	Instantaneous 230 V AC		
	2 MW 4.5 kA Right	2 MW 4.5 kA Left	2 MW 6 kA Right



$I_{\Delta n}$	$I_n$	Bulk packaging (36 units)	Characteristic		Characteristic	
			C	C	B	C
<b>Type AC</b>						
30 mA	6 A	–	5SU1353-1KK06	5SU1353-1KL06	5SU1356-0KK06	5SU1356-1KK06
	8 A	–	5SU1353-1KK08	–	–	5SU1356-1KK08
	10 A	–	5SU1353-1KK10	5SU1353-1KL10	5SU1356-0KK10	5SU1356-1KK10
		■	5SU1353-1GV10	–	–	–
	13 A	–	5SU1353-1KK13	5SU1353-1KL13	5SU1356-0KK13	5SU1356-1KK13
	16 A	–	5SU1353-1KK16	5SU1353-1KL16	5SU1356-0KK16	5SU1356-1KK16
		■	5SU1353-1GV16	–	–	5SU1356-1GV16
	20 A	–	5SU1353-1KK20	5SU1353-1KL20	5SU1356-0KK20	5SU1356-1KK20
	25 A	–	5SU1353-1KK25	5SU1353-1KL25	5SU1356-0KK25	5SU1356-1KK25
	32 A	–	5SU1353-1KK32	5SU1353-1KL32	5SU1356-0KK32	5SU1356-1KK32
40 A	–	5SU1353-1KK40	5SU1353-1KL40	5SU1356-0KK40	5SU1356-1KK40	
100 mA	6 A	–	–	–	–	–
	10 A	–	–	–	–	–
	13 A	–	–	–	–	–
	16 A	–	–	–	–	–
	20 A	–	–	–	–	–
	25 A	–	–	–	–	–
	32 A	–	–	–	–	–
	40 A	–	–	–	–	–
300 mA	6 A	–	5SU1653-1KK06	5SU1653-1KL06	5SU1656-0KK06	5SU1656-1KK06
	10 A	–	5SU1653-1KK10	5SU1653-1KL10	5SU1656-0KK10	5SU1656-1KK10
	13 A	–	5SU1653-1KK13	5SU1653-1KL16	5SU1656-0KK13	5SU1656-1KK13
	16 A	–	5SU1653-1KK16	–	5SU1656-0KK16	5SU1656-1KK16
		■	5SU1653-1GV16	–	–	–
	20 A	–	5SU1653-1KK20	5SU1653-1KL20	5SU1656-0KK20	5SU1656-1KK20
	25 A	–	5SU1653-1KK25	5SU1653-1KL25	5SU1656-0KK25	5SU1656-1KK25
	32 A	–	5SU1653-1KK32	5SU1653-1KL32	5SU1656-0KK32	5SU1656-1KK32
	40 A	–	5SU1653-1KK40	5SU1653-1KL40	5SU1656-0KK40	5SU1656-1KK40

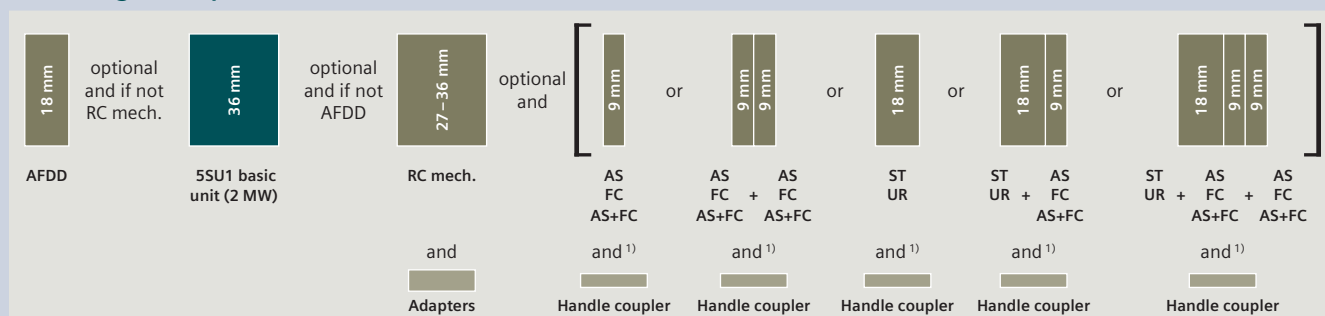

### Mounting concept



<sup>1)</sup> Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RC mech.

AFDD Arc fault detection unit [See page 4/52](#)  
 AS Auxiliary switch [See page 4/58](#)  
 FC Fault signal contact [See page 4/60](#)  
 AS+FC Auxiliary switch and fault signal contact [See page 4/61](#)

ST Shunt trips [See page 4/64](#)  
 UR Undervoltage release [See page 4/65](#)  
 RC mech. Remote control mechanism [See page 4/66](#)

Instantaneous 230 V AC		Short-time delayed [G], super resistant [K] 230 V AC	
2 MW		2 MW	
10 kA		10 kA	
Right		Right	
			
Characteristic B		Characteristic C	
5SU1354-0KK06	5SU1354-1KK06	–	–
–	5SU1354-1KK08	–	–
5SU1354-0KK10	5SU1354-1KK10	5SU1354-0LB10	5SU1354-1LB10
–	–	–	–
5SU1354-0KK13	5SU1354-1KK13	5SU1354-0LB13	5SU1354-1LB13
5SU1354-0KK16	5SU1354-1KK16	5SU1354-0LB16	5SU1354-1LB16
–	–	–	–
5SU1354-0KK20	5SU1354-1KK20	5SU1354-0LB20	5SU1354-1LB20
5SU1354-0KK25	5SU1354-1KK25	5SU1354-0LB25	5SU1354-1LB25
5SU1354-0KK32	5SU1354-1KK32	5SU1354-0LB32	5SU1354-1LB32
5SU1354-0KK40	5SU1354-1KK40	5SU1354-0LB40	5SU1354-1LB40
–	5SU1454-1KK06	–	–
–	5SU1454-1KK10	–	–
–	5SU1454-1KK13	–	–
–	5SU1454-1KK16	–	–
–	5SU1454-1KK20	–	–
–	5SU1454-1KK25	–	–
–	5SU1454-1KK32	–	–
–	5SU1454-1KK40	–	–
5SU1654-0KK06	5SU1654-1KK06	–	–
5SU1654-0KK10	5SU1654-1KK10	–	–
5SU1654-0KK13	5SU1654-1KK13	–	–
5SU1654-0KK16	5SU1654-1KK16	–	–
–	–	–	–
5SU1654-0KK20	5SU1654-1KK20	–	–
5SU1654-0KK25	5SU1654-1KK25	–	–
5SU1654-0KK32	5SU1654-1KK32	–	–
5SU1654-0KK40	5SU1654-1KK40	–	–

## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Handle couplers for AS, FC, AS+FC, ST and UR		Article No.
1 set = 5 units		5ST3805-1
Remote control mechanisms (RC)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with ext. function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
2 MW		5ST3820-5
Arc fault detection units (AFDD)		Article No.
For 5SU1 basic units	$I_n$ up to 16 A	5SM6021-2
	$I_n$ up to 40 A	5SM6024-2

# 5SU1 RCBOs

Type A, 2/3/4-pole with residual current tripped indication


Short-circuit breaking capacity **6 kA** **10 kA**

2-pole  
Instantaneous  
230 V AC






$I_{\Delta n}$	$I_n$	Characteristic		Characteristic	
		B	C	B	C
30 mA	6 A	5SU1326-6FP06	5SU1326-7FP06	5SU1324-6FP06	5SU1324-7FP06
	10 A	5SU1326-6FP10	5SU1326-7FP10	5SU1324-6FP10	5SU1324-7FP10
	13 A	5SU1326-6FP13	5SU1326-7FP13	5SU1324-6FP13	5SU1324-7FP13
	16 A	5SU1326-6FP16	5SU1326-7FP16	5SU1324-6FP16	5SU1324-7FP16
	20 A	5SU1326-6FP20	5SU1326-7FP20	5SU1324-6FP20	5SU1324-7FP20
	25 A	5SU1326-6FP25	5SU1326-7FP25	5SU1324-6FP25	5SU1324-7FP25
	32 A	5SU1326-6FP32	5SU1326-7FP32	5SU1324-6FP32	5SU1324-7FP32
300 mA	6 A	–	–	–	–
	10 A	–	–	–	–
	16 A	–	–	–	–
	20 A	–	–	–	–
	25 A	–	–	–	–
	32 A	–	–	–	–
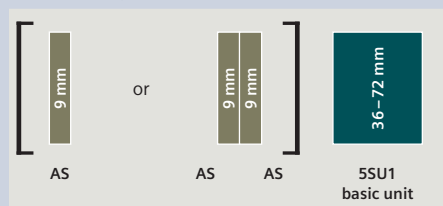
## Mounting concept



AS Auxiliary switch [See page 4/58](#)



2-pole Short-time delayed, super resistant [K] 230 V AC 10 kA		3-pole Instantaneous 400 V AC 6 kA		4-pole Instantaneous 400 V AC 6 kA	
					
Characteristic		Characteristic		Characteristic	
B	C	B	C	B	C
–	5SU1324-7FR06	5SU1336-6FP06	5SU1336-7FP06	5SU1346-6FP06	5SU1346-7FP06
–	5SU1324-7FR10	5SU1336-6FP10	5SU1336-7FP10	5SU1346-6FP10	5SU1346-7FP10
–	–	5SU1336-6FP13	5SU1336-7FP13	5SU1346-6FP13	5SU1346-7FP13
5SU1324-6FR16	5SU1324-7FR16	5SU1336-6FP16	5SU1336-7FP16	5SU1346-6FP16	5SU1346-7FP16
5SU1324-6FR20	5SU1324-7FR20	5SU1336-6FP20	5SU1336-7FP20	5SU1346-6FP20	5SU1346-7FP20
5SU1324-6FR25	5SU1324-7FR25	5SU1336-6FP25	5SU1336-7FP25	5SU1346-6FP25	5SU1346-7FP25
–	5SU1324-7FR32	5SU1336-6FP32	5SU1336-7FP32	5SU1346-6FP32	5SU1346-7FP32
–	–	5SU1636-6FP06	5SU1636-7FP06	5SU1646-6FP06	5SU1646-7FP06
–	–	5SU1636-6FP10	5SU1636-7FP10	5SU1646-6FP10	5SU1646-7FP10
–	–	5SU1636-6FP16	5SU1636-7FP16	5SU1646-6FP16	5SU1646-7FP16
–	–	5SU1636-6FP20	5SU1636-7FP20	5SU1646-6FP20	5SU1646-7FP20
–	–	5SU1636-6FP25	5SU1636-7FP25	5SU1646-6FP25	5SU1646-7FP25
–	–	5SU1636-6FP32	5SU1636-7FP32	5SU1646-6FP32	5SU1646-7FP32

4

### Accessories

Auxiliary switch (AS)		Article No.
1 CO	Standard	5ST1010-0FP

# 5SU1 RCBOs


## Type A and AC, 2-pole

Mounting width	Instantaneous	
	110 V AC	230 V AC
Short-circuit breaking capacity	3 MW	3 MW
	10 kA	10 kA




$I_{\Delta n}$	$I_n$	Characteristic		Characteristic
		B	C	B
<b>Type A</b>				
30 mA	6 A	5SU1324-6KX06	5SU1324-7KX06	5SU1324-6FA06
	10 A	5SU1324-6KX10	5SU1324-7KX10	5SU1324-6FA10
	13 A	5SU1324-6KX13	5SU1324-7KX13	5SU1324-6FA13
	16 A	5SU1324-6KX16	5SU1324-7KX16	5SU1324-6FA16
	20 A	5SU1324-6KX20	5SU1324-7KX20	5SU1324-6FA20
	25 A	5SU1324-6KX25	5SU1324-7KX25	5SU1324-6FA25
	32 A	5SU1324-6KX32	5SU1324-7KX32	5SU1324-6FA32
	40 A	5SU1324-6KX40	5SU1324-7KX40	5SU1324-6FA40
	125 A	–	–	–
	125 A	–	–	–
<b>Type AC</b>				
30 mA	125 A	–	–	–
300 mA	125 A	–	–	–

### Mounting concept

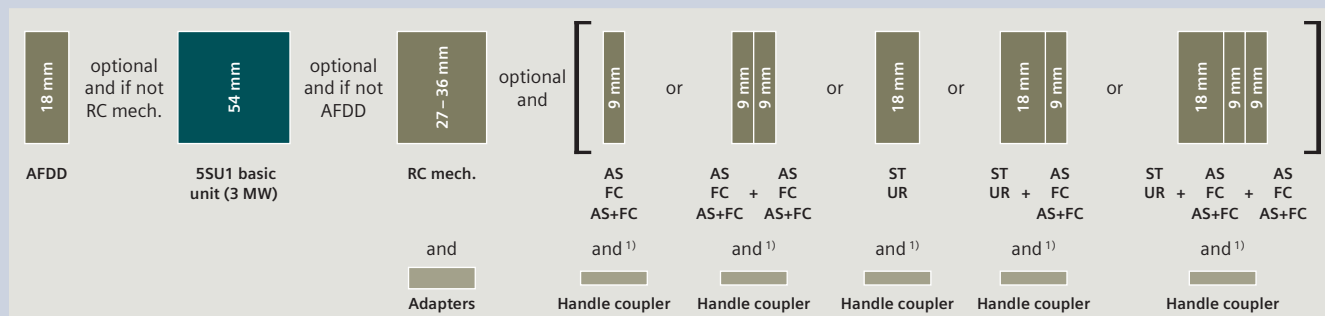

<sup>1)</sup> Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RC mech.

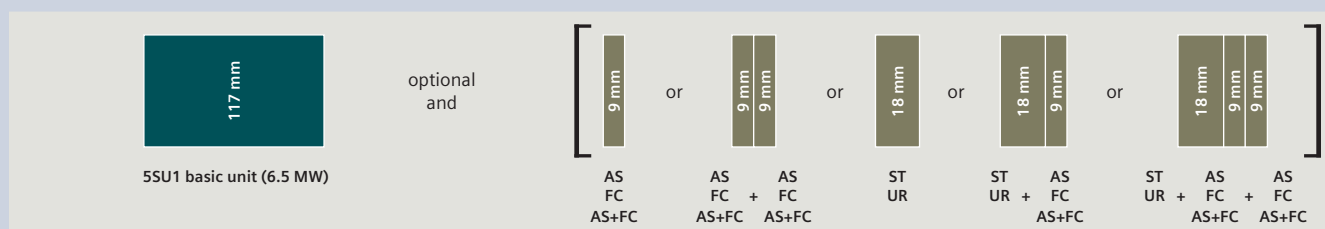

AFDD Arc fault detection unit  
AS Auxiliary switch  
FC Fault signal contact



See page 4/52  
See page 4/58  
See page 4/60

AS+FC Auxiliary switch and fault signal contact  
ST Shunt trips

See page 4/61  
See page 4/64

UR Undervoltage release  
RC mech. Remote control mechanism

See page 4/65  
See page 4/66

		Selective [S] 230 V AC	
6.5 MW 10 kA		6.5 MW 10 kA	
			
Characteristic		Characteristic	
C	B	C	B
5SU1324-7FA06	–	–	–
5SU1324-7FA10	–	–	–
5SU1324-7FA13	–	–	–
5SU1324-7FA16	–	–	–
5SU1324-7FA20	–	–	–
5SU1324-7FA25	–	–	–
5SU1324-7FA32	–	–	–
5SU1324-7FA40	–	–	–
–	5SU1324-6KK82	5SU1324-7KK82	–
–	5SU1624-6KK82	5SU1624-7KK82	5SU1624-6WK82
–	5SU1324-0KK82	5SU1324-1KK82	–
–	5SU1624-0KK82	5SU1624-1KK82	–

4

## Accessories

Auxiliary switches (AS)		Article No.	Undervoltage releases (UR)		Article No.
1 NO + 1 NC	Standard	5ST3010	With integrated auxiliary switch	230 V AC	5ST3040
	For low power	5ST3013		110 V DC	5ST3041
	For low power (with diode)	5ST3013-0XX01		24 V DC	5ST3042
2 NO	Standard	5ST3011	Without integrated auxiliary switch	230 V AC	5ST3043
	For low power	5ST3014		110 V DC	5ST3044
2 NC	Standard	5ST3012		24 V DC	5ST3045
	For low power	5ST3015			
1 CO	Standard	5ST3016	Handle couplers for AS, FC, AS+FC, ST and UR		Article No.
Fault signal contacts (FC)			1 set = 5 units		
1 NO + 1 NC		5ST3020	Remote control mechanisms (RC)		
2 NO		5ST3021	Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
2 NC		5ST3022		177 ... 270 V AC	5ST3054
Auxiliary switches and fault signal contacts (AS+FC)			Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
1 CO (AS) + 1 CO (FC)		5ST3062		177 ... 270 V AC	5ST3056
5ST3 COM (AS+FC)		5ST3062-OMC	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
Shunt trips (ST)				177 ... 270 V AC	5ST3058
110 ... 415 V AC, 110 ... 220 V DC		5ST3030	Power with ext. function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
24 ... 48 V AC/DC		5ST3031		170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
12 V DC		5ST3031-0XX01	Adapters for remote control mechanisms (RC mech.)		
			2 MW		5ST3820-5
			Arc fault detection units (AFDD)		
			For 5SU1 basic units (3 MW)	$I_n$ up to 16 A	5SM6021-2
				$I_n$ up to 40 A	5SM6024-2

# 5SU1 RCBOs


Type A and AC, 4-pole

Mounting width Short-circuit breaking capacity	Instantaneous 400 V AC	Selective [S] 400 V AC
	11 MW 10 kA	11 MW 10 kA



$I_{\Delta n}$	$I_n$	Characteristic		Characteristic	
		B	C	B	C
<b>Type A</b>					
30 mA	125 A	5SU1344-6KK82	5SU1344-7KK82	–	–
300 mA	125 A	5SU1644-6KK82	5SU1644-7KK82	5SU1644-6WK82	5SU1644-7WK82
1000 mA	125 A	–	–	5SU1844-6WK82	5SU1844-7WK82
<b>Type AC</b>					
30 mA	125 A	5SU1344-0KK82	5SU1344-1KK82	–	–
300 mA	125 A	5SU1644-0KK82	5SU1644-1KK82	–	–

## Mounting concept

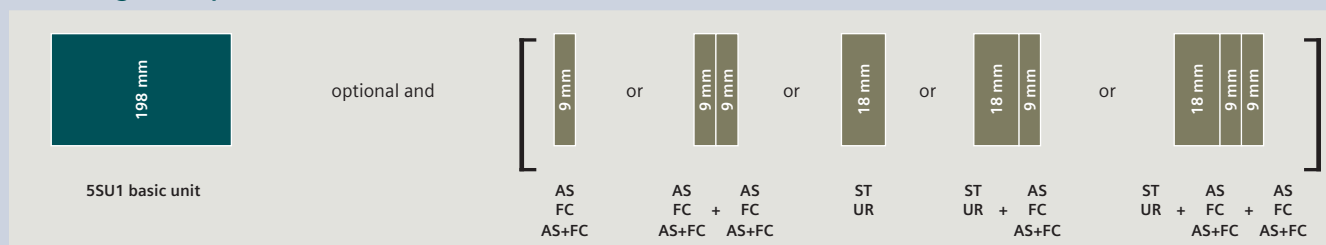



AS Auxiliary switch  
 FC Fault signal contact  
 AS+FC Auxiliary switch and fault signal contact

See page 4/58  
 See page 4/60  
 See page 4/61

ST Shunt trips  
 UR Undervoltage release

See page 4/64  
 See page 4/65

## Type B and B+, 4-pole

		Super resistant [K]		Selective [S]	
		400 V AC		480 V AC	
Mounting width	11 MW				
	10 kA				
Short-circuit breaking capacity					
$I_{\Delta n}$	$I_n$	Characteristic		Characteristic	
		C	D	C	D
<b>Type B</b>					
30 mA	100 A	5SU1374-7AK81	5SU1374-8AK81	–	–
	125 A	5SU1374-7AK82	–	–	–
300 mA	100 A	5SU1674-7AK81	5SU1674-8AK81	5SU1674-7CK81	–
	125 A	5SU1674-7AK82	–	5SU1674-7CK82	5SU1674-7BK82
<b>Type B+</b>					
30 mA	100 A	5SU1374-7DK81	5SU1374-8DK81	–	–
	125 A	5SU1374-7DK82	–	–	–
300 mA	100 A	5SU1674-7DK81	5SU1674-8DK81	5SU1674-7FK81	–
	125 A	5SU1674-7DK82	–	5SU1674-7FK82	5SU1674-7EK82




4

## Accessories

Auxiliary switches (AS)		Article No.	Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 NO + 1 NC	Standard	5ST3010	1 CO (AS) + 1 CO (FC)		5ST3062
	For low power	5ST3013	5ST3 COM (AS+FC)		5ST3062-0MC
	For low power (with diode)	5ST3013-0XX01	<b>Shunt trips (ST)</b>		<b>Article No.</b>
2 NO	Standard	5ST3011	110 ... 415 V AC, 110 ... 220 V DC		5ST3030
	For low power	5ST3014	24 ... 48 V AC/DC		5ST3031
2 NC	Standard	5ST3012	12 V DC		5ST3031-0XX01
	For low power	5ST3015	<b>Undervoltage releases (UR)</b>		<b>Article No.</b>
1 CO	Standard	5ST3016	With integrated auxiliary switch		230 V AC 5ST3040
<b>Fault signal contacts (FC)</b>			<b>Article No.</b>		
1 NO + 1 NC		5ST3020	110 V DC		5ST3041
2 NO		5ST3021	24 V DC		5ST3042
2 NC		5ST3022	Without integrated auxiliary switch		230 V AC 5ST3043
			110 V DC		5ST3044
			24 V DC		5ST3045


# 5SV1 RCBOs

## Type A, 1P+N

Mounting width Short-circuit breaking capacity N connection	Instantaneous		Short-time delayed [G], Super resistant [K]
	230 V AC		230 V AC
	1 MW	1 MW	1 MW
	4.5 kA	6 kA	6 kA
	Right	Right	Right
			

$I_{\Delta n}$	$I_n$	Bulk packaging (12 units)	Characteristic		Characteristic		Characteristic	
			B	C	B	C	B	C
Typ A								
30 mA	2 A	–	–	5SV1313-7KK02	–	5SV1316-7KK02	–	–
	4 A	–	–	5SV1313-7KK04	–	5SV1316-7KK04	–	–
	6 A	–	5SV1313-6KK06	5SV1313-7KK06	5SV1316-6KK06	5SV1316-7KK06	5SV1316-6LK06	5SV1316-7LK06
		■	–	–	5SV1316-6GV06	5SV1316-7GV06	–	–
	10 A	–	5SV1313-6KK10	5SV1313-7KK10	5SV1316-6KK10	5SV1316-7KK10	5SV1316-6LK10	5SV1316-7LK10
		■	–	–	5SV1316-6GV10	5SV1316-7GV10	–	–
	13 A	–	5SV1313-6KK13	5SV1313-7KK13	5SV1316-6KK13	5SV1316-7KK13	5SV1316-6LK13	5SV1316-7LK13
		■	–	–	5SV1316-6GV13	5SV1316-7GV13	–	–
16 A	–	5SV1313-6KK16	5SV1313-7KK16	5SV1316-6KK16	5SV1316-7KK16	5SV1316-6LK16	5SV1316-7LK16	
	■	–	–	5SV1316-6GV16	5SV1316-7GV16	–	–	
300 mA	2 A	–	–	5SV1613-7KK02	–	5SV1616-7KK02	–	–
	4 A	–	–	5SV1613-7KK04	–	5SV1616-7KK04	–	–
	6 A	–	5SV1613-6KK06	5SV1613-7KK06	5SV1616-6KK06	5SV1616-7KK06	–	–
	10 A	–	5SV1613-6KK10	5SV1613-7KK10	5SV1616-6KK10	5SV1616-7KK10	–	–
	13 A	–	5SV1613-6KK13	5SV1613-7KK13	5SV1616-6KK13	5SV1616-7KK13	–	–
	16 A	–	5SV1613-6KK16	5SV1613-7KK16	5SV1616-6KK16	5SV1616-7KK16	–	–

### Mounting concept

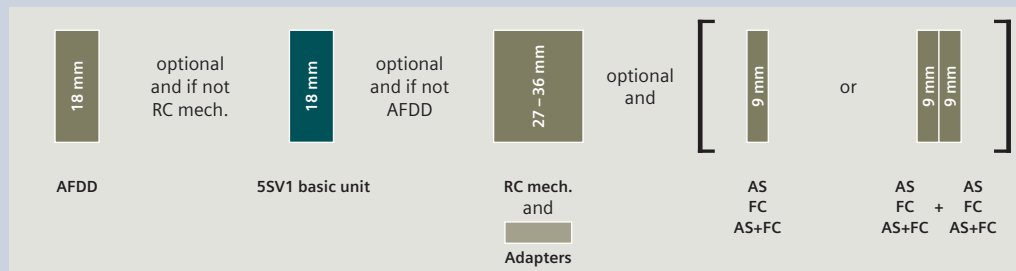


AFDD Arc fault detection units [See page 4/52](#)  
 AS Auxiliary switch [See page 4/58](#)  
 FC Fault signal contact [See page 4/60](#)

AS+FC Auxiliary switch and fault signal contact [See page 4/61](#)  
 RC mech. Remote control mechanism [See page 4/66](#)

## Type F and AC, 1P+N

Mounting width	Instantaneous 230 V AC		Super resistant [K] 230 V AC
	Short-circuit breaking capacity	1 MW	1 MW
N connection	4.5 kA	6 kA	6 kA
	Right	Right	Right

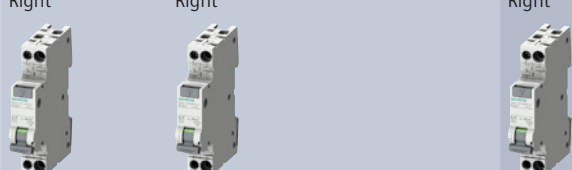

$I_{\Delta n}$	$I_n$	Bulk packaging (12 units)	Characteristic			Characteristic	
			C	B	C	B	C
<b>Type F</b>							
30 mA	6 A	–	–	–	–	5SV1316-3KK06	5SV1316-4KK06
	10 A	–	–	–	–	5SV1316-3KK10	5SV1316-4KK10
	13 A	–	–	–	–	5SV1316-3KK13	5SV1316-4KK13
	16 A	–	–	–	–	5SV1316-3KK16	5SV1316-4KK16
<b>Type AC</b>							
30 mA	2 A	–	5SV1313-1KK02	–	5SV1316-1KK02	–	–
	4 A	–	5SV1313-1KK04	–	5SV1316-1KK04	–	–
	6 A	–	5SV1313-1KK06	5SV1316-0KK06	5SV1316-1KK06	–	–
	10 A	–	5SV1313-1KK10	5SV1316-0KK10	5SV1316-1KK10	–	–
		■	5SV1313-1GV10	–	5SV1316-1GV10	–	–
	13 A	–	5SV1313-1KK13	5SV1316-0KK13	5SV1316-1KK13	–	–
	16 A	–	5SV1313-1KK16	5SV1316-0KK16	5SV1316-1KK16	–	–
		■	5SV1313-1GV16	–	5SV1316-1GV16	–	–
300 mA	2 A	–	5SV1613-1KK02	–	5SV1616-1KK02	–	–
	4 A	–	5SV1613-1KK04	–	5SV1616-1KK04	–	–
	6 A	–	5SV1613-1KK06	5SV1616-0KK06	5SV1616-1KK06	–	–
	10 A	–	5SV1613-1KK10	5SV1616-0KK10	5SV1616-1KK10	–	–
	13 A	–	5SV1613-1KK13	5SV1616-0KK13	5SV1616-1KK13	–	–
	16 A	–	5SV1613-1KK16	5SV1616-0KK16	5SV1616-1KK16	–	–
		■	5SV1613-1GV16	–	5SV1616-1GV16	–	–

4


## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Remote control mechanisms (RC)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>
Adapters for remote control mechanisms (RC mech.)		Article No.
1 MW		5ST3820-6
Arc fault detection units (AFDD)		Article No.
For 5SV1 basic units	$I_n$ up to 16 A	5SM6011-2

# 5SM6 arc fault detection units


For combination with an MCB or RCBO



For combination with basic units			Rated current $I_n$	
Width of basic unit	Miniature circuit breakers	RCBO		
1 MW	5SL60 (no KL types)	5SV1	Up to 16 A	5SM6011-2
			Up to 40 A	5SM6014-2
2 MW	5SY <sup>1)</sup> , 5SL4 (only 1+N devices)	5SU1 (2 MW, 3 MW)	Up to 16 A	5SM6021-2
			Up to 40 A	5SM6024-2

<sup>1)</sup> Not suitable for use with 5SY5 or 5SY8

## Mounting concept

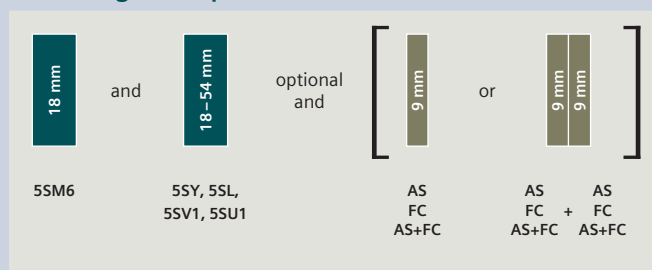

AS Auxiliary switch [See page 4/58](#)  
 FC Fault signal contact [See page 4/60](#)  
 AS+FC Auxiliary switch and fault signal contact [See page 4/61](#)

The mounting concept shown is only one example of how devices and accessories can be combined.

## Accessories


Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

See suitable busbars, from page 4/70 onwards  
 See suitable terminals and end caps, from page 4/70 onwards



# 5SV6 AFDD/MCB


Mounting width

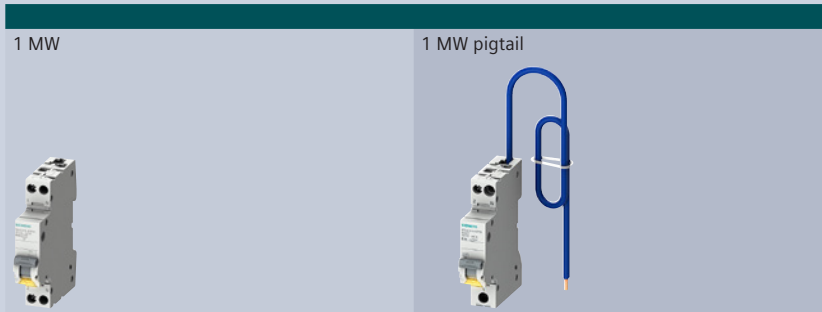

Rated current $I_n$	Bulk packaging (12 units)	Characteristic		Characteristic	
		B	C	B	C
6 A	– ■	5SV6016-6KK06 5SV6016-6GV06	5SV6016-7KK06 5SV6016-7GV06	5SV6016-6KP06 –	5SV6016-7KP06 –
10 A	– ■	5SV6016-6KK10 5SV6016-6GV10	5SV6016-7KK10 5SV6016-7GV10	5SV6016-6KP10 –	5SV6016-7KP10 –
13 A	– ■	5SV6016-6KK13 5SV6016-6GV13	5SV6016-7KK13 –	5SV6016-6KP13 –	5SV6016-7KP13 –
16 A	– ■	5SV6016-6KK16 5SV6016-6GV16	5SV6016-7KK16 5SV6016-7GV16	5SV6016-6KP16 –	5SV6016-7KP16 –
20 A	–	5SV6016-6KK20	5SV6016-7KK20	5SV6016-6KP20	5SV6016-7KP20
25 A	– ■	5SV6016-6KK25 5SV6016-6GV25	5SV6016-7KK25 –	5SV6016-6KP25 –	5SV6016-7KP25 –
32 A	–	5SV6016-6KK32	5SV6016-7KK32	5SV6016-6KP32	5SV6016-7KP32
40 A	–	5SV6016-6KK40	5SV6016-7KK40	5SV6016-6KP40	5SV6016-7KP40

4

## Mounting concept

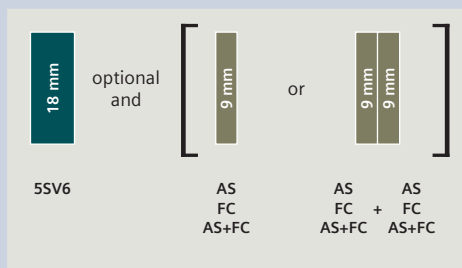

AS Auxiliary switch [See page 4/58](#)  
 FC Fault signal contact [See page 4/60](#)  
 AS+FC Auxiliary switch and fault signal contact [See page 4/61](#)

## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

See suitable busbars, from page 4/70 onwards  
 See suitable terminals and end caps, from page 4/70 onwards

# 5SV6 COM AFDD/MCB

With communication and measuring function

Mounting width 1 MW




Rated current $I_n$	Characteristic	
	B	C
6 A	5SV6016-6MC06	5SV6016-7MC06
10 A	5SV6016-6MC10	5SV6016-7MC10
13 A	5SV6016-6MC13	5SV6016-7MC13
16 A	5SV6016-6MC16	5SV6016-7MC16
20 A	5SV6016-6MC20	5SV6016-7MC20
25 A	5SV6016-6MC25	5SV6016-7MC25
32 A	5SV6016-6MC32	5SV6016-7MC32

## Note:

Please note the country-specific radio licenses of the products in SIOS  
[www.siemens.com/lowvoltage/certificates](http://www.siemens.com/lowvoltage/certificates) (109801197)

## Mounting concept

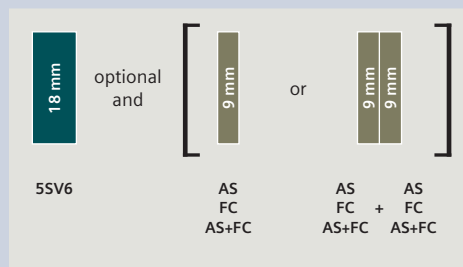

AS Auxiliary switch [See page 4/58](#)  
 FC Fault signal contact [See page 4/60](#)  
 AS+FC Auxiliary switch and fault signal contact [See page 4/61](#)


## Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

See suitable busbars, from page 4/75 onwards  
 See suitable terminals and end caps, from page 4/72 onwards



## 7KN Powercenter 1000 data transceiver

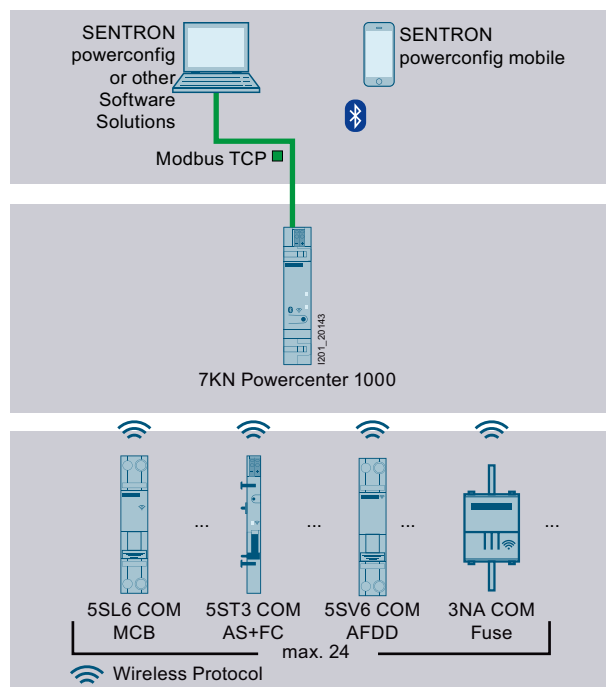

- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



7KN Powercenter 1000

Article No.

7KN1110-0MC00

See page 10/19

You will find further information under:

[www.siemens.com/lowvoltage/manuals](http://www.siemens.com/lowvoltage/manuals)

Installation manual – Circuit protection devices with communication and measuring function (109791805)



System manual – Circuit protection devices with communication and measuring function (109791806)




## Monitoring functions with limit monitoring

- Trip monitoring: short-circuit, overload, arc fault
- Counters incl. limit monitoring for:
  - Operating hours
  - Operating hours with load current
  - Operating cycles (ON/OFF)
  - Tripping operations
  - Short circuits
- Limit values for:
  - Overcurrent alarm 1 and alarm 2
  - Undercurrent alarm 1 and alarm 2
  - Overvoltage alarm 1 and alarm 2
  - Undervoltage alarm 1 and alarm 2
  - Lower voltage threshold for AFDD tripping
  - Temperature

Measured values	Unit	Memory
Temperature	°C	1 hour in 1-minute intervals; 7 days in 15-minute intervals
Average temperature	°C	–
Current	A	Min. and max. values over 10 days; 1 hour in 10-second intervals; 7 days in 15-minute intervals
Average current	A	–
Maximum current	A	–
Voltage	V	Min. and max. values over 10 days
Line frequency	Hz	Min. and max. values over 10 days
Active power	W	Min. and max. values over 10 days
Apparent power	VA	Min. and max. values over 10 days
Reactive power	Var	–
Power factor	–	–
Active energy imported	Wh	7 days in 15-minute intervals; 30 days in 1-day intervals
Active energy exported	Wh	–
Reactive energy imported	Varh	–
Reactive energy exported	Varh	–

# Overview of modular system

## Residual current protective devices

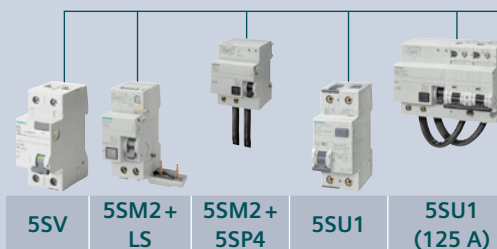

				5SV	5SM2+LS	5SM2+5SP4	5SU1	5SU1 (125 A)
<b>5SM6 arc fault detection units</b>				<b>Article No.</b>				
	Rated current up to 16 A	Standard	5SM6021-2	-	-	-	■	-
		For compact devices 1P+N in 1 MW	5SM6011-2	-	-	-	-	-
	Rated current up to 40 A	Standard	5SM6024-2	-	-	-	■	-
		For compact devices 1P+N in 1 MW	5SM6014-2	-	-	-	-	-
<b>Auxiliary switches (AS)</b>				<b>Article No.</b>				
	1 NO + 1 NC	Standard	5ST3010	■	■	■	■	■
		For low power	5ST3013	■	■	■	■	■
		For low power (with diode)	5ST3013-0XX01	■	■	■	■	■
	2 NO	Standard	5ST3011	■	■	■	■	■
		For low power	5ST3014	■	■	■	■	■
	2 NC	Standard	5ST3012	■	■	■	■	■
		For low power	5ST3015	■	■	■	■	■
	1 CO	Standard	5ST3016	■	■	■	■	■
				5ST1010-0FP	-	-	-	-
<b>Fault signal contacts (FC)</b>				<b>Article No.</b>				
	1 NO + 1 NC		5ST3020	■	■	■	■	■
	2 NO		5ST3021	■	■	■	■	■
	2 NC		5ST3022	■	■	■	■	■
<b>Auxiliary switches and fault signal contacts (AS+FC)</b>				<b>Article No.</b>				
	1 CO (AS) + 1 CO (FC)	Standard	5ST3062	■	■	■	■	■
	5ST3 COM (AS+FC)	With communication and measuring function	5ST3062-0MC	■	■	■	■	■
<b>Shunt trips (ST)</b>				<b>Article No.</b>				
	110 ... 415 V AC, 110 ... 220 V DC		5ST3030	■	■	■	■	■
	24 ... 48 V AC/DC		5ST3031	■	■	■	■	■
	12 V DC		5ST3031-0XX01	■	■	■	■	■
<b>Undervoltage releases (UR)</b>				<b>Article No.</b>				
	With integrated auxiliary switch	230 V AC	5ST3040	■	■	■	■	■
		110 V DC	5ST3041	■	■	■	■	■
		24 V DC	5ST3042	■	■	■	■	■
	Without integrated auxiliary switch	230 V AC	5ST3043	■	■	■	■	■
		110 V DC	5ST3044	■	■	■	■	■
		24 V DC	5ST3045	■	■	■	■	■
<b>Remote control mechanisms (RC)</b>				<b>Article No.</b>				
	Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053	-	-	-	■	-
		177 ... 270 V AC	5ST3054	-	-	-	■	-
	Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055	■	■	-	■	-
		177 ... 270 V AC	5ST3056	■	■	-	■	-
	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057	■	■	-	■	-
		177 ... 270 V AC	5ST3058	■	■	-	■	-
	Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070	■	■	-	■	-
		170 ... 277 V AC, 77 ... 286 V DC	5ST3071 <b>new</b>	■	-	-	■	-
<b>Standard busbars</b>				<b>Article No.</b>				
	Cannot be cut		5ST36..	■	■	■	■	■
	Can be cut		5ST37..	■	■	■	■	■
<b>Compact busbars</b>				<b>Article No.</b>				
	Cannot be cut		5ST36..	■	-	-	-	-
	Can be cut		5ST37..	■	-	-	-	-

From page 4/18

■ Suitable for all versions

□ Suitable for some versions

Arc fault detection devices

Miniature circuit breakers

Device protection switches

Switching devices

5SU1... FP/FR	5SV1	5SM6	5SV6/ 5SV6 COM	5SL3	5SL6	5SL4	5SJ6...-KS	5SL30	5SL60/ 5SL6 COM	5SY	5SP4	5SJ4..HG..	5SY17	5TE8	5TL
-	-	-	-	-	-	□	-	-	-	□	-	-	-	-	-
-	■	-	-	-	-	-	-	-	-	□	-	-	-	-	-
-	■	-	-	-	-	-	-	-	□	-	-	-	-	-	-
-	■	□	■	■	■	■	-	■	■	■	■	...-OHG	■	■	■
-	■	□	■	■	■	■	-	■	■	■	■	-	■	■	■
-	■	□	■	■	■	■	-	■	■	■	■	...-OHG	■	■	■
-	■	□	■	■	■	■	-	■	■	■	■	...-OHG	■	■	■
-	■	□	■	■	■	■	-	■	■	■	■	-	■	■	■
■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	■	□	■	■	■	■	-	■	■	■	■	...-OHG	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	...-OHG	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	...-OHG	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
-	■	□	■	■	■	■	-	■	■	■	■	-	■	-	-
■	■	□	■	■	■	■	■	■	■	■	■	■	■	□	■
■	■	□	■	■	■	■	■	■	■	■	■	■	■	□	■
-	■	■	■	□	□	□	-	■	■	-	-	-	■	-	-
-	■	■	■	□	□	□	-	■	■	-	-	-	-	-	-
From page 4/52			From page 3/12									From page 3/42		From page 5/6	

# Electrical accessories

## Auxiliary switches (AS)



- Signals contact point of the mounted device
- Version for the switching of small currents and voltages for the control of programmable control systems (PLCs) according to EN 61131-2
- Test button enables the testing of control circuits without the need to switch the mounted device

For combination with basic units						Contacts	Version	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	ON/OFF switches				
<b>Auxiliary switches (AS)</b>									
–	–	5SM3 (3P+N, 100/125 A)	–	–	–	1 NO + 1 NC	Standard	0.5 MW	5SW3330
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 <sup>1)</sup> , 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010
							For low power	0.5 MW	5ST3013
							For low power (with diode)	0.5 MW	5ST3013-0XX01
						2 NO	Standard	0.5 MW	5ST3011
							For low power	0.5 MW	5ST3014
						2 NC	Standard	0.5 MW	5ST3012
							For low power	0.5 MW	5ST3015
1 CO	Standard	0.5 MW	5ST3016						
–	–	–	5SU1...FP/FR	–	–	1 CO	Standard	0.5 MW	5ST1010-0FP
<b>Auxiliary switches (AS) with TEST button</b>									
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 <sup>1)</sup> , 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010-2
							For low power	0.5 MW	5ST3013-2
						2 NO	Standard	0.5 MW	5ST3011-2
							For low power	0.5 MW	5ST3014-2
						2 NC	Standard	0.5 MW	5ST3012-2
							For low power	0.5 MW	5ST3015-2

<sup>1)</sup> 5ST3805-1 handle coupler required

## Further technical specifications

		5ST3010, 5ST3011, 5ST3012, 5ST3016	5ST3010-2, 5ST3011-2, 5ST3012-2	5ST3013, 5ST3014, 5ST3015, 5ST3013-0XX01 <sup>1)</sup>	5ST3013-2, 5ST3014-2, 5ST3015-2	5SW3330	5ST1010-OFP
<b>Standards</b>							
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1			IEC/EN 62019		
	UL, CSA	UL 1077, CSA C22.2 No. 235	–	UL 1077, CSA C22.2 No. 235	–		
<b>Contacts</b>							
Minimum contact load		50 mA, 24 V		1 mA, 5 V DC	5 mA, 5 V DC	50 mA, 24 V	5 mA, 24 V DC
Maximum contact load		–		100 mA, 30 V DC	50 mA, 30 V DC	–	
Contact load according to IEC/EN 62019 and IEC/EN 60947-5-1	230 V AC, AC-12	–				5/–	6 A/–
	230 V AC, AC-13	6 A/6 A		–			
	400 V AC, AC-13	2 A/2 A		–			
	230 V AC, AC-14	6 A/6 A		–			
	400 V AC, AC-14	2 A/2 A		–			
	24 V DC, DC-13	6 A/3 A		–			
	30 V DC, DC-14	–		0.1 A		–	
	60 V DC, DC-13	3 A/1.5 A		–			
	110 V DC, DC-13	1 A/0.75 A		–			
	220 V DC, DC-12	–				0.5/–	1 A/–
	220 V DC, DC-13	1 A/0.5 A		–			
Contact load according to UL	120 V AC	–					
	125 V AC	3 A	–				
	240 V AC	4 A	–				
	277 V AC	–					
	480 V AC	–					
	60 V DC	–					
	125 V DC	1.1 A	–				
	250 V DC	0.55 A	–				
Service life, on average, with rated load	Actuations	20000			–	8000	
<b>Safety</b>							
Short-circuit protection		Miniature circuit breakers 5SY... 6 A or gG 6 A fuse			B6 or C6 or gL/gG 6 A fuse		
<b>Connections</b>							
Conductor cross-sections		0.5 ... 2.5 mm <sup>2</sup> (AWG 22 ... 14)			0.75 ... 2.5 mm <sup>2</sup>		
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)			–	0.6 Nm	
<b>Ambient conditions</b>							
Permissible ambient temperature		–40 ... +70 °C			–25 ... +60 °C		
Permissible storage temperature		–40 ... +75 °C			–40 ... +70 °C		
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles					
Mounting position		Any					
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s <sup>2</sup>			–		
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s <sup>2</sup>			–		

<sup>1)</sup> No approvals

# Electrical accessories



## Fault signal contacts (FC)

- Signals the automatic tripping of the protective device in the event of a fault, such as an overload or a short circuit
- If the fault signal contact is activated, the contact position does not change if the in-built protective device is tripped manually
- Version with TEST and RESET buttons enables the testing of control circuits without the need to trip the protective device
- Red RESET button in the operating handle indicates automatic shutdown of the mounted protective device

For combination with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBO	Arc fault detection devices			
<b>Fault signal contacts (FC)</b>							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 <sup>1)</sup> , 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020
					2 NO	0.5 MW	5ST3021
					2 NC	0.5 MW	5ST3022
<b>Fault signal contacts (FC) with Test and Reset buttons</b>							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 <sup>1)</sup> , 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020-2
					2 NO	0.5 MW	5ST3021-2
					2 NC	0.5 MW	5ST3022-2

<sup>1)</sup> 5ST3805-1 handle coupler required

## Further technical specifications

Standards			
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1	
	UL, CSA	UL 1077, CSA C22.2 No. 235	–
Contacts			
Minimum contact load		50 mA, 24 V	
Contact load according to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A	
	400 V AC, AC-13	6 A/6 A	
	230 V AC, AC-14	2 A/2A	
	400 V AC, AC-14	2 A/2A	
	24 V DC, DC-13	6 A/3 A	
	60 V DC, DC-13	3 A/1.5 A	
	110 V DC, DC-13	1 A/0.75 A	
	220 V DC, DC-13	1 A/0.5 A	
Contact load according to UL	120 V AC	–	
	AC 125 V	3 A	–
	AC 240 V	4 A	–
	AC 277 V	–	
	AC 480 V	1.5 A	–
	DC 60 V	–	
	DC 125 V	1.1 A	–
	DC 250 V	0.55 A	–
Service life, on average, with rated load	Actuations	20000	
Safety			
Short-circuit protection		Miniature circuit breakers or gG 6 A fuse	
Connections			
Conductor cross-sections		0.5 ... 2.5 mm <sup>2</sup> (AWG 22 ... 14)	
Terminals	Max. tightening torque	0.5 Nm [4.5 lb-in]	
Ambient conditions			
Permissible ambient temperature		–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C	
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles	
Mounting position		Any	
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s <sup>2</sup>	
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s <sup>2</sup>	

**5ST3020,  
5ST3021,  
5ST3022**

**5ST3020-2,  
5ST3021-2,  
5ST3022-2**





## Auxiliary switches and fault signal contacts (AS+FC)

- Combine the properties of both switches in a width of only 0.5 MW (9 mm)
- Signal contact point of the mounted device
- Signal the automatic tripping of the protective device in the event of a fault, such as an overload, short circuit or residual current
- If the fault signal contact is activated, the contact position does not change if the in-built protective device is tripped manually

For combination with basic units				Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBO	Arc fault detection devices		
<b>Auxiliary switches and fault signal contacts (AS+FC)</b>						
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 <sup>1)</sup> , 5SV1	5SV6	1 CO (AS) + 1 CO (FC)	0.5 MW
						5ST3062

<sup>1)</sup> 5ST3805-1 handle coupler required

4

### Further technical specifications

5ST3062

Standards		
Standards	IEC/EN UL, CSA	IEC/EN 62019, IEC/EN 60947-5-1 UL 1077, CSA C22.2 No. 235
Contacts		
Minimum contact load		50 mA, 24 V
Maximum contact load		–
Contact load according to IEC/EN 62019/ IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A
	400 V AC, AC-14	2 A/2 A
Contact load according to IEC/EN 62019/ IEC/EN 60947-5-1	24 V DC, DC-13	3 A/3 A
	60 V DC, DC-13	3 A/1 A
	110 V DC, DC-13	0.5 A/0.5 A
	220 V DC, DC-13	0.5 A/0.3 A
Contact load according to UL	125 V AC	2 A
	240 V AC	1.5 A
	480 V AC	0.75 A
	125 V DC	0.5 A
	250 V DC	0.3 A
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breakers or gG 6 A fuse
Connections		
Conductor cross-sections		0.5 ... 2.5 mm <sup>2</sup> /AWG 22 ... 14
Terminals	Max. tightening torque	0.5 Nm [4.5 lb-in]
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s <sup>2</sup>
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s <sup>2</sup>

# Electrical accessories

## 5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with communication and measuring function



- Reports the switching state of the mounted standard circuit protection device (ON, tripped, manual OFF, tripped with locked handle)
- Measures the temperature of the device and counts operating cycles, trips and operating hours
- Communication via radio to 7KN Powercenter 1000 data transceiver
- Plug-in terminals for 24 V DC power supply incl. daisy chain function
- Low space requirements of 0.5 MW (9 mm)

For combining with basic units					Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	Communication	
<b>5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with communication and measuring function</b>						
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 <sup>1)</sup> , 5SV1	5SV6	Radio link to 7KN Powercenter 1000	0.5 MW 5ST3062-0MC

<sup>1)</sup> 5ST3805-1 handle coupler required

### Note:

Please note the country-specific radio licenses of the products in SIOS  
[www.siemens.com/lowvoltage/certificates \(109801197\)](http://www.siemens.com/lowvoltage/certificates)


### Further technical specifications

#### 5ST3062-0MC

<b>Standards</b>		
Standards	IEC/EN; UL, CSA RED	60669-2-5 2014/53/EU
<b>Power supply</b>		
Power supply		24 V DC ±20%, SELV
Conductor cross-sections		0.2 ... 1.5 mm <sup>2</sup>
Connection type		Plug-in terminal
<b>Safety</b>		
Pollution degree for overvoltage category		2/II
Degree of protection		IP40, with front cover
<b>Ambient conditions</b>		
Permissible ambient temperature		-25 ... +60 °C
Permissible storage temperature		-40 ... +85 °C
Humidity		93% at 40 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Schock		150 m/s <sup>2</sup>
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s <sup>2</sup>
Service life		10000
<b>Communication</b>		
Interface	7KN Powercenter 1000	Radio link
Temperature		Accuracy of 2.5°C with limit monitoring incl. storage (1 hour in 1-minute intervals and 7 days in 15-minute intervals)
Operating cycle counters		Mechanical operation with limit monitoring
Trip counter		Trip of the mounted circuit protection device with limit monitoring
Operating hours counter		Operating hours with limit monitoring



## 7KN Powercenter 1000 data transceiver

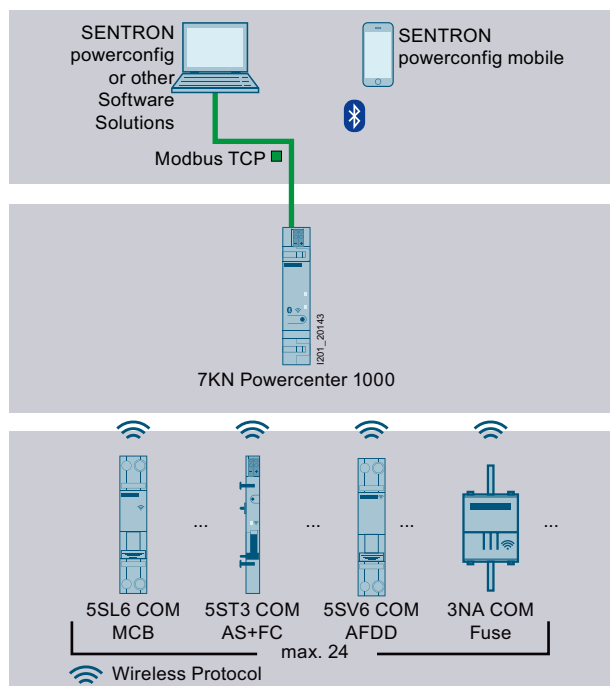

- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



7KN Powercenter 1000

Article No.

7KN1110-0MC00

### See page 10/19

You will find further information under:  
[www.siemens.com/lowvoltage/manuals](http://www.siemens.com/lowvoltage/manuals)

Installation manual – Circuit protection devices with communication and measuring function (109791805)



System manual – Circuit protection devices with communication and measuring function (109791806)



# Electrical accessories



## Shunt trips (ST)

- For remote-control tripping of the mounted device

For combination with basic units			Rated operational voltage $U_e$	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBO			
<b>Shunt trips (ST)</b>					
5SL4, 5SY, 5SP4	5SV	5SU1 <sup>1)</sup>	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030
			24 ... 48 V AC/DC	1 MW	5ST3031
			12 V DC	1 MW	5ST3031-0XX01

<sup>1)</sup> 5ST3805-1 handle coupler required

4

### Further technical specifications

Further technical specifications	5ST3030	5ST3031	5ST3031-0XX01
<b>Standards</b>			
Standards	IEC/EN		EN 60947-1
<b>Supply</b>			
Primary operating range	0.7 ... 1.1 × $U_n$		
Rated frequency $f_n$	50 ... 60 Hz		–
<b>Contacts</b>			
Minimum contact load	50 mA, 24 V		1 mA, 5 V
Tripping operations	Max. 2000		
Service life, on average, with rated load	Actuations		20000
<b>Safety</b>			
Short-circuit protection	Miniature circuit breakers B/C 6 A or fuse gG 6 A		
<b>Connections</b>			
Conductor cross-sections	0.5 ... 2.5 mm <sup>2</sup> (AWG 22 ... 14)		
Terminals	Max. tightening torque		0.8 Nm [6.8 lb-in]
<b>Ambient conditions</b>			
Permissible ambient temperature	–25 ... +55 °C		–40 ... +70 °C
Permissible storage temperature	–40 ... +75 °C		
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles
Mounting position	Any		
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27		150 m/s <sup>2</sup>
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6		50 m/s <sup>2</sup>



## Undervoltage releases (UR)

- Are integrated (e.g. in EMERGENCY-OFF loops), thus ensuring that the MCB trips in the event of an emergency. EMERGENCY OFF is a function provided to disconnect the electricity supply to all or some parts of the installation in case of emergency, when there is a risk of electric shock or any other hazard caused by electrical power
- In addition, an undervoltage release also trips if the voltage is interrupted or too low, or prevents the MCB from closing
- Combination with 5SV RCCB not suitable for implementation of EMERGENCY-OFF/ EMERGENCY-STOP circuits

For combination with basic units			Rated operational voltage $U_e$	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBO			
<b>With integrated auxiliary switch</b>					
5SL4, 5SY, 5SP4	5SV	5SU1 <sup>1)</sup>	230 V AC	1 MW	5ST3040
			110 V DC	1 MW	5ST3041
			24 V DC	1 MW	5ST3042
<b>Without integrated auxiliary switch</b>					
5SL4, 5SY, 5SP4	5SV	5SU1 <sup>1)</sup>	230 V AC	1 MW	5ST3043
			110 V DC	1 MW	5ST3044
			24 V DC	1 MW	5ST3045

<sup>1)</sup> 5ST3805-1 handle coupler required

### Further technical specifications

5ST304.

<b>Standards</b>		
Standards	IEC/EN	EN 60947-1
<b>Supply</b>		
Primary operating range	0.85 ... 1.1 × $U_n$	
Rated frequency $f_n$	50/60 Hz	
<b>Contacts</b>		
Minimum contact load	50 mA, 24 V	
Tripping operations	Max. 2000	
Service life, on average, with rated load	Actuations	20000
<b>Safety</b>		
Short-circuit protection	Miniature circuit breakers B/C 6 A or fuse gG 6 A	
<b>Connections</b>		
Conductor cross-sections	0.5 ... 2.5 mm <sup>2</sup> (AWG 22 ... 14)	
Terminals	Max. tightening torque	0.8 Nm [6.8 lb-in]
<b>Ambient conditions</b>		
Permissible ambient temperature	−25 ... +55 °C	
Permissible storage temperature	−40 ... +75 °C	
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position	Any	
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s <sup>2</sup>
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s <sup>2</sup>

# Electrical accessories



## 5ST3 remote control mechanisms (RC)

- For operating facilities that are extensive or not continuously staffed
- Allow direct and immediate access to the plant even if it is remote or in a location that is hard to reach
- Permit fast restarts following a fault
- Version with ARD with automatic restart
- Versions with ARD and Power with integrated auxiliary switches and fault signal contacts

Type of remote control mechanism	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage $U_e$	Mounting width (1 MW = 18 mm)	Article No.
Basic	–	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	1.5 MW	5ST3053
				177 ... 270 V AC	2 MW	5ST3054
Power	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3055
				177 ... 270 V AC	2 MW	5ST3056
Power with ARD	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3057
				177 ... 270 V AC	2 MW	5ST3058
Power with extended function	LED	–40 °C ... +70 °C	Acc. to EN 61373/ EN 50155 "1B"	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3070
				170 ... 277 V AC, 77 ... 286 V DC	2 TE	5ST3071 <b>new</b>

### Further technical specifications









	5ST3053	5ST3054	5ST3055	5ST3056	5ST3057	5ST3058	5ST3070	5ST3071
<b>Standards</b>								
Standards	EN 50557 (VDE 0640-20)							
<b>Supply</b>								
Rated frequency $f_n$	50 ... 60 Hz							
Rated power dissipation on standby	≤1 VA							
<b>Contacts</b>								
Service life, on average, with rated load	Actuations	10000						
Number of remote switching operations per minute	2							
Number of automatic reclose attempts	–				3	–		
Cable length in the control circuit	≤1500 m							≤1500 m (DC)/ ≤200 m (AC)
Sliding selector with locking device	–	■						
Integrated auxiliary switches	–		1CO; 2 A; 250 V					
Integrated fault signal contacts	–		1CO; 2 A; 250 V					
<b>Connections</b>								
Conductor cross-sections	0.5 ... 1.5 mm <sup>2</sup> (AWG 14 ... 30)							
Terminal tightening torque	0.2 ... 0.25 Nm (2.0 lb-in)							
<b>Ambient conditions</b>								
Permissible storage temperature	–40 ... +55 °C					–40 ... +70 °C		
Degree of protection	IP20							
Pollution degree for overvoltage category	3/II							

### Suitable adapters for combination with basic units



Basic units	Mounting width							Article No.
	1 MW	2 MW	3 MW	4 MW	2-pole	3-pole	4-pole	
5SU1	–	■	■	–	–	–	–	5ST3820-5
5SV1	■	–	–	–	–	–	–	5ST3820-6
5SV3	–	■	–	■	–	–	–	5ST3820-6
5SM2 with 5SY	–	–	–	–	■	–	–	5ST3820-3 + 5ST3820-1
	–	–	–	–	–	■	■	5ST3820-3 + 5ST3820-2
5SM2 with 5SL	–	–	–	–	■	–	–	5ST3820-3 + 5ST3820-6
	–	–	–	–	–	■	■	5ST3820-3 + 5ST3820-7

# Mechanical accessories

Handle couplers for additional components	
	<ul style="list-style-type: none"> <li>Necessary for mounting the additional components auxiliary switches, fault signal contacts, shunt trips and undervoltage releases onto the 5SU1 RCBO</li> <li>1 set = 5 units</li> </ul>
	Article No. 5ST3805-1
Handle locking devices	
	<ul style="list-style-type: none"> <li>To prevent undesired mechanical ON/OFF switching</li> <li>Sealable and lockable</li> <li>For padlock with 3 ... 6 mm shackle</li> </ul>
	Version Article No. For 5SV RCCBs, 5SV1 RCBOs, 5SV6 AFDD/MCB 5ST3806
	For 5SU1 RCBOs 5ST3801-1
Locking device	
	<ul style="list-style-type: none"> <li>For 5SV RCCBs, 5SV1 RCBOs, 5SV6 AFDD/MCB</li> </ul>
	Comprising Article No. 5ST3806 handle locking device and 5ST3802 padlock 5ST3807
Padlock	
	<ul style="list-style-type: none"> <li>For 5ST3801 and 5ST3806 handle locking devices and 5ST3054 ... 58, 5ST3070 remote control mechanisms</li> </ul>
	Article No. 5ST3802
Device labels	
	<ul style="list-style-type: none"> <li>For adhesive attachment</li> <li>For modular installation devices, such as 5SY, 5SL, 5TL1</li> </ul>
	Types Article No. 15 mm x 6 mm, white (WIN 098) 8WH8210-0AA35 15 mm x 6 mm, yellow (WIN 099) 8WH8210-0AA36
Covers for connection terminals	
	<ul style="list-style-type: none"> <li>For 5SV3 and 5SV4 residual current operated circuit breakers, sealable (2 units in plastic bag)</li> </ul>
	Mounting width Article No. 2 MW 5SW3010 4 MW 5SW3008
Terminal covers, gray	
	<ul style="list-style-type: none"> <li>For surface mounting, IP40 degree of protection</li> <li>Sealable</li> <li>Can be used with 35 mm DIN rail</li> </ul>
	For width up to Article No. 2.5 MW 5SW3004 4.5 MW 5SW3005
Wall enclosures, gray	
	<ul style="list-style-type: none"> <li>For flush mounting, IP40 degree of protection</li> <li>Can be used with 35 mm DIN rail</li> </ul>
	For width up to Article No. 2.5 MW 5SW3006 4.5 MW 5SW3007

# RCCB protective socket outlets

Acc. to VDE 0664

## Covers



- Can be assembled as mini-distribution board
- Suitable for all devices
- Cover parts prepared for rail mounting of conventional label caps

Comprising	Article No.
End plates	5ST2134
Angled profile	5ST2135
Flat profile as alternative	5ST2136

## RCCB protective socket outlets in molded-plastic enclosures



- Equipped with RCCB and flush-mounted SCHUKO® socket outlet
- IP54 degree of protection

Rated residual current $I_{\Delta n}$	Rated current $I_n$	Article No.
10 mA	16 A	5SZ9206
30 mA	16 A	5SZ9216

4






# Standard busbars

## General information



### Infeed


#### At the start or end of the busbar

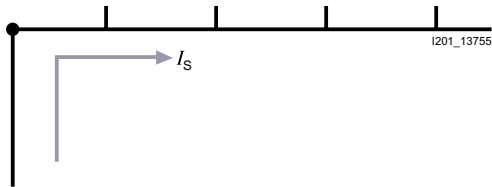

Maximum busbar current  $I_s$ /phase


- Cross-section 10 mm<sup>2</sup>: 63 A
- Cross-section 16 mm<sup>2</sup>: 80 A

#### Along the busbar or midpoint infeed

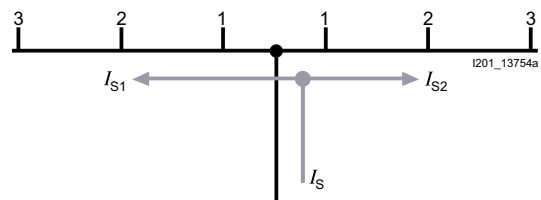

Maximum busbar current  $I_s$ /phase

- Cross-section 10 mm<sup>2</sup>: 100 A
- Cross-section 16 mm<sup>2</sup>: 130 A






## Fixed lengths, cannot be cut

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section	
				10 mm <sup>2</sup>	16 mm <sup>2</sup>
<b>2-phase/1-phase + N</b> <p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 6 × 2MW devices (2P)	12 MW	210 mm	Article No. 5ST3608	Article No. 5ST3638
<b>3-phase, for MCBs with RCCB</b> <p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 8 MCBs 1P with 1 RCCB 3P+N, N right	12 MW	210 mm	Article No. 5ST3624	Article No. 5ST3654
<p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 10 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCBs 3P and 7 MCBs 1P	14 MW	249 mm	5ST3624-4	–
<p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 6 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCBs 3P and 3 MCBs 1P	10 MW	176 mm	5ST3624-1	–
<p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 8 MCBs 1P with 1 RCCB 3P+N, N left	11 MW	192 mm	5ST3667	5ST3668
<b>4-phase/3-phase + N</b> <p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 6 × 2MW devices (1P+N)	12 MW	215 mm	Article No. 5ST3623	Article No. 5ST3653
<b>4-phase/3-phase + N, for MCBs with RCCB</b> <p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 1 RCCB 3P+N, 1 MCBs 3P+N and 6 LS 1P	14 MW	248 mm	Article No. 5ST3724-4	–
<p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 1 RCCB 3P+N, 1 MCBs 3P+N and 3 LS 1P+N	14 MW	248 mm	5ST3725-4	–
<p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 1 RCCB 3P+N, 1 MCBs 3P and 3 LS 1P+N	13 MW	230 mm	5ST3725-3	–
<p>Ø 10 mm<sup>2</sup> Ø 16 mm<sup>2</sup></p>	For 1 RCCB 3P+N and 5 MCBs 1P+N	14 MW	248 mm	5ST3625-4	–

# Standard busbars

Can be cut

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section	
					10 mm <sup>2</sup>	16 mm <sup>2</sup>
	For 2 MW units (2P/1+N)	12 MW	214 mm	■	Article No.	Article No.
		56 MW	1016 mm	–	5ST3734	5ST3704
	For RCBOs or MCBs 1P+N	56 MW	1000 mm	–	Article No.	Article No.
					5ST3770-2	5ST3770-3
	For 6 MCBs 1P+N with 1 RCCB 3P+N, N right	16 MW	292 mm	■	Article No.	Article No.
					5ST3770-4	5ST3770-5

## Accessories for busbars 5ST36 and 5ST37

End caps for 5ST37		
Version	Article No.	
For 2-phase and 3-phase busbars	5ST3750	
For 4-phase busbars	5ST3718	





## 5ST36 and 5ST37

### Fixed lengths, cannot be cut, for devices with add-on 5SM6 arc fault detection units

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 10 mm <sup>2</sup>	Article No.
<b>3-phase</b> 	For 5SM601.	12 MW	210 mm	–	Gray		5ST3615-1

4

### Can be cut, for devices with add-on 5SM6 arc fault detection units

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 10 mm <sup>2</sup>	Article No.
<b>1-phase, straight</b> 	For 5SM601.	56 MW	1000 mm	–	Gray Blue		5ST3764-1 5ST3765-2
<b>1-phase, angled 45°</b> 	For 5SM601.	56 MW	1000 mm	–	Blue		5ST3765-1
<b>2-phase/1-phase + N</b> 	For 5SM602. (1P+N)	56 MW	1000 mm	–	Gray		5ST3735-1
<b>3-phase</b> 	For 5SM601.	60 MW	1050 mm	–	Gray		5ST3740-1
<b>4-phase/3-phase + N</b> 	For 5SM602.	52 MW	950 mm	–	Gray		5ST3746-1


# Standard busbars



## 5ST36 and 5ST37

Can be cut, for devices with add-on 5SM6 arc fault detection units and infeed via RCCB

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 16 mm <sup>2</sup>	Article No.
2-phase/1-phase + N	For RCCB 2P N-right and 5 AFDD (5SM601.) + compact device	12 MW	214 mm	■	Gray		5ST3772



4

## Accessories

Terminals for infeed at side		Article No.
For conductors up to 25 mm <sup>2</sup>	Short	5ST3768
	Short, IP20	5ST3771-2
	Long	5ST3771-1
End caps		Article No.
For 1-phase busbars	Gray	5ST3766
	Blue	5ST3767
For 2 and 3-phase busbars		5ST3750
For 4-phase busbars		5ST3718
Touch protection		Article No.
For free connections, yellow (RAL 1004) 5× 1 pin		5ST3655


# Compact busbars

## General information



### Infeed


At the start or end of the busbar

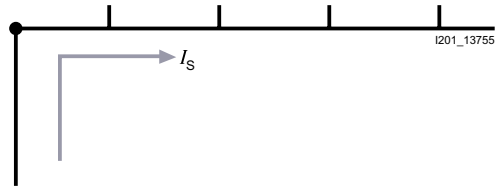

Maximum busbar current  $I_s$ /phase

- Cross-section 10 mm<sup>2</sup>: 63 A
- Cross-section 16 mm<sup>2</sup>: 80 A

Along the busbar or midpoint infeed





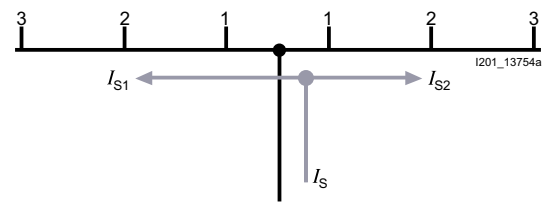


Maximum busbar current  $I_s$ /phase



- Cross-section 10 mm<sup>2</sup>: 100 A
- Cross-section 16 mm<sup>2</sup>: 130 A

# Compact busbars

5ST36, fixed lengths, cannot be cut

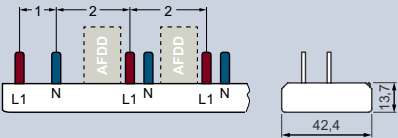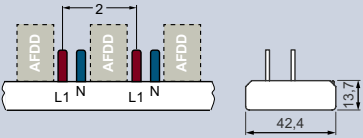Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm <sup>2</sup>
<b>2-phase/1-phase + N, for infeed via RCCB</b> 	For 1 x RCCB 1P+N and 5 x compact devices equipped with 5SM6 arc fault detection unit	12 MW	216 mm	■	Article No. 5ST3685-0
<b>2-phase/1-phase + N</b> 	For compact devices	6 MW 9 MW 12 MW	113 mm 166 mm 218 mm	■ ■ ■	Article No. 5ST3674-6 5ST3674-7 5ST3674-0
	For 6x compact devices with 5SM6 arc fault detection unit	12 MW	200 mm	■	5ST3676-0
<b>4-phase/3-phase + N</b> 	For compact devices	6 MW 9 MW 12 MW 14 MW	113 mm 166 mm 218 mm 254 mm	■ ■ ■ ■	Article No. 5ST3673-6 5ST3673-7 5ST3673-0 5ST3673-4
	For 6x compact devices with 5SM6 arc fault detection unit	11 MW	200 mm	■	5ST3675-0






## 5ST37, can be cut

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm <sup>2</sup>	Article No.
<b>2-phase/1-phase + N, for infeed via RCCB</b>						
	For 1× RCCB 1P+N and 10× compact devices	12 MW	215 mm	■		5ST3784-0
	For 1× RCCB 1P+N (RCCB N left only) and 10× compact devices	12 MW	215 mm	■		5ST3784-0KL
<b>2-phase/1-phase + N</b>						
	For compact devices	60 MW	1060 mm	–		5ST3774-0
	For compact devices with 5SM6 arc fault detection unit	59 MW	1042 mm	–		5ST3776-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–		5ST3778-0
	For compact devices with 5SM6 arc fault detection unit and auxiliary switch	58.5 MW	1036 mm	–		5ST3780-0
	For 2 MW units (MCBs or RCBOs) with 5SM6 arc fault detection device and auxiliary switch	54 MW	956 mm	–		5ST3786-0

# Compact busbars

## 5ST37, can be cut

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm <sup>2</sup>	Article No.
<b>4-phase/3-phase + N, for infeed via RCCB</b>						
	For 1× RCCB 3P+N and 6× compact devices	10 MW	181 mm	■		5ST3783-1
	For 1× RCCB 3P+N and 8× compact devices	12 MW	216 mm	■		5ST3783-0
	For 1× RCCB 3P+N and 10× compact devices	14 MW	251 mm	■		5ST3783-4
	For 1× RCCB 3P+N (RCCB N left only) and 6× compact devices	10 MW	181 mm	■		5ST3783-1KL
	For 1× RCCB 3P+N (RCCB N left only) and 8× compact devices	12 MW	216 mm	■		5ST3783-0KL
	For 1× RCCB 3P+N, 1× MCB 3P and 7× compact devices	14 MW	253 mm	■		5ST3785-4
	For 1× RCCB 3P+N, 2× MCBs 3P+N and 12× compact devices	24 MW	430 mm	■		5ST3790-1
	For 1× RCCB 3P+N, 2× MCBs 3P+N and 45× compact devices	57 MW	1009 mm	–		5ST3790-2
	For 1× RCCB 3P+N, 1× MCB 3P+N and 4× compact devices	12 MW	217 mm	■		5ST3795-0
	For 1× RCCB 3P+N, 1× MCB 3P+N and 6× compact devices	14 MW	253 mm	■		5ST3795-4



Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm <sup>2</sup> Article No.
	For compact devices	60 MW	1060 mm	–	5ST3773-0
	For compact devices equipped with 5SM6 arc fault detection unit	59 MW	1042 mm	–	5ST3775-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3777-0

4

### Accessories for 5ST3 compact busbars, versions that can and cannot be cut

Touch protection for 5ST3				
Version	Color	Article No.		
	For free connections, for pins L1, N	Yellow (RAL1004)	5ST3655	
	For pins L2/L3	Yellow (RAL1004)	5ST3655-0HG	
End caps for 5ST3				
Version	Color	Article No.		
	For 2-phase and 4-phase busbars	Gray	5ST3788-0	
Terminals, short, IP20				
Version	For conductors	Infeed	Article No.	
	Infeed terminal for connection of larger cross section	Up to 25 mm <sup>2</sup>	Lateral	5ST3771-2



# Appendix



Conditions of sale and delivery \_\_\_\_\_ A/2

Link directory \_\_\_\_\_ A/4

# Conditions of sale and delivery

## 1. General Provisions

By using this catalog you can purchase products (hardware, software and services) described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as „T&C“). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

### 1.1 For customers with a seat or registered office in European Union

For customers with a seat or registered office in European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for stand-alone software products and software products forming a part of a product or project, the „General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany“<sup>1)</sup> and/or
- for consulting services the „Allgemeine Geschäftsbedingungen für Beratungsleistungen der Division DF – Deutschland“ (available only in German) and/or
- for other services, the „Supplementary Terms and Conditions for Services (‘BL’)<sup>1)</sup> and/or
- for other supplies the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“<sup>1)</sup>.

In case such supplies should contain Open Source Software, the conditions of which shall prevail over the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“<sup>1)</sup>, a notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

### 1.2 For customers with a seat or registered office outside European Union

For customers with a seat or registered office outside European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for consulting services the „Standard Terms and Conditions for Consulting Services of the Division DF for Customers with a Seat or Registered Office Outside of Germany“<sup>1)</sup> and/or
- for other services the „International Terms & Conditions for Services“<sup>1)</sup> supplemented by „Software Licensing Conditions“<sup>1)</sup> and/or
- for other supplies of hard- and software the „International Terms & Conditions for Products“<sup>1)</sup> supplemented by „Software Licensing Conditions“<sup>1)</sup>

### 1.3 For customers with master or framework agreement

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

## 2. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

<sup>1)</sup> The text of the Terms and Conditions of Siemens AG can be downloaded at [https://mall.industry.siemens.com/legal/ww/en/terms\\_of\\_trade\\_en.pdf](https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf)

### 3. Export Regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with „ECCN“ unequal „N“) and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations. Products labeled with „AL“ unequal „N“ are subject to European/national export authorization.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels „AL“ and „ECCN“ indicated on order confirmations, delivery notes and invoices are authoritative.

Products without label, with label „AL:N“/„ECCN:N“, or label „AL:9X9999“/„ECCN: 9X9999“ may require authorization from responsible authorities depending on the final end-use, or the destination.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you shall comply with all applicable national and international (re-)export control regulations. In any event of such transfer of goods, works and services you shall comply with the (re-) export control regulations of the Federal Republic of Germany, of the European Union and of the United States of America.

Prior to any transfer of goods, works and services provided by us to a third party you shall in particular check and guarantee by appropriate measures that

- there will be no infringement of an embargo imposed by the European Union, by the United States of America and/or by the United Nations by such transfer, by brokering of contracts concerning those goods, works and services or by provision of other economic resources in connection with those goods, works and services, also considering the limitations of domestic business and prohibitions of by-passing those embargos;
- such goods, works and services are not intended for use in connection with armaments, nuclear technology or weapons, if and to the extent such use is subject to prohibition or authorization, unless required authorization is provided;
- the regulations of all applicable Sanctioned Party Lists of the European Union and the United States of America concerning the trading with entities, persons and organizations listed therein are considered.

If required to enable authorities or us to conduct export control checks, you, upon request by us, shall promptly provide us with all information pertaining to the particular end customer, the particular destination and the particular intended use of goods, works and services provided by us, as well as any export control restrictions existing.

You acknowledge that under the EU embargo regulations against Iran, Syria and Russia respectively the sale of certain listed goods and related services is subject to authorization by the competent export control authorities of the European Union. If (1) the goods or services ordered by you are destined for Iran, Syria or Russia, and (2) the contract for our supplies and/or services is subject to prior authorization of the competent export control authorities of the European Union, the contract between you and us shall come into force in this respect only upon granting of such authorization.

The products listed in this catalog may be subject to European/ German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities. Errors excepted and subject to change without prior notice.

# Link directory

## Catalog LV 10

### General information

Information on low-voltage power distribution and electrical installation technology	<a href="http://www.siemens.com/lowvoltage">www.siemens.com/lowvoltage</a>
Tender specifications	<a href="http://www.siemens.com/lowvoltage/tenderspecifications">www.siemens.com/lowvoltage/tenderspecifications</a>
Conversion tool	<a href="http://www.siemens.com/conversion-tool">www.siemens.com/conversion-tool</a>
Image database	<a href="http://www.siemens.com/lowvoltage/picturedb">www.siemens.com/lowvoltage/picturedb</a>
CAX download manager	<a href="http://www.siemens.com/cax">www.siemens.com/cax</a>
Newsletter system	<a href="http://www.siemens.com/lowvoltage/newsletter">www.siemens.com/lowvoltage/newsletter</a>
Siemens YouTube channel	<a href="http://www.youtube.com/Siemens">www.youtube.com/Siemens</a>
Catalogue LV 10	<a href="http://www.siemens.com/lv10">www.siemens.com/lv10</a>
Catalogue LV 18	<a href="http://www.siemens.com/lv18">www.siemens.com/lv18</a>
Brochures/catalogs	<a href="http://www.siemens.com/lowvoltage/catalogs">www.siemens.com/lowvoltage/catalogs</a>
Operating instructions/manuals	<a href="http://www.siemens.com/lowvoltage/manuals">www.siemens.com/lowvoltage/manuals</a>
Siemens Industry Online Support (SIOS)	<a href="http://www.siemens.com/lowvoltage/product-support">www.siemens.com/lowvoltage/product-support</a>
Siemens Industry Online Support app	<a href="http://www.siemens.com/support-app">www.siemens.com/support-app</a>
My Documentation Manager (MDM)	<a href="http://www.siemens.com/lowvoltage/mdm">www.siemens.com/lowvoltage/mdm</a>
Configurators	<a href="http://www.siemens.com/lowvoltage/configurators">www.siemens.com/lowvoltage/configurators</a>
Siemens Industry Mall – product catalog and online ordering system	<a href="http://www.siemens.com/lowvoltage/mall">www.siemens.com/lowvoltage/mall</a>
Direct forwarding to the Industry Mall	<a href="http://www.siemens.com/product?Article No.">www.siemens.com/product?Article No.</a>
Training	<a href="http://www.siemens.com/sitrain-lowvoltage">www.siemens.com/sitrain-lowvoltage</a>
Local contacts	<a href="http://www.siemens.com/lowvoltage/contact">www.siemens.com/lowvoltage/contact</a> <a href="http://www.siemens.com/lowvoltage/components/contact">www.siemens.com/lowvoltage/components/contact</a> <a href="http://www.siemens.com/lowvoltage/systems/contact">www.siemens.com/lowvoltage/systems/contact</a> <a href="http://www.siemens.com/lowvoltage/software/contact">www.siemens.com/lowvoltage/software/contact</a>
Technical Support	<a href="http://www.siemens.com/support-request">www.siemens.com/support-request</a>
Information on services	<a href="http://www.siemens.com/service-catalog">www.siemens.com/service-catalog</a>
Manual for the generation, transmission and distribution of electrical energy	<a href="http://www.siemens.com/power-engineering-guide">www.siemens.com/power-engineering-guide</a>
Control panels for the North American market	<a href="http://www.siemens.com/northamerican-standards">www.siemens.com/northamerican-standards</a>
Control panel building	<a href="http://www.siemens.com/controlpanel">www.siemens.com/controlpanel</a>
Energy savings and amortization	<a href="http://www.automation.siemens.com/sinasave">www.automation.siemens.com/sinasave</a>
SIMATIC Energy Suite	<a href="http://www.siemens.com/energysuite">www.siemens.com/energysuite</a>
SITOP power supplies	<a href="http://www.siemens.com/sitop">www.siemens.com/sitop</a>
Power distribution with Totally Integrated Power	<a href="http://www.siemens.com/tip">www.siemens.com/tip</a>



# Catalogs and further information



## LV 10 Low-Voltage Power Distribution and Electrical Installation Technology

SENTRON • SIVACON • ALPHA

Protection, Switching, Measuring and  
Monitoring Devices, Switchboards and  
Distribution Systems

PDF (E86060-K8280-A101-B5-7600)



## ET D1 Switches and Socket Outlets DELTA

PDF



## LV 18 Air Circuit Breakers and Molded Case Circuit Breakers with UL Certification

SENTRON

PDF (E86060-K8280-E347-A9-7600)



## Industry Mall

Information and Ordering Platform  
on the Internet:

[www.siemens.com/industrymall](http://www.siemens.com/industrymall)



## IC 10 Industrial Controls SIRIUS

PDF (E86060-K1010-A101-B3-7600)



## SITRAIN

Digital Industry Academy

[www.siemens.com/sitrain](http://www.siemens.com/sitrain)



## Siemens TIA Selection Tool

for the selection, configuration and  
ordering of TIA products and devices

[www.siemens.com/tst](http://www.siemens.com/tst)

The catalogs listed above and additional catalogs are available in PDF format at Siemens Industry Online Support [www.siemens.com/lowvoltage/catalogs](http://www.siemens.com/lowvoltage/catalogs)

Further information on low-voltage power distribution and electrical installation technology is available on the Internet at [www.siemens.com/lowvoltage](http://www.siemens.com/lowvoltage)

## Get more information

[www.siemens.com/lowvoltage](http://www.siemens.com/lowvoltage)

Published by  
Siemens AG

Smart Infrastructure  
Electrical Products  
Siemensstraße 10  
93055 Regensburg, Germany

For the U.S. published by  
Siemens Industry Inc.

100 Technology Drive  
Alpharetta, GA 30005  
United States

PDF (Catalog Extract  
E86060-K8280-A101-B5-7600)  
KG 0622 86 En  
Produced in Germany  
© Siemens 2022

## Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the Internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit <https://www.siemens.com/industrialsecurity>.

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under <https://www.siemens.com/cert>.

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.