

产品信息

Product Information

07/2025

SINAMICS V20 FSAA/FSAB/FSAC/FSAD/FSC 升级安装组件（选件）
SINAMICS V20 FSAA/FSAB/FSAC/FSAD/FSC migration mounting kit (option)

订货号

Article number

- 6SL3266-1ER00-0VA0 (用于外形尺寸 AA/AB for frame size AA/AB)
- 6SL3266-1EB00-0VA0 (用于外形尺寸 AC for frame size AC)
- 6SL3266-1EV00-0VA0 (用于外形尺寸 AD for frame size AD)
- 6SL3266-1EW00-0VA0 (用于外形尺寸 C for frame size C)

功能

Functionality


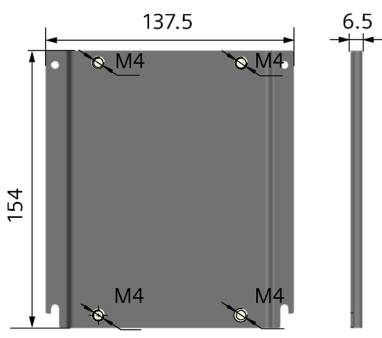
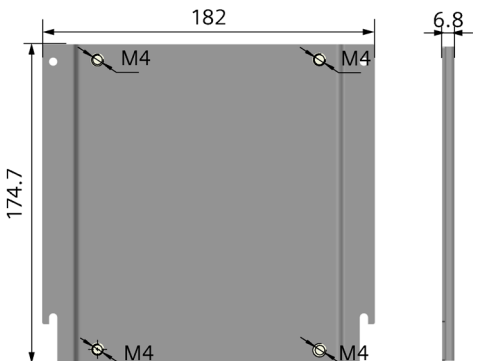
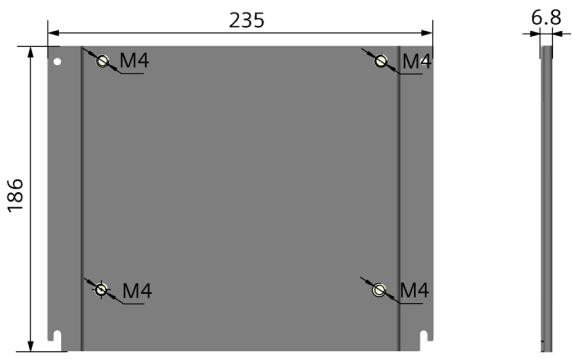
可以使用选配的外形尺寸 FSAA/FSAB 升级安装组件，将变频器安装到 G110 电柜中或 DIN 导轨上。如果您的电柜壁所钻的孔位是匹配外形尺寸 A 的，可依据 FSAA/FSAB 的尺寸在电柜壁上重新钻孔，也可使用此选件进行安装。
You can use the optional migration mounting kit for frame size FSAA/FSAB to install the converter into the G110 control cabinet or onto a DIN rail. If your control cabinet has holes drilled for frame size A, you can either drill additional holes based on the FSAA/FSAB outline dimensions or use this option for installation.

可以直接将外形尺寸 FSAC 安装在 FSA 的 DIN 导轨安装套件上，也可使用 FSAC 的升级安装组件将外形尺寸 FSAC 安装到 FSB 的 DIN 导轨安装套件上。如果您的电柜壁所钻的孔位是匹配外形尺寸 B 的，可依据 FSAC 的尺寸在电柜壁上重新钻孔，也可使用此选件进行安装。
Frame size FSAC can be directly installed using an FSA DIN rail mounting kit; alternatively, you can use the optional migration mounting kit for FSAC to install the FSAC converter onto an FSB DIN rail mounting kit. If your control cabinet has holes drilled for frame size B, you can either drill additional holes based on the FSAC outline dimensions or use this option for installation.

如果您的电柜壁所钻的孔位是匹配外形尺寸 C 的，可依据 FSAD 的尺寸在电柜壁上重新钻孔，也可使用此选件进行安装。
If your control cabinet has holes drilled for frame size C, you can either drill additional holes based on the FSAD outline dimensions or use this option for installation.

经过优化设计，400 V 变频器外形尺寸 C 7.5 kW 具有更紧凑的外形尺寸。如果您的电柜壁所钻的孔位是匹配外形尺寸 D 的，可依据 FSC 的尺寸在电柜壁上重新钻孔，也可使用此选件进行安装。
With the optimized design, the 400 V converter frame size C in a 7.5 kW power rating has more compact outline dimensions. If your control cabinet has holes drilled for frame size D, you can either drill additional holes based on the FSC outline dimensions or use this option for installation.

产品组成及外形尺寸 (mm)
Components and outline dimensions (mm)

FSAA/FSAB  2 × M4 螺钉 2 × M4 screws	FSAC  4 × M4 螺钉 4 × M4 screws
FSAD  4 × M4 螺钉 4 × M4 screws	FSC  4 × M4 螺钉 4 × M4 screws
最大扭矩 Maximum torque: 2.0 Nm 螺钉长度 Screw length: 6 ... 10 mm	

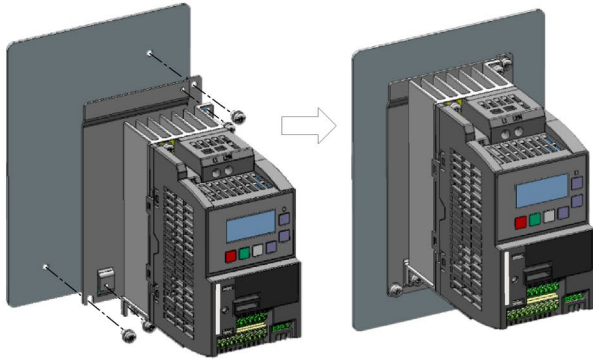
安装升级安装组件至变频器

Fixing a migration mounting kit to the converter


- 控制柜内安装：

Converter mounted in a control cabinet:


FSAA/FSAB



FSAC/FSAD

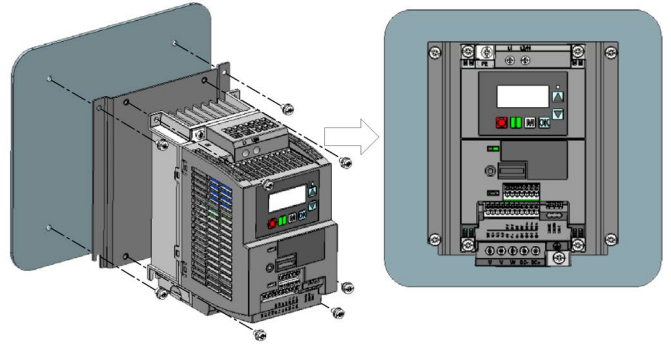

FSC

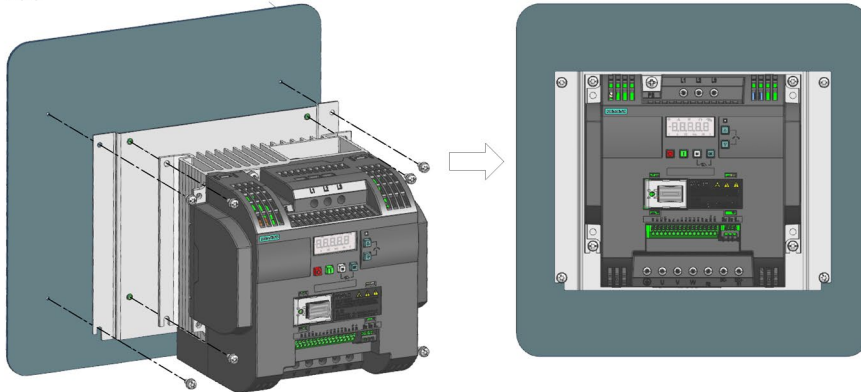

- DIN 导轨安装：
DIN rail mounting mode:

