© Siemens 2019



SIEMENS

SIMATIC PCS 7

SIMATIC PCS 7 Process Control System

Volume 1: System components

Catalog ST PCS 7

Update June 2019

siemens.com/simatic-pcs7

© Siemens 2019

Related catalogs

Catalogs for Process Automation

www.siemens.com/pa-catalogs



SIMATIC ST PCS 7 T
SIMATIC PCS 7 Process Control System
Vol. 2: Technology components

PDF (E86060-K4678-A141-A4-7600)




SIMATIC ST PCS 7 AO
SIMATIC PCS 7
Process Control System
Vol. 3: Add-ons for SIMATIC PCS 7

PDF (E86060-K4678-A121-B4-7600)



SIMATIC ST 70
Products for
Totally Integrated Automation

PDF (E86060-K4670-A101-B7-7600)



SIMATIC HMI / PC-based Automation ST 80/ST PC
Human Machine Interface Systems
PC-based Automation

PDF (E86060-K4680-A101-C7-7600)




Industrial Communication IK PI
SIMATIC NET

E86060-K6710-A101-B8-7600



SITOP KT 10.1
SITOP
Power supply

E86060-D4001-A510-D8



Process Automation FI 01
Field Instruments for
Process Automation

PDF (E86060-K6201-A101-C3-7600)



Process Automation AP 01
Process Analytical Instruments

PDF (E86060-K3501-A101-B4-7600)

Process Automation WT 10
Products for Weighing Technology

PDF (E86060-K6410-A101-A6-7600)



SITRAIN
Training for Industry

www.siemens.com/sitrain



Products for Automation and Drives CA 01
Interactive Catalog
Download

www.siemens.com/automation/ca01



Industry Mall
Information and Ordering Platform
on the Internet:

www.siemens.com/industrymall



Contact
Your personal contact can be found in our
Contacts Database at:

www.siemens.com/automation-contact



© Siemens 2019

SIMATIC PCS 7 V9.0 Process Control System

System components

SIMATIC PCS 7



Catalog ST PCS 7 · November 2017
PDF Update March 2019

Supersedes:
Catalog ST PCS 7 · 2016
Catalog ST PCS 7 · 2017 (Preliminary edition)

Refer to the Industry Mall for current updates of this catalog:
www.siemens.com/industrymall

The products contained in this catalog can also be found in the Interactive Catalog CA 01.
Please contact your local Siemens branch.
The catalog can also be downloaded at:
www.siemens.com/ca01

© Siemens 2019

Software Media and Logistics 1
PCS 7 Software Packages, Software Update Service

System Administration 2
SIMATIC PCS 7 Management Console

Industrial Workstation/IPC 3

Engineering System 4
New: SIMATIC PCS 7 Plant Automation Accelerator

Operator System 5

Process Data Archiving and Reporting 6
Process Historian, Information Server

Plant Device Management 7
SIMATIC PDM, SIMATIC PCS 7 Maintenance Station

Automation Systems 8
New: AS 410E

Compact systems 9
SIMATIC PCS 7 BOX

Industrial Communication 10

Process I/O 11
New: SIMATIC CFU, SIMATIC ET 200SP HA

Batch automation 12
SIMATIC BATCH

Route control 13
SIMATIC Route Control

Safety Integrated for Process Automation 14
New: SIMATIC SIS compact

Industrial Security 15

Update/Upgrade Packages 16

Services for SIMATIC PCS 7 17

Appendix 18

The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with DIN EN ISO 9001 (Certified Registration No. 000656 QM08). The certificate is recognized by all IQNet countries.

© Siemens 2019

Digital Enterprise

The building blocks that ensure everything works together perfectly in the digital enterprise

Digitalization is already changing all areas of life and existing business models. It is placing greater pressure on industry while at the same time creating new business opportunities. Today, thanks to scalable solutions from Siemens, companies can already become a digital enterprise and ensure their competitiveness.



Industry faces tremendous challenges

Reduce time-to-market

Today manufacturers have to bring products to market at an ever-increasing pace despite the growing complexity of these products. In the past, a major manufacturer would push aside a small one, but now it is a fast manufacturer that overtakes a slow one.

Boost flexibility

Consumers want customized products, but at a price they would pay for a mass-produced item. That only works if production is more flexible than ever before.

Improve quality

To ensure a high level of quality while meeting legal requirements, companies have to establish closed quality loops and enable the traceability of products.


Boost efficiency

Today the product itself needs to be sustainable and environmentally friendly, while energy efficiency in production has become a competitive advantage.

Increase security

Increasing networking escalates the threat to production facilities of cyberattacks. Today more than ever, companies need suitable security measures.

© Siemens 2019

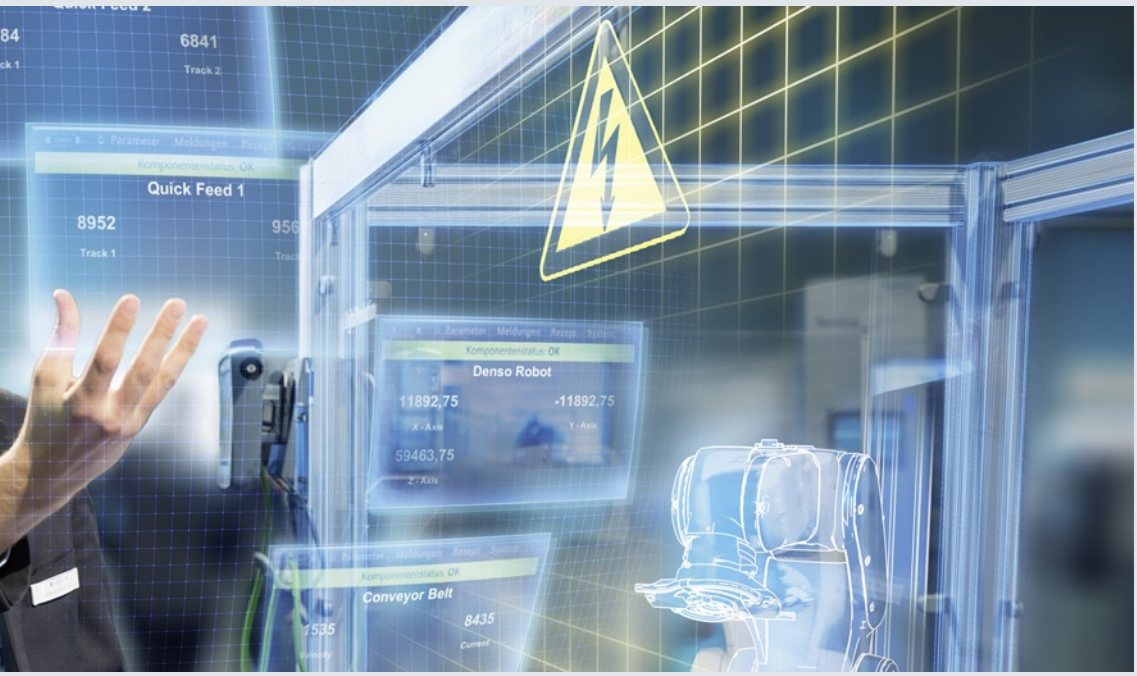

The digital enterprise has already become a reality

To fully benefit from all the advantages of digitalization, companies first have to achieve complete consistency of their data. Fully digitally integrated business processes, including those of suppliers, can help to create a digital representation of the entire value chain. This requires

- the integration of industrial software and automation,
- expansion of the communication networks,
- security in automation,
- and the use of business-specific industrial services.

MindSphere

The cloud-based open IoT operating system from Siemens

With MindSphere, Siemens offers a cost-effective and scalable cloud platform as a service (PaaS) for the development of applications. The platform, designed as an open operating system for the Internet of Things, makes it possible to improve the efficiency of plants by collecting and analyzing large volumes of production data.

Totally Integrated Automation (TIA)

Where digitalization becomes reality


Totally Integrated Automation (TIA) ensures the seamless transition from the virtual to the real world. It already encompasses all the necessary conditions for transforming the benefits of digitalization into true added value. The data that will form the digital twin for actual production is generated from a common base.

Digital Plant
Learn more about the digital enterprise for the process industry
www.siemens.com/digitalplant


Digital Enterprise Suite
Learn more about the digital enterprise for the discrete industry
www.siemens.com/digital-enterprise-suite

© Siemens 2019

SIMATIC PCS 7
Room for new perspectives

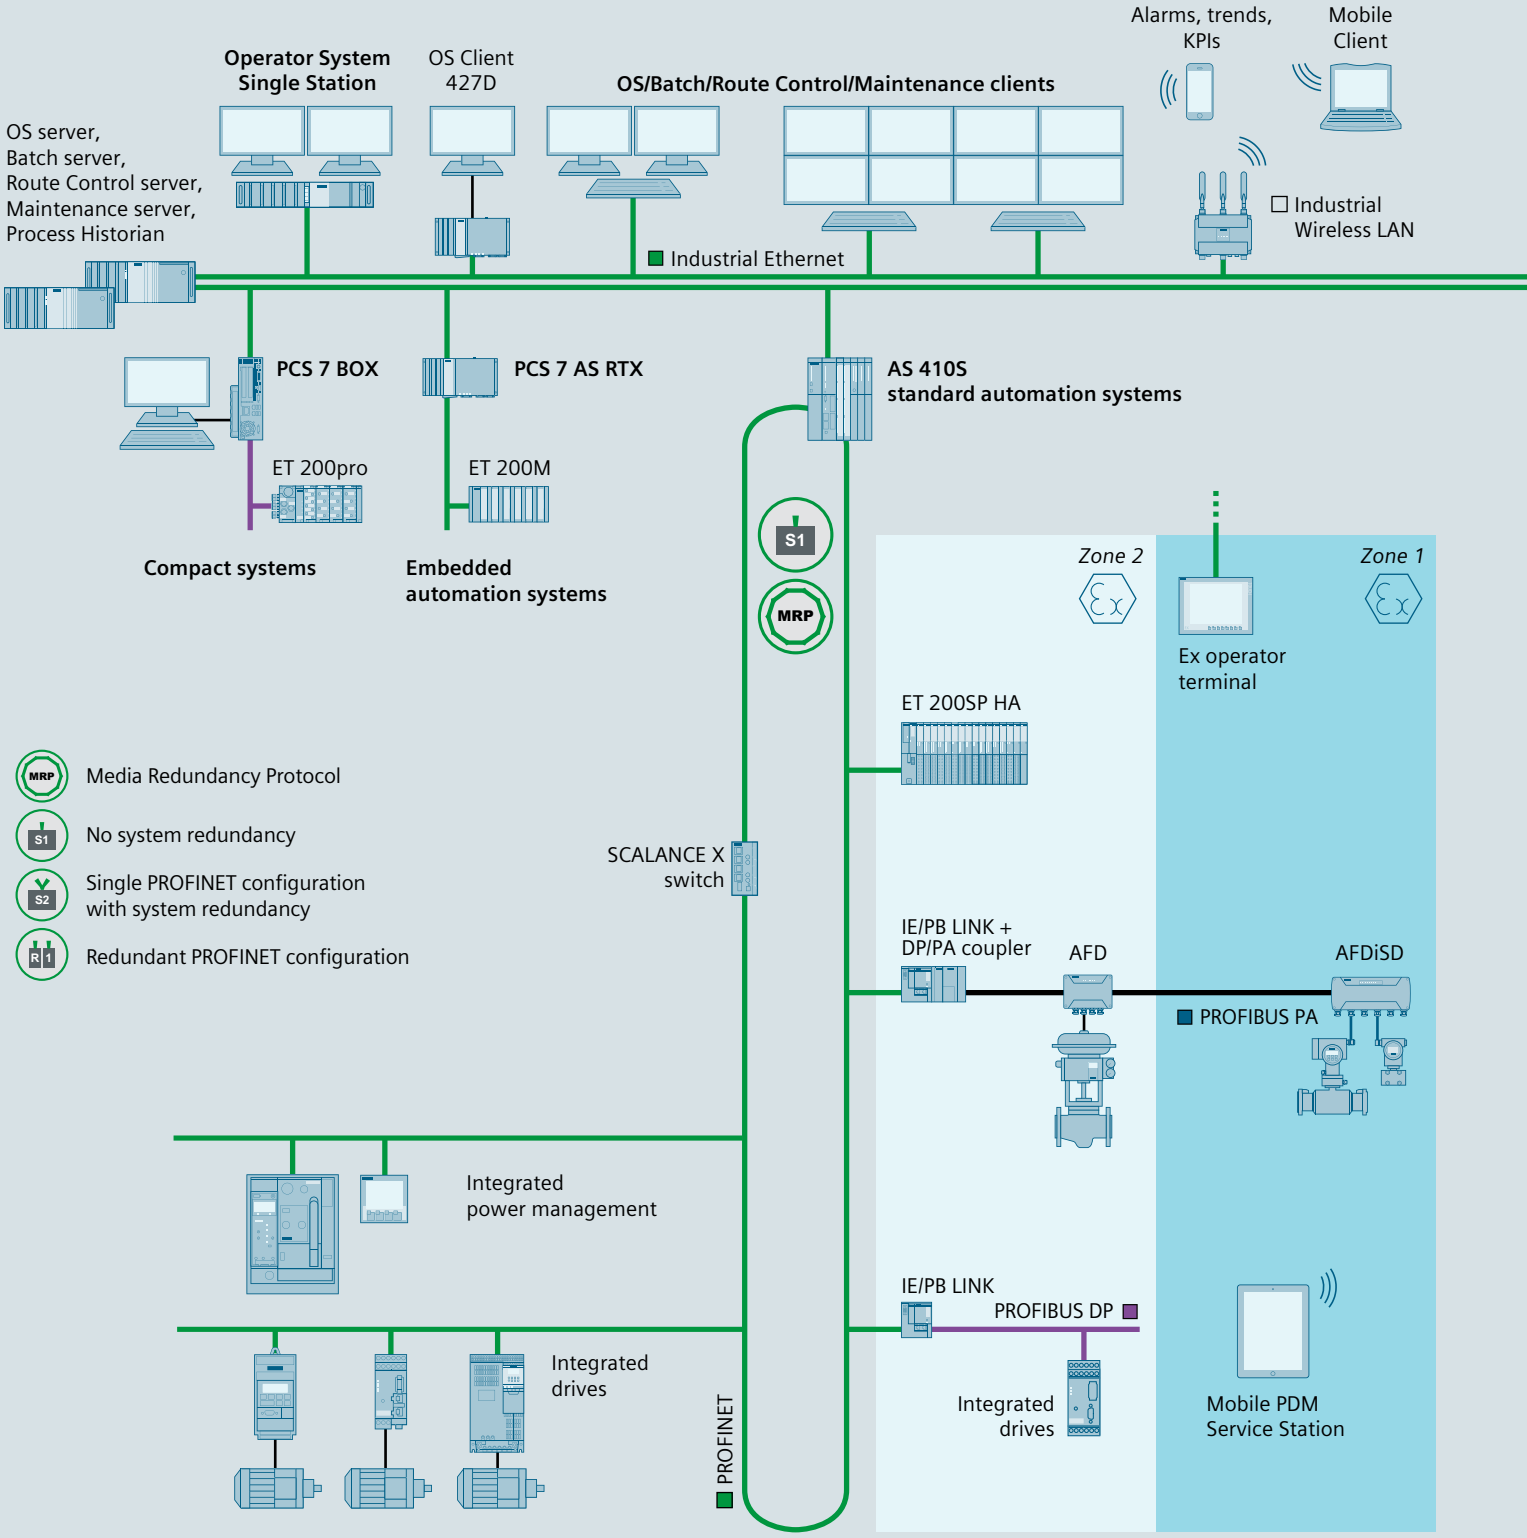

© Siemens 2019

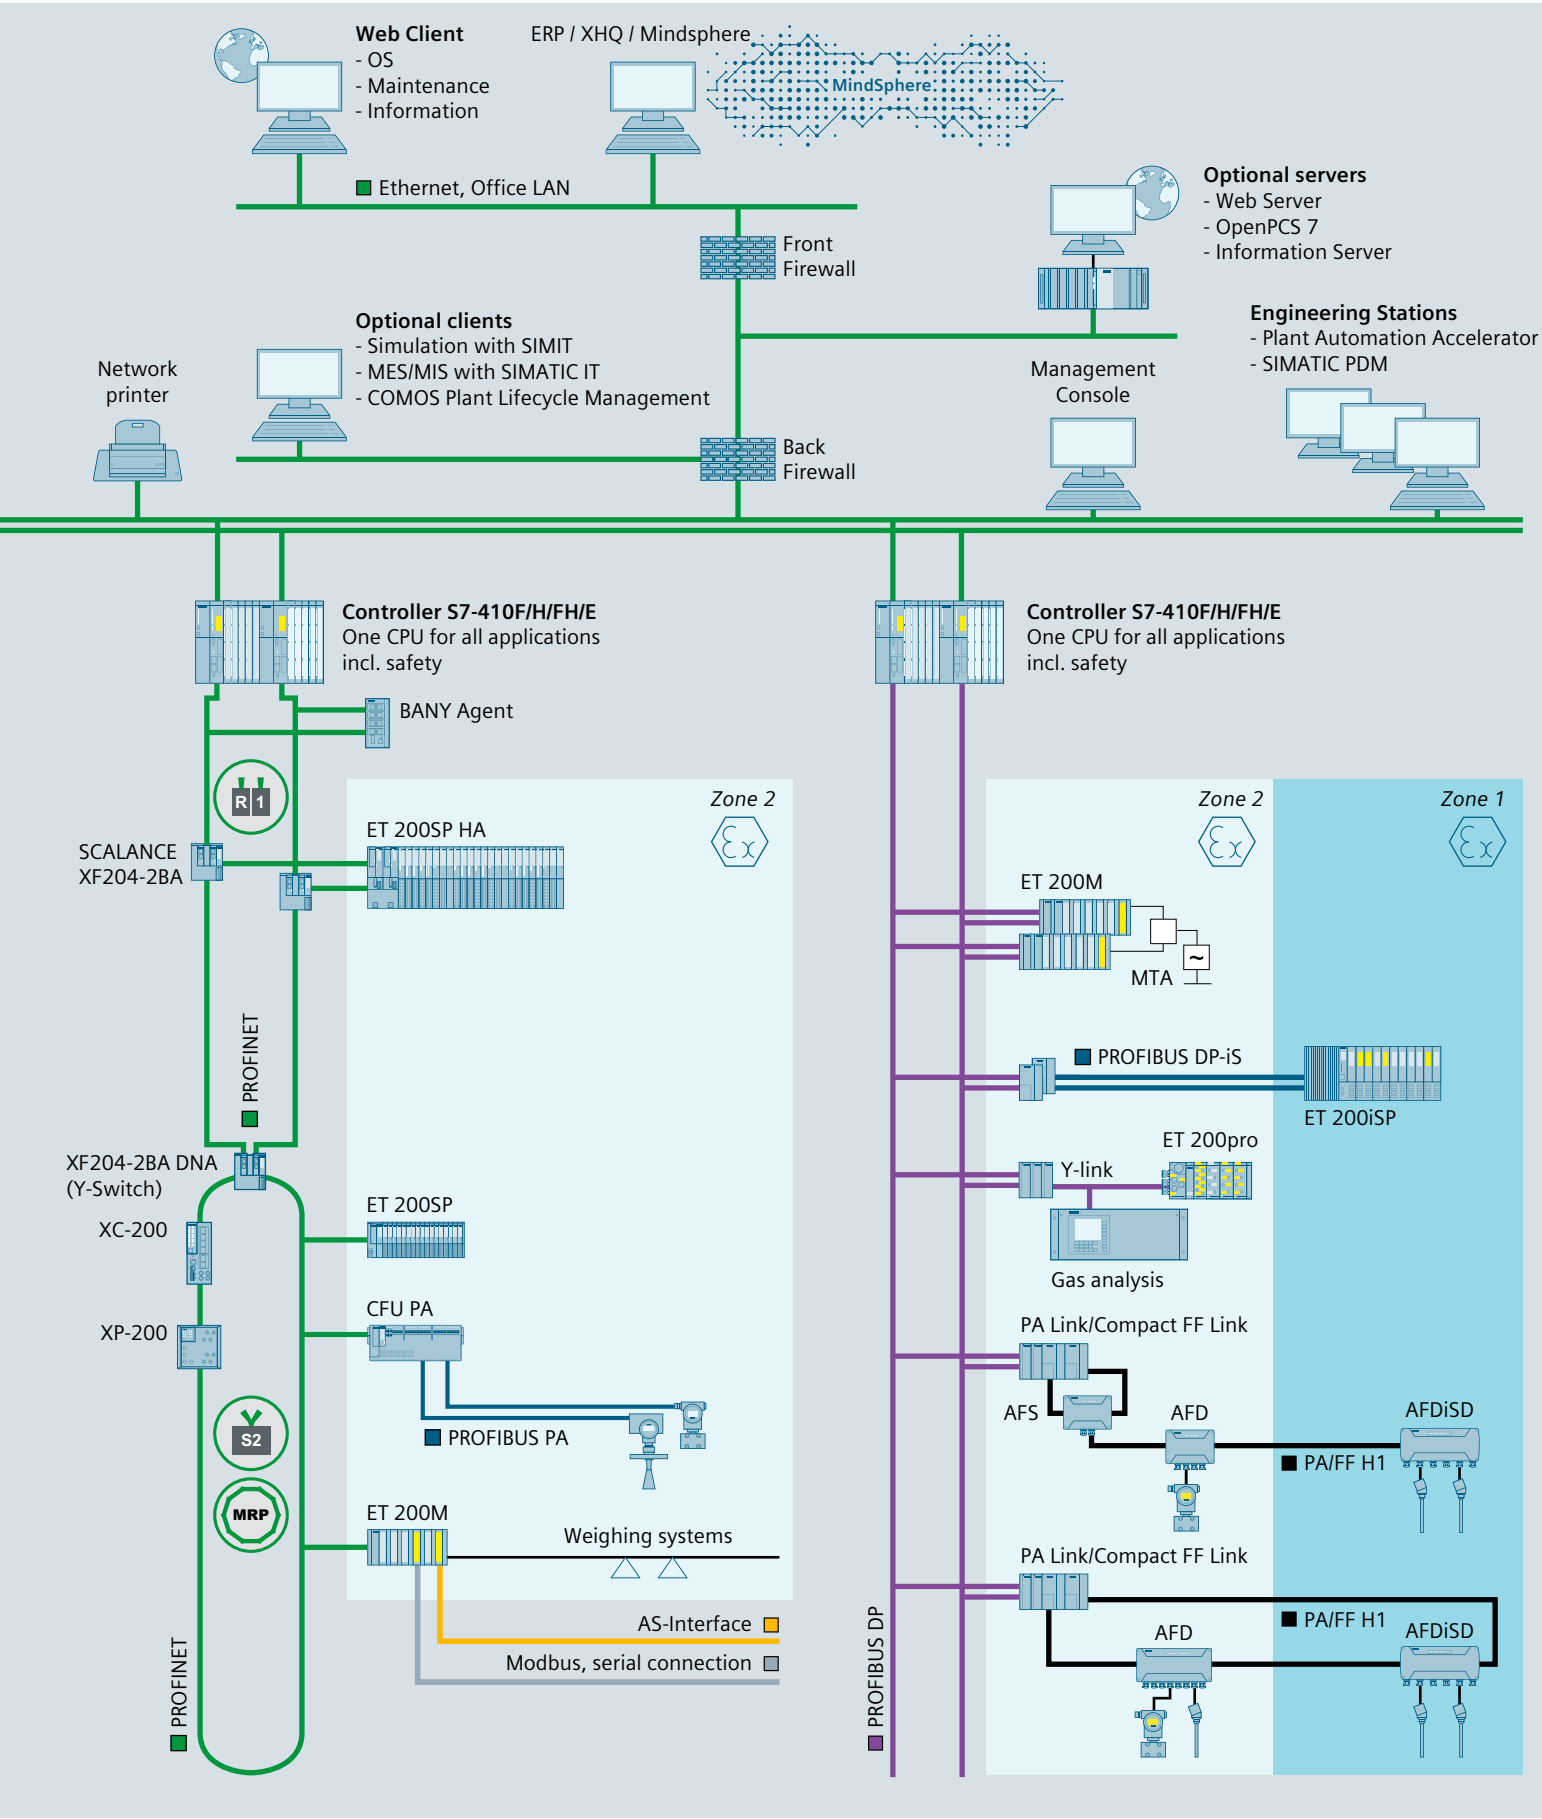

© Siemens 2019

Room for new perspectives with SIMATIC PCS 7

SIMATIC PCS 7 is one of the international leaders in process control systems, and has the potential to implement innovative solutions for the special challenges associated with the process industry. The functional diversity, flexibility, and performance of the SIMATIC PCS 7 pushes the limits of a typical process control system, and its technological enhancements offer many additional possibilities and new perspectives.

SIMATIC PCS 7 benefits from its seamless integration in Siemens Totally Integrated Automation (TIA), a complete range of matched products, systems, and solutions for all hierarchy levels of industrial automation - from the enterprise management level, to the control level, all the way down to the field level. This enables integrate, customized automation in all sectors of the process and hybrid industry.

An essential advantage of the consistency of the product and system spectrum and the solutions based upon this spectrum is that faster and more precise control sequences, as well as integrated security functions of shared hardware, engineering, and engineering tools can be used for automation of continuous and discontinuous processes.



© Siemens 2019



More flexibility in process automation

In process plants, the process control system is the starting point for optimal value added: All procedures and processes can be operated, monitored and influenced with the process control system.

The higher the performance of the process control system, the more effectively this potential can be used. For this reason, performance is in the foreground with SIMATIC PCS 7, alongside scalability, flexibility and integration. Starting with planning and engineering, SIMATIC PCS 7 offers powerful tools, functions and features for cost-effective and efficient plant operation through all phases of the plant life cycle.

Flexibility through integration

Integration is one of the special strengths of SIMATIC PCS 7. It has numerous aspects:

- Horizontal integration into TIA
- Vertical integration into hierarchical communication
- System-integrated tools for engineering tasks
- Integration of the field level, including drives, switchgear, etc.
- Integrated functions, e.g. for batch process automation, route control, process safety, energy management, telecontrol tasks, etc.


Horizontal integration

A system for integrated automation of the entire process chain, from incoming raw materials to outgoing goods – this is one of the decisive advantages resulting from the seamless integration of SIMATIC PCS 7 into Totally Integrated Automation.

The process control system is mainly responsible for automating the primary processes here, but it can do very much more: All ancillary facilities such as the electrical infrastructure in the form of low-voltage or medium-voltage switchgear or the building management system, can also be integrated into the system.

Integration of selected SIMATIC standard components – automation systems, industrial PCs, network components, or distributed process I/O – into the process control system ensures optimum interaction, and secures economic benefits such as ease of selection, reduced stock keeping, and global support.

© Siemens 2019

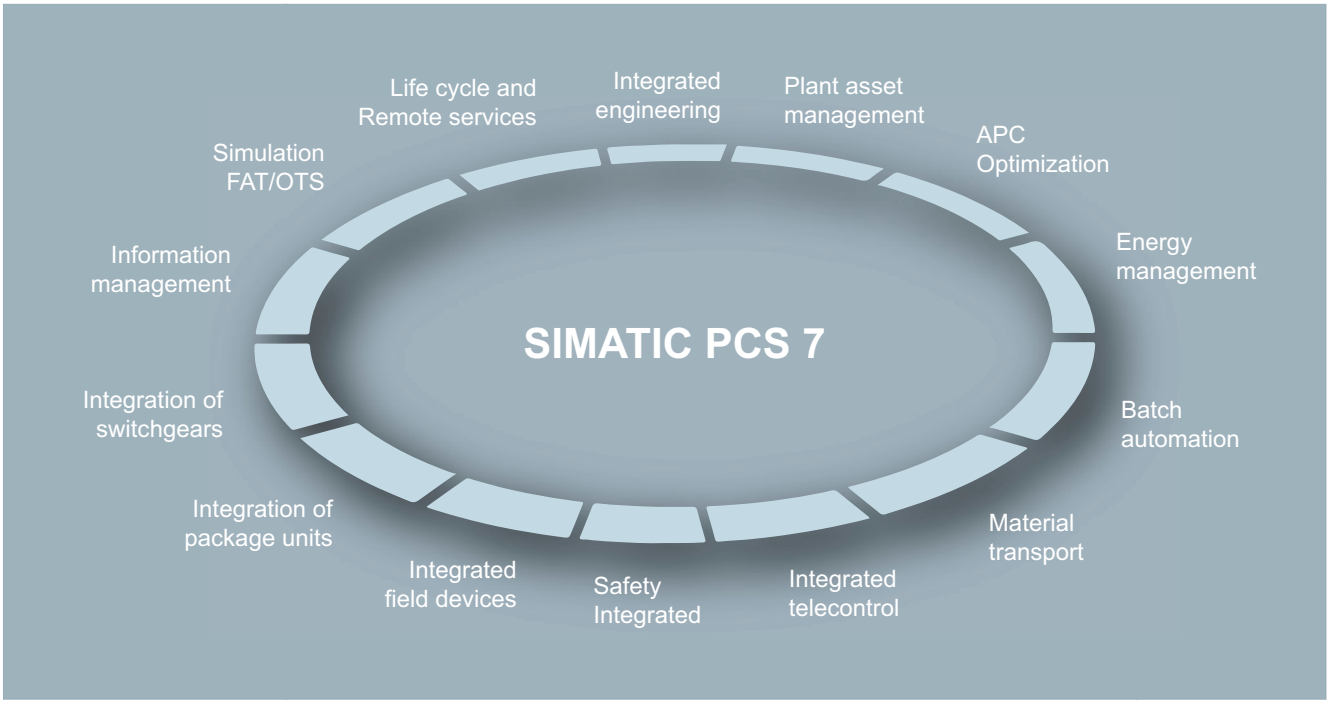

Vertical integration

The hierarchal communication of a company encompasses the field level, the control level and the process level, up to management and enterprise resource planning (ERP). Thanks to standardized interfaces – based on international industry standards as well as internal interfaces – SIMATIC PCS 7 is able to provide process data for analysis, planning, coordination, and optimization of plant sequences or production and business processes – in real time, and at any location in the company.

Central engineering

Impressive features of SIMATIC PCS 7 include graded functional diversity, consistent operator control philosophy and uniformly structured engineering and management tools. A central engineering system with a coordinated range of tools for integrated system engineering and configuring of batch automation, safety functions, material transport or telecontrol systems creates value added over the entire life cycle. Reductions in configuring and training costs minimize the total cost of ownership (TCO) over the entire plant life cycle.

Functional diversity

Depending on the typical process automation or customized requirements, the SIMATIC PCS 7 functions can be expanded by the following, for example:

- Batch process automation (SIMATIC BATCH)
- Functional safety and protection functions (Safety Integrated for Process Automation)
- Route control for material transport (SIMATIC Route Control)
- Telecontrol of remote units (SIMATIC PCS 7 TeleControl)
- Automation of electrical switchgear (SIMATIC PCS 7 PowerControl)

Further additional functions that are also integrated or can be integrated, seamlessly into the control system make optimization of processes and reductions in operating costs possible. SIMATIC PCS 7 features, for example, tools for energy and asset management and it offers higher quality closed-loop control functions, as well as industry-specific automation solutions and libraries.

© Siemens 2019



Custom automation

Thanks to its unique scalable system architecture, SIMATIC PCS 7 provides the ideal basis for cost-effective implementation of individual automation solutions and economic operation of processes.

SIMATIC PCS 7 users derive sustained profit from a modular system platform based on standard SIMATIC components. Its uniformity enables flexible scaling of hardware and software, as well as perfect interaction both within the system and beyond system limits. The architecture of the SIMATIC PCS 7 Process Control System is designed in such a manner that instrumentation and control can be configured in accordance with customer requirements and optimally matched to the dimensions of the plant. The control system can be subsequently expanded or reconfigured at any time if there is an increase in capacity or a technological modification. When the plant grows, SIMATIC PCS 7 simply grows along with it – without the provision of expensive reserve capacities!

Flexibility and performance in engineering

The workflow in engineering for process plants is and remains a challenge: Multiple participants, many different data formats and multiple interfaces frequently result in transmission errors and system discontinuity and thus to greater time input and costs. Information generally gets lost or needs to be corrected manually when data exchanged between multiple disciplines.

For the first time, a fully integrated solution is now available for planning and documenting plant projects: the SIMATIC PCS 7 Plant Automation Accelerator. Customers benefit in particular from consistent engineering without system discontinuities between automation planning and the control system.

The object-based approach of the SIMATIC PCS 7 Plant Automation Accelerator allows you to work on a central data platform, ensuring fully integrated planning – from plant engineering through to automation – based on an electronic workflow. This workflow ranges from planning to issuing offers, including bills of materials, the automatic generation of process control data for the SIMATIC PCS 7 process control system from electrical engineering, to controlled mass data engineering and direct as-in documentation of the plant.

This modular engineering approach increases overall project efficiency and minimizes risks. High standardization and simple configuration also save time and costs in engineering during the implementation phase. Simple synchronization between planning and engineering avoids duplicate input and interface losses and reduces project runtimes.

© Siemens 2019

Flexibility in operation

Process control is also becoming increasingly complex due to the multi-layer nature of automation engineering and increased merging with information technology. Intuitive and fault free operation is therefore more important than ever with regard to efficient working and the minimization of downtimes and servicing requirements. Using effective Advanced Process Control (APC) functions and an excellent operator system, SIMATIC PCS 7 supports both optimization and user-friendly, safe control of the process. Monitoring of product quality and performance indicators additionally allows the process to be operated more economically. SIMATIC PCS 7 excels with its flexibility, plant availability, and investment security.

Process control and maintenance

The SIMATIC PCS 7 operator system is used to monitor process operation using various views, and permits interventions when necessary. Its architecture is flexible and scalable – from single-user systems up to multi-user systems with a redundant client/server architecture. The operator interface takes account of the current specifications of NAMUR (user association of automation technology in the process industries) and PI (Profibus International) and offers a high level of user-friendliness for simple, intuitive interaction with the plant. Ergonomic symbols, task-oriented faceplates, uniform representation of status information, and optimized alarm functions allow safe process control.

The alarm management function integrated in SIMATIC PCS 7 is able to focus on essential alarms and to specifically guide the operator in exceptional circumstances. In this way, it systematically reduces the workload of operating staff.



Preventive and predictive maintenance strategies reduce total cost of ownership. With the SIMATIC PCS 7 Maintenance Station, maintenance personnel always have a watchful eye on critical production equipment such as pumps, valves, distillation columns or motors, and can carry out the relevant maintenance measures in good time before servicing is required – independent of the maintenance plan and without the risk of an unscheduled plant standstill.

Process optimization

SIMATIC PCS 7 supports process optimization in many different ways, including:

- Control Performance Monitoring
- Advanced Process Control
- Process Historian

The Control Performance Monitoring function monitors and signals the control quality of the closed-loop control block. If the performance declines, the controller can be optimized in good time or specific maintenance measures can be initiated.

The integrated I&C libraries of SIMATIC PCS 7 also provide higher quality closed-loop control functions with which cost-effective Advanced Process Control applications can be implemented: Multi-variable control, predictive control, or override control. It is thus possible to effectively improve profitability, product quality, safety, and environmental protection in small and medium-sized plants.

Current and historic process data form the basis of all optimization. Secure and user-friendly real-time data storage and analysis is handled using the Process Historian. The process values, messages, and batch data managed in the database of the Process Historian can be called extremely rapidly. User-specific processing and visualization of this historic data are supported by the information server, which is a reporting system based on the Microsoft Reporting Services.

© Siemens 2019



SIMATIC PCS 7 V9.0

The new version of our established SIMATIC PCS 7 process control system is another building block for the digital enterprise.

SIMATIC PCS 7 V9.0 facilitates the route to digital transformation for the process industry – step by step. With its hardware and software innovations, the new version of our established process control system makes the step into digitalization even more secure and easier to plan.

SIMATIC PCS 7 is based wholly on PROFINET. The leading international Industrial Ethernet standard represents the high-performance real-time communication required in the era of big data, right into the field. Rapid, reliable, redundant and high-performance, PROFINET gives our customers new options for integrated diagnostics, monitoring and evaluation of their data. It also enables flexible and easily scalable network structures and enormous costs savings throughout the life cycle thanks to a huge reduction in cabling required.

These benefits are also reflected in the hardware innovations with SIMATIC PCS 7 V9.0:

The ultra-compact and high available new SIMATIC ET 200SP HA and SIMATIC CFU device lines support PROFINET – thus ensuring far greater freedom in plant planning and operation.

Of course, we all use digitization in our SIMATIC PCS 7 software innovations: our digital software portfolio and digital services for process automation therefore have and continue to be part an ongoing strategic development process, not least in the light of cloud applications.

The result: SIMATIC PCS 7 V9.0 offers our customers room for new perspectives – for greater flexibility in process automation.

© Siemens 2019



SIMATIC PCS 7 system and technology components

With the rugged, high-performance **SIMATIC PCS 7 system components** from Catalog ST PCS 7, you already have a versatile platform for cost-effective implementation and economical operation of your process control systems. Perfect interplay of these system components makes it possible for you to sustain high-quality production and to establish new products significantly faster on the market.

With **SIMATIC PCS 7 technology components** from Catalog ST PCS 7 T that can be seamlessly integrated into the process control system, you can expand the functional scope of the system components in a carefully targeted manner for specific automation tasks.

This covers a wide spectrum, for example:

- Telecontrol for monitoring and controlling remote plant units
- Automation technology for electrical low-voltage or medium-voltage switchgear
- Industry-specific automation systems for the cement and mining industries, as well as for laboratory and training facilities
- Graphical objects for task-oriented optimization of process visualization
- Block libraries for technological functions, package unit and panel integration, monitoring and analyzing mechanical assets, as well as for building automation systems (heating, ventilation, air-conditioning – FMCS/HVAC)
- Editors and function blocks for the efficient configuration of small or medium-sized automation systems with simple parameter control and materials management
- Process analytical technology for quality assurance through optimization of development and production processes based on up-to-date measurements, and critical quality and performance attributes
- Simulation system for testing and commissioning of plant-specific application software
- Flexible, high-performance Manufacturing Execution System (MES)
- System expansion for operator systems for the integration of third-party controllers, programmable logic controllers and package units
- Products for migration of the process control systems APACS+/QUADLOG or Bailey INFI 90/NET 90 with SIMATIC PCS 7

SIMATIC PCS 7 technology components have been released for all versions and service packs of SIMATIC PCS 7 system components. The development and testing of SIMATIC PCS 7 technology components are dependent on the corresponding SIMATIC PCS 7 system components, so versioning and release is normally offset by approximately 3 to 6 months.

Additional functionality can be integrated using add-on products

Modularity, flexibility, scalability, and the openness of SIMATIC PCS 7 offer optimal prerequisites for integrating supplementary components and solutions in the process control system in an applicative manner and thus extend and round off its functionality.

Many supplementary add-on products for SIMATIC PCS 7 have been developed by Siemens as well as by external partners (see Catalog ST PCS 7, Add-ons for the SIMATIC PCS 7 Process Control System). These software packages and hardware components authorized by the system manufacturer enable cost-effective implementation of SIMATIC PCS 7 for special automation tasks.

© Siemens 2019

Software Media and Logistics



1/2 PCS 7 Software Packages

1/4 Software Update Service

1/7 System documentation

© Siemens 2019

Design

Product categories for SIMATIC PCS 7 software

Generally, the SIMATIC PCS 7 and TIA software products offered in Catalog ST PCS 7 can be categorized as follows:

- **Core products** (single, floating or rental license) with:
  - Installation Software (Software Media Package)
  - License key for software licensing
- **Secondary products** (single, floating or rental license) with:
  - License key for licensing of installation software is delivered with a core product or supplied separately
- **Cumulative volume licenses (quantity options)** with
  - License keys for a specific license volume in the form of process objects (POs), archive tags, TAGs, agents, clients, sources or units

All software products categorized in this way are available as packages. As an alternative to this physical form of delivery, the installation software, software and volume licensing are often available online as well.

The available forms of delivery for each product are explicitly specified in the ordering data and identified by different article numbers.

Delivery form package

The products are delivered in a form and package suitable for parcel shipping by conventional means of transportation (e.g. shipped by truck, rail or air) to the shipping address of the customer.

The installation software (Software Media Packages) and product-specific software licenses for the following products are separate packages, which are not merged into a single delivery unit when supplied in package form.

- SIMATIC PCS 7 core products (installation software provided as SIMATIC PCS 7 Software Media Package or SIMATIC PCS 7 Software Media Package ASIA)
- SIMATIC PDM, S7 F Systems and SIMATIC Safety Matrix (linstallation software provided as product-specific software media package)

The installation software (Software Media Package) is provided once for each ordered item for these products. When ordering more than one item, you can influence the number of software media packages using the order item. For example, if you order three SIMATIC PCS 7 OS Software Single Station software products as a single ordered item, you will receive only one software media package. However, if your order is divided into three ordered items, you will receive a software media package for each of the three software licenses.

Additional software media packages and volume licenses specified for the corresponding product can be ordered separately depending on the requirement.

The following table illustrates these ordering and delivery logistics:

Order				Product package	
Item No.	**Quantity**	**Product name**	**Article No.**	**Quantity**	**Components**
Ordering of 3 units with one order item					
010	**3**	**SIMATIC PCS 7 OS Software Single Station V9.0 incl. 100 OS runtime PO**	6ES7658-2AA58-0YA0	3	License key USB flash drive, certificate of license
				1	SIMATIC PCS 7 Software Media Package
Ordering of 3 units with three order items					
010	**1**	**SIMATIC PCS 7 OS Software Single Station V9.0 incl. 100 OS runtime PO**	6ES7658-2AA58-0YA0	1	License key USB flash drive, certificate of license
				1	SIMATIC PCS 7 Software Media Package
020	**1**	**SIMATIC PCS 7 OS Software Single Station V9.0 incl. 100 OS runtime PO**	6ES7658-2AA58-0YA0	1	License key USB flash drive, certificate of license
				1	SIMATIC PCS 7 Software Media Package
030	**1**	**SIMATIC PCS 7 OS Software Single Station V9.0 incl. 100 OS runtime PO**	6ES7658-2AA58-0YA0	1	License key USB flash drive, certificate of license
				1	SIMATIC PCS 7 Software Media Package

These ordering and delivery logistics are not relevant for products that are typically supplied without a software media package. They include:

- Secondary products
- Core products with rental license
- Client software

© Siemens 2019

Design (continued)

Delivery form online

We offer online delivery for SIMATIC PCS 7 software and license keys via the Internet as an innovative alternative to the physical delivery of goods. The decisive advantage over the physical delivery of goods lies in the fact that the software and licenses are available immediately and can be easily managed.

The software products and licenses that can be downloaded have different article numbers. They are ordered through the normal channels, e.g. the Industry Mall.

When ordering via the Industry Mall, you can filter out the ordering data of those products that can be delivered online with reference to the selected branch of the product and offering tree. This can be done by selecting the type of delivery "Online delivery" from a drop-down list on the right of the screen. This way you will achieve a better overview of the online offering.

When ordering a product that can be delivered online, the email address of the ship-to party must be provided. The recipient of the goods is informed by email as soon as the ordered products are available for downloading. The email message with the availability information also contains the login data. Parallel delivery on a data carrier does not take place.

The software, license key and associated documents, e.g. the online Certificate of License (CoL), are downloaded in the Automation License Manager (ALM). A license key can be downloaded once only. To log in, the login data received in the email is required. As an alternative, the access data to the Industry Mall account can be used for logging in.

Apart from the download, ALM also supports license management. You can, for example, get an overview of the available licenses or those obtained online, allocate licenses, and run a hardware-specific license analysis.

Ordering data

	Article No.
SIMATIC PCS 7 Software Media Packages Runs with the following operating systems (see SIMATIC PCS 7 Readme and the project licenses for more details): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit	
SIMATIC PCS 7 Software Media Package V9.0[1] Installation software and electronic documentation on DVD, incl. trial license for 14 days 5 languages (English, German, French, Italian, Spanish), software class A	
• Physical delivery Software DVDs, certificate of license	**6ES7658-4XX58-0YT8**
• Online delivery Software download, online certificate of license Note: Email address required!	**6ES7658-4XX58-0YG8**
SIMATIC PCS 7 Software Media Package ASIA V9.0[1] Installation software and electronic documentation on DVD, incl. trial license for 14 days 2 languages (English, Chinese), software class A	
• Physical delivery Software DVDs, certificate of license	**6ES7658-4XX58-0CT8**

[1] Permanent use of SIMATIC PCS 7 software requires valid software licenses.

More information

Regional product versions

All SIMATIC PCS 7 software products are designed for international use, in other words there is only one product version for worldwide use and this is offered in up to 6 languages: English, German, French, Italian, Spanish and Chinese. However, the number of supported languages is not standard; it can vary from product to product.

In addition, a regional "ASIA" product version will also be offered for the SIMATIC PCS 7 Software Media Package and specific SIMATIC PCS 7 software products of the "Engineering System" and "Operator System" system components. The ASIA products are available in two languages: English and Chinese (simplified). They are explicitly identified in the name by the suffix "ASIA".

If a product listed in this catalog does not have the suffix "ASIA" in its name, it can always be used globally. However, the following restriction applies: If a regional ASIA product is offered, the pendant for international use does not support the Asian languages (currently Chinese simplified) present in the ASIA product.

The products for international use, i.e. products without the suffix "ASIA", are not intended as the basis for runtime systems with fonts in Asian languages.


The following special points must be observed as a result of the definition of separate products for installation software and licenses. The SIMATIC PCS 7 installation software is available in the form of two data medium packages:

- SIMATIC PCS 7 Software Media Package
- SIMATIC PCS 7 Software Media Package ASIA

The specific ASIA software licenses harmonize exclusively with the SIMATIC PCS 7 Software Media Package ASIA. SIMATIC PCS 7 software licenses for which there is no ASIA pendant can be used with both SIMATIC PCS 7 Software Media Packages.

© Siemens 2019

Overview

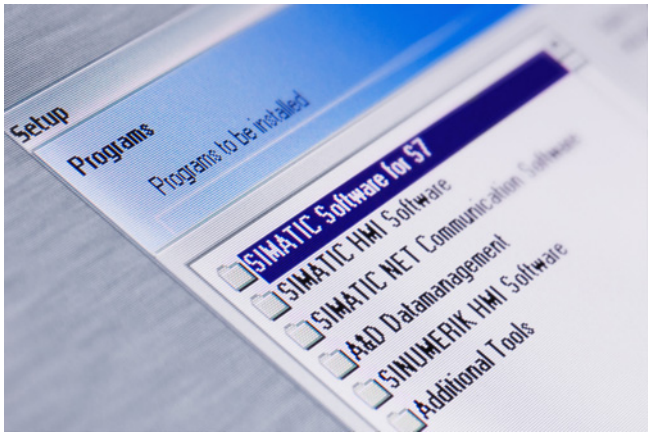

Software Update Service for SIMATIC PCS 7

Siemens offers a cost-effective Software Update Service (SUS) for international SIMATIC PCS 7 software products (except for specially marked regional versions, such products with the "ASIA" label). If you utilize this service, you participate in the further development of the SIMATIC PCS 7 software you are using, and are always in possession of the latest release versions. You can join the software update service for SIMATIC PCS 7 by purchasing SUS packages, and this is only possible on the basis of the current software versions at the time of purchase.

The SUS packages represent a structural division of the SIMATIC PCS 7 software product range using functional and system-specific aspects. The number and composition of the package components identified as **list elements** depend mainly on license aspects. A list element can represent a single software product or also be a synonym for several products of the same type, see page 1/5.

When purchasing **one** SUS package, you automatically receive all upgrades and ServicePacks for the software referred to in this package for one year. Within this period of one year, you are therefore authorized to update **one** corresponding license from your stock for **each** list element in this package. The total number of SUS packages of one type which you require is therefore determined by the list element which includes most of the software licenses you use.

An example of the SUS OS server package should make this clear once again based on a fictitious license inventory:

Software products in inventory	License inventory	License inventory per list item	Number of SUS packages
• 3 × PCS 7 AS/OS Engineering Software 1 × PCS 7 AS Engineering Software	3 1	4	4
• 1 × Version Cross Manager	1	1	
• 3 × PCS 7 SFC Visualization	3	3	

For a list item that represents several products, existing licenses of these products are to be added in the inventory first. In the example, these are the licenses of the "PCS 7 AS/OS Engineering Software" and "PCS 7 AS Engineering Software" for the first list element of the SUS Engineering AS/OS.

The license inventory is defined by a single product for the other list items. The list item that combines the most licenses is ultimately decisive in determining the number of required SUS packages. Based on the example, you would therefore need to order 4 SUS Engineering AS/OS packages.

Duration of subscription, cancellation

Delivery is to the address entered in the order. An SUS is automatically extended for a further year unless canceled no later than 3 months prior to expiration. Cancellation must be made in writing, and must be sent to the dispatch center with reference to the contract number.

SUS editions

SUS packages are available as:

- SUS package
- SUS Compact
- SUS Download

SUS package is the most comprehensive package form. If you order this package n-times, you will receive n number of packing units.

Each of these packing units contains

- Initial delivery: 1 Certificate of Contract
- Upgrade delivery: 1 data carrier set, 1 license key USB flash drive with **one** license

SUS Compact reduces the scope of the package for the Software Update Service for multiple workstations and simplifies the central management of licenses.

If you order SUS Compact n-times, you will receive only one packing unit. This packing unit contains

- Initial delivery: n Certificates of Contract
- Upgrade delivery: 1 data carrier set, 1 license key USB flash drive with **n** licenses

SUS Compact is offered for the following SIMATIC PCS 7 SUS packages:

- SUS OS single station
- SUS OS server
- SUS OS Client, SFC Visualization
- SUS SIMATIC BATCH Server/Single Station
- SUS SIMATIC BATCH Client

SUS Download, which is delivered over the Internet, has the advantage that software and licenses are available more rapidly than with goods delivery, and can also be managed more easily.

A recipient email address is required for delivery of SUS Download. An order item can only be assigned to a single email address. The consignee is informed by email as soon as the Certificates of Contract or the software and licenses are available for downloading.

Downloading of software, license keys, and associated documents is carried out in the Automation License Manager (ALM).

SUS Manager

It is easy to manage SUS contracts, e.g. change the delivery form, with the SUS Manager:
www.siemens.com/susmanager

© Siemens 2019

Overview (continued)

The following table uses an example to clarify the differences between the SUS editions:

Edition	SUS package	SUS Compact	SUS Download
Delivery form	Physical delivery	Physical delivery	Online delivery
Order	25 × SUS package in one order item	25 × SUS Compact in one order item	25 × SUS Download in one order item
First delivery	25 packing units with: • 1 × Certificate of Contract (CoC)	1 packing unit with: • 25 × Certificate of Contract (CoC)	1 email message for • 25 × Online Certificate of Contract (ECoC)
Subsequent delivery of Service Packs	25 × Service Pack (data carrier set)	1 × Service Pack (data carrier set)	1 × Service Pack (download)
Subsequent delivery of upgrades	25 packing units with: • 1 × data carrier set • 1 × license key USB flash drive with 1 license • 1 × Certificate of License (CoL)	1 packing unit with: • 1 × data carrier set • 1 × license key USB flash drive with 25 licenses • 25 × Certificate of License (CoL)	1 email message for • Software download • 1 × license key download for 25 licenses • 1 × Online certificate of license for 25 CoL (zip file)
Billing	1 bill	1 bill	1 bill

If a comparable product exists in a different edition for an existing SUS package, the existing SUS contract can be modified accordingly if required.

Software Update Service for TIA products

In addition to the SUS for the SIMATIC PCS 7 process control system, there is also the SUS for SIMATIC PCS 7 products used in a different context (CFC, SIMATIC PDM) within the scope of Totally Integrated Automation (TIA). The SIMATIC PDM packages SUS PDM Basic and SUS PDM Complete are identical for both cases.

The SUS range is rounded-off by the SUS for SIMATIC S7 products used in the context of SIMATIC PCS 7, e.g. SUS S7-PLCSIM.

Design

Structure and content of the SUS packages for the SIMATIC PCS 7 Software Update Service

Note:

Each item of an SUS package (element in list) represents a software license.

SUS Engineering AS/OS	• PCS 7 AS/OS Engineering Software, PCS 7 AS Engineering Software • PCS 7 ES Single Station (AS/OS: 250 POs) • PCS 7 Management Console • PCS 7 Import-Export Assistant • Version Cross Manager • Version Trail • PCS 7 SFC Visualization • PCS 7 BCE • IE S7 license for communication via CP 1623/CP 1628
SUS Logic Matrix	• PCS 7 Logic Matrix Viewer
SUS PDM Basic[1]	• PDM Basic PDM Service PDM S7 PDM PCS 7 • PDM HART Server
SUS PDM Complete[1]	• PDM stand-alone server PDM PCS 7 server PDM PCS 7-FF • PDM HART Server
SUS OS single station (2 SUS packages are required for a redundant pair)	• PCS 7 OS Software Single Station, PCS 7 OS Software Single Station Redundancy (for one single station) • PCS 7 OpenPCS 7/OS Client • PCS 7 OpenPCS 7 • PCS 7 SFC Visualization • PCS 7 BCE • IE S7 license for communication via CP 1623/CP 1628
SUS OS server (2 SUS packages are required for a redundant pair)	• PCS 7 OS Software Server, PCS 7 OS Software Server Redundancy (for one server) • PCS 7 OpenPCS 7/OS Client • PCS 7 OpenPCS 7 • PCS 7 SFC Visualization • PCS 7 BCE • IE S7 license for communication via CP 1623/CP 1628
SUS Process Historian, Information Server (2 SUS packages are required for a redundant pair)	• PCS 7 Process Historian Basic Package, PCS 7 Process Historian Redundancy (for one server) PCS 7 Process Historian and Information Server Basic Package • PCS 7 Process Historian Archive BATCH • PCS 7 Process Historian OPC UA Server • PCS 7 Information Server Basic Package
SUS OS Client, SFC Visualization	• PCS 7 OS Software Client • PCS 7 SFC Visualization
SUS Web Server	• PCS 7 Web Server • PCS 7 Web Diagnostics Server • PCS 7 Web Diagnostics Client
SUS Maintenance Station	• PCS 7 Maintenance Station Engineering • PCS 7 Maintenance Station Runtime Basic Package • PCS 7 OS Software Client
SUS SIMATIC BATCH Server/ Single Station	• PCS 7 SIMATIC BATCH Server • PCS 7 SIMATIC BATCH Single Station Package • PCS 7 SIMATIC BATCH Basic • PCS 7 SIMATIC BATCH API • PCS 7 BCE • IE S7 license for communication via CP 1623/CP 1628
SUS SIMATIC BATCH Client	• PCS 7 SIMATIC BATCH Client • PCS 7 SIMATIC BATCH Recipe System
SUS SIMATIC Route Control	• PCS 7 SIMATIC Route Control Engineering • PCS 7 SIMATIC Route Control Center • PCS 7 SIMATIC Route Control Server • PCS 7 BCE • IE S7 license for communication via CP 1623/CP 1628

[1] Optional product components for SIMATIC PDM such as PDM Extended, PDM Integration in STEP 7/PCS 7, PDM Routing, PDM Server and PDM Communication FOUNDATION Fieldbus are each included in a product package listed in the SUS PDM Basic or SUS PDM Complete and are implicitly authorized to be updated via the corresponding license. You need to change from SUS PDM Basic to SUS PDM Complete to use the PDM Server or PDM Communication FOUNDATION Fieldbus product components.


© Siemens 2019

Ordering data	Article No.
SUS package	
SIMATIC PCS 7 Software Update Service, package Subscription for 1 year with automatic extension; requirement: Current software version; physical delivery	
• PCS 7 Software Update Service for Engineering AS/OS	**6ES7658-1XX00-0YL8**
• PCS 7 Software Update Service Logic Matrix	**6ES7658-1JX00-0YL8**
• PCS 7 Software Update Service for OS Single Station	**6ES7658-2AX00-0YL8**
• PCS 7 Software Update Service for OS Server	**6ES7658-2BX00-0YL8**
• PCS7 Software Update Service Process Historian, Information Server	**6ES7652-7XX00-0YL8**
• PCS 7 Software Update Service for OS Client, SFC Visualization	**6ES7658-2CX00-0YL8**
• PCS 7 Software Update Service for Web Server	**6ES7658-2GX00-2YL8**
• PCS 7 Software Update Service for Maintenance Station	**6ES7658-7GX00-0YL8**
• PCS 7 Software Update Service for SIMATIC BATCH Server/Single Station	**6ES7657-0SA00-0YL8**
• PCS 7 Software Update Service for SIMATIC BATCH Client	**6ES7657-0XX00-2YL8**
• PCS 7 Software Update Service for SIMATIC Route Control	**6ES7658-7DX00-0YL8**
Software Update Service for TIA products, package (SIMATIC PCS 7 products used in a different context, as well as SIMATIC S7 products used with SIMATIC PCS 7) Subscription for 1 year with automatic extension; requirement: current software version	
• SIMATIC PDM Basic Software Update Service	**6ES7658-3XX01-0YL8**
• SIMATIC PDM Complete Software Update Service	**6ES7658-3XX02-0YL8**
• S7-PLCSIM Software Update Service	**6ES7841-0CA01-0YX2**

	Article No.
SUS Compact	
SIMATIC PCS 7 Software Update Service, Compact Subscription for 1 year with automatic extension; requirement: Current software version; physical delivery	
• PCS 7 Software Update Service for OS Single Station	**6ES7658-2AX00-0YM8**
• PCS 7 Software Update Service for OS Server	**6ES7658-2BX00-0YM8**
• PCS 7 Software Update Service for OS Client, SFC Visualization	**6ES7658-2CX00-0YM8**
• PCS 7 Software Update Service for SIMATIC BATCH Server/Single Station	**6ES7657-0SA00-0YM8**
• PCS 7 Software Update Service for SIMATIC BATCH Client	**6ES7657-0XX00-2YM8**
SUS Download	
SIMATIC PCS 7 Software Update Service, Download Subscription for 1 year with automatic extension; requirement: current software version; delivery form: online Note: Email address required!	
• PCS 7 Software Update Service for Engineering AS/OS	**6ES7658-1XX00-0YV8**
• PCS 7 Software Update Service for OS Single Station	**6ES7658-2AX00-0YV8**
• PCS 7 Software Update Service for OS Server	**6ES7658-2BX00-0YV8**
• PCS7 Software Update Service Process Historian, Information Server	**6ES7652-7XX00-0YV8**
• PCS 7 Software Update Service for OS Client, SFC Visualization	**6ES7658-2CX00-0YV8**
• PCS 7 Software Update Service for Web Server	**6ES7658-2GX00-2YV8**
• PCS 7 Software Update Service for Maintenance Station	**6ES7658-7GX00-0YV8**
• PCS 7 Software Update Service for SIMATIC BATCH Server/Single Station	**6ES7657-0SA00-0YV8**
• PCS 7 Software Update Service for SIMATIC BATCH Client	**6ES7657-0XX00-2YV8**
• PCS 7 Software Update Service for SIMATIC Route Control	**6ES7658-7DX00-0YV8**
• SIMATIC PDM Basic Software Update Service	**6ES7658-3XX01-0YV8**
• SIMATIC PDM Complete Software Update Service	**6ES7658-3XX02-0YV8**

© Siemens 2019

Overview

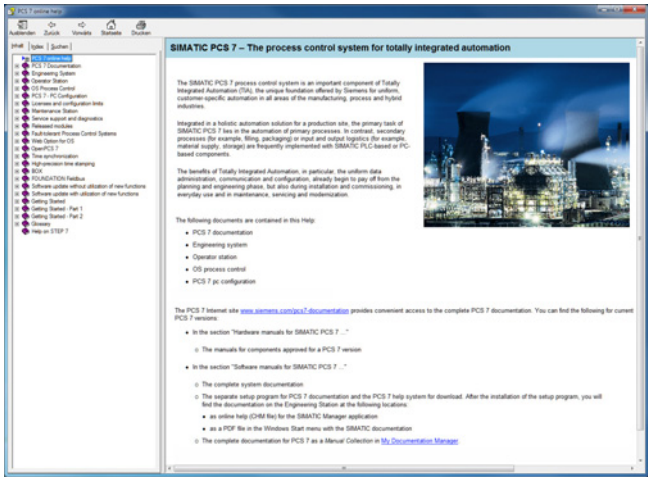

PCS 7 online help is supplied with SIMATIC PCS 7. It can be called using the SIMATIC Manager. The help can be dynamically expanded with add-on help documents.

The complete SIMATIC PCS 7 system documentation is provided as a free-of-charge, multilingual manual collection on the Internet via **My Documentation Manager**.

My Documentation Manager not only enables you to view documents, you can also collect them in your own library and generate your own documents. Information about using these functions as well as FAQs are available in My Documentation Manager.

The SIMATIC PCS 7 system documentation provides both beginners and experienced users with valuable information on all aspects of the process control system. The range extends from the system introduction, covers initial steps and cross-system topics, up to a description of individual system components. With the "Getting Started" documentation you can gain initial practical experience using example projects.

In order to use this, select the manuals for your SIMATIC PCS 7 version on the website for SIMATIC PCS 7 technical documentation:

www.siemens.com/pcs7-documentation


You can open the available SIMATIC PCS 7 manuals directly in the My Documentation Manager, or first start the My Documentation Manager and then select the desired documentation in the integrated Siemens library.

In addition to the SIMATIC PCS 7 system documentation, the Siemens library in the My Documentation Manager provides access to the technical documentation of other products and systems from the SIMATIC range of products.

Latest information on SIMATIC PCS 7 in the Readme file

The PCS 7 online Readme files can also be opened at the Internet address provided above. There you will find information on the approved operating systems for PCS 7 software, for example. On the "Technical Documentation SIMATIC PCS 7" page, select "Software Manuals SIMATIC PCS 7 V9.0". All PCS 7 Readme files in Siemens Industry Online Support can be opened on the following page.

More information

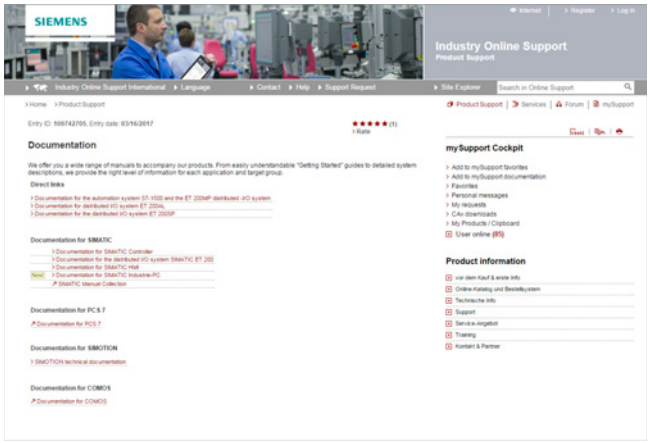

The "SIMATIC documentation" page site in Siemens Industry Online Support directs you straight to the complete range of technical documentation available for SIMATIC products and systems. You can select individual documents from this range for viewing or downloading.


Additional information is available on the Internet at:

www.siemens.com/simatic-docu

© Siemens 2019

Notes


© Siemens 2019

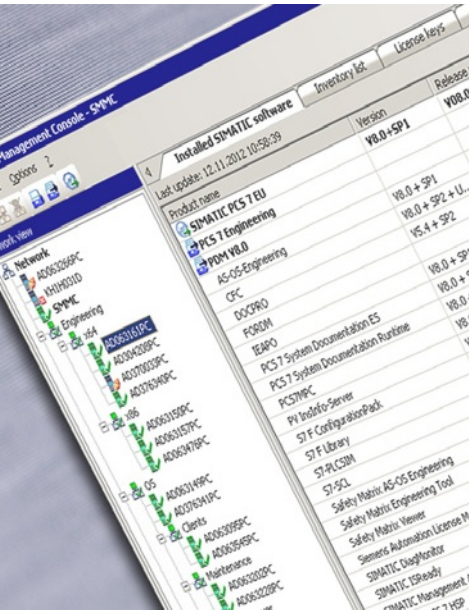

© Siemens 2019

2

Overview

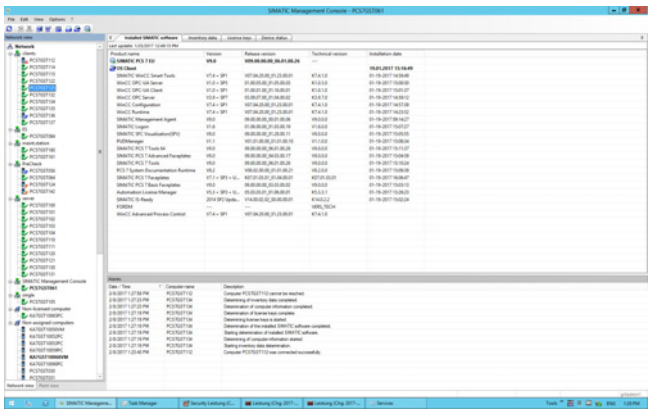

SIMATIC Management Console: Overview of installed software status


A process control system includes numerous heterogeneous components with specific parameters and settings. It is also subject to a dynamic change process due to updates, upgrades as well as modernization measures and expansion. As the plant gets older, it becomes more difficult for you to keep track of the current state of hardware and software. What is more, establishing and maintaining transparency without system support is very time-consuming.

The SIMATIC PCS 7 Management Console enables you to reduce the work for managing your SIMATIC PCS 7 plant to a minimum. You also have the latest status of the installed hardware and software components immediately at hand.

SIMATIC PCS 7 Management Console enables:

- Centralized, standardized administration of SIMATIC PCS 7 software
- Inventory of all installed hardware and software components of the SIMATIC PCS 7 plant

Design

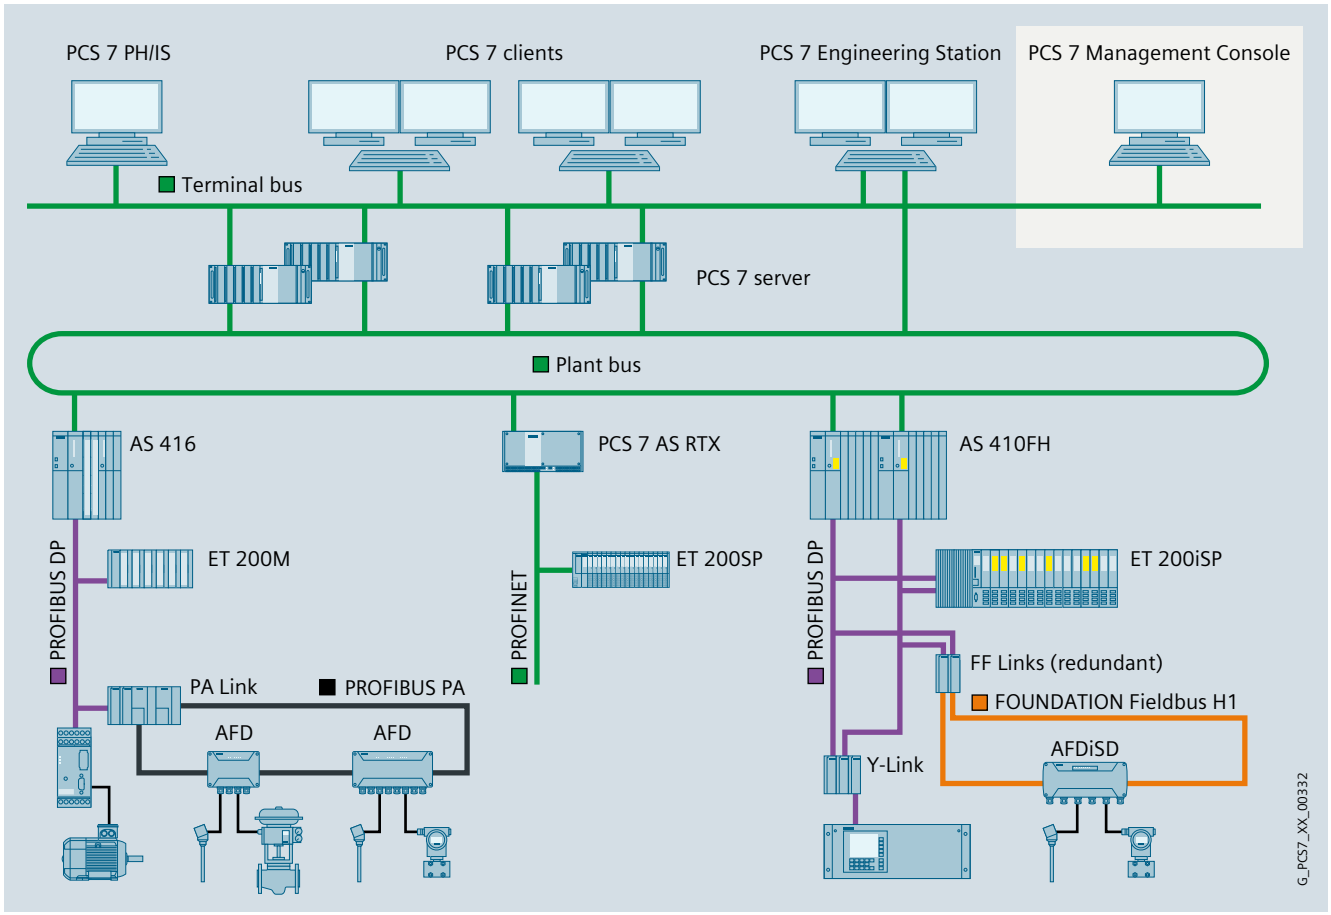

Example of a SIMATIC PCS 7 plant with a stand-alone SIMATIC PCS 7 Management Console

© Siemens 2019

Design (continued)

The SIMATIC PCS 7 Management Console enables you to manage either individual SIMATIC PCS 7 plants or multiple plants of a SIMATIC PCS 7 plant network.

For small and medium-sized SIMATIC PCS 7 plants with up to 25 workstations, the SIMATIC PCS 7 Management Console can be installed and operated on a PCS 7 engineering station.

However, a stand-alone SIMATIC PCS 7 Management Console is typically used for medium-sized and large SIMATIC PCS 7 plant networks with a total of more than 25 workstations. For the single-station or server versions of SIMATIC PCS 7 Industrial Workstation that are suitable as the basic hardware for such an exclusive SIMATIC PCS 7 Management Console, see "Industrial Workstation/IPC".

The central SIMATIC PCS 7 Management Console communicates with "agents" on the relevant SIMATIC PCS 7 Industrial Workstations in a SIMATIC PCS 7 plant. These Management Console agents run local SIMATIC PCS 7 Management Console jobs and return the results.

Secure authentication of communication between the SIMATIC PCS 7 Management Console and the Management Console agents is ensured by the Kerberos protocol.

A License Management Console agent is required for each SIMATIC PCS 7 Industrial Workstation managed by the Management Console. The Management Console agents are available in cumulative sets with 10, 50 and 100 licenses.

Function

Central administration of SIMATIC PCS 7 software

The central administration of the software versions of all stations of a SIMATIC PCS 7 system significantly reduces the administrative effort. SIMATIC PCS 7 installations, updates and service packs are subject to administration. In addition to the current SIMATIC PCS 7 software version, upgrades to the current software version are supported. The software can be installed on an individual target station or on multiple target stations in parallel using setup packages. The installation on the target station does not require active participation of the user. Thanks to the upstream security mechanisms, unintended adverse effects on runtime operation can be prevented.

Setup management

- Provision of SIMATIC PCS 7 installation files on a dedicated file servers or combined on the SIMATIC PCS 7 Management Console
- Addition/removal of SIMATIC PCS 7 setups in the central setup management of the SIMATIC PCS 7 Management Console
- Creation of pre-configured setup packages based on plant/user-specific aspects (e.g. OS client package)
- Display and editing of SIMATIC PCS 7 setups and setup packages for preparing for installation
- Rollout of pre-configured setup packages to target stations
  - Addition of software packages during installation
  - Editing of setups or setup packages

Status monitoring of the target stations

- Check of target stations for installation readiness by determining and displaying the operating state or role (e.g. OS runtime active/inactive, redundancy mode)
- Implicit, remote disabling of a station in preparation for the start of a SIMATIC PCS 7 update installation
- Status monitoring of the entire SIMATIC PCS 7 installation (e.g. resumption of the installation after restart or network interruption)
- Implicit, remote enabling of a station after completion of a SIMATIC PCS 7 update installation

© Siemens 2019

2

Function (continued)

SIMATIC PCS 7 system inventory

General inventory taking of installed hardware and software components from a central location offers the following advantages, for example:

- Quick analysis of the installed components as preparation for replacement actions or upgrades
- Simple creation of a detailed inventory report

The SIMATIC PCS 7 system inventory spans all levels of a SIMATIC PCS 7 system (management level, control level, field level). It covers SIMATIC PCS 7 system components in the named levels, e.g. SIMATIC PCS 7 workstations, Industrial Ethernet switches, automation systems (controllers), remote I/Os, links, field devices, drives, etc. For the AS 410 automation systems configured in the SIMATIC PCS 7 system, the number of available and used process objects is also determined in the inventory

SIMATIC PCS 7 system inventory includes:

- Central acquisition of inventory data by reading it from the database of the SIMATIC PCS 7 engineering system or directly from the components
- Generation of an inventory report in Microsoft Excel format
  - Combination of filter results with user-defined categories
  - Colored marking of filtered data
- Comparison with the latest software version
- Creation of a license certificate in the form of a list of installed software licenses and their use

Ordering data

	Article No.
SIMATIC PCS 7 Management Console V9.0	
5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit, Windows 10 Enterprise 2015 LTSB and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-5BX58-2YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-5BX58-2YH5**
Management Console Agents[2]	
Independent of language, software class A, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 10 agents	**6ES7658-5BA00-2YB5**
- 50 agents	**6ES7658-5BB00-2YB5**
- 100 agents	**6ES7658-5BC00-2YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 10 agents	**6ES7658-5BA00-2YH5**
- 50 agents	**6ES7658-5BB00-2YH5**
- 100 agents	**6ES7658-5BC00-2YH5**

1) See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

2) An agent is required for each SIMATIC PCS 7 Industrial Workstation managed by the Management Console.

© Siemens 2019



3/2 **Introduction**

3/4 **SIMATIC Rack PC**
3/14 IPC547G
3/22 IPC647D
3/30 IPC847D

3/37 **SIMATIC BOX PC**
3/37 OS Client IPC627D/IPC677D

3/44 **SIMATIC Microbox PC**
3/46 OS Client IPC427D
3/48 OS Client IPC477D

3/50 **Expansion components**
3/50 Mouse and Keyboard
3/51 Input Tools
3/52 Smart Card Reader

© Siemens 2019

Overview



We offer a select range of modern and powerful SIMATIC PCS 7 Industrial Workstations for the systems located above the controller level in the SIMATIC PCS 7 system architecture, e.g. for:

- Engineering
- Operating and monitoring (also via Internet/intranet)
- Asset management
- Batch automation
- Route control
- Remote control
- IT applications

SIMATIC PCS 7 Industrial Workstations based on a SIMATIC Rack PC of the type IPC547G, IPC647D or IPC 847D are optimized for use as single station, server or client, and can be expanded in line with the system.

As a supplement to these, the SIMATIC Microbox PC in the version SIMATIC PCS 7 OS Client IPC427/477 as well as the SIMATIC Box PC in the version SIMATIC PCS 7 BOX OS Client IPC627 (without/with panel front) provide low-cost client alternatives for operator control and monitoring and for batch automation.

© Siemens 2019

Application

Basic hardware for single station/server

SIMATIC PCS 7 Industrial Workstations of type IPC547G, IPC647D or IPC 847D, which are available for use as single station or server, vary in their performance, features, expansion spares, and in the length of the product lifecycle. A table compares the essential features of these types in the catalog section "SIMATIC Rack PC, introduction", allowing you to quickly narrow down the search for your specific application. You can then use the detailed technical data in the same catalog section to define this preselection in detail.

Basic hardware for clients

Compared to the more compact client versions, SIMATIC PCS 7 OS Client IPC427/477 and SIMATIC PCS 7 BOX OS Client IPC627 (without/with panel front), clients based on a SIMATIC Rack PC have a larger number and greater variety of interfaces. They therefore offer more expansion options and can be used more universally. In multi-monitor mode, you can control up to four process monitors with equivalent quality.

The main advantage of the SIMATIC PCS 7 OS Client IPC427/477 is their highly compact and rugged design which allows 24/7 maintenance-free operation without fans. These clients are particularly resistant to vibration and shock in the version with solid-state drive (SSD) because there are no rotating storage media. The SIMATIC PCS 7 OS Client IPC427 is a computing unit without monitor in a compact metal enclosure. The SIMATIC PCS 7 OS Client IPC477 was designed as integrated device with a 22" TFT Touch Panel and integrated computing unit. The expansion options for both devices are limited due to their design.

The compact and rugged SIMATIC PCS 7 BOX OS Client IPC627 with a comparable interface configuration is slightly larger than a client on the basis of the SIMATIC Microbox PC. In return, it is additionally equipped with a DVD drive and two free slots for expansion modules. It can also be ordered as a design version with panel front (22" TFT display with touch screen).

Options

Notes on the use of other basic hardware and non-SIMATIC software

Siemens guarantees the compatibility of hardware and software for system configurations based on components in this catalog.

The system test confirms that the system software of the SIMATIC PCS 7 process control system can be run on the basic hardware offered in this catalog. Despite comprehensive tests, it cannot be excluded that the function of a SIMATIC PCS 7 system could be disturbed or interfered with as a result of additional non-SIMATIC software, i.e. software which has not been explicitly approved for SIMATIC PCS 7.

If you use hardware other than the basic hardware offered in this catalog, or additional non-SIMATIC software, this is at your own risk. If compatibility problems arise as a result of these hardware/software components, the support provided for their elimination is not free of charge.


The licenses for plant bus communication via Industrial Ethernet, i.e. for Basic Communication Ethernet (BCE) and CP 1623/1628 communication (IE) are bound to the SIMATIC PCS 7 Industrial Workstations. Depending on the selected type of communication, the SIMATIC PCS 7 Industrial Workstations for single stations and servers are delivered as standard with a network adapter plus BCE license or a CP 1623 plus SIMATIC NET HARDNET IE S7 communications software.

SIMATIC PCS 7 BCE V9.0 license

If you are using SIMATIC PCS 7 V9.0 on other computers (not SIMATIC PCS 7 Industrial Workstations), you also require a SIMATIC PCS 7 BCE V9.0 license (article number 6ES7650-1CD58-2YB5 for goods delivery; article number 6ES7650-1CD58-2YH5 for online delivery) for all single stations or servers that are connected to the plant bus via a standard network adapter and not via a CP 1623/CP 1628.

© Siemens 2019

Overview

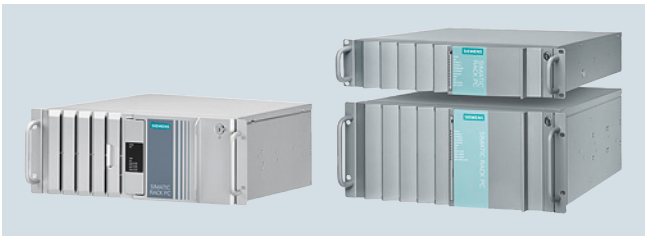

Rack PC family IPC547, IPC647, IPC847

The SIMATIC PCS 7 Industrial Workstation IPC547G is an excellent platform for the configuration of single stations, servers and clients. With their all-round capabilities they are ideally equipped for numerous applications in process automation. You also have high-performance alternatives with workstation types IPC647D and IPC847D.

Because basic components such as chipset, processor and work memory are identical, many of their technical specifications are comparable. The essential differences result from the different overall heights. Since the IPC647D is only half as high as IPC847D, the number and variety of the free slots are reduced. On the other hand, the more compact design requires significantly less space and enables higher packing densities in the control cabinet. This allows the realization of space-saving designs.

The IPC847D is the most powerful and best equipped SIMATIC PCS 7 Industrial Workstation. Its numerous and varied slots provide a great deal of potential for expansion. The IPC847D is predestined for use as a server or single station. Since it would be over-dimensioned as a client, IPC847D is not offered in this version.

Application

Features		SIMATIC PCS 7 Industrial Workstation		
		IPC547G	IPC647D	IPC847D
				
Available SIMATIC PCS 7 pre-installations	V9.0	●	●	●
Available versions	ES/OS single station	●	●	●
	OS server	●	●	●
	OS client	●	●	–
Height		4 U	2 U	4 U
ECC work memory		–	●	●
Onboard RAID controller	RAID 1 (SATA HDD)	●	●	●
	RAID 1 (SATA SSD)	●	●	●
Hardware RAID controller (PCI x8)	RAID 1 (SAS HDD)	–	●	●
	RAID 5 (SAS HDD)	–	–	●
Hard disks or solid state drives (SSD)	SATA/SAS HDD	●/–	●/●	●/●
	SATA SSD	●	●	●
No. of slots	PCIe x16	2	2 or 4	5
	PCIe x8	1	–	–
	PCIe x4	2	–	3
	PCIe x1	–	–	–
	PCI	2	0 or 2	3
Redundant power supply	with diagnostics	–	●	●
	Without diagnostics	●	–	–
Lifecycle	Marketing	3 years	5 years	5 years
	Spare parts/repair	3 years	5 years	5 years

© Siemens 2019

Application (continued)

Specially optimized versions are available for operation as single stations, servers or clients. The operating system and the following ES/OS software of the SIMATIC PCS 7 process control system are factory installed:

- Single station: PCS 7 Engineering Software for AS/OS (including OS Runtime software)
- Server: PCS 7 OS Software Server
- Client: PCS 7 OS Software Client

You only need the corresponding licenses in order to use the pre-installed SIMATIC PCS 7 software.

Note:

Please note the standard installation if you use the SIMATIC PCS 7 Industrial Workstations within the SIMATIC PCS 7 process control system for other tasks, e.g. as basic hardware for SIMATIC BATCH, SIMATIC Route Control, PCS 7 TeleControl, PCS 7 PowerControl, PCS 7 Process Historian, PCS 7 Information Server or PCS 7 Web Server. You can then expand or discard the existing SIMATIC PCS 7 pre-installation, or restore it using one of the Restore DVD sets provided (for details, see "Restore DVD set" for the relevant workstation type).

Design

Types of plant bus communication

A SIMATIC PCS 7 workstation in the single station or server version can be used in a variety of ways on the Industrial Ethernet plant bus depending on the type and number of automation systems connected:

Interface	Software	for AS communication
Communication module CP 1623/CP 1628	SIMATIC NET HARDNET-IE S7 communication software, licensed for up to four CP 1623/CP 1628 (4x license)	with up to 64 AS single stations (no AS redundancy stations)
	SIMATIC NET HARDNET-IE S7-REDCONNECT communication software, licensed for up to four CP 1623/CP 1628 (4x license)	with redundant automation systems (redundancy stations)
Ethernet card	BCE (Basic Communication Ethernet) license	with up to 8 AS single stations

The SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack is suitable for upgrading the SIMATIC NET HARDNET-IE S7 communication software. See "Communication", "Industrial Ethernet, PCS 7 system connection", see page 10/59.

The Industrial Ethernet versions of the SIMATIC PCS 7 Industrial Workstation for single stations and servers are equipped as standard with a CP 1623 communication module and SIMATIC NET HARDNET-IE S7 communications software. The BCE license is involved in the BCE versions of the SIMATIC PCS 7 Industrial Workstation.

Upgrade from BCE to CP 1623/1628 communication

OS single stations and OS servers with BCE communication can be retro-upgraded for communication with CP 1623/1628. Items required:

- Network card for connecting to Industrial Ethernet:
  - CP 1623 with PCI Express interface or
  - CP 1628 with PCIexpress interface and additional security functions
- S7 Communication Software for CP 1623/CP 1628
  - SIMATIC NET HARDNET-IE S7 for communication with AS single stations or
  - SIMATIC NET HARDNET-IE S7 REDCONNECT for communication with AS redundancy stations and AS single stations

For additional information and ordering data for the components mentioned, see "Communication" chapter, section "Industrial Ethernet, System Connection of PCS 7 systems", see page 10/59

Expansion components

The core component of the SIMATIC PCS 7 Industrial Workstation is a SIMATIC industrial PC without mouse, keyboard and monitor. This basic hardware can be expanded further with the following components from this catalog depending on the environment of use and customer requirements:

- Accessories
  - Memory modules
  - Country-specific power supply cable
  - Tower Kit (IPC547G and IPC847D only)
- Expansion components
  - Mouse and keyboard
  - Input aids (touch pens)
  - Multi-monitor mode
  - Smart card reader

Multi-monitor mode can be selected when configuring the SIMATIC PCS 7 Industrial Workstation with the selection table or configurator, but it can also be installed and expanded later. The number of process monitors that can be operated on a SIMATIC PCS 7 Workstation varies according to the workstation type and configuration. In the maximum configuration, multi-monitor mode with 4 process monitors is possible depending on the workstation type.

© Siemens 2019

Technical specifications

Comparison of workstation types for SIMATIC PCS 7 V9.0

Type	SIMATIC IPC547G	SIMATIC IPC647D	SIMATIC IPC847D
Design and equipment features			
Design			
19" rack	4 U	2 U	4 U
Ready for telescopic rails?	Yes	Yes	Yes
Horizontal/vertical installation	Yes/Yes	Yes/No	Yes/Yes
19" fixing bracket with handle; dismountable from outside	Yes	Yes	Yes
Tower kit (accessory)	Yes	No	Yes
Degree of protection	IP30 at front (front door closed); IP20 at the rear according to EN 60529	IP41 at front (front door closed); IP20 at the rear according to EN 60529	IP41 at front (front door closed); IP20 at the rear according to EN 60529
Dust protection	With closed front door in conformity with IEC 60529 Filter class G2 EN 779, particles > 0.5 mm are blocked by 99%	With closed front door in conformity with IEC 60529 Filter class G2 EN 779, particles > 0.5 mm are blocked by 99%	With closed front door in conformity with IEC 60529 Filter class G2 EN 779, particles > 0.5 mm are blocked by 99%
Chipset	Intel C236 (GL82C236 PCH)	Intel C226 (DH82C226 PCH)	Intel C226 (DH82C226 PCH)
CPU			
Processor, clock	• Intel Xeon Processor E3-1275 v5 4C/8T, 3.6 (4.0) GHz, 8 MB cache, iAMT • Intel Core i7-6700 4C/8T, 3.4 (4.0) GHz, 8 MB cache, iAMT • Intel Core i5-6500 4C/4T, 3.2 (3.6) GHz, 6 MB cache, iAMT	• Intel Xeon E3-1268L v3, 4 cores, 8 threads, 2.3 (3.3) GHz, GT2, 8 MB cache, Turbo Boost, VT-d, iAMT • Intel Core i5-4570TE, 2 cores, 4 threads, 2.7 (3.3) GHz, GT2, 4 MB cache, Turbo Boost, VT-d, iAMT • Intel Core i3-4330TE, 2 cores, 4 threads, 2.4 GHz, GT2, 4 MB cache	• Intel Xeon E3-1268L v3, 4 cores, 8 threads, 2.3 (3.3) GHz, GT2, 8 MB cache, Turbo Boost, VT-d, iAMT • Intel Core i5-4570TE, 2 cores, 4 threads, 2.7 (3.3) GHz, GT2, 4 MB cache, Turbo Boost, VT-d, iAMT • Intel Core i3-4330TE, 2 cores, 4 threads, 2.4 GHz, GT2, 4 MB cache
Main memory (SDRAM)			
Type	DDR4-2133 SDRAM (PC4-2400T)	DDR3-1600 SDRAM (PC3-12800), with or without ECC	DDR3-1600 SDRAM (PC3-12800), with or without ECC
Maximum configuration	4 DIMM memory sockets in total; together up to 64 GB	4 DIMM memory sockets in total; together up to 32 GB	4 DIMM memory sockets in total; together up to 32 GB
Standard configuration	4 GB DDR4-2133 SDRAM (1 × 4 GB); single channel 8 GB DDR4-2133 SDRAM (2 × 4 GB); dual channel 16 GB DDR4-2133 SDRAM (2 × 8 GB); dual channel 32 GB DDR4-2133 SDRAM (2 × 16 GB); dual channel 64 GB DDR4-2133 SDRAM (4 × 16 GB); dual channel 8 GB or more can be selected for OS server or ES/OS single station 4 GB or more can be selected for OS client	4 GB DDR3 SDRAM (2 × 2 GB); dual channel 4 GB DDR3 SDRAM (1 × 4 GB); single channel, ECC 8 GB DDR3 SDRAM (2 × 4 GB); dual channel (without/with ECC) 16 GB DDR3 SDRAM (2 × 8 GB); dual channel (without/with ECC) 32 GB DDR3 SDRAM (4 × 8 GB); dual channel (without/with ECC) 8 GB or more can be selected for OS server or ES/OS single station 4 GB and more can be selected for OS client	8 GB DDR3 SDRAM (2 × 4 GB); dual channel (without/with ECC) 16 GB DDR3 SDRAM (2 × 8 GB); dual channel (without/with ECC) 32 GB DDR3 SDRAM (4 × 8 GB); dual channel (without/with ECC) 8 GB or more can be selected for OS server or ES/OS single station
Motherboard slots	Total of 7 slots: • 2 × PCI 1 × PCIe x4 (1 lane, Gen 3.0) 1 × PCIe x4 (4 lanes, Gen 3.0) 1 × PCIe x8 (1 lane, Gen 3.0) 1 × PCIe x16 (4 lanes, Gen 3.0) 1 × PCIe x16; Gen 3.0 Modules up to 312 mm in length can be used	Selectable bus modules with total of 4 slots: • 2 × PCIe x16 (8 lanes, Gen 3.0) and 2 × PCI • 1 × PCIe x16 (8 lanes, Gen 3.0), 1 × PCIe x16 (4 lanes, Gen 2.0); 2 × PCIe x16 (4 lanes, Gen 3.0) Modules up to 312 mm in length can be used	Bus module with total of 11 slots: 1 × PCIe x16 (8 lanes, Gen 3.0) 2 × PCIe x16 (4 lanes, Gen 3.0) 2 × PCIe x16 (4 lanes, Gen 2.0) 3 × PCIe x4 (4 lanes, Gen 2.0) 3 × PCI Modules up to 312 mm in length can be used

© Siemens 2019

Technical specifications (continued)

Type	SIMATIC IPC547G	SIMATIC IPC647D	SIMATIC IPC847D
Possible slots for SATA drives			
On the front	Alternative for HDD/SSD: 1 × 5.25" + 3 × slimline removable trays 3.5" or 4 × slimline removable trays 3.5" 1 × 3.5" (slimline) for DVD burner	2 × slimline removable drive bay 3.5" for HDD/SSD 1 × 3.5" (slimline) for DVD burner	4 × slimline removable drive bay 3.5" for HDD/SSD 1 × 3.5" (slimline) for DVD burner
Indoors	2 × 3.5" for HDD/SSD	2 × 3.5" for HDD (in shock and vibration-damped drive cage; alternative to removable drive bay)	2 × 3.5" for HDD in shock and vibration-damped drive cage 2 × 3.5" for HDD/SSD, integral
RAID controller			
Onboard RAID controller	Intel PCH with Intel Rapid Storage Technology	Intel 8 series SATA RAID controller	Intel 8 series SATA RAID controller
• RAID 1 (SATA HDD)	Yes	Yes	Yes
• RAID 1 (SATA SSD)	Yes	Yes	Yes
Hardware RAID controller (PCI x8; 2 slots occupied)			
• RAID 1 (SAS HDD)	No	Yes	Yes
• RAID 5 (SAS HDD)	No	No	Yes
Drives			
Hard disk drive (HDD) 3.5", 6 Gbps, NCQ technology			
• ES/OS Single station or OS Server	1 TB; Enterprise type: 1 TB or 2 TB	500 GB SATA, 1 TB SATA or 1 TB SAS	500 GB SATA, 1 TB SATA or 1 TB SAS
• OS client	1 TB; Enterprise type: 1 TB or 2 TB	500 GB or 1 TB SATA	500 GB or 1 TB SATA
Solid State Drive (SSD) 2.5"			
• ES/OS Single station or OS Server	240 GB or 480 GB SATA (eMLC)	240 GB or 480 GB SATA (eMLC)	240 GB or 480 GB SATA (eMLC)
• OS client	240 GB or 480 GB SATA (eMLC)	240 GB or 480 GB SATA (eMLC)	–
DVD burner	DVD±R/RW 5.25" SATA Slimline Read: • DVD-ROM: single layer and dual layer 8x • DVD-R/+R 8x • DVD-RW/+RW 8x • DVD-RAM 8x • CD-ROM, CD-R 24x, CD-RW 24x Write: • DVD+R 8x, DVD+R DL 6x DVD+RW 8x, DVD-R 8x, DVD-R DL 6x DVD-RW 6x • DVD-RAM 5x • CD-R 10x, CD-RW 16x	DVD±R/RW 5.25" SATA Slimline Read: • DVD-ROM: single layer 8x, dual layer 6x • DVD-R/+R: single layer 8x, dual layer 6x • DVD-RW/+RW 8x • DVD-RAM 5x • CD-R 24x, CD-RW 24x Write: • DVD+R 8x, DVD+RW 8x, DVD-R 8x, DVD-RW 6x • DVD+R9 (DL) 6x, DVD-R DL 2x • CD-R 24x, CD-RW 24x	DVD±R/RW 5.25" SATA Slimline Read: • DVD-ROM: single layer 8x, dual layer 6x • DVD-R/+R: single layer 8x, dual layer 6x • DVD-RW/+RW 8x • DVD-RAM 5x • CD-ROM, CD-R 24x, CD-RW 24x Write: • DVD+R 8x, DVD+RW 8x, DVD-R 8x, DVD-RW 6x • DVD+R (DL) 6x, DVD-R DL 2x • CD-R 24x, CD-RW 24x

© Siemens 2019

Technical specifications (continued)

Type	SIMATIC IPC547G	SIMATIC IPC647D	SIMATIC IPC847D
HDD/SSD configuration	HDD (single station, server or client) • 1 TB HDD SATA internal (optionally Enterprise type) 0.2 g vibration, 1 g shock • 1 TB HDD SATA in removable tray, at the front (optionally Enterprise type) • 1 TB RAID 1 internal; 0.2 g vibration, 1 g shock (2 × 1 TB HDD SATA, optionally Enterprise type, data mirroring) • 1 TB RAID 1 in removable trays; hot-swap; at the front (2 × 1 TB HDD SATA, optionally Enterprise type, data mirroring) • 2 TB RAID 1 in removable trays; hot-swap; at the front (2 × 2 TB HDD SATA, Enterprise type, data mirroring) • 2 TB RAID 1 (2 × 2 TB HDD SATA, data mirroring) plus 2 TB hot-spare HDD SATA; each Enterprise type; in removable trays; hot-swap; at the front SSD (single station, server or client) • 240 GB or 480 GB SSD SATA internal • 240 GB or 480 GB SSD SATA in removable tray; at the front • 240 or 480 GB RAID 1 (2 × 240/480 GB SSD SATA) in removable trays, hot-swap, at the front HDD+SSD (single station or server) • 2 TB RAID 1 (2 × 2 TB HDD SATA, Enterprise type, data mirroring), hot-swap, plus 480 GB SSD SATA; each in removable trays; at the front	HDD (single station, server or client) • 500 GB or 1 TB HDD SATA internal; 0.5 g vibration, 5 g shock • 500 GB or 1 TB HDD SATA in removable drive bay; at the front • 1 TB RAID 1 internal; 0.5 g vibration, 5 g shock (2 × 1 TB HDD SATA, data mirroring) • 1 TB RAID 1 in removable drive bay; for hot swapping; at the front, data mirroring (2 × 1 TB HDD SATA) HDD (single station or server) • 1 TB RAID 1 in removable drive bay; for hot swapping; at the front, data mirroring (2 × 1 TB HDD SAS) SSD (single station, server or client) • 240 GB or 480 GB SSD SATA internal • 240 GB or 480 GB SSD SATA in removable drive bay; at the front • RAID 1 SSD SATA in removable drive bay; for hot swapping; at the front, data mirroring; (single station or server) - 240 GB (2 × 240 GB) - 480 GB (2 × 480 GB) HDD+SSD (single station or server) • 1 TB RAID 1 internal; 0.5 g vibration, 5 g shock (2 × 1 TB HDD SATA, data mirroring) plus 240 GB SSD SATA, internal, in the DVD drive slot • 1 TB RAID1 in removable drive bay; for hot swapping; at the front, data mirroring (2 × 1 TB HDD SATA or 2 × 1 TB HDD SAS) plus 240 GB SSD SATA, internal, in the DVD drive slot	HDD (single station or server) • 500 GB or 1 TB HDD SATA, internal; 0.5 g vibration, 5 g shock • 500 GB or 1 TB HDD SATA in removable drive bay; at the front • 1 TB RAID 1 internal; 0.5 g vibration, 5 g shock (2 × 1 TB HDD SATA, data mirroring) • 1 TB RAID 1 in removable drive bay; for hot swapping; at the front, data mirroring (2 × 1 TB HDD SATA or 2 × 1 TB HDD SAS) • 1 TB RAID 1 (2 × 1 TB HDD SATA, data mirroring) plus 1 TB hot-spare HDD SATA; each in removable drive bay; for hot swapping; at the front • 2 TB RAID 5 in removable drive bay; for hot swapping; at the front, (3 × 1 TB HDD SAS, striping with parity) • 2 TB RAID 5 (3 × 1 TB HDD SAS, striping with parity) plus 1 TB hot-spare HDD SAS; each in removable drive bay; for hot swapping; at the front SSD (single station or server) • 240 GB or 480 GB SSD SATA internal • 240 GB or 480 GB SSD SATA in removable drive bay; at the front • RAID 1 SSD SATA in removable drive bay; for hot swapping; at the front, data mirroring - 240 GB (2 × 240 GB) - 480 GB (2 × 480 GB) HDD+SSD (single station or server) • 1 TB RAID 1 internal; 0.5 g vibration, 5 g shock (2 × 1 TB HDD SATA, data mirroring) plus 240 GB SSD SATA, in removable drive bay, at the front • 1 TB RAID 1 (2 × 1 TB HDD SATA or 2 × 1 TB HDD SAS; data mirroring, for hot swapping) plus 240 GB SSD SATA, each in removable drive bay; at the front • 2 TB RAID 5 (3 × 1 TB HDD SAS, striping with parity, for hot swapping) plus 240 GB SSD SATA, each in removable drive bay; at the front
Graphics card	Onboard Intel graphics controller, integrated in processor; version depends on processor, either HD Graphics 530 (i7-6700 and i5-6500) or HD Graphics P530 (E3-1275 v5)	Onboard Intel graphics controller HD Graphics P4600/P4700; 2-D and 3-D engine integrated in processor	Onboard Intel graphics controller HD Graphics P4600/P4700; 2-D and 3-D engine integrated in processor
Graphics memory	Dynamic Video Memory Technology (uses between 32 MB and 1.7 GB RAM)	Dynamic Video Memory Technology (uses between 32 MB and 1.7 GB RAM)	Dynamic Video Memory Technology (uses between 32 MB and 1.7 GB RAM)
Resolutions. frequencies, colors			
• VGA connection	Up to 2 560 × 1 600 at 60 Hz, 32-bit color depth (DisplayPort to VGA via adapter cable)	Up to 2 560 × 1 600 at 120 Hz, 32-bit color depth (DVI-I to VGA or DisplayPort to VGA via adapter cable)	Up to 2 560 × 1 600 at 120 Hz, 32-bit color depth (DVI-I to VGA or DisplayPort to VGA via adapter cable)
• DVI connection	Up to 1920 × 1200 at 60 Hz, 32-bit color depth	Up to 2048 × 1152 at 60 Hz, 32-bit color depth	Up to 2048 × 1152 at 60 Hz, 32-bit color depth
• DisplayPort	Up to 4096 × 2304 at 60 Hz, 32-bit color depth	Up to 4096 × 2160 at 24 Hz, 32bit color depth	Up to 4096 × 2160 at 24 Hz, 32-bit color depth

© Siemens 2019

Technical specifications (continued)

Type	SIMATIC IPC547G	SIMATIC IPC647D	SIMATIC IPC847D
Interface modules, interfaces			
Terminal bus interface	2 × Ethernet port (RJ45) 10/100/1000 Mbps, teaming-capable, two independent controllers: Intel Jacksonville i219-LM and Intel Springville i210-AT	2 × Ethernet port (RJ45) 10/100/1000 Mbps, electrically isolated, teaming-capable, two independent controllers: Intel WGI217LM and Intel WGI210IT	2 × Ethernet port (RJ45) 10/100/1000 Mbps, electrically isolated, teaming-capable, two independent controllers: Intel WGI217LM and Intel WGI210IT
Plant bus interface module (single station/server), alternatives			
• BCE	Ethernet network adapter RJ45 10/100/1000 Mbps (PCIe x1)	Ethernet network adapter RJ45 10/100/1000 Mbps (PCIe x1)	Ethernet network adapter RJ45 10/100/1000 Mbps (PCIe x1)
• IE	CP 1623 communication module (PCIe x1)	CP 1623 communication module (PCIe x1)	CP 1623 communication module (PCIe x1)
USB 3.0	6 channels, 900 mA high current (≤ 3 A in total), super speed • 4 × at rear • 2 × at front	4 channels, 500 mA high current, super speed • 2 × at rear • 1 × at front • 1 × internal, with mechanical locking, e.g. for USB dongle	4 channels, 500 mA high current, super speed • 2 × at rear • 1 × at front • 1 × internal, with mechanical locking, e.g. for USB dongle
USB 2.0	5 channels, 500 mA high current, high speed • 4 × at rear • 1 × internal, with mechanical locking, e.g. for USB dongle	3 channels, 500 mA high current, high speed • 2 × at rear • 1 × at front	3 channels, 500 mA high current, high speed • 2 × at rear • 1 × at front
Serial (COM)	1 × COM1 (V.24), 9-pin sub-D female connector	1 × COM1 (V.24), 9-pin sub-D male connector	1 × COM1 (V.24), 9-pin sub-D male connector
Audio	Realtek ALC671, 6-channel DAC support; 1 × Line In; 1 × Micro In; 1 × Line Out (2 W into 4 Ω)	1 × Micro In; 1 × Line Out/headphones (2 × 0.5 W/8 Ω); IDT 92HD81HD	1 × Micro In; 1 × Line Out/headphones (2 × 0.5 W/8 Ω); IDT 92HD81HD
DisplayPort	Yes, 2 ×	Yes, 2 ×	Yes, 2 ×
DVI	1 × DVI-D for digital connection of a monitor	1 × DVI-I for digital connection of a monitor	1 × DVI-I for digital connection of a monitor
Multi-monitor interface	2 monitors: Integral interfaces: 1 × DVI and 1 × DVI via DisplayPort DVI adapter or 2 × via DisplayPort 3 or 4 monitors: Onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 graphics card (2 × DisplayPort) combined, DVI via additional adapter cable	2 monitors: Integral interfaces: 1 × DVI and 1 × DVI via DisplayPort DVI adapter or 2 × via DisplayPort 3 or 4 monitors: Onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 graphics card (2 × DisplayPort) combined, DVI over additional adapter cable	2 monitors: Integral interfaces: 1 × DVI and 1 × DVI via DisplayPort DVI adapter or 2 × via DisplayPort 3 or 4 monitors: Onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 graphics card (2 × DisplayPort) combined, DVI over additional adapter cable
Keyboard	1 × PS/2	1 × PS/2	1 × PS/2
Mouse	1 × PS/2	1 × PS/2	1 × PS/2
Operating systems and diagnostics software			
ES/OS single station	Windows 10 IoT Enterprise LTSB 2015 64-bit, MUI (German, English, French, Italian, Spanish, Chinese)	Windows 10 IoT Enterprise LTSB 2015 64-bit, MU (German, English, French, Italian, Spanish, Chinese)	Windows 10 IoT Enterprise LTSB 2015 64-bit, MUI (German, English, French, Italian, Spanish, Chinese)
OS server	Windows Server 2016 Standard Edition 64-bit, including 16 core, 5 CAL, MUI (German, English, French, Italian, Spanish, Chinese)	Windows Server 2016 Standard Edition 64-bit, including 16 core, 5 CAL, MUI (German, English, French, Italian, Spanish, Chinese)	Windows Server 2016 Standard Edition 64-bit, including 16 core, 5 CAL, MUI (German, English, French, Italian, Spanish, Chinese)
OS client	Windows 10 IoT Enterprise LTSB 2015 64-bit, MUI (German, English, French, Italian, Spanish, Chinese)	Windows 10 IoT Enterprise LTSB 2015 64-bit, MUI (German, English, French, Italian, Spanish, Chinese)	--
System tested SIMATIC Industrial Software	SIMATIC IPC DiagMonitor integrated in pre-installation	SIMATIC IPC DiagMonitor integrated in pre-installation	SIMATIC IPC DiagMonitor integrated in pre-installation

© Siemens 2019

Technical specifications (continued)

Type	SIMATIC IPC547G	SIMATIC IPC647D	SIMATIC IPC847D
Monitoring and diagnostics functions			
Watchdog	• Monitoring of program execution • Monitoring time adjustable in the software • Restart can be configured for faults	• Monitoring of program execution • Monitoring time adjustable in the software • Restart can be configured for faults	• Monitoring of program execution • Monitoring time adjustable in the software • Restart can be configured for faults
Temperature	High/low violation of permitted operating temperature	Violation of permissible operating temperature	Violation of permissible operating temperature
Fans	Speed monitoring for • Front fan • Processor fan • Fan on drive cage • Fan of single, non-redundant power supply	Speed monitoring for • Front fan • Processor fan • Power supply fan	Speed monitoring for • Front fan • Processor fan • Power supply fan
Battery	Two-stage monitoring; service life following first warning at least 1 month	Two-stage monitoring; service life following first warning at least 1 month	Two-stage monitoring; service life following first warning at least 1 month
Drives	SMART messages of hard disks; RAID states "Normal", "Degraded" and "Rebuild"	SMART messages of hard disks; RAID states "Normal", "Degraded" and "Rebuild"	SMART messages of hard disks; RAID states "Normal", "Degraded" and "Rebuild"
Indicators (front LEDs)	• POWER (operating state) • TEMP (temperature status) • FAN (fan status) • HDD (hard disk activity) • HDD0/1/2/3 alarm (RAID status messages)	• POWER (device switched on) • HDD (hard disk activity) • ETHERNET 1, ETHERNET 2 (Ethernet status) • WATCHDOG (ready/fault signal) • TEMP (temperature status) • FAN (fan/temperature monitoring) • HDD0/1 ALARM (RAID status messages)	• POWER (device switched on) • ETHERNET 1, ETHERNET 2 (Ethernet status) • WATCHDOG (ready/fault signal) • TEMP (temperature status) • FAN (fan/temperature monitoring) • HDD0/1/2 ALARM (RAID status messages) and HDD | HDD3 ALARM (hard disk activity and RAID status message)
Safety			
Protection class	Protection class I in accordance with IEC 61140	Protection class I in accordance with IEC 61140	Protection class I in accordance with IEC 61140
Safety directives	IEC 60950-1; EN 60950-1; UL 60950-1; CSA C22.2 No. 60950-1-07	IEC 60950-1; EN 60950-1; UL 60950-1; CSA C22.2 No 60950-1-07	IEC 60950-1 EN 60950-1 UL 60950-1 CSA C22.2 No 60950-1-07
Noise emission			
Operation	< 45 dB(A) according to DIN 45635 (40 dB(A) at 20 °C and Windows idle mode)	< 45 dB(A) at 25 °C according to EN ISO 7779 (without DVD drive)	< 55 dB(A) at 25 °C according to EN ISO 7779 (all drives in operation; high CPU loading) < 45 dB(A) at 25 °C according to EN ISO 7779 (without DVD drive; low CPU loading)
Electromagnetic compatibility (EMC)			
Interference emission	EN 61000-6-3; EN 61000-6-4 CISPR 22, EN 55022 Class B; FCC Class A / EN 61000-3-2 Class D; EN 61000-3-3	EN 61000-6-3, FCC Class A; EN 61000-6-4; CISPR 22, EN 55022 Class B; EN 61000-3-2 Class D and EN 61000-3-3	EN 61000-6-3, FCC Class A; EN 61000-6-4; CISPR 22, EN 55022 Class B; EN 61000-3-2 Class D and EN 61000-3-3
Immunity to conducted interference on the supply lines	±2 kV (to IEC 61000-4-4, burst) ±1 kV (to IEC 61000-4-5, symmetrical surge) ±2 kV (to IEC 61000-4-5, asymmetrical surge)	±2 kV (to IEC 61000-4-4; burst) ±1 kV (to IEC 61000-4-5; symmetrical surge) ±2 kV (to IEC 61000-4-5; asymmetrical surge)	±2 kV (to IEC 61000-4-4; burst) ±1 kV (to IEC 61000-4-5; symmetrical surge) ±2 kV (to IEC 61000-4-5; asymmetrical surge)
Immunity to interference on signal lines	±1 kV (to IEC 61000-4-4; burst; length < 30 m) ±2 kV (to IEC 61000-4-4; burst; length > 30 m) ±2 kV (to IEC 61000-4-5; surge; length > 30 m)	±1 kV (to IEC 61000-4-4; burst; length < 30 m) ±2 kV (to IEC 61000-4-4; burst; length > 30 m) ±2 kV (to IEC 61000-4-5; length > 30 m)	±1 kV (to IEC 61000-4-4; burst; length < 30 m) ±2 kV (to IEC 61000-4-4; burst; length > 30 m) ±2 kV (to IEC 61000-4-5; surge; length > 30 m)
Immunity to static discharge	±4 kV contact discharge (according to IEC 61000-4-2) ±8 kV atmospheric discharge (according to IEC 61000-4-2)	±6 kV contact discharge (according to IEC 61000-4-2) ±8 kV atmospheric discharge (according to IEC 61000-4-2)	±6 kV contact discharge (according to IEC 61000-4-2) ±8 kV atmospheric discharge (according to IEC 61000-4-2)

© Siemens 2019

Technical specifications (continued)

Type	SIMATIC IPC547G	SIMATIC IPC647D	SIMATIC IPC847D
Immunity to radio frequency interference	1 V/m, 2 … 2.7 GHz, 80% AM (to IEC 61000-4-3) 3 V/m, 1.4 … 2 GHz, 80% AM (to IEC 61000-4-3) 10 V/m, 80 … 1 000 MHz, 80% AM (to IEC 61000-4-3) 10 V, 150 kHz … 80 MHz, 80% AM (to IEC 61000-4-6)	3 V/m, 2 … 2.7 GHz, 80 % AM (to IEC 61000-4-3) 10 V/m, 80 … 1 000 MHz and 1.4 … 2 GHz, 80 % AM (to IEC 6100-4-3) 10 V, 10 kHz ... 80 MHz, 80 % AM (to IEC 61000-4-6)	3 V/m, 2 … 2.7 GHz, 80 % AM (to IEC 61000-4-3) 10 V/m, 80 … 1 000 MHz and 1.4 … 2 GHz, 80 % AM (to IEC 6100-4-3) 10 V, 10 kHz ... 80 MHz, 80 % AM (to IEC 61000-4-6)
Magnetic field	30 A/m, 50 Hz/60 Hz (according to IEC 61000-4-8)	100 A/m, 50 Hz/60 Hz (to IEC 61000-4-8)	100 A/m, 50 Hz/60 Hz (to IEC 61000-4-8)
Climatic conditions			
Temperature	Tested according to IEC 60068-2-2, IEC 60068-2-1, IEC 60068-2-14	Tested according to IEC 60068-2-2, IEC 60068-2-1, IEC 60068-2-14	Tested according to IEC 60068-2-2, IEC 60068-2-1, IEC 60068-2-14
• Operation	+5 … +35 °C (without restriction) 0 to +40 °C (no DVD burner operation)[1] Gradient: ≤ 10 K/h, no condensation [1] Power dissipation of the expansion modules in total max. 80 W	+0 to +35 °C (without restriction) 0 to +40 °C (without hardware RAID controller)[1] 0 to +45 °C (without DVD burner, without hardware RAID controller)[1] 0 to +50 °C (without DVD burner, without hardware RAID controller, no HDD operation in removable drive bay) Gradient: max. 10 °C/h, no condensation [1] Power dissipation of the expansion modules in total max. 55 W	0 to +35 °C (with hardware RAID controller) 0 to +45 °C (without DVD burner) 0 to +50 °C (without DVD burner, max. 3 removable drive bays)[1] Gradient: max. 10 °C/h, no condensation [1] Power dissipation of the expansion modules in total max. 30 W
• Storage/transport	-20 … +60 °C Gradient: max. 2 K/h, no condensation	-20 … +60 °C Gradient: max. 20 °C/h, no condensation	-20 … +60 °C Gradient: max. 20 °C/h, no condensation
Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30	Tested according to IEC 60068-2-78, IEC 60068-2-30	Tested according to IEC 60068-2-78, IEC 60068-2-30
• Operation	5 ... 85% at 30 °C (no condensation) Gradient: max. 10 K/h (no condensation)	5 … 80 % at 25 °C (no condensation) Gradient: max. 10 °C/h (no condensation)	5 … 80 % at 25 °C (no condensation) Gradient: max. 10 °C/h (no condensation)
• Storage/transport	5 ... 95% at 25 ... 55 °C (no condensation) Gradient: ≤ 20 K/h (no condensation)	5 … 95 % at 25 °C (no condensation) Gradient: max. 20 °C/h (no condensation)	5 … 95 % at 25 °C (no condensation) Gradient: max. 20 °C/h (no condensation)
Atmospheric pressure			
• Operation	1080 ... 689 hPa (corresponds to a height of -1 000 ... 3 000 m)	1080 ... 795 hPa (corresponds to a height of -1 000 ... 2 000 m)	1080 ... 795 hPa (corresponds to a height of -1 000 ... 2 000 m)
• Storage/transport	1080 ... 660 hPa (corresponds to a height of -1 000 ... 3 500 m)	1080 ... 660 hPa (corresponds to a height of -1 000 ... 3 500 m)	1080 ... 660 hPa (corresponds to a height of -1 000 ... 3 500 m)
Mechanical environmental conditions			
Vibrations	Tested according to IEC 60068-2-6, 10 cycles	Tested according to IEC 60068-2-6, 10 cycles	Tested according to IEC 60068-2-6, 10 cycles
• Operation	20 … 58 Hz: Amplitude 0.015 mm; 58 … 200 Hz: 2 m/s² (approx. 0.2 g) Note: No mechanical loads when using hard disks in removable trays and during DVD burning process.	10 … 58 Hz: Amplitude 0.0375 mm; 58 ... 500 Hz: 4.9 m/s² (approx. 0.5 g) Note: No mechanical loads when using hard disks in removable drive bay and during DVD burning process.	10 … 58 Hz: Amplitude 0.0375 mm[1]; 58 ... 500 Hz: 4.9 m/s² (approx. 0.5 g)[1] Note: No mechanical loads when using hard disks in removable drive bay and during DVD burning process. [1] With HDD mounting on side panel and assembly of device using telescopic rails max. 0.019 mm at 10 … 58 Hz; max. 3 m/s² at 58 … 500 Hz
• Storage/transport	5 … 8.51 Hz: Amplitude 3.5 mm; 8.51 … 500 Hz: 9.8 m/s²	5 … 9 Hz: Amplitude 3.5 mm; 9 … 500 Hz: 9.8 m/s²	5 … 9 Hz: Amplitude 3.5 mm; 9 … 500 Hz: 9.8 m/s²

© Siemens 2019

Technical specifications (continued)

Type	SIMATIC IPC547G	SIMATIC IPC647D	SIMATIC IPC847D
Shock resistance	Tested according to IEC 60068-2-27	Tested according to IEC 60068-2-27, IEC 60068-2-29	Tested according to IEC 60068-2-27, IEC 60068-2-29
• Operation	Half sine: 9.8 m/s², 20 ms (approx. 1 g), 100 shocks per axis Note: No mechanical loads when using hard disks in removable trays and during DVD burning process.	Half sine: 50 m/s², 30 ms (approx. 5 g), 100 shocks per axis Note: No mechanical loads when using hard disks in removable drive bay and during DVD burning process.	Half sine: 50 m/s², 30 ms (approx. 5 g), 100 shocks per axis[1)] Note: No mechanical loads when using hard disks in removable drive bay and during DVD burning process. [1)] With HDD mounting on side panel and assembly of device using telescopic rails max. 0.019 mm at 10 … 58 Hz; max. 3 m/s² at 58 … 500 Hz
• Storage/transport	Half sine: 250 m/s², 6 ms, 1 000 shocks per axis	Half sine: 250 m/s², 6 ms, 1 000 shocks per axis	Half sine: 250 m/s², 6 ms, 1 000 shocks per axis
Approvals, standards			
CE in conformity with 2004/108/EC, 2006/95/EC	Yes	Yes	Yes
Industrial area of application			
• Interference emission	EN 61000-6-4:2007 + A1:2011	EN 61000-6-4:2007 + A1:2011	EN 61000-6-4:2007 + A1:2011
• Noise immunity	EN 61000-6-2:2005	EN 61000-6-2:2005	EN 61000-6-2:2005
Area of application: Residential, business, trade, small enterprise			
• Interference emission	EN 61000-6-3:2007 + A1:2011	EN 61000-6-3:2007 + A1:2011	EN 61000-6-3:2007 + A1:2011
• Noise immunity	EN 61000-6-1:2007	EN 61000-6-1:2007	EN 61000-6-1:2007
cULus: • 60950-1, File No. E11 5352 • CAN/CSA-C22.2 No. 60950-1-07 (I.T.E.)	Yes	Yes	Yes
USA: FCC Rules, Part 15, Class A	Yes	Yes	Yes
Canada: ICES-003, Class B; NMB-003, Class B	Yes	Yes	Yes
Australia/New Zealand: EN 61000-6-3:2007	Yes	Yes	Yes
Korea: Korean Certification (KC Mark)	Yes	Yes	Yes
EAC (Eurasian Conformity)	Yes	Yes	Yes
Special features			
Quality assurance according to ISO 9001:2008	Yes	Yes	Yes

© Siemens 2019

Technical specifications (continued)

Type	SIMATIC IPC547G	SIMATIC IPC647D	SIMATIC IPC847D
Power supply			
Nominal supply voltage (U_N)	Single power supply unit: • 100 … 240 V AC (-15%, +10%) Redundant power supply unit: • 2 × 100 … 240 V AC (-15%, +10%)	Single power supply unit: • 100 … 240 V AC (-15%, +10%) Redundant power supply unit: • 2 × 100 … 240 V AC (-15%, +10%)	Single power supply unit: • 100 … 240 V AC (-15%, +10%) Redundant power supply unit: • 2 × 100 … 240 V AC (-15%, +10%)
Frequency	50 … 60 Hz (min. 47 Hz, max. 63 Hz, sinusoidal)	50 … 60 Hz (min. 47 Hz, max. 63 Hz, sinusoidal)	50 … 60 Hz (min. 47 Hz, max. 63 Hz, sinusoidal)
Short-term voltage dip	• 20 ms for 230 W (max. 10 events per hour; recovery time ≥ 1 s) with single power supply unit • 20 ms for 240 W (≤ 10 events per hour; recovery time ≥ 1 s) with redundant power supply unit	20 ms at 93 V (max. 10 events per hour; min. recovery time 1 s)	20 ms at 93 V (max. 10 events per hour; min. recovery time 1 s)
Power consumption at 230 W secondary (maximum configuration)	• 260 W max. at 90% efficiency with single power supply unit • 270 W max. at 85% efficiency with redundant power supply unit	240 W max. at 80 % efficiency with single or redundant power supply unit	• 270 W max. at 80 % efficiency with single power supply unit • 300 W max. at 70 % efficiency with redundant power supply unit
AC input current	Single power supply unit: • Continuous current up to 6 A at 100 V; up to 3 A at 240 V • Up to 80 A for 3.6 ms during startup Redundant power supply unit: • Continuous current up to 5 A at 100 V; up to 2.5 A at 240 V • Up to 210 A per module for 1.65 ms during startup	• Continuous current up to 6 A • Up to 30 A for 5 ms during startup	• Continuous current up to 7 A • Up to 30 A for 5 ms during startup
Max. current output (DC)	Single power supply unit: • +5 V: 25 A; +3.3 V: 20 A (in total up to 190 W) • +12 V: 14 A; +12 V: 11 A • -12 V: 0.1 A • +5 V_{aux}: 2 A Redundant power supply unit: • +5 V: 20 A; +3.3 V: 20 A (in total up to 100 W) • +12 V: 16 A; +12 V: 16 A • -12 V: 0.5 A • +5 V_{aux}: 3 A Total sum of all voltages max. 230 W	• +5 V: 30 A; +3.3 V: 28 A (in total up to 160 W) • +12 V: 15 A • -12 V: 0.5 A • -5 V: 0.5 A • +5 V_{aux}: 2 A Total sum of all voltages max. 190 W	• +5 V: 26 A; +3.3 V: 24 A (in total up to 190 W) • +12 V: 15 A; +12 V: 15 A • -12 V: 0.2 A • +5 V_{aux}: 2 A Total sum of all voltages max. 210 W
Dimensions and weights			
Installation dimensions (W × H × D) in mm	433.5 × 176.5 × 445.5	430.4 × 88.1 × 444.6	430.4 × 177.4 × 444.4
Weight (depending on configuration)	15 … 23 kg	10 … 14 kg	16 … 23 kg

© Siemens 2019

3


Overview



SIMATIC RackPC IPC547G

The SIMATIC PCS 7 Industrial Workstations based on a SIMATIC Rack PC of type IPC547G are UL-certified and have the CE mark for use in industry as well as residential, business and commercial environments. With its 19" design and innovative 6th generation Intel Core i technology, they offer high performance, availability and ease of service.

Design

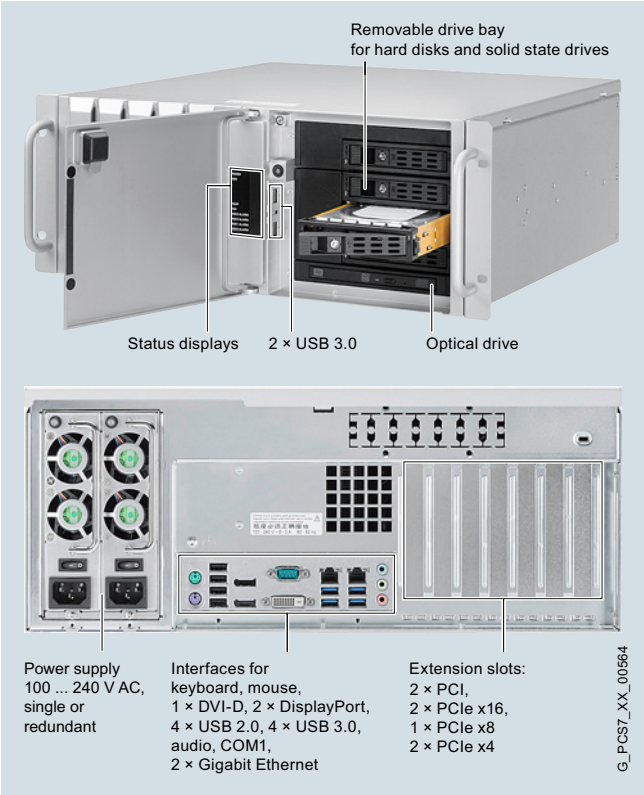

SIMATIC IPC547G, front with open front door (top) and rear with redundant power supply

The SIMATIC PCS 7 Industrial Workstations of type IPC547G are suitable for reliable 24-hour continuous operation at ambient temperatures between 0 and 40 °C.

The corrosion-resistant 19" all-metal enclosure (4 U) is especially well-protected against dust by a filter and overpressure ventilation. It is service friendly and both mechanically and electromechanically rugged.

SIMATIC PCS 7 Industrial Workstations of type IPC547G are prepared for mounting on telescopic rails. They can be installed in vertical or horizontal position and in 500 mm deep 19" control cabinets, which saves space. Using an optional tower kit, the Rack PC can be converted into an industrial tower.

Further essential features

High-performance technology for demanding automation and visualization tasks

- Motherboard based on the Intel C236 chip set and Intel HD Graphics 530/P530 integrated in the processor.
- Powerful, energy-saving 6th generation Intel Core i processors with Turbo Boost 2.0, Hyper Threading and Virtualization technology
- Memory capacity with up to 64 GB DDR4-2133 SDRAM (support of dual channel technology)
- High data transfer rates, e.g. by serial ATA solid-state drive up to 480 GB, serial ATA hard disks up to 2 TB, Dual Gigabit Ethernet, PCI Express 3.0 technology
- Exceptional memory and graphics performance of graphics and memory controller integrated in the processor
- Optional graphics expansion (dual head graphics card PCI Express x16) for multi-monitor mode with up to 4 process monitors (up to 2 process monitors on the onboard graphics controller)

© Siemens 2019

Design (continued)

Expansion options and interfaces

- 2 × 10/100/1000 Mbps Ethernet RJ45 port integrated onboard
- Numerous slots for PCI/PCI Express expansion modules (all for modules up to 312 mm in length)
  - 2 × PCI
  - 1 × PCIe x4 (1 lane) Gen 3
  - 1 × PCIe x4 (4 lanes) Gen 3
  - 1 × PCIe x8 (1 lane) Gen 3
  - 1 × PCIe x16 Gen 3
  - 1 × PCIe x16 (4 lanes) Gen 3
- Total of 6 USB 3.0 ports
  - 4 on the rear of the device
  - 2 on the front
- Total of 5 USB 2.0 ports
  - 4 on the rear of the device
  - 1 internal, e.g. for software license dongle ASIA
- Further interfaces at the rear of the device:
  - 2 × PS/2 for mouse and keyboard
  - 1 × Serial COM interface (COM1)
  - 2 × DisplayPort V1.2, 1 × DVI-D
  - Audio (1 × Line In, 1 × Line Out, 1 × Micro In)
- Slots for drives (allocation depending on configured equipment):
  - 3 slots 5.25" (front), suitable for 4 removable trays
  - 1 5.25"slot for slimline drive (on the front)
  - 2 slots 3.5" (internal)
- Connections for SATA drives, allocation depending on preconfigured equipment with:
  - HDD/SSD 3.5"/2.5" in the removable tray, on the front (up to 4)
  - 1 slimline drive DVD±R/RW (on the front)
  - HDD/SSD 3.5"/2.5" on drive frame plate at left side wall (up to 2)

High system availability

- High-quality components with high MTBF values and quiet speed-controlled fans enable 24-hour continuous use in an industrial environment.
- RAID1 configuration for data mirroring on 2 HDD or SSD (also in hot-swap removable trays for replacement during operation)
- Faulty drive in a RAID configuration can be quickly identified via the HDD alarm LED
- RAID configuration optionally with hot-spare hard disk (reserve) for automatic takeover of the function of a defective drive
- Redundant 100 to 240 V AC power supply with hot-swap functionality as an equipment variant
- Lockable front door provides access protection for removable media, USB ports, operator controls (on/off button), front fan and air filter
- Efficient diagnostics and monitoring functions for temperature, fan, and program execution (watchdog) as well as for battery and drives
- LEDs on front for power, hard disk activity, and status of RAID, temperature and fans
- iAMT (Intel Active Management Technology) for remote access for purposes of remote maintenance

Integration in SIMATIC PCS 7 system diagnostics

- Using the SIMATIC IPC DiagMonitor diagnostics software, the operating hours counter as well as monitoring of program execution (watchdog), temperature, fan speed, hard disk status and system failure can be integrated into the system diagnostics with the SIMATIC PCS 7 Maintenance Station

Practical and service-friendly design for industrial use

- High electromagnetic compatibility (EMC)
- Degree of protection on the front: IP30 (with front door closed), on the rear: IP20
- Dust protection through fan-controlled overpressure ventilation across a filter
- Replacement of components, e.g. plug-in modules or hard disks, requires a single tool
- Replacement of front fan and dust filter without a tool
- Card retainers for securing modules, especially for protection against vibration and shock
- Fast replacement of hard disks by means of a hot-swap removable tray (equipment variant)
- Simple cabinet assembly possible using telescopic rails

High investment protection

- System-tested with SIMATIC PCS 7
- Marketing period of 3 years, supply with replacement parts/ repairs over 3 years
- Support for legacy interfaces (PS/2, COM)
- Certifications for worldwide marketing (cULus)
- Mounting-compatible across device generations
- Worldwide service and support

© Siemens 2019

3

Design (continued)

Restore DVD Set

The operating system and the SIMATIC PCS 7 software are already pre-installed on the SIMATIC PCS 7 Industrial Workstations. A supplied Restore DVD enables quick restoration to the factory state or a new installation for a different application.

The following table shows you the contents of the supplied Restore DVD Set and the pre-installed software for each version of the SIMATIC PCS 7 Industrial Workstation.

SIMATIC PCS 7 V9.0 Industrial Workstation	Supplied Restore DVD Set	Pre-installed on delivery
Single station		
SIMATIC PCS 7 ES/OS IPC547G (IE or BCE)	Restore Image 1: Windows 10 IoT Enterprise LTSB 2015 64-bit operating system with default settings for optimal SIMATIC PCS 7 operation	–
	Restore Image 2: Windows 10 IoT Enterprise LTSB 2015 64-bit operating system plus software installation for operation as ES/OS single station	●
Server		
SIMATIC PCS 7 OS Server IPC547G (IE or BCE)	Restore Image 1: Windows Server 2016 Standard Edition 64-bit operating system with default settings for optimized SIMATIC PCS 7 operation	–
	Restore Image 2: Windows Server 2016 Standard Edition 64-bit operating system plus software installation for operation as OS server	●
Client		
SIMATIC PCS 7 OS Client IPC547G	Restore Image 1: Windows 10 IoT Enterprise LTSB 2015 64-bit operating system with default settings for optimal SIMATIC PCS 7 operation	–
	Restore Image 2: Windows 10 IoT Enterprise LTSB 2015 64-bit operating system plus software installation for operation as OS client	●

Individual configuration of SIMATIC PCS 7 Industrial Workstations

By selecting predefined equipment features, you can individually configure the SIMATIC PCS 7 Industrial Workstation and thus also its article number. Selection tables for single station, server and client are available for this in the "Ordering data" section. An additional selection table enables you to order complete SIMATIC PCS 7 Industrial Workstations as a replacement part.

The "PCS 7 INDUSTRIAL WORKSTATION IPC547G" configurator in the Industry Mall allows you to interactively select and directly order the SIMATIC PCS 7 Industrial Workstation in the single station, server or client version - either directly for the system or as a replacement part.

Individually configured SIMATIC PCS 7 Industrial Workstations will be built to order. Therefore the average delivery time for such an order is 15 working days.

Technical specifications

Detailed technical specifications for the SIMATIC PCS 7 Industrial Workstation of type IPC547G are available under "Comparison of the workstation types" in the catalog section "SIMATIC Rack PC, Introduction". see page 3/6

© Siemens 2019

Ordering data

Individually configurable SIMATIC PCS 7 Industrial Workstations IPC547G

	Article No.
SIMATIC PCS 7 Industrial Workstation for ES/OS Single Station	**6ES7660-**
SIMATIC IPC547G Industrial PC	**7** ☐ ☐ ☐ ☐ **-** **3** **B** ☐ ☐
Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	
Processor and system type	
• Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache); ES/OS single station	**A**
• Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache); ES/OS single station	**D**
• Xeon E3-1275 v5 (4C/8T, 3.6 (4.0) GHz, 8 MB cache); ES/OS single station	**G**
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 1 × 1 TB HDD SATA internal; 0.2 g vibration, 1 g shock	**A**
• 1 × 1 TB HDD SATA, Enterprise, internal; 0.2 g vibration, 1 g shock	**B**
• RAID 1, 1 TB (2 × 1 TB HDD SATA), internal; 0.2 g vibration, 1 g shock	**C**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, Enterprise), internal; 0.2 g vibration, 1 g shock	**D**
• 1 × 1 TB HDD SATA in removable tray, on the front	**E**
• 1 × 1 TB HDD SATA, Enterprise, in removable tray, on the front	**F**
• RAID 1, 1 TB (2 × 1 TB HDD SATA), in removable trays, hot-swap; on the front	**G**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, Enterprise), in removable trays, hot-swap; on the front	**H**
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, hot-swap; on the front	**J**
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, hot-swap + 1 × 2 TB HDD SATA, Enterprise, as hot spare in removable tray; on the front	**K**
HDD SATA + SSD	
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, hot-swap + 1 × 480 GB SSD (eMLC) SATA, in removable tray; on the front	**L**
SSD	
• 240 GB SSD (eMLC) SATA; internal	**M**
• 480 GB SSD (eMLC) SATA; internal	**N**
• 240 GB SSD (eMLC) SATA, in removable tray; on the front	**P**
• 480 GB SSD (eMLC) SATA, in removable tray; on the front	**Q**
• RAID 1, 240 GB (2 × 240 GB SSD (eMLC) SATA), in removable trays, hot-swap, on the front	**R**
• RAID 1, 480 GB (2 × 480 GB SSD (eMLC) SATA), in removable trays, hot-swap, on the front	**S**
Main memory	
• 8 GB DDR4 SDRAM (2 × 4 GB), dual channel	**1**
• 16 GB DDR4 SDRAM (2 × 8 GB), dual channel	**2**
• 32 GB DDR4 SDRAM (2 × 16 GB), dual channel	**3**
• 64 GB DDR4 SDRAM (4 × 16 GB), dual channel	**4**

	Article No.
SIMATIC PCS 7 Industrial Workstation for ES/OS Single Station	**6ES7660-**
SIMATIC IPC547G Industrial PC	**7** ☐ ☐ ☐ ☐ **-** **3** **B** ☐ ☐
Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	
Communication with plant bus	
• BCE	**0**
• Industrial Ethernet (CP 1623)	**1**
• Without additional communication modules	**8**
Enclosure type/removable media/ multi-monitor mode	
Blue chromated enclosure	
• Without optical drive	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**A**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**B**
• With DVD±RW (slim)	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**C**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**D**
Painted enclosure	
• Without optical drive	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**E**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**F**
• With DVD±RW (slim)	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**G**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**H**
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply acc. NAMUR	
- Without power supply cord	**0**
- Power supply cord for Europe	**1**
- Power supply cord for the USA	**2**
- Power supply cord for China	**3**
• 2 × 100 ... 240 V AC, redundant industrial power supply	
- Without power supply cord	**4**
- Power supply cord for Europe	**5**
- Power supply cord for the USA	**6**
- Power supply cord for China	**8**

© Siemens 2019

3

Ordering data (continued)

	Article No.
SIMATIC PCS 7 Industrial Workstation for OS Server	**6ES7660-**
SIMATIC IPC547G Industrial PC	**7** ■ ■ ■ ■ **-** **3** **G** ■ ■
Windows Server 2016 Standard Edition operating system, 64-bit, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	
Processor and system type	
• Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache); OS server	**B**
• Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache); OS server	**E**
• Xeon E3-1275 v5 (4C/8T, 3.6 (4.0) GHz, 8 MB cache); OS server	**H**
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 1 × 1 TB HDD SATA internal; 0.2 g vibration, 1 g shock	**A**
• 1 × 1 TB HDD SATA, Enterprise, internal; 0.2 g vibration, 1 g shock	**B**
• RAID 1, 1 TB (2 × 1 TB HDD SATA), internal; 0.2 g vibration, 1 g shock	**C**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, Enterprise), internal; 0.2 g vibration, 1 g shock	**D**
• 1 × 1 TB HDD SATA in removable tray, on the front	**E**
• 1 × 1 TB HDD SATA, Enterprise, in removable tray, on the front	**F**
• RAID 1, 1 TB (2 × 1 TB HDD SATA), in removable trays, hot-swap, on the front	**G**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, Enterprise), in removable trays, hot-swap; on the front	**H**
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, hot-swap; on the front	**J**
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, hot-swap + 1 × 2 TB HDD SATA, Enterprise, as hot spare in removable tray; on the front	**K**
HDD SATA + SSD	
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, hot-swap + 1 × 480 GB SSD (eMLC) SATA, in removable tray; on the front	**L**
SSD	
• 240 GB SSD (eMLC) SATA; internal	**M**
• 480 GB SSD (eMLC) SATA; internal	**N**
• 240 GB SSD (eMLC) SATA, in removable tray; on the front	**P**
• 480 GB SSD (eMLC) SATA, in removable tray; on the front	**Q**
• RAID 1, 240 GB (2 × 240 GB SSD (eMLC) SATA), in removable trays, hot-swap, on the front	**R**
• RAID 1, 480 GB (2 × 480 GB SSD (eMLC) SATA), in removable trays, hot-swap, on the front	**S**
Main memory	
• 8 GB DDR4 SDRAM (2 × 4 GB), dual channel	**1**
• 16 GB DDR4 SDRAM (2 × 8 GB), dual channel	**2**
• 32 GB DDR4 SDRAM (2 × 16 GB), dual channel	**3**
• 64 GB DDR4 SDRAM (4 × 16 GB), dual channel	**4**

	Article No.
SIMATIC PCS 7 Industrial Workstation for OS Server	**6ES7660-**
SIMATIC IPC547G Industrial PC	**7** ■ ■ ■ ■ **-** **3** **G** ■ ■
Windows Server 2016 Standard Edition operating system, 64-bit, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	
Communication with plant bus	
• BCE	**0**
• Industrial Ethernet (CP 1623)	**1**
• Without additional communication modules	**8**
Enclosure type/removable media/ multi-monitor mode	
Blue chromated enclosure	
• Without optical drive	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**A**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**B**
• With DVD±RW (slim)	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**C**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**D**
Painted enclosure	
• Without optical drive	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**E**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**F**
• With DVD±RW (slim)	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**G**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**H**
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply acc. NAMUR	
- Without power supply cord	**0**
- Power supply cord for Europe	**1**
- Power supply cord for the USA	**2**
- Power supply cord for China	**3**
• 2 × 100 ... 240 V AC, redundant industrial power supply	
- Without power supply cord	**4**
- Power supply cord for Europe	**5**
- Power supply cord for the USA	**6**
- Power supply cord for China	**8**

© Siemens 2019

Ordering data (continued)

	Article No.
SIMATIC PCS 7 Industrial Workstation for OS Client	**6ES7660-**
SIMATIC IPC547G Industrial PC	**7** ■ ■ ■ ■ **-** **3** **B** ■ ■
Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	
Processor and system type	
• Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache); OS client	**C**
• Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache); OS client	**F**
• Xeon E3-1275 v5 (4C/8T, 3.6 (4.0) GHz, 8 MB cache); OS client	**J**
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 1 × 1 TB HDD SATA internal; 0.2 g vibration, 1 g shock	**A**
• 1 × 1 TB HDD SATA, Enterprise, internal; 0.2 g vibration, 1 g shock	**B**
• RAID 1, 1 TB (2 × 1 TB HDD SATA), internal; 0.2 g vibration, 1 g shock	**C**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, Enterprise), internal; 0.2 g vibration, 1 g shock	**D**
• 1 × 1 TB HDD SATA in removable tray, on the front	**E**
• 1 × 1 TB HDD SATA, Enterprise, in removable tray, on the front	**F**
• RAID 1, 1 TB (2 × 1 TB HDD SATA), in removable trays, hot-swap, on the front	**G**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, Enterprise), in removable trays, hot-swap; on the front	**H**
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, hot-swap; on the front	**J**
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, hot-swap + 1 × 2 TB HDD SATA, Enterprise, as hot spare in removable tray; on the front	**K**
SSD	
• 240 GB SSD (eMLC) SATA; internal	**M**
• 480 GB SSD (eMLC) SATA; internal	**N**
• 240 GB SSD (eMLC) SATA, in removable tray; on the front	**P**
• 480 GB SSD (eMLC) SATA, in removable tray; on the front	**Q**
• RAID 1, 240 GB (2 × 240 GB SSD (eMLC) SATA), in removable trays, hot-swap, on the front	**R**
• RAID 1, 480 GB (2 × 480 GB SSD (eMLC) SATA), in removable trays, hot-swap, on the front	**S**
Main memory	
• 4 GB DDR4 SDRAM (1 × 4 GB)	**0**
• 8 GB DDR4 SDRAM (2 × 4 GB), dual channel	**1**
• 16 GB DDR4 SDRAM (2 × 8 GB), dual channel	**2**
• 32 GB DDR4 SDRAM (2 × 16 GB), dual channel	**3**
• 64 GB DDR4 SDRAM (4 × 16 GB), dual channel	**4**
Communication with plant bus	
• Without additional communication modules	**8**

	Article No.
SIMATIC PCS 7 Industrial Workstation for OS Client	**6ES7660-**
SIMATIC IPC547G Industrial PC	**7** ■ ■ ■ ■ **-** **3** **B** ■ ■
Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	
Enclosure type/removable media/ multi-monitor mode	
Blue chromated enclosure	
• Without optical drive	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**A**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**B**
• With DVD±RW (slim)	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**C**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**D**
Painted enclosure	
• Without optical drive	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**E**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**F**
• With DVD±RW (slim)	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**G**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**H**
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply acc. NAMUR	
- Without power supply cord	**0**
- Power supply cord for Europe	**1**
- Power supply cord for the USA	**2**
- Power supply cord for China	**3**
• 2 × 100 ... 240 V AC, redundant industrial power supply	
- Without power supply cord	**4**
- Power supply cord for Europe	**5**
- Power supply cord for the USA	**6**
- Power supply cord for China	**8**

© Siemens 2019

3

Ordering data (continued)

SIMATIC PCS 7 Industrial Workstation of type IPC547G as replacement part

Without hardware expansions, software pre-installation, system software licenses, Restore DVDs

Replacement for ES/OS single station, OS server, or OS client of type IPC547G

	Article No.
SIMATIC PCS 7 Industrial Workstation as replacement part	**6ES7660-**
SIMATIC IPC547G Industrial PC	**7** ■ ■ ■ ■ **-** **8** ■ ■ ■
Without SIMATIC PCS 7 Restore DVD sets, without pre-installation	
Processor and system type	
• Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache); replacement part	**W**
• Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache); replacement part	**X**
• Xeon E3-1275 v5 (4C/8T, 3.6 (4.0) GHz, 8 MB cache); replacement part	**Y**
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 1 × 1 TB HDD SATA internal; 0.2 g vibration, 1 g shock	**A**
• 1 × 1 TB HDD SATA, Enterprise, internal; 0.2 g vibration, 1 g shock	**B**
• RAID 1, 1 TB (2 × 1 TB HDD SATA), internal; 0.2 g vibration, 1 g shock	**C**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, Enterprise), internal; 0.2 g vibration, 1 g shock	**D**
• 1 × 1 TB HDD SATA in removable tray, on the front	**E**
• 1 × 1 TB HDD SATA, Enterprise, in removable tray, on the front	**F**
• RAID 1, 1 TB (2 × 1 TB HDD SATA), in removable trays, for hot swapping, on the front	**G**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, Enterprise), in removable trays, for hot swapping; on the front	**H**
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, for hot swapping; on the front	**J**
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, for hot swapping + 1 × 2 TB HDD SATA, Enterprise, as hot spare in removable tray; on the front	**K**
HDD SATA + SSD	
• RAID 1, 2 TB (2 × 2 TB HDD SATA, Enterprise), in removable trays, for hot swapping + 1 × 480 GB SSD (eMLC) SATA, in removable tray; on the front	**L**
SSD	
• 240 GB SSD (eMLC) SATA; internal	**M**
• 480 GB SSD (eMLC) SATA; internal	**N**
• 240 GB SSD (eMLC) SATA, in removable tray; on the front	**P**
• 480 GB SSD (eMLC) SATA, in removable tray; on the front	**Q**
• RAID 1, 240 GB (2 × 240 GB SSD (eMLC) SATA), in removable trays, hot-swap, on the front	**R**
• RAID 1, 480 GB (2 × 480 GB SSD (eMLC) SATA), in removable trays, hot-swap, on the front	**S**
Main memory	
• 4 GB DDR4 SDRAM (1 × 4 GB)	**0**
• 8 GB DDR4 SDRAM (2 × 4 GB), dual channel	**1**
• 16 GB DDR4 SDRAM (2 × 8 GB), dual channel	**2**
• 32 GB DDR4 SDRAM (2 × 16 GB), dual channel	**3**
• 64 GB DDR4 SDRAM (4 × 1 GB), dual channel	**4**

	Article No.
SIMATIC PCS 7 Industrial Workstation as replacement part	**6ES7660-**
SIMATIC IPC547G Industrial PC	**7** ■ ■ ■ ■ **-** **8** ■ ■ ■
Without SIMATIC PCS 7 Restore DVD sets, without pre-installation	
Communication with plant bus	
• BCE	**0**
• Industrial Ethernet (CP 1623)	**1**
• Without additional communication modules	**8**
Operating system	
• Windows 7 Ultimate, 64-bit, MUI (English, German, French, Italian, Spanish, Chinese)	**A**
• Windows 10 IoT Enterprise 2015 LTSB 64-bit, MUI (English, German, French, Italian, Spanish, Chinese)	**B**
• Windows Server 2012 R2 Standard Edition, 64-bit, incl. 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese)	**F**
• Windows Server 2016 Standard Edition, 64-bit, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese)	**G**
• Without operating system	**X**
Enclosure type/removable media/ multi-monitor mode	
Blue chromated enclosure	
• Without optical drive	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**A**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**B**
• With DVD±RW (slim)	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**C**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**D**
Painted enclosure	
• Without optical drive	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**E**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**F**
• With DVD±RW (slim)	
- Incl. 1 × adapter cable (DisplayPort to DVI-D)	**G**
- Multi-monitor mode with 4 monitors: Onboard interfaces (2 × DisplayPort) + dual head PCIe x16 graphics card (2 × DisplayPort) combined incl. 1 × adapter cable DisplayPort to DVI-D and 1 × Dual DVI-I adapter	**H**
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply acc. NAMUR	
- Without power supply cord	**0**
- Power supply cord for Europe	**1**
- Power supply cord for the USA	**2**
- Power supply cord for China	**3**
• 2 × 100 to 240 V AC, redundant industrial power supply	
- Without power supply cord	**4**
- Power supply cord for Europe	**5**
- Power supply cord for the USA	**6**
- Power supply cord for China	**8**

© Siemens 2019

Additional and expansion components


USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**
Memory expansion	
• 4 GB DDR4-2133 SDRAM (1 × 4 GB)	**6ES7648-2AL60-0PA0**
• 8 GB DDR4-2133 SDRAM (1 × 8 GB)	**6ES7648-2AL70-0PA0**
• 16 GB DDR4-2133 SDRAM (1 × 16 GB)	**6ES7648-2AL80-0PA0**
Tower Kit for SIMATIC IPC547G Tower Kit for conversion of a Rack PC into an industrial tower PC	**6ES7648-1AA01-0XC0**
Retainer For locking the internal USB port	**6ES7648-1AA00-0XK0**
Removable tray For 3.5" hard disk (SATA/SAS) or 2.5" SSD (SATA), without drive	**6ES7648-0EH00-1BA0**
Adapter cable	
• DisplayPort to DVI-D for onboard graphics	**6ES7648-3AF00-0XA0**
• DisplayPort to VGA for onboard graphics	**6ES7648-3AG00-0XA0**
Power supply cord, 3 m, for Rack PC	
• Europe (for Austria, Belgium, Finland, France, Germany, the Netherlands, Spain, Sweden)	**6ES7900-0AA00-0XA0**
• For the UK	**6ES7900-0BA00-0XA0**
• For Switzerland	**6ES7900-0CA00-0XA0**
• For the USA	**6ES7900-0DA00-0XA0**
• For Italy	**6ES7900-0EA00-0XA0**
• For China	**6ES7900-0FA00-0XA0**
SIMATIC NET HARDNET IE S7 REDCONNECT PowerPack For communication with high availability AS systems, see "Communication", "Industrial Ethernet – System connection PCS 7 systems", see page 10/59	

Accessories

Power supply cord for Rack PC

The power supply cords for the SIMATIC PCS 7 Industrial Workstation of type IPC547G are governed by country-specific particularities. The "Europe" power supply cord can be used in Germany, France, Spain, the Netherlands, Belgium, Sweden, Austria and Finland. Besides the "Europe" power supply cord, specific power supply cords for the USA and China can also be selected in the configurator. Other country-specific power supply cords for Great Britain, Italy and Switzerland can be ordered separately as accessories.

The following picture shows the design of some of the plugs for the power supply connection:

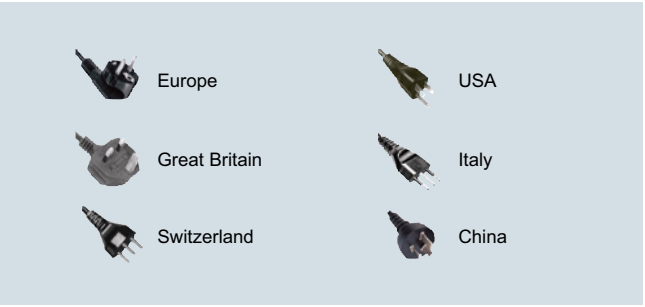

Country-specific power supply cords for Rack PC

Tower Kit for IPC547G

The Tower Kit enables conversion of a SIMATIC PCS 7 Industrial Workstation with rack PC design to an industrial tower PC.
A Tower Kit can be ordered as an accessory for the SIMATIC PCS 7 Industrial Workstation of type IPC547G.



SIMATIC IPC547G with Tower Kit

© Siemens 2019

3


Overview



SIMATIC IPC647D

Based on a SIMATIC Rack PC of type IPC647D, SIMATIC PCS 7 Industrial Workstations in 19" format are extremely compact, rugged and powerful. They are UL-certified and have the CE mark for use in industry as well as residential, business and commercial environments. They are therefore ideally suited for use as a single station, server or client in the SIMATIC PCS 7 process control system. They enable high packing density in the control cabinet and save a significant amount of space in the control room due to their low overall height (2 Us).

Design

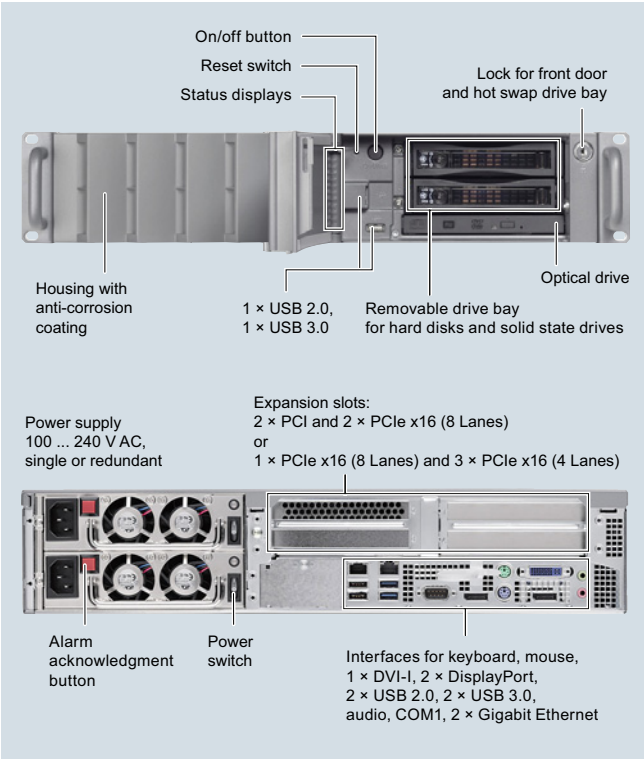

SIMATIC IPC647D, front with open front door (top) and rear

The SIMATIC PCS 7 Industrial Workstations of type IPC647D have a painted all-metal enclosure in 19" rack design (2 Us), which is particularly protected against dust by a filter and pressurized ventilation. This mechanically and electromechanically rugged enclosure has a service-friendly design.

SIMATIC PCS 7 Industrial Workstations of type IPC647D are especially suited for space-saving mounting in 500-mm deep 19" control cabinets due to their compact dimensions. They can be installed or positioned horizontally.

The SIMATIC PCS 7 Industrial Workstations of type IPC647D are suitable for reliable 24-hour continuous operation at ambient temperatures between 5 and 50 °C. Shocks up to 5 g and vibrations up to 0.5 g can be tolerated during operation.

Further essential features

Powerful technology with modern processors and graphic controllers

- Motherboard based on an Intel C226 chipset (DH82C226 PCH)
- Main memory expansion with 4 to 32 GB (client) or 8 to 32 GB (server/single station) DDR3-1600 SDRAM, with or without ECC (mainly in dual-channel mode for the optimum performance)
- Powerful and energy-saving Intel multi-core processors with virtualization technology: XEON E3, Core i5 or Core i3
- Powerful Intel graphics controller HD Graphics 4600/4700 onboard, integrated in the processor:
  - 2 digital interfaces: DVI-I and DisplayPort (DVI-D via DisplayPort DVI adapter)
  - Analog VGA connection via DVI-I adapter to VGA or DisplayPort to VGA
- Optional graphics expansion for multi-monitor mode with up to 4 process monitors (up to 2 process monitors on the onboard graphics controller)
- Optimization to maximum performance with 160/240/480 GB solid-state drive

© Siemens 2019

Overview (continued)

Expansion options and interfaces

- 2 × 10/100/1000 Mbit/s Ethernet RJ45 port integrated onboard
- Alternative bus modules with up to 4 slots for PCI/PCI-Express expansion modules (all for modules up to 312 mm long)
  - 2 × PCIe x16 (8 lanes) and 2 × PCI or
  - 1 × PCIe x16 (8 lanes) and 3 × PCIe x16 (4 lanes)
- Total of 4 USB 3.0 ports
  - 2 × on the rear of the device
  - 1 × on the front
  - 1 × internal, e.g. for software license dongle ASIA
- Total of 3 USB 2.0 ports
  - 2 × on the rear of the device
  - 1 × on the front
- Serial COM interface (1 × COM1)
- Further interfaces at the rear of the device:
  - 2 × PS/2 for mouse and keyboard
  - Audio (1 × Line Out, 1 × Micro In)
- Connections for SATA/SAS drives, occupied in accordance with preconfigured features:
  - Up to 2 HDD/SSD in slimline removable drive bay (at the front) or alternatively
  - Up to 2 HDD in the vibration-damped drive cage (internal)
  - 1 slimline DVD burner (at the front) or alternatively
  - 1 SSD in the DVD drive slot

High system availability and safety

- High-quality components with high MTBF values
- RAID1 configurations for data mirroring on 2 drives (also in hot swap removable drive bay for replacement of a hard disk during operation):
  - 2 SATA HDD or 2 SATA SSD on the onboard RAID controller
  - 2 SAS HDD on the hardware RAID controller
- Faulty hard disk in a RAID network can be quickly identified via the HDD alarm LED
- Redundant power supply 100 to 240 V AC as design variation
- Efficient self-diagnostics via LEDs on front for power, watchdog (ready/fault signal), hard disk activity, and status of Ethernet, RAID, fans and temperature
- Closing of the front door prevents:
  - Access to drives, removable memory media, USB interface, operator controls (reset, power), front fan and filter mat
  - Opening of the enclosure cover

Integration in SIMATIC PCS 7 system diagnostics

- Can be integrated into the system diagnostics with the SIMATIC PCS 7 Maintenance Station by means of the SIMATIC IPC DiagMonitor diagnostics software for monitoring the program execution (watchdog), temperature, fan speed, hard disk status and system failure

Practical and service-friendly design for industrial use

- High electromagnetic compatibility (EMC)
- Degree of protection on the front: IP41 (with door closed), at rear: IP20
- Dust protection by means of pressurized ventilation with regulated front fan and dust filter
- Front fan and dust filter can be replaced without tools
- Special hard disk holders and card retainers for protection against vibration and shock
- Fast replacement of hard disks by means of hot-swap frame (configuration option)
- Simple cabinet assembly possible using telescopic rails

High investment protection

- System-tested with SIMATIC PCS 7
- Marketing period 5 years, supply with replacement parts/ repairs over further 5 years
- Support for legacy interfaces (PS/2, COM)
- Certifications for worldwide marketing (cULus)
- Worldwide service and support

© Siemens 2019

3

Design (continued)

Restore DVD Set

The operating system and the SIMATIC PCS 7 software are already pre-installed on the SIMATIC PCS 7 Industrial Workstations. A supplied Restore DVD enables quick restoration to the factory state or a new installation for a different application.

The following table shows you the contents of the supplied Restore DVD Set and the pre-installed software for each version of the SIMATIC PCS 7 Industrial Workstation.

SIMATIC PCS 7 V9.0 Industrial Workstation	Supplied Restore DVD Set	Pre-installed on delivery
Single station		
SIMATIC PCS 7 ES/OS IPC647D (IE or BCE)	Restore Image 1: Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system with default settings for optimal SIMATIC PCS 7 operation	–
	Restore Image 2: Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system plus software installation for operation as ES/OS single station	●
Server		
SIMATIC PCS 7 OS Server IPC647D (IE or BCE)	Restore Image 1: Windows Server 2016 Standard Edition 64-bit operating system with default settings for optimized SIMATIC PCS 7 operation	–
	Restore Image 2:	
	• Windows Server 2016 Standard Edition 64-bit operating system plus software nstallation for operation as OS Server	●
	• Windows Server 2016 Standard Edition 64-bit operating system plus software installation for operation as Engineering Station	–
	• Windows Server 2016 Standard Edition 64-bit operating system plus software installation for operation as SIMATIC PCS 7 Web Server	–
Client		
SIMATIC PCS 7 OS Client IPC647D	Restore Image 1: Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system with default settings for optimal SIMATIC PCS 7 operation	–
	Restore Image 2: Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system plus software installation for operation as OS client	●

Individual configuration of SIMATIC PCS 7 Industrial Workstations

By selecting predefined equipment features, you can individually configure the SIMATIC PCS 7 Industrial Workstation and thus also its article number. Selection tables for single station, server and client are available for this in the "Ordering data" section (paper catalog). An additional selection table enables you to order complete SIMATIC PCS 7 Industrial Workstations as a replacement part.

The PCS 7 INDUSTRIAL WORKSTATION IPC647D configurator in the Industry Mall allows you to interactively select and order the SIMATIC PCS 7 Industrial Workstation in the single station, server or client version – directly for the system or as a replacement part.

Individually configured SIMATIC PCS 7 Industrial Workstations will be built to order. Therefore the average delivery time for such an order is 15 working days.

Technical specifications

Detailed technical specifications for the SIMATIC PCS 7 Industrial Workstation of type IPC647D are available under "Comparison of the workstation types" in the catalog section "SIMATIC Rack PC, Introduction", see page 3/6.

© Siemens 2019

Ordering data

Individually configurable SIMATIC PCS 7 Industrial Workstations IPC647D

	Article No.
SIMATIC PCS 7 Industrial Workstation for ES/OS single station	**6ES7660-**
SIMATIC Industrial PC IPC647D	**5** ■ ■ ■ ■ **-** **3** **B** ■ ■
Operating system Windows 10 IoT Enterprise 2015 LTSB 64-bit, MUI (English, German, French, Italian, Spanish, Chinese), SIMATIC PCS 7 V9.0+SP1 preinstalled	
Processor and system type	
• Core i3-4330TE (2C/4T, 2.40 GHz, 4 MB cache), ES/OS single station	**A**
• Core i5-4570TE (2C/4T, 2.70 GHz, 4 MB cache, TB, VT-d, AMT), ES/OS single station	**D**
• Xeon E3-1268L v3 (4C/8T, 2.30 GHz, 8 MB cache, TB, VT-d, AMT), ES/OS single station	**G**
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 500 GB HDD SATA, 0.5 g vibration, 5 g shock; internal	**A**
• 1 TB HDD SATA, 0.5 g vibration, 5 g shock; internal	**B**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock; internal	**C**
• 500 GB HDD SATA, in removable drive bay; at the front	**D**
• 1 TB HDD SATA, in removable drive bay, at the front	**E**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping; at the front	**F**
HDD SATA + SSD	
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock, internal + 240 GB SSD (eMLC) SATA; internal in the DVD drive slot[1]	**H**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping, at the front + 240 GB SSD (eMLC) SATA; internal, in the DVD drive slot[1]	**J**
SSD	
• 240 GB SSD (eMLC) SATA; internal	**Q**
• 480 GB SSD (eMLC) SATA; internal	**R**
• 240 GB SSD (eMLC) SATA; in removable drive bay; at the front	**T**
• 480 GB SSD (eMLC) SATA; in removable drive bay; at the front	**U**
• RAID 1, 240 GB (2 × 240 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	**V**
• RAID 1, 480 GB (2 × 480 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	**W**
Main memory	
• 8 GB DDR3 SDRAM (2 × 4 GB), dual channel	**1**
• 16 GB DDR3 SDRAM (2 × 8 GB), dual channel	**2**
• 32 GB DDR3 SDRAM (4 × 8 GB), dual channel	**3**
• 8 GB DDR3 SDRAM (2 × 4 GB), ECC, dual channel	**5**
• 16 GB DDR3 SDRAM (2 × 8 GB), ECC, dual channel	**6**
• 32 GB DDR3 SDRAM (4 × 8 GB), ECC, dual channel	**7**
Communication with plant bus	
• BCE	**0**
• Industrial Ethernet (CP 1623)	**1**
• Without additional communication modules	**8**

	Article No.
SIMATIC PCS 7 Industrial Workstation for ES/OS single station	**6ES7660-**
SIMATIC Industrial PC IPC647D	**5** ■ ■ ■ ■ **-** **3** **B** ■ ■
Operating system Windows 10 IoT Enterprise 2015 LTSB 64-bit, MUI (English, German, French, Italian, Spanish, Chinese), SIMATIC PCS 7 V9.0+SP1 preinstalled	
Bus module/removable media/ multi-monitor option	
Bus module with 2 × PCI, 2 × PCIe x16 (8 lanes)	
• Without optical drive	
- Without multi-monitor mode	**A**
- Multi-monitor mode for 2 screens via onboard interfaces[2]	**B**
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3]	**V**
• With DVD±RW (slim)[1]	
- Without multi-monitor mode[1]	**D**
- Multi-monitor mode for 2 screens via onboard interfaces[2]	**E**
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3]	**W**
Bus module with 1 × PCIe x16 (8 lanes), 3 × PCIe x16 (4 lanes)	
• Without optical drive	
- Without multi-monitor mode	**G**
- Multi-monitor mode for 2 screens via onboard interfaces[2]	**H**
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3]	**X**
• With DVD±RW (slim)[1]	
- Without multi-monitor mode[1]	**K**
- Multi-monitor mode for 2 screens via onboard interfaces[2]	**L**
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3]	**Y**
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply to NAMUR	
- Power supply cord for Europe	**0**
- Power supply cord for the UK	**1**
- Power supply cord for Switzerland	**2**
- Power supply cord for the USA	**3**
- Power supply cord for Italy	**4**
- Power supply cord for China	**5**
• 2 × 100 ... 240 V AC, redundant power supply; without power supply cord	**6**
• 110/240 V AC industrial power supply with NAMUR; without power cable	**8**

[1] The RAID 1 with SSD drive option cannot be used together with a DVD drive as they use the same drive slot: selection criterion "Hard disks and solid state drives", item H, J, cannot be combined with selection criterion "Bus module/removable media/multi-monitor option", item D, E, W, K, L, Y

[2] Incl. 1 adapter cable (DisplayPort to DVI-D)

[3] Incl. 1 adapter cable (DisplayPort to DVI-D), incl. 1 × Dual DVI-I adapter for Dual Head PCIe x16 card

© Siemens 2019

3

Ordering data (continued)

	Article No.
SIMATIC PCS 7 Industrial Workstation for OS server	**6ES7660-**
SIMATIC Industrial PC IPC647D	5 ■ ■ ■ ■ - 3 F ■ ■
Windows Server 2016 Standard Edition operating system, 64-bit, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	
Processor and system type	
• Core i3-4330TE (2C/4T, 2.40 GHz, 4 MB cache), OS server	B
• Core i5-4570TE (2C/4T, 2.70 GHz, 4 MB cache, TB, VT-d, AMT), OS server	E
• Xeon E3-1268L v3 (4C/8T, 2.30 GHz, 8 MB cache, TB, VT-d, AMT), OS server	H
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 500 GB HDD SATA, 0.5 g vibration, 5 g shock; internal	A
• 1 TB HDD SATA, 0.5 g vibration, 5 g shock; internal	B
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock; internal	C
• 500 GB HDD SATA, in removable drive bay; at the front	D
• 1 TB HDD SATA, in removable drive bay, at the front	E
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping; at the front	F
• RAID 1, 1 TB (2 × 1 TB HDD SAS, data mirroring); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. zero-maintenance cache protection (ZMCP) module[4]	G
HDD SATA + SSD	
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock, internal + 240 GB SSD (eMLC) SATA; internal in the DVD drive slot[1]	H
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping, at the front + 240 GB SSD (eMLC) SATA; internal, in the DVD drive slot[1]	J
• RAID 1, 1 TB (2 × 1 TB HDD SAS, data mirroring); in removable drive bay, hot-swap; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module + 240 GB SSD (eMLC) SATA; internal in DVD drive slot[1)4)]	K
SSD	
• 240 GB SSD (eMLC) SATA; internal	Q
• 480 GB SSD (eMLC) SATA; internal	R
• 240 GB SSD (eMLC) SATA; in removable drive bay; at the front	T
• 480 GB SSD (eMLC) SATA; in removable drive bay; at the front	U
• RAID 1, 240 GB (2 × 240 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	V
• RAID 1, 480 GB (2 × 480 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	W
Main memory	
• 8 GB DDR3 SDRAM (2 × 4 GB), dual channel	1
• 16 GB DDR3 SDRAM (2 × 8 GB), dual channel	2
• 32 GB DDR3 SDRAM (4 × 8 GB), dual channel	3
• 8 GB DDR3 SDRAM (2 × 4 GB), ECC, dual channel	5
• 16 GB DDR3 SDRAM (2 × 8 GB), ECC, dual channel	6
• 32 GB DDR3 SDRAM (4 × 8 GB), ECC, dual channel	7

	Article No.
SIMATIC PCS 7 Industrial Workstation for OS server	**6ES7660-**
SIMATIC Industrial PC IPC647D	5 ■ ■ ■ ■ - 3 F ■ ■
Windows Server 2016 Standard Edition operating system, 64-bit, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	
Communication with plant bus	
• BCE	0
• Industrial Ethernet (CP 1623)	1
• Without additional communication modules	8
Bus module/removable media/ multi-monitor option	
Bus module with 2 × PCI, 2 × PCIe x16 (8 lanes)	
• Without optical drive	
- Without multi-monitor mode[4]	A
- Multi-monitor mode for 2 screens via onboard interfaces[2)4)]	B
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3)4)]	V
• With DVD±RW (slim)[1]	
- Without multi-monitor mode[1)4)]	D
- Multi-monitor mode for 2 screens via onboard interfaces[1)2)4)]	E
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[1)3)4)]	W
Bus module with 1 × PCIe x16 (8 lanes), 3 × PCIe x16 (4 lanes)	
• Without optical drive	
- Without multi-monitor mode	G
- Multi-monitor mode for 2 screens via onboard interfaces[2)]	H
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3)]	X
• With DVD±RW (slim)[1]	
- Without multi-monitor mode[1)]	K
- Multi-monitor mode for 2 screens via onboard interfaces[1)2)]	L
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[1)3)]	Y
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply to NAMUR	
- Power supply cord for Europe	0
- Power supply cord for the UK	1
- Power supply cord for Switzerland	2
- Power supply cord for the USA	3
- Power supply cord for Italy	4
- Power supply cord for China	5
• 2 × 100 ... 240 V AC, redundant power supply; without power supply cord	6
• 110/240 V AC industrial power supply with NAMUR; without power cable	8

1) The RAID 1 with SSD drive option cannot be used together with a DVD drive as they use the same drive slot: selection criterion "Hard disks and solid state drives", item H, J, K, cannot be combined with selection criterion "Bus module/removable media/multi-monitor option", item D, E, W, K, L, Y

2) Incl. 1 adapter cable (DisplayPort to DVI-D)

3) Incl. 1 adapter cable (DisplayPort to DVI-D), incl. 1 × Dual DVI-I adapter for Dual Head PCIe x16 card

4) Selection criterion "Hard disks and solid state drives", item G, K, cannot be combined with selection criterion "Bus module/removable media/multi-monitor option", item A, B, V, D, E, W

© Siemens 2019

Ordering data (continued)

	Article No.
SIMATIC PCS 7 Industrial Workstation for OS client	**6ES7660-**
SIMATIC Industrial PC IPC647D	5 ■ ■ ■ ■ - 3 B ■ ■
Operating system Windows 10 IoT Enterprise 2015 LTSB 64-bit, MUI (English, German, French, Italian, Spanish, Chinese), SIMATIC PCS 7 V9.0+SP1 preinstalled	
Processor and system type	
• Core i3-4330TE (2C/4T, 2.40 GHz, 4 MB cache), OS client	C
• Core i5-4570TE (2C/4T, 2.70 GHz, 4 MB cache, TB, VT-d, AMT), OS client	F
• Xeon E3-1268L v3 (4C/8T, 2.30 GHz, 8 MB cache, TB, VT-d, AMT), OS client	J
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 500 GB HDD SATA, 0.5 g vibration, 5 g shock; internal	A
• 1 TB HDD SATA, 0.5 g vibration, 5 g shock; internal	B
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock; internal	C
• 500 GB HDD SATA, in removable drive bay; at the front	D
• 1 TB HDD SATA, in removable drive bay, at the front	E
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping; at the front	F
SSD	
• 240 GB SSD (eMLC) SATA; internal	Q
• 480 GB SSD (eMLC) SATA; internal	R
• 240 GB SSD (eMLC) SATA; in removable drive bay; at the front	T
• 480 GB SSD (eMLC) SATA; in removable drive bay; at the front	U
Main memory	
• 4 GB DDR3 SDRAM (2 × 2 GB), dual channel	0
• 8 GB DDR3 SDRAM (2 × 4 GB), dual channel	1
• 16 GB DDR3 SDRAM (2 × 8 GB), dual channel	2
• 32 GB DDR3 SDRAM (4 × 8 GB), dual channel	3
• 4 GB DDR3 SDRAM (1 × 4 GB), ECC, single channel	4
• 8 GB DDR3 SDRAM (2 × 4 GB), ECC, dual channel	5
• 16 GB DDR3 SDRAM (2 × 8 GB), ECC, dual channel	6
• 32 GB DDR3 SDRAM (4 × 8 GB), ECC, dual channel	7
Communication with plant bus	
• Without additional communication modules	8

	Article No.
SIMATIC PCS 7 Industrial Workstation for OS client	**6ES7660-**
SIMATIC Industrial PC IPC647D	5 ■ ■ ■ ■ - 3 B ■ ■
Operating system Windows 10 IoT Enterprise 2015 LTSB 64-bit, MUI (English, German, French, Italian, Spanish, Chinese), SIMATIC PCS 7 V9.0+SP1 preinstalled	
Interfaces on bus module/swap media/ multi-monitor option	
Bus module with 2 × PCI, 2 × PCIe x16 (8 lanes)	
• Without optical drive	
- Without multi-monitor mode	A
- Multi-monitor mode for 2 screens via onboard interfaces[2]	B
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3]	V
• With DVD±RW (slim)	
- Without multi-monitor mode	D
- Multi-monitor mode for 2 screens via onboard interfaces[2]	E
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3]	W
Bus module with 1 × PCIe x16 (8 lanes), 3 × PCIe x16 (4 lanes)	
• Without optical drive	
- Without multi-monitor mode	G
- Multi-monitor mode for 2 screens via onboard interfaces[2]	H
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3]	X
• With DVD±RW (slim)	
- Without multi-monitor mode	K
- Multi-monitor mode for 2 screens via onboard interfaces[2]	L
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3]	Y
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply to NAMUR	
- Power supply cord for Europe	0
- Power supply cord for the UK	1
- Power supply cord for Switzerland	2
- Power supply cord for the USA	3
- Power supply cord for Italy	4
- Power supply cord for China	5
• 2 × 100 ... 240 V AC, redundant power supply; without power supply cord	6
• 110/240 V AC industrial power supply with NAMUR; without power cable	8

[2] Incl. 1 adapter cable (DisplayPort to DVI-D)

[3] Incl. 1 adapter cable (DisplayPort to DVI-D), incl. 1 × Dual DVI-I adapter for Dual Head PCIe x16 card

© Siemens 2019

3

Ordering data (continued)

SIMATIC PCS 7 Industrial Workstations of the type IPC647D as replacement part

Without hardware expansions, software pre-installation, system software licenses, restore DVDs

Replacement for ES/OS single station, OS server, or OS client of type IPC647D

	Article No.									
SIMATIC PCS 7 Industrial Workstation as replacement part Industrial PC SIMATIC IPC647D without pre-installation, without SIMATIC PCS 7 Restore DVD sets	**6ES7660-**									
	5					**-**	**8**			
Processor and system type										
• Core i3-4330TE (2C/4T, 2.40 GHz, 4 MB cache), replacement part	**W**									
• Core i5-4570TE (2C/4T, 2.70 GHz, 4 MB cache, TB, VT-d, AMT), replacement part	**X**									
• Xeon E3-1268L v3 (4C/8T, 2.30 GHz, 8 MB cache, TB, VT-d, AMT), replacement part	**Y**									
Hard disks and solid-state drives										
With SATA hard disk (HDD)										
• 500 GB HDD SATA, 0.5 g vibration, 5 g shock; internal		**A**								
• 1 TB HDD SATA, 0.5 g vibration, 5 g shock; internal		**B**								
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock; internal		**C**								
• 500 GB HDD SATA, in removable drive bay; at the front		**D**								
• 1 TB HDD SATA, in removable drive bay, at the front		**E**								
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping; at the front		**F**								
• RAID 1, 1 TB (2 × 1 TB HDD SAS, data mirroring); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. zero-maintenance cache protection (ZMCP) module[4)5)]		**G**								
HDD SATA + SSD										
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock, internal + 240 GB SSD (eMLC) SATA; internal in the DVD drive slot[1)]		**H**								
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping, at the front + 240 GB SSD (eMLC) SATA; internal, in the DVD drive slot[1)]		**J**								
• RAID 1, 1 TB (2 × 1 TB HDD SAS, data mirroring); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module + 240 GB SSD (eMLC) SATA; internal in DVD drive slot[1)4)5)]		**K**								
SSD										
• 240 GB SSD (eMLC) SATA; internal		**Q**								
• 480 GB SSD (eMLC) SATA; internal		**R**								
• 240 GB SSD (eMLC) SATA; in removable drive bay; at the front		**T**								
• 480 GB SSD (eMLC) SATA; in removable drive bay; at the front		**U**								
• RAID 1, 240 GB (2 × 240 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front		**V**								
• RAID 1, 480 GB (2 × 480 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front		**W**								
Main memory										
• 4 GB DDR3 SDRAM (2 × 2 GB), dual channel			**0**							
• 8 GB DDR3 SDRAM (2 × 4 GB), dual channel			**1**							
• 16 GB DDR3 SDRAM (2 × 8 GB), dual channel			**2**							
• 32 GB DDR3 SDRAM (4 × 8 GB), dual channel			**3**							
• 4 GB DDR3 SDRAM (1 × 4 GB), ECC, single channel			**4**							
• 8 GB DDR3 SDRAM (2 × 4 GB), ECC, dual ch.			**5**							
• 16 GB DDR3 SDRAM (2 × 8 GB), ECC, dual ch.			**6**							
• 32 GB DDR3 SDRAM (4 × 8 GB), ECC, dual ch.			**7**							

	Article No.									
SIMATIC PCS 7 Industrial Workstation as replacement part Industrial PC SIMATIC IPC647D without pre-installation, without SIMATIC PCS 7 Restore DVD sets	**6ES7660-**									
	5					**-**	**8**			
Communication with plant bus										
• BCE						**0**				
• Industrial Ethernet (CP 1623)						**1**				
• Without additional communication modules						**8**				
Operating system										
• Windows 7 Ultimate, 64-bit, MUI (English, German, French, Italian, Spanish, Chinese)								**A**		
• Windows 10 IoT Enterprise 2015 LTSB 64-bit, MUI (English, German, French, Italian, Spanish, Chinese)[5)]								**B**		
• Windows Server 2012 R2 Standard Edition, 64-bit, incl. 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese)								**E**		
• Windows Server 2016 Standard Edition, 64-bit, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese)								**F**		
• Without operating system								**X**		
Interfaces on bus module/swap media/ multi-monitor option										
Bus module with 2 × PCI, 2 × PCIe x16 (8 lanes)										
• Without optical drive										
- Without multi-monitor mode[4)]									**A**	
- Multi-monitor mode for 2 screens via onboard interfaces[2)4)]									**B**	
- Multi-monitor mode for 4 screens via PCIe x16 graphics card[4)]									**C**	
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3)4)]									**V**	
• With DVD±RW (slim)[1)]										
- Without multi-monitor mode[1)4)]									**D**	
- Multi-monitor mode for 2 screens via onboard interfaces[1)2)4)]									**E**	
- Multi-monitor mode for 4 screens via PCIe x16 graphics card[1)4)]									**F**	
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[1)3)4)]									**W**	
Bus module with 1 × PCIe x16 (8 lanes), 3 × PCIe x16 (4 lanes)										
• Without optical drive										
- Without multi-monitor mode									**G**	
- Multi-monitor mode for 2 screens via onboard interfaces[2)]									**H**	
- Multi-monitor mode for 4 screens via PCIe x16 graphics card									**J**	
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[3)]									**X**	
• With DVD±RW (slim)[1)]										
- Without multi-monitor mode[1)]									**K**	
- Multi-monitor mode for 2 screens via onboard interfaces[1)2)]									**L**	
- Multi-monitor mode for 4 screens via PCIe x16 graphics card[1)]									**M**	
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[1)3)]									**Y**	

© Siemens 2019

Ordering data (continued)

	Article No.
SIMATIC PCS 7 Industrial Workstation as replacement part	**6ES7660-**
Industrial PC SIMATIC IPC647D without pre-installation, without SIMATIC PCS 7 Restore DVD sets	**5 ■ ■ ■ ■ - 8 ■ ■ ■**
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply to NAMUR	
- Power supply cord for Europe	**0**
- Power supply cord for the UK	**1**
- Power supply cord for Switzerland	**2**
- Power supply cord for the USA	**3**
- Power supply cord for Italy	**4**
- Power supply cord for China	**5**
• 2 × 100 ... 240 V AC, redundant power supply; without power supply cord	**6**
• 110/240 V AC industrial power supply with NAMUR; without power cable	**8**

1) The RAID 1 with SSD drive option cannot be used together with a DVD drive as they use the same drive slot: selection criterion "Hard disks and solid state drives", item H, J, K, cannot be combined with selection criterion "Bus module/removable media/multi-monitor option", item D, E, F, W, K, L, M, Y

2) Incl. 1 adapter cable (DisplayPort to DVI-D)

3) Incl. 1 adapter cable (DisplayPort to DVI-D), incl. 1 × Dual DVI-I adapter for Dual Head PCIe x16 card

4) Selection criterion "Hard disks and solid state drives", item G, K, cannot be combined with selection criterion "Bus module/removable media/multi-monitor option", item A, B, C, V, D, E, F, W

5) Hard disk options with hardware RAID controller G and K not for Windows 10 IoT Enterprise 2015 LTSB operating system

Additional and expansion components

USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US-International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**
Memory expansion	
• 2 GB DDR3 SDRAM (1 × 2 GB)	**6ES7648-2AJ50-0MA0**
• 4 GB DDR3 SDRAM (1 × 4 GB)	**6ES7648-2AJ60-0MA0**
• 4 GB DDR3 SDRAM with ECC (1 × 4 GB)	**6ES7648-2AJ60-1MA0**
• 8 GB DDR3 SDRAM (1 × 8 GB)	**6ES7648-2AJ70-0MA0**
• 8 GB DDR3 SDRAM with ECC (1 × 8 GB)	**6ES7648-2AJ70-1MA0**
Retainer For locking the internal USB port	**6ES7648-1AA00-0XK0**
Rack unit for low-profile removable drive bay For 3.5" hard disk (SATA/SAS) or 2.5" SSD (SATA), without drive	**6ES7648-0EG01-1BA0**
Adapter cable	
• DisplayPort to DVI-D for onboard graphics	**6ES7648-3AF00-0XA0**
• DisplayPort to VGA for onboard graphics	**6ES7648-3AG00-0XA0**
• DVI-I to VGA for onboard graphics, 250 mm long	**6ES7648-3AB00-0XA0**
Power supply cord, 3 m, for Rack PC[1]	
• Europe (for Austria, Belgium, Finland, France, Germany, the Netherlands, Spain, Sweden)	**6ES7900-0AA00-0XA0**
• For the UK	**6ES7900-0BA00-0XA0**
• For Switzerland	**6ES7900-0CA00-0XA0**
• For the USA	**6ES7900-0DA00-0XA0**
• For Italy	**6ES7900-0EA00-0XA0**
• For China	**6ES7900-0FA00-0XA0**
SIMATIC NET HARDNET IE S7 REDCONNECT PowerPack For communication with high-availability AS systems, see "Communication", "Industrial Ethernet – System connection PCS 7 systems", see page 10/59	

1) The SIMATIC PCS 7 preferred types are delivered as standard with a "European power cable". The country-specific versions listed above are required for some countries.

© Siemens 2019

3

Overview




SIMATIC IPC847D

The SIMATIC PCS 7 Industrial Workstation of type IPC847D is the most powerful and best equipped system platform. It satisfies all requirements for implementing complex server applications and for archiving process data.

Many basic components, such as chipset, processor, memory, etc. are for the most part identical to those of type IPC647D. As a result of the double overall height, the SIMATIC PCS 7 Industrial Workstation of type IPC847D has more slots and therefore ample potential for expansions. Since it would be over-dimensioned as a client, it is only offered as a single station and server.

Design

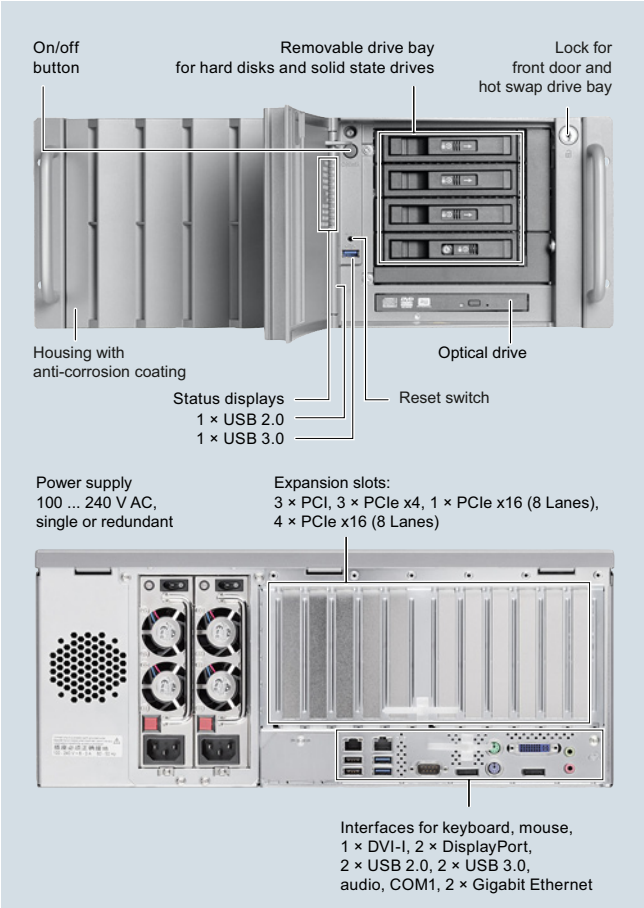

SIMATIC IPC847D, front with open front door (top) and rear

SIMATIC PCS 7 Industrial Workstations of type IPC847D are UL-certified and have the CE marking for use in industry as well as residential, business and commercial environments.

The painted all-metal enclosure in 19" mounting format (4 HUs) is especially protected against dust by a filter and pressurized ventilation. It features a mechanically and electromagnetically rugged design and is very easy to service.

The SIMATIC PCS 7 Industrial Workstations of type IPC847D can be positioned and installed horizontally or vertically. Using an optional tower kit, the Rack PC can be converted into an industry tower. The dimensions of the IPC847D also allow space-saving assembly in 500-mm deep 19" control cabinets.

The SIMATIC PCS 7 Industrial Workstations of type IPC847D are suitable for reliable 24-hour continuous operation at ambient temperatures between 5 and 50 °C. Shocks up to 5 g and vibrations up to 0.5 g can be tolerated during operation.

Further essential features

Powerful technology with modern processors and graphic controllers

- Motherboard based on an Intel C226 chipset (DH82C226 PCH)
- Main memory expansion with 4 to 8 GB DDR3-1066 SDRAM, either with or without ECC (mainly in dual-channel mode for the best performance)
- Powerful and energy-saving Intel multi-core processors with virtualization technology: XEON E3, Core i5 or Core i3
- Powerful Intel graphics controller HD Graphics 4600/4700 onboard, integrated in the processor:
  - 2 digital interfaces: DVI-I and DisplayPort (DVI-D via DisplayPort DVI adapter)
  - Analog VGA connection via DVI-I adapter to VGA or DisplayPort to VGA
- Optional graphics expansion for multi-monitor mode with up to 4 process monitors (up to 2 process monitors on the onboard graphics controller)
- Optimization to maximum performance with 240/480 GB solid-state drive

© Siemens 2019

Design (continued)

Expansion options and interfaces

- 2 × 10/100/1000 Mbit/s Ethernet RJ45 port integrated onboard
- Bus module with up to 11 slots for PCI/PCI-Express expansion modules (all for modules up to 312 mm long)
  - 1 × PCIe x16 (8 lanes)
  - 4 × PCIe x16 (4 lanes)
  - 3 × PCIe x4 (4 lanes)
  - 3 × PCI
- Total of 4 USB 3.0 ports
  - 2 × on the rear of the device
  - 1 × on the front
  - 1 × internal, e.g. for software license dongle ASIA
- Total of 3 USB 2.0 ports
  - 2 × on the rear of the device
  - 1 × on the front
- Serial COM interface (1 × COM1)
- Further interfaces at the rear of the device:
  - 2 × PS/2 for mouse and keyboard
  - Audio (1 × Line Out, 1 × Micro In)
- Connections for SATA/SAS drives, occupied in accordance with preconfigured features:
  - Up to 4 HDD/SSD in slimline removable drive bay (at the front)
  - 1 slimline DVD burner (at the front)
  - Up to 2 HDD/SSD 3.5"/2.5" in the internal drive cage
  - Up to 2 HDD in the rear drive cage (internal, vibration-damped)

High system availability and safety

- High-quality components with high MTBF values
- RAID1 configurations for data mirroring on 2 drives (also in hot swap removable drive bay for replacement of a hard disk during operation) with:
  - 2 SATA HDD or 2 SATA SSD on the onboard RAID controller
  - 2 SAS HDD on the hardware RAID controller
- RAID 5 configuration with 3 SAS HDD on the hardware RAID controller for striping with parity (in hot swap removable drive bay for replacement of a hard disk during operation)
- RAID configurations optionally with hot-spare hard disk (reserve) for automatically taking over the function of a faulty hard disk
- Faulty hard disk in a RAID configuration can be quickly identified via the HDD alarm LED
- Redundant 100 to 240 V AC power supply with "hot swap" functionality (module replacement during operation) as design variation
- Efficient self-diagnostics via LEDs on front for power, watchdog (ready/fault signal), hard disk activity, and status of Ethernet, RAID, fans and temperature
- Closing of the front door prevents:
  - Access to drives, removable memory media, USB interface, operator controls (reset, power), front fan and filter mat
  - Opening of the enclosure cover

Integration in SIMATIC PCS 7 system diagnostics

- Can be integrated into the system diagnostics with the SIMATIC PCS 7 Maintenance Station by means of the SIMATIC IPC DiagMonitor diagnostics software for monitoring the program execution (watchdog), temperature, fan speed, hard disk status and system failure

Practical and service-friendly design for industrial use

- High electromagnetic compatibility (EMC)
- Degree of protection on the front: IP41 (with door closed), at rear: IP20
- Dust protection by means of pressurized ventilation with regulated front fan and dust filter
- Front fan and dust filter can be replaced without tools
- Special hard disk holders and card retainers for protection against vibration and shock
- Fast replacement of hard disks by means of hot-swap frame (configuration option)
- Simple cabinet assembly possible using telescopic rails

High investment protection

- System-tested with SIMATIC PCS 7
- Marketing period 5 years, supply with replacement parts/ repairs over further 5 years
- Support for legacy interfaces (PS/2, COM)
- Certifications for worldwide marketing (cULus)
- Mounting-compatible across device generations
- Worldwide service and support

© Siemens 2019

3

Design (continued)

Restore DVD Set

The operating system and the SIMATIC PCS 7 software are already pre-installed on the SIMATIC PCS 7 Industrial Workstations. A supplied Restore DVD enables quick restoration to the factory state or a new installation for a different application.

The following table shows you the contents of the supplied Restore DVD Set and the pre-installed software for each version of the SIMATIC PCS 7 Industrial Workstation.

SIMATIC PCS 7 V9.0 Industrial Workstation	Supplied Restore DVD Set	Pre-installed on delivery
Single station		
SIMATIC PCS 7 ES/OS IPC847D (IE or BCE)	Restore Image 1: Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system with default settings for optimal SIMATIC PCS 7 operation	–
	Restore Image 2: Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system plus software installation for operation as ES/OS single station	●
Server		
SIMATIC PCS 7 OS Server IPC847D (IE or BCE)	Restore Image 1: Windows Server 2016 Standard Edition 64-bit operating system with default settings for optimized SIMATIC PCS 7 operation	–
	Restore Image 2:	
	• Windows Server 2016 Standard Edition 64-bit operating system plus software installation for operation as OS Server	●
	• Windows Server 2016 Standard Edition 64-bit operating system plus software installation for operation as Engineering Station	–
	• Windows Server 2016 Standard Edition 64-bit operating system plus software installation for operation as SIMATIC PCS 7 Web Server	–

Individual configuration of SIMATIC PCS 7 Industrial Workstations

By selecting predefined equipment features, you can individually configure the SIMATIC PCS 7 Industrial Workstation and thus also its article number. Selection tables for single station, server and client are available for this in the "Ordering data" section. An additional selection table enables you to order complete SIMATIC PCS 7 Industrial Workstations as a replacement part.

The PCS 7 INDUSTRIAL WORKSTATION IPC847D configurator in the Industry Mall allows you to interactively select and order the SIMATIC PCS 7 Industrial Workstation in the single station or server version - directly for the system or as a replacement part.

Individually configured SIMATIC PCS 7 Industrial Workstations will be built to order. Therefore the average delivery time for such an order is 15 working days.

Technical specifications

Detailed technical specifications for the SIMATIC PCS 7 Industrial Workstation of type IPC847D are available under "Comparison of the workstation types" in the catalog section "SIMATIC Rack PC, Introduction", see page 3/6.

© Siemens 2019

Ordering data

Individually configurable SIMATIC PCS 7 Industrial Workstations IPC847D

	Article No.
SIMATIC PCS 7 Industrial Workstation for ES/OS single station	**6ES7660-**
SIMATIC IPC847D industrial PC	**6** ■ ■ ■ ■ **-** **3** **B** ■ ■
Windows 10 IoT Enterprise 64-bit operating system, MUI (English, German, French, Italian, Spanish, Chinese), SIMATIC PCS 7 V9.0+SP1 preinstalled	
Processor and system type	
• Core i3-4330TE (2C/4T, 2.40 GHz, 4 MB cache), ES/OS single station	**A**
• Core i5-4570TE (2C/4T, 2.70 GHz, 4 MB cache, TB, VT-d, AMT), ES/OS single station	**D**
• Xeon E3-1268L v3 (4C/8T, 2.30 GHz, 8 MB cache, TB, VT-d, AMT), ES/OS single station	**G**
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 500 GB HDD SATA, 0.5 g vibration, 5 g shock; internal	**A**
• 1 TB HDD SATA, 0.5 g vibration, 5 g shock; internal	**B**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock; internal	**C**
• 500 GB HDD SATA, in removable drive bay; at the front	**D**
• 1 TB HDD SATA, in removable drive bay, at the front	**E**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping; at the front	**F**
• RAID 1, 1 TB (2 x 1 TB HDD SATA, data mirroring) + 1 TB HDD SATA as hot spare; in removable drive bay, for hot swapping; at the front	**G**
HDD SATA + SSD	
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock, internal + 240 GB SSD SATA; in removable drive bay, at the front	**M**
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring), in removable drive bay, for hot swapping + 240 GB SSD (eMLC) SATA, in removable drive bay; at the front	**N**
SSD	
• 240 GB SSD (eMLC) SATA; internal	**R**
• 480 GB SSD (eMLC) SATA; internal	**S**
• 240 GB SSD (eMLC) SATA; in removable drive bay; at the front	**T**
• 480 GB SSD (eMLC) SATA, in removable drive bay; at the front	**U**
• RAID 1, 240 GB (2 × 240 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	**V**
• RAID 1, 480 GB (2 × 480 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	**W**
Main memory	
• 8 GB DDR3 SDRAM (2 × 4 GB), dual channel	**1**
• 16 GB DDR3 SDRAM (2 × 8 GB), dual channel	**2**
• 32 GB DDR3 SDRAM (4 × 8 GB), dual channel	**3**
• 8 GB DDR3 SDRAM (2 × 4 GB), ECC, dual channel	**5**
• 16 GB DDR3 SDRAM (2 × 8 GB), ECC, dual channel	**6**
• 32 GB DDR3 SDRAM (4 × 8 GB), ECC, dual channel	**7**

	Article No.
SIMATIC PCS 7 Industrial Workstation for ES/OS single station	**6ES7660-**
SIMATIC IPC847D industrial PC	**6** ■ ■ ■ ■ **-** **3** **B** ■ ■
Windows 10 IoT Enterprise 64-bit operating system, MUI (English, German, French, Italian, Spanish, Chinese), SIMATIC PCS 7 V9.0+SP1 preinstalled	
Communication with plant bus	
• BCE	**0**
• Industrial Ethernet (CP 1623)	**1**
• Without additional communication modules	**8**
Interfaces on bus module/swap media/ multi-monitor option	
Bus module with 3 × PCI, 3 × PCIe x4, 5 × PCIe x16	
• Without optical drive	
- Without multi-monitor mode	**A**
- Multi-monitor mode for 2 screens via onboard interfaces[1]	**B**
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[2]	**X**
• With DVD±RW (slim)	
- Without multi-monitor mode	**D**
- Multi-monitor mode for 2 screens via onboard interfaces[1]	**E**
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[2]	**Y**
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply to NAMUR	
- Power supply cord for Europe	**0**
- Power supply cord for the UK	**1**
- Power supply cord for Switzerland	**2**
- Power supply cord for the USA	**3**
- Power supply cord for Italy	**4**
- Power supply cord for China	**5**
• 2 × 100 ... 240 V AC, redundant power supply; without power supply cord	**6**
• 110/240 V AC industrial power supply with NAMUR; without power cable	**8**

[1] Incl. 1 adapter cable (DisplayPort to DVI-D)

[2] Incl. 1 adapter cable (DisplayPort to DVI-D), incl. 1 × Dual DVI-I adapter for Dual Head PCIe x16 card

© Siemens 2019

3

Ordering data (continued)

	Article No.
SIMATIC PCS 7 Industrial Workstation For OS server	**6ES7660-**
SIMATIC IPC847D industrial PC Windows Server 2016 Standard Edition 64-bit operating system, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	6 ■ ■ ■ ■ - 3 F ■ ■
Processor and system type	
• Core i3-4330TE (2C/4T, 2.40 GHz, 4 MB cache), OS server	B
• Core i5-4570TE (2C/4T, 2.70 GHz, 4 MB cache, TB, VT-d, AMT), OS server	E
• Xeon E3-1268L v3 (4C/8T, 2.30 GHz, 8 MB cache, TB, VT-d, AMT), OS server	H
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 500 GB HDD SATA, 0.5 g vibration, 5 g shock; internal	A
• 1 TB HDD SATA, 0.5 g vibration, 5 g shock; internal	B
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock; internal	C
• 500 GB HDD SATA, in removable drive bay; at the front	D
• 1 TB HDD SATA, in removable drive bay, at the front	E
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping; at the front	F
• RAID 1, 1 TB (2 x 1 TB HDD SATA, data mirroring) + 1 TB HDD SATA as hot spare; in removable drive bay, for hot swapping; at the front	G
• RAID 1, 1 TB (2 × 1 TB HDD SAS, data mirroring); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. zero-maintenance cache protection (ZMCP) module	H
• RAID 5, 2 TB (3 × 1 TB HDD SAS, striping with parity); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module	K
• RAID 5, 2 TB (3 × 1 TB HDD SAS, striping with parity) + 1 TB HDD SAS as hot spare; in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module	L
HDD SATA + SSD	
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock, internal + 240 GB SSD SATA, internal	M
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring), in removable drive bay, for hot swapping + 240 GB SSD (eMLC) SATA, in removable drive bay; at the front	N
• RAID 1, 1 TB (2 × 1 TB HDD SAS, data mirroring); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module + 240 GB SSD (eMLC) SATA; in removable drive bay, at the front	P
• RAID 5, 2 TB (3 × 1 TB HDD SAS, striping with parity); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module + 240 GB SSD (eMLC) SATA; in removable drive bay, at the front	Q
SSD	
• 240 GB SSD (eMLC) SATA; internal	R
• 480 GB SSD (eMLC) SATA; internal	S
• 240 GB SSD (eMLC) SATA; in removable drive bay; at the front	T
• 480 GB SSD (eMLC) SATA; in removable drive bay; at the front	U
• RAID 1, 240 GB (2 × 240 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	V
• RAID 1, 480 GB (2 × 480 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	W

	Article No.
SIMATIC PCS 7 Industrial Workstation For OS server	**6ES7660-**
SIMATIC IPC847D industrial PC Windows Server 2016 Standard Edition 64-bit operating system, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese), and SIMATIC PCS 7 V9.0+SP1 pre-installed	6 ■ ■ ■ ■ - 3 F ■ ■
Main memory	
• 8 GB DDR3 SDRAM (2 × 4 GB), dual channel	1
• 16 GB DDR3 SDRAM (2 × 8 GB), dual channel	2
• 32 GB DDR3 SDRAM (4 × 8 GB), dual channel	3
• 8 GB DDR3 SDRAM (2 × 4 GB), ECC, dual channel	5
• 16 GB DDR3 SDRAM (2 × 8 GB), ECC, dual channel	6
• 32 GB DDR3 SDRAM (4 × 8 GB), ECC, dual channel	7
Communication with plant bus	
• BCE	0
• Industrial Ethernet (CP 1623)	1
• Without additional communication modules	8
Interfaces on bus module/swap media/ multi-monitor option	
Bus module with 3 × PCI, 3 × PCIe x4, 5 × PCIe x16	
• Without optical drive	
- Without multi-monitor mode	A
- Multi-monitor mode for 2 screens via onboard interfaces[1]	B
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[2]	X
• With DVD±RW (slim)	
- Without multi-monitor mode	D
- Multi-monitor mode for 2 screens via onboard interfaces[1]	E
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[2]	Y
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply to NAMUR	
- Power supply cord for Europe	0
- Power supply cord for the UK	1
- Power supply cord for Switzerland	2
- Power supply cord for the USA	3
- Power supply cord for Italy	4
- Power supply cord for China	5
• 2 × 100 ... 240 V AC, redundant power supply; without power supply cord	6
• 110/240 V AC industrial power supply with NAMUR; without power cable	8

1) Incl. 1 adapter cable (DisplayPort to DVI-D)

2) Incl. PCIe x16 graphics card

© Siemens 2019

Ordering data (continued)

SIMATIC PCS 7 Industrial Workstations of the type IPC847D as replacement part

Without hardware expansions, software pre-installation, system software licenses, Restore DVDs

Replacement for ES/OS single station or OS server of the type IPC847D

	Article No.
SIMATIC PCS 7 Industrial Workstation as replacement part	**6ES7660-**
Industrial PC SIMATIC IPC847D without pre-installation, without SIMATIC PCS 7 Restore DVD sets	6 ■ ■ ■ ■ - 8 ■ ■ ■
Processor and system type	
• Core i3-4330TE (2C/4T, 2.40 GHz, 4 MB cache), replacement part	W
• Core i5-4570TE (2C/4T, 2.70 GHz, 4 MB cache, TB, VT-d, AMT), replacement part	X
• Xeon E3-1268L v3 (4C/8T, 2.30 GHz, 8 MB cache, TB, VT-d, AMT), replacement part	Y
Hard disks and solid-state drives	
With SATA hard disk (HDD)	
• 500 GB HDD SATA, 0.5 g vibration, 5 g shock; internal	A
• 1 TB HDD SATA, 0.5 g vibration, 5 g shock; internal	B
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock; internal	C
• 500 GB HDD SATA, in removable drive bay; at the front	D
• 1 TB HDD SATA, in removable drive bay, at the front	E
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); in removable drive bay, for hot swapping; at the front	F
• RAID 1, 1 TB (2 x 1 TB HDD SATA, data mirroring) + 1 TB HDD SATA as hot spare; in removable drive bay, for hot swapping; at the front	G
• RAID 1, 1 TB (2 × 1 TB HDD SAS, data mirroring); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. zero-maintenance cache protection (ZMCP) module[3]	H
• RAID 5, 2 TB (3 × 1 TB HDD SAS, striping with parity); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module[3]	K
• RAID 5, 2 TB (3 × 1 TB HDD SAS, striping with parity) + 1 TB HDD SAS as hot spare; in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module[3]	L
HDD SATA + SSD	
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring); 0.5 g vibration, 5 g shock, internal + 240 GB SSD SATA; in removable drive bay, at the front	M
• RAID 1, 1 TB (2 × 1 TB HDD SATA, data mirroring), in removable drive bay, for hot swapping + 240 GB SSD (eMLC) SATA, in removable drive bay; at the front	N
• RAID 1, 1 TB (2 × 1 TB HDD SAS, data mirroring); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module + 240 GB SSD (eMLC) SATA; in removable drive bay, at the front[3]	P
• RAID 5, 2 TB (3 × 1 TB HDD SAS, striping with parity); in removable drive bay, for hot swapping; at the front; with hardware RAID controller (PCIe x8; 2 slots occupied) incl. ZMCP module + 240 GB SSD (eMLC) SATA; in removable drive bay, at the front[3]	Q
SSD	
• 240 GB SSD (eMLC) SATA; internal	R
• 480 GB SSD (eMLC) SATA; internal	S
• 240 GB SSD (eMLC) SATA; in removable drive bay; at the front	T
• 480 GB SSD (eMLC) SATA; in removable drive bay; at the front	U
• RAID 1, 240 GB (2 × 240 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	V
• RAID 1, 480 GB (2 × 480 GB) SSD (eMLC), SATA, data mirroring; in removable drive bay; for hot swapping; at the front	W

	Article No.
SIMATIC PCS 7 Industrial Workstation as replacement part	**6ES7660-**
Industrial PC SIMATIC IPC847D without pre-installation, without SIMATIC PCS 7 Restore DVD sets	6 ■ ■ ■ ■ - 8 ■ ■ ■
Main memory	
• 8 GB DDR3 SDRAM (2 × 4 GB), dual channel	1
• 16 GB DDR3 SDRAM (2 × 8 GB), dual channel	2
• 32 GB DDR3 SDRAM (4 × 8 GB), dual channel	3
• 8 GB DDR3 SDRAM (2 × 4 GB), ECC, dual channel	5
• 16 GB DDR3 SDRAM (2 × 8 GB), ECC, dual channel	6
• 32 GB DDR3 SDRAM (4 × 8 GB), ECC, dual channel	7
Communication with plant bus	
• BCE	0
• Industrial Ethernet (CP 1623)	1
• Without additional communication modules	8
Operating system	
• Windows 7 Ultimate 64-bit, MUI (German, English, French, Italian, Spanish, Chinese)	A
• Windows 10 IoT Enterprise 2015 LTSB 64-bit, MUI (English, German, French, Italian, Spanish, Chinese)[3]	B
• Windows Server 2012 R2 Standard Edition 64-bit, incl. 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese)	E
• Windows Server 2016 Standard Edition 64-bit, incl. 16 Core, 5 CAL, MUI (English, German, French, Italian, Spanish, Chinese)	F
• Without operating system	X
Interfaces on bus module/swap media/ multi-monitor option	
Bus module with 3 × PCI, 3 × PCIe x4, 5 × PCIe x16	
• Without optical drive	
- Without multi-monitor mode	A
- Multi-monitor mode for 2 screens via onboard interfaces[1]	B
- Multi-monitor mode for 4 screens via PCIe x16 graphics card	C
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[2]	X
• With DVD±RW (slim)	
- Without multi-monitor mode	D
- Multi-monitor mode for 2 screens via onboard interfaces[1]	E
- Multi-monitor mode for 4 screens via PCIe x16 graphics card	F
- Multi-monitor mode for 4 screens (combined, onboard interfaces (2 × DisplayPort) + Dual Head PCIe x16 card (2 × DisplayPort))[2]	Y
Power supply unit, country-specific version	
• 100 ... 240 V AC industrial power supply to NAMUR	
- Power supply cord for Europe	0
- Power supply cord for the UK	1
- Power supply cord for Switzerland	2
- Power supply cord for the USA	3
- Power supply cord for Italy	4
- Power supply cord for China	5
• 2 × 100 ... 240 V AC, redundant power supply; without power supply cord	6
• 110/240 V AC industrial power supply with NAMUR; without power cable	8

[1] Incl. 1 adapter cable (DisplayPort to DVI-D)

[2] Incl. 1 adapter cable (DisplayPort to DVI-D), incl. 1 × Dual DVI-I adapter for Dual Head PCIe x16 card

[3] Hard disk options with hardware RAID controller H, K, L, P and Q, not for Windows 10 IoT Enterprise 2015 LTSB operating system

© Siemens 2019

3

Additional and expansion components

USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US-International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**
Memory expansion	
• 2 GB DDR3 SDRAM (1 × 2 GB)	**6ES7648-2AJ50-0MA0**
• 4 GB DDR3 SDRAM (1 × 4 GB)	**6ES7648-2AJ60-0MA0**
• 4 GB DDR3 SDRAM with ECC (1 × 4 GB)	**6ES7648-2AJ60-1MA0**
• 8 GB DDR3 SDRAM (1 × 8 GB)	**6ES7648-2AJ70-0MA0**
• 8 GB DDR3 SDRAM with ECC (1 × 8 GB)	**6ES7648-2AJ70-1MA0**
Tower Kit for SIMATIC PCS 7 Industrial Workstations Tower Kit for conversion of a Rack PC into an industrial tower PC	**6ES7648-1AA00-0XD0**
Retainer For locking the internal USB port	**6ES7648-1AA00-0XK0**
Rack unit for low-profile removable drive bay For 3.5" hard disk (SATA/SAS) or 2.5" SSD (SATA), without drive	**6ES7648-0EG01-1BA0**
Adapter cable	
• DisplayPort to DVI-D for onboard graphics	**6ES7648-3AF00-0XA0**
• DisplayPort to VGA for onboard graphics	**6ES7648-3AG00-0XA0**
• DVI-I to VGA for onboard graphics, 250 mm long	**6ES7648-3AB00-0XA0**
Power supply cord, 3 m, for Rack PC[1]	
• Europe (for Austria, Belgium, Finland, France, Germany, the Netherlands, Spain, Sweden)	**6ES7900-0AA00-0XA0**
• For the UK	**6ES7900-0BA00-0XA0**
• For Switzerland	**6ES7900-0CA00-0XA0**
• For the USA	**6ES7900-0DA00-0XA0**
• For Italy	**6ES7900-0EA00-0XA0**
• For China	**6ES7900-0FA00-0XA0**
SIMATIC NET HARDNET IE S7 REDCONNECT PowerPack For communication with high-availability AS systems, see "Communication", "Industrial Ethernet – System connection PCS 7 systems", see page 10/59	

[1] The SIMATIC PCS 7 preferred types are delivered as standard with a "European power cable". The country-specific versions listed above are required for some countries.

Accessories

Power supply cord for Rack PC

The SIMATIC PCS 7 preferred types are always delivered with a "European power supply cord". This can be used in Germany, France, Spain, Netherlands, Belgium, Sweden, Austria and Finland.

The country-specific versions listed in the Ordering data are required for other countries. The following picture shows the design of a number of power supply plugs:



Country-specific power supply cords for Rack PC

Tower Kit for IPC847D

The Tower Kit enables conversion of a SIMATIC PCS 7 Industrial Workstation with rack PC design to an industrial tower PC. A Tower Kit can be ordered as an accessory for the SIMATIC PCS 7 Industrial Workstation IPC847D.



Tower Kit for IPC847D

© Siemens 2019

Overview



The SIMATIC PCS 7 BOX OS Client IPC627D based on the SIMATIC Box PC of type SIMATIC IPC627D can be used within the SIMATIC PCS 7 process control system as OS Client or SIMATIC BATCH client. For these applications it is an alternative to clients based on a SIMATIC Microbox PC or SIMATIC Rack PC.

With its compact and sturdy metal enclosure, the SIMATIC PCS 7 BOX OS Client IPC627D with a comparable interface configuration is slightly larger than a client on the basis of the SIMATIC Microbox PC. In return, it is additionally equipped with a DVD drive and two free slots for expansion modules.

Design

The SIMATIC IPC627D Industrial PC serves as platform for the SIMATIC PCS 7 BOX OS Client IPC627D. In accordance with its CE marking it can be used in industrial environments as well as in domestic, business and commercial environments.

The IPC627D based on Intel Core i3 or Xeon processor technology has the following particularly impressive properties and equipment features:

- Stable platform available for a period of about 5 years with embedded Intel components (spare parts supply and repairs for approx. 5 years)
- Rugged metal enclosure with IP20 degree of protection with high electromagnetic compatibility.
- Powerful and energy-saving Intel multi-core processors XEON E3 or Core i3
- Powerful Intel graphics controller HD Graphics 4600 onboard, integrated in the processor:
  - 2 digital interfaces DVI-I and DisplayPort (DVI-D via DisplayPort DVI adapter)
  - Analog VGA connection via DVI-I adapter to VGA or DisplayPort to VGA
- Support of multi-monitor mode with two process monitors via onboard graphics:
  - 1 × process monitor at DVI-I connection
  - 1 × process monitor at DisplayPort via DisplayPort to DVI-D adapter cable
- Alternative design version of panel front: SIMATIC PCS 7 BOX with fixed 22" TFT display with single touch screen, resolution 1920 × 1080
- Flexible installation in various positions with mounting brackets or portrait installation kits
- High shock/vibration resistance in all possible mounting positions
- Variable power supply: 24 V DC or 110/230 V AC (100 to 240 V)
- Maximum processor performance up to an ambient temperature of 55 °C
- Integrated drives:
  - 1 × SATA 3.5" (HDD) hard disk or SATA 2.5" (SSD) solid-state drive
  - 1 × optical drive SATA DVD±R/RW
- Certification for worldwide marketing (cULus)
- Fast restoration of the delivery state with supplied restore DVD


© Siemens 2019

3

Design (continued)

Interfaces

- 4 × USB 3.0 (SuperSpeed) external
- 1 × USB 3.0 (SuperSpeed) external, on front (Panel Front design version only)
- 1 × USB 3.0 (SuperSpeed) internal, e.g. for ASIA license key, hardlock USB
- 1 × COM1 (RS 232)
- 1 × DVI-I interface (DVI/VGA combined; VGA via adapter cable)
- 1 × DisplayPort (DVI-D or VGA via adapter cable)
- 2 × Ethernet 10/100/1000 Mbps (RJ45)
- 1 × PCI-Express x16 (185 mm) and 1 × PCI (185 mm), vacant for expansions

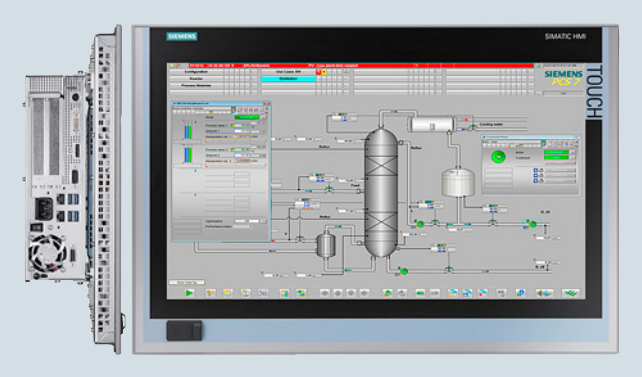

SIMATIC PCS 7 BOX with Panel Front, side and front views

Design versions/expandability

The SIMATIC PCS 7 BOX in standard design is a compact computing unit with HMI devices (mouse, keyboard, process monitor) that can be ordered separately and are connected by means of integrated ports/interfaces.

The device is equipped with four USB 3.0 ports for mouse and keyboard as well as additional USB input/output devices, e.g. chip card reader USB.

Two process monitors can be controlled in multi-monitor mode via the integrated digital graphic interfaces DVI-I and DVI-D (via adapter cable at the DisplayPort). The selection of the process monitors depends on the technical data of the integrated graphics as well as the image formats and resolutions which can be adjusted in the project editor of the OS software (see section "Operator System, OS Software, Introduction"), see page 5/6.

As an alternative to the SIMATIC PCS 7 BOX in standard design, we are offering a built-in unit with Panel Front according to **SIMATIC IPC677D** which can be mounted in mounting cutouts of control cabinets, enclosures or consoles as well as on swivel arms.

With the built-in unit, a panel with 22" TFT display and touch screen is permanently connected with the computing unit. The 22" TFT display supports a resolution of 1920 × 1080 pixels. An additional USB 3.0 port for connection of external I/O devices is available on the panel front on the left below the display.

Using a touch pen as an input aid protects the touch screen and makes it easy to achieve pin-point accuracy when operating small input boxes or buttons – especially when working with gloves.



Touch pen

Diagnostics

- Integrated diagnostic displays (4 dual-color LEDs for status display of the operating state)
- Monitoring and diagnostics functions available in combination with the SIMATIC IPC DiagMonitor diagnostics software for:
  - Temperatures
  - Backup battery voltage
  - HDD/SSD status (S.M.A.R.T.)
  - System status (Watchdog)
  - Fan speed
  - Operating hours counter

Pre-installed software

The following software is pre-installed on the SIMATIC PCS 7 BOX OS Client IPC627D / IPC677D on delivery:

- Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system, multi-language (English, German, French, Italian, Spanish, Chinese)
- SIMATIC PCS 7 OS Software Client
- SIMATIC IPC DiagMonitor diagnostics software

Note

The license for the SIMATIC PCS 7 OS software client for the SIMATIC PCS 7 BOX OS Clients is no longer included in the scope of delivery. As with the SIMATIC PCS 7 Industrial Workstations in rack version, it must be purchased separately.

© Siemens 2019

Technical specifications

	Standard design (OS Client IPC627D)	Panel front design (OS Client IPC677D)
Design and equipment features		
Design	Rack-mountable device with sturdy metal enclosure, suitable for wall and portrait mounting	Rack-mounted device with rugged metal enclosure and Panel Front, suitable for mounting in control cabinets, enclosures, consoles and on swivel arms; max. mounting angle ±20° from the vertical
Degree of protection	IP20	Computer unit and rear of panel IP20; panel front: IP65
Processor (alternatively)	• Intel Xeon E3-1268L v3, 4 cores, 8 threads, 2.3 (3.3) GHz, GT2, 8 MB cache, Turbo Boost, VT-d, iAMT • Intel Core i3-4330TE, 2 cores, 4 threads, 2.4 GHz, GT2, 4 MB cache, VT-x	
Chipset	Intel C226 (DH82C226 PCH)	
Main memory		
• Type	DDR3-1600 SDRAM (PC3-12800) DIMM	
• Maximum configuration	16 GB DDR3 SDRAM (2 sockets)	
• Standard configuration	8 GB DDR3 SDRAM	
Graphics		
• Graphic controller	Onboard Intel graphics controller HD Graphics P4600; 2-D and 3-D engine integrated in processor	
• Graphics memory	Dynamic Video Memory (uses up to 512 MB RAM)	
• Resolutions, frequencies, colors of the onboard graphics		
- DVI	1920 × 1200 at 60 Hz, 24-bit color depth	
- Display port	3840 × 2160 at 130 Hz, 30-bit color depth	
• Color display (panel front)	–	22" TFT display with single touch screen
- Resolution (W × H in pixels)	–	1920 × 1080
- Luminance (cd/m²), up to	–	400
- Horizontal/vertical viewing angle	–	170°/170°
- MTBF LED backlight	–	80 000 h
Free expansion slots	1 × PCI (185 mm) 1 × PCI Express x16 (185 mm)	
Drives		
• Hard disk (HDD)/Solid State Drive (SSD)	1 × HDD 3.5" SATA, 250 GB or 1 × SSD 2.5" SATA, 240 GB	
• Optical drive	1 × Slimline SATA DVD±R/RW	
Interfaces		
Ethernet	2 × 10/100/1000 Mbps (RJ45), Intel WGI217LM (AMT interface) and Intel WGI210IT	
USB		
• External	4 × USB 3.0 (max. 2 high-current ports at the same time)	4 × USB 3.0 (max. 2 high-current ports at the same time) 1 x USB 3.0 high-current port on the front panel
• Internal	1 × USB 3.0 high-current for internal USB flash drive/dongle	
Serial	1 × COM1 (V.24), 9-pin sub-D connector	
Parallel	–	
Graphics connection	• 1 × DVI-I (DVI/VGA combined) • 1 × DisplayPort	
Keyboard, mouse	Connectable via USB (keyboard and mouse not included in scope of delivery)	
Operating system and diagnostics software		
Operating system	Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system, multi-language (English, German, French, Italian, Spanish, Chinese), pre-installed on hard disk and enclosed on Restore DVD set, no activation required	
System-tested SIMATIC industrial software	SIMATIC IPC DiagMonitor	
Monitoring and diagnostics functions		
Display elements	4 × dual-color LEDs for status display of the operating state: PC ON/WD (watchdog), RUN/STOP, ERROR, MAINT	
SIMATIC IPC DiagMonitor diagnostics software		
• Temperature (overtemperature/undertemperature)	• Processor temperature • Temperature close to the RAM chips • Temperature of the basic module	
• Battery voltage	Backup battery	
• Storage media	Monitoring of HDD/SSD with S.M.A.R.T. functionality	
• Watchdog	System monitoring; possible reactions: Hardware or software reset	
• Fans	Monitoring of the fan speed	
• Operating hours counter	Information about the total runtime	

© Siemens 2019

3

Technical specifications (continued)

	Standard design (OS Client IPC627D)	Panel front design (OS Client IPC677D)
Safety		
Protection class	Protection class I compliant with IEC 61140	
Safety directives	EN 60950-1; UL60950-1 CAN/CSA C22.2 No 60950-1-07 UL508 CSA C22.2 No 142	EN 60950-1 UL508 CSA C22.2 No 142
Noise emission		
Operation	< 55 dB(A) according to EN ISO 7779	
Electromagnetic compatibility (EMC)		
Interference emission	EN 61000-6-3 EN 61000-6-4 CISPR22 Class B FCC Class A	EN 61000-6-3 EN 61000-6-4 CISPR22 Class A FCC Class A
Immunity to conducted interference on the supply lines	±2 kV (according to IEC 61000-4-4; burst) ±1 kV (according to IEC 61000-4-5; symmetrical surge) ±2 kV (according to IEC 61000-4-5; asymmetrical surge)	
Immunity to interference on signal lines	±1 kV (according to IEC 61000-4-4; burst; length < 3 m) ±2 kV (according to IEC 61000-4-4; burst; length > 3 m) ±2 kV (according to IEC 61000-4-5; surge; length > 30 m)	
Immunity to static discharge	±6 kV contact discharge (according to IEC 61000-4-2) ±8 kV air discharge (according to IEC 61000-4-2)	
Immunity to high-frequency radiation	10 V/m, 80 ... 1 000 MHz and 1.4 ... 2 GHz, 80 % AM (to IEC 61000-4-3) 3 V/m, 2 ... 2.7 GHz, 80 % AM (to IEC 61000-4-3) 10 V/m, 10 kHz ... 80 MHz, 80 % AM (to IEC 61000-4-6)	
Immunity to magnetic fields	100 A/m, 50/60 Hz (according to IEC 61000-4-8)	
Climatic conditions		
Temperature	Tested according to IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14	
• Operation	• +5 ... +45 °C (with DVD writer, only up to +40 °C) • +5 ... +50 °C (power USB and PCI/PCIe expansions max. 20 W) • +5 ... +55 °C (power USB and PCI/PCIe expansions max. 10 W)	• Horizontal, vertical installation: +5 ... +45 °C (with DVD writer, only up to +40 °C) • Horizontal, angled installation: +5 ... +40 °C (power USB and PCI/PCIe expansions max. 30 W; no DVD operation) • Vertical, vertical installation: +5 ... +45 °C (power USB and PCI/PCIe expansions max. 30 W; no DVD operation)
• Storage/transport	-20 … +60 °C	
• Gradient		
- Operation	Max. 10 °C/h	
- Storage	20 °C/h, no condensation	
Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30	
• Operation	5 ... 80 % at 25 °C (no condensation)	
• Storage/transport	5 ... 95 % at 25 °C (no condensation)	
Atmospheric pressure		
• Operation	1 080 to 795 hPa (corresponds to an altitude of -1 000 to 2 000 m)	
• Storage/transport	1 080 to 660 hPa (corresponds to an altitude of -1 000 to 3 500 m)	
Mechanical environmental conditions		
Vibrations	Tested according to IEC 60068-2-6	
• Operation	10 … 58 Hz: 0.075 mm, 58 to 500 Hz: 9.8 m/s^2	
- Limitation with DVD writer	10 … 58 Hz: 0.019 mm, 58 to 500 Hz: 2.5 m/s^2	
- Limitation with portrait assembly	10 … 58 Hz: 0.0375 mm, 58 to 500 Hz: 4.9 m/s^2	–
• Storage/transport	5 … 9 Hz: 3.5 mm, 9 to 500 Hz: 9.8 m/s^2	
Shock resistance	Tested according to IEC 60068-2-27, IEC 60068-2-29	
• Operation	50 m/s^2, 30 ms	
- Limitation with portrait assembly	25 m/s^2, 30 ms	–
• Storage/transport	250 m/s^2, 6 ms	

© Siemens 2019

Technical specifications (continued)

	Standard design (OS Client IPC627D)	Panel front design (OS Client IPC677D)
Standards, specifications		
CE - Residential, business and commercial operations, and small businesses		
• Interference emission	EN 61000-6-3: 2007 +A1:2011	–
• Noise immunity	EN 61000-6-1: 2007	–
CE industrial environment		
• Interference emission	EN 61000-6-4: 2007 +A1:2011	EN 61000-6-4: 2007
• Noise immunity	EN 61000-6-2: 2005	EN 61000-6-2: 2005
Certificates and approvals		
Quality assurance system according to ISO 9001:2008	According to DQS certificate 001323 QM08	
cULus	Underwriters Laboratories (UL) complying with standard UL 60950-1, CAN/CSA-C22.2 No. 60950-1 (I.T.E), UL 508 and CAN/CSA-C22.2 No. 142 (IND.CONT.EQ)	Underwriters Laboratories (UL) complying with standard UL 508 and CAN/CSA-C22.2 No. 142 (IND.CONT.EQ)
FCC USA	FCC Rules, Part 15, Class A	
Canada	ICES-003, Class B; NMB-003, Class B	ICES-003, Class A; NMB-003, Class A
Australia/New Zealand	EN 61000-6-3:2007	EN 61000-6-4:2007
Korea	Korean Certification (KC Mark)	
Power supply		
Supply voltage (AC)	Nominal 100 … 240 V AC (-15 %/+10 %), wide range	
Supply voltage (DC)	Nominal 24 V DC (-20 %/+20 %), SELV, isolated	
AC input current	Continuous current up to 1.7 A (up to 50 A for 1 ms at startup)	
DC input current	Continuous current up to 7.1 A (up to 14 A for 30 ms at startup)	
Brief voltage interruption according to NAMUR	Max. 20 ms (at 0.85 rated voltage) (max. 10 events per hour; recovery time of at least 1 s)	
Max. power consumption		
• Active power (AC/DC)	176 W	
• Apparent power (AC)	190 VA	
Max. current output (+12 V DC)	12.5 A	
Dimensions and weights		
External dimensions including DVD writer (W × H × D in mm)	312 × 267 × 105	560 × 380 × 139 (148 incl. front USB port)
Mounting cutout (W × H in mm)	–	541 × 362
Mounting depth including DVD writer (D in mm)	–	133
Weight	Approx. 7 kg	Approx. 16 kg
System software and licenses (included in product package)		
Restore DVD sets/preinstallation		
• Restore DVD set 1	Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system with default settings for optimal SIMATIC PCS 7 operation	
• Restore DVD set 2	Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system plus software installation for SIMATIC PCS 7 BOX operation (corresponds to preinstallation)	

© Siemens 2019

3

Ordering data

SIMATIC PCS 7 BOX OS Client IPC627D/IPC677D

	Article No.								
SIMATIC PCS 7 BOX OS Client System	**6ES7650-**								
Type: SIMATIC IPC627D, equipped with 2 × 10/100/1000 Mbps Ethernet RJ45; graphics onboard, 4 × USB 3.0; 1 × serial (COM1); 1 × PCI, 1 × PCIe (X16)	**4**	**B**	■	**8**	**2**	**-**	**3**	**V**	■	■
SIMATIC PCS 7 software V9.0+SP1 pre-installed										
Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system, MUI (English, German, French, Italian, Spanish, Chinese)										
Without additional communications interfaces										
Processor and storage media										
• Intel Core i3-4330TE processor (2 cores/ 4 threads, 2.4 GHz, 4 MB cache, VT-x); main memory 8 GB, DDR3 1600, DIMM; 250 GB SATA; DVD±R/RW			**A**							
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM; 240 GB SSD; DVD±R/RW			**B**							
Panel Front										
• without panel								**A**		
• 22" Single Touch, 1920 × 1080 pixels								**B**		
Power supply, country-specific power supply cord										
• 110/230 V AC industrial power supply to NAMUR;										
- Power supply cord for Europe										**0**
- Power supply cord for the UK										**1**
- Power supply cord for Switzerland										**2**
- Power supply cord for the USA										**3**
- Power supply cord for Italy										**4**
- Power supply cord for China										**5**
• 24 V DC industrial power supply										**6**

SIMATIC PCS 7 BOX IPC627D/IPC677D as a spare part

The configuration table below for replacement part systems is not only intended for the SIMATIC PCS 7 BOX OS Client IPC627D/IPC677D, but for all system variants of the SIMATIC PCS 7 BOX IPC627D/IPC677D.

	Article No.									
SIMATIC PCS 7 BOX System as a spare part	**6ES7650-**									
Type: SIMATIC IPC627D without pre-installation, without SIMATIC PCS 7 restore DVDs, equipped with 2 × 10/100/1000 Mbps Ethernet RJ45; graphics onboard, 4 × USB 3.0; 1 × serial (COM1); 1 × PCI, 1 × PCIe (X16)	**4**	**B**	■	■	■	**-**	**8**	**X**	■	■
Processor and storage media										
• Intel Core i3-4330TE processor (2 cores/ 4 threads, 2.4 GHz, 4 MB cache, VT-x); main memory 8 GB, DDR3 1600, DIMM; 250 GB SATA; DVD±R/RW		**A**								
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM; 240 GB SSD; DVD±R/RW		**B**								
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM, ECC; RAID1, 2 × 320 GB SATA (2.5"); DVD±R/RW		**C**								
Communication interfaces										
• PROFIBUS onboard (CP 5622 compatible)				**0**						
• PROFINET onboard (CP 1616 compatible)				**1**						
• Without additional communication modules				**8**						
Operating system										
• Windows 7 Ultimate 32-bit, MUI (English, German, French, Italian, Spanish, Chinese)					**0**					
• Windows 7 Ultimate 64-bit, MUI (English, German, French, Italian, Spanish, Chinese)					**1**					
• Windows 10 IoT Enterprise 2015 LTSB 64-bit, MUI (English, German, French, Italian, Spanish, Chinese)					**2**					
• Without operating system					**8**					
Panel Front										
• without panel									**A**	
• 22" Single Touch, 1920 × 1080 pixels									**B**	
Power supply, country-specific power supply cord										
• 110/230 V AC industrial power supply to NAMUR,										
- Power supply cord for Europe										**0**
- Power supply cord for the UK										**1**
- Power supply cord for Switzerland										**2**
- Power supply cord for the USA										**3**
- Power supply cord for Italy										**4**
- Power supply cord for China										**5**
• 24 V DC industrial power supply										**6**

© Siemens 2019

Ordering data (continued)

Additional and expansion components

USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US-International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**
Touch pen, thick, resistive technology For resistive touch screen, optimized for operation with gloves, including screw-on wall-mounting bracket	**6AV7672-1JB00-0AA0**
Memory expansion	
• 2 GB DDR3 1600 SDRAM, DIMM	**6ES7648-2AJ50-0MA0**
• 4 GB DDR3 1600 SDRAM, DIMM	**6ES7648-2AJ60-0MA0**
• 8 GB DDR3 1600 SDRAM, DIMM	**6ES7648-2AJ70-0MA0**
• 8 GB DDR3 1600 SDRAM, DIMM, ECC	**6ES7648-2AJ70-1MA0**
Adapter cable	
• DisplayPort to DVI-D for onboard graphics	**6ES7648-3AF00-0XA0**
• DisplayPort to VGA for onboard graphics	**6ES7648-3AG00-0XA0**
• DVI-I to VGA for onboard graphics, 250 mm long	**6ES7648-3AB00-0XA0**
SIMATIC IPC power supply cord For Box PC and Panel PC, 230 V AC, angled, 3 m	
• For Germany, France, Spain, the Netherlands, Belgium, Sweden, Austria, Finland	**6ES7900-1AA00-0XA0**
• For the UK	**6ES7900-1BA00-0XA0**
• For Switzerland	**6ES7900-1CA00-0XA0**
• For the USA	**6ES7900-1DA00-0XA0**
• For Italy	**6ES7900-1EA00-0XA0**
• For China	**6ES7900-1FA00-0XA0**

Accessories

Portrait mounting kit	
• Kit 1: Interfaces to the front	**6ES7648-1AA10-1YB0**
• Kit 2: Interfaces point up/down	**6ES7648-1AA10-1YA0**

Accessories

Portrait installation kit

As an alternative to installation with mounting brackets, the portrait assembly kit allows for space-saving installation of the SIMATIC PCS 7 BOX OS Client (standard design without Panel Front). The portrait assembly kit is available in two versions:

- Kit 1: Portrait assembly with interfaces to the front
- Kit 2: Portrait assembly with interfaces on top or bottom

Together with the kit, the SIMATIC PCS 7 BOX OS Client occupies a mounting depth of 365 mm (Kit 1) or 279 mm (Kit 2) in the standard design. The limitations associated with portrait assembly regarding vibration and shock resistance are relatively small.

Since all interfaces are accessible from the front when using Kit 1, this type of assembly is particularly suitable for commissioning and servicing.

Please observe the information on operation planning and device installation in the manual of the SIMATIC IPC627D in conjunction with the use of portrait assembly kits.

© Siemens 2019

Overview



SIMATIC IPC427E and SIMATIC IPC477E family

Clients based on the rugged SIMATIC Microbox PC can be used within the SIMATIC PCS 7 process control system in the operator system and in SIMATIC BATCH. With their compact design, they are a space-saving alternative to clients based on a SIMATIC BOX PC or SIMATIC Rack PC for these applications. However, the numbers of expansion options and interfaces are comparatively lower.

Two designs are available:

- SIMATIC PCS 7 OS client IPC427E
  computing unit (without monitor) in compact metal enclosure, suitable for mounting rail and wall mounting, optional installation with portrait mounting kit
- SIMATIC PCS 7 OS client IC477E
  built-in unit, consisting of 22" TFT single Touch Panel with integrated computing unit, suitable for installation in mounting cutouts, for example in consoles or cabinets

Both designs are available with hard disk as well as solid state drive. Due to their exceptional physical properties, both versions are suitable for maintenance-free 24/7 operation without the support of a fan.

For the SIMATIC PCS 7 OS client IPC427E, visualization of a project/subproject can be distributed to two process monitors connected to the onboard interfaces in multi-monitor mode. For the SIMATIC PCS 7 OS client IPC477E, process control is primarily via the integrated 22" display.

Technical specifications

Comparison of SIMATIC PCS 7 OS Clients IPC427D and IPC477D

SIMATIC PCS 7 OS clients based on the Microbox		
Types	**SIMATIC PCS 7 OS client IPC427E**	**SIMATIC PCS 7 OS client IPC477E**
Design and equipment features		
Design	• Compact Microbox PC without panel • DIN rail or wall mounting; horizontal (preferred) or vertical • Portrait mounting; vertical	• Compact Panel PC, consisting of 22" TFT single Touch Panel with integrated computing unit • Built-in unit for installation in mounting cutouts, for example in consoles or cabinets; in landscape format (vertical or max. ± 45° vertical incline) • Fastening with mounting clips or mounting brackets
Degree of protection in accordance with IEC 60529	IP20	IP65 front; IP20 rear (enclosure)
CPU	Intel Core i5-6442EQ, 4C/4T, 1.9 (2.7) GHz, 6 MB cache, iAMT	Intel Core i5-6442EQ, 4C/4T, 1.9 (2.7) GHz, 6 MB cache, iAMT
Main memory	4 GB DDR4 SO-DIMM max. 16 GB	4 GB DDR4 SO-DIMM max. 16 GB
Graphic controller	Intel HD graphics controller	Intel HD graphics controller
Storage media, alternative		
• Hard disk	2.5" SATA-HDD 320 GB	2.5" SATA-HDD 320 GB
• Solid State Drive	2.5" SATA-SSD 240 GB	2.5" SATA-SSD 240 GB
Storage media, additive		
• CD-ROM/DVD-RW/diskette	Connectable via USB (not included in scope of delivery)	Connectable via USB (not included in scope of delivery)
Interfaces		
• Ethernet	3 Ethernet ports (RJ45); 10/100/1000 Mbps, isolated, with teaming capability	3 Ethernet ports (RJ45); 10/100/1000 Mbps, isolated, with teaming capability
• USB	4 high-speed USB 3.0 ports	4 high-speed USB 3.0 ports
• Graphics connection	2 × DisplayPort	2 × DisplayPort
• Keyboard, mouse	Connectable via USB (keyboard and mouse not included in scope of delivery)	Connectable via USB (keyboard and mouse not included in scope of delivery)
Monitoring functions		
• Temperature monitoring	Yes	–
• Watchdog	Yes	Yes
• Status LEDs	Yes	–
• Fan	No	–
Monitoring function via the network	Optional	–

© Siemens 2019


Technical specifications (continued)

SIMATIC PCS 7 OS clients based on the Microbox		
Types	**SIMATIC PCS 7 OS client IPC427E**	**SIMATIC PCS 7 OS client IPC477E**
Operating system, basic software		
Operating system	Windows 10 Enterprise 2015 LTSB, 64-bit	Windows 10 Enterprise 2015 LTSB, 64-bit
System-tested SIMATIC industrial software	SIMATIC IPC DiagMonitor integrated in pre-installation	SIMATIC IPC DiagMonitor integrated in pre-installation
Electromagnetic compatibility (EMC)		
Interference emission over mains/AC power supply	EN 61000-6-3, EN 61000-6-4, CISPR 22 class B, FCC class A	EN 61000-6-3, EN 61000-6-4, CISPR 22 class B, FCC class A
Immunity to conducted interference on the supply cables	±2 kV (according to IEC 61000-4-4; burst) ±1 kV (according to IEC 61000-4-5; symmetrical surge) ±2 kV (according to IEC 61000-4-5; asymmetrical surge)	±2 kV (according to IEC 61000-4-4; burst) ±1 kV (according to IEC 61000-4-5; symmetrical surge) ±2 kV (according to IEC 61000-4-5; asymmetrical surge)
Noise immunity on signal cables	±1 kV (according to IEC 61000-4-4; burst; length < 3 m) ±2 kV (according to IEC 61000-4-4; burst; length > 3 m) ±2 kV (according to IEC 61000-4-5; surge; length > 30 m)	±1 kV (according to IEC 61000-4-4; burst; length < 3 m) ±2 kV (according to IEC 61000-4-4; burst; length > 3 m) ±2 kV (according to IEC 61000-4-5; surge; length > 30 m)
Immunity to static discharge in accordance with IEC 61000-4-2	±6 kV contact discharge ±8 kV air discharge	± 6 kV contact discharge ±8 kV air discharge
Immunity to radio frequency interference	10 V/m for 80 to 1 000 MHz and 1.4 to 2 GHz, 80% AM in accordance with IEC 61000-4-3 3 V/m for 2 to 2.7 GHz, 80% AM in accordance with IEC 61000-4-3 10 V for 10 kHz to 80 MHz, 80% AM in accordance with IEC 61000-4-6	10 V/m for 80 to 1 000 MHz and 1.4 to 2 GHz, 80% AM in accordance with IEC 61000-4-3 3 V/m for 2 to 2.7 GHz, 80% AM in accordance with IEC 61000-4-3 10 V for 10 kHz to 80 MHz, 80% AM in accordance with IEC 61000-4-6
Immunity to magnetic fields at 50 Hz	100 A/m in accordance with IEC 61000-4-8	100 A/m in accordance with IEC 61000-4-8
Climatic conditions		
Ambient temperature in operation	0 to +50 °C	0 to +45 °C
Relative humidity • Operation • Storage	Tested according to IEC 60068-2-78, IEC 60068-2-30 5 ... 80 % at 25 °C (no condensation) 5 ... 95 % at 25 °C (no condensation)	Tested according to IEC 60068-2-78, IEC 60068-2-30 5 to 80% at 25 °C (no condensation)
Mechanical environmental conditions		
Vibration load • Operation	Tested according to IEC 60068-2-6 10 … 58 Hz: 0.075 mm 58 to 200 Hz: 9.8 m/s² (1 g)	Tested according to IEC 60068-2-6 5 … 9 Hz: 3.5 mm, 9 to 500 Hz: 9.8 m/s² (with SSD); 10 to 58 Hz 0.0375 mm; 58 to 200 Hz: 4.9 m/s² (hard drisk)
Shock load • Operation	Tested according to IEC 60068-2-29 50 m/s² (5 g), 30 ms, 100 shocks	Tested according to IEC 60068-2-27 50 m/s², 30 ms (with hard disk) 150 m/s², 11 ms (without hard disk)
Standards, approvals and certificates		
CE mark	Yes	Yes
CSA approval		Yes
UL approval • UL 508	Yes Yes	Yes Yes
cULus	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC certification	Yes	Yes
FCC	Yes	Yes
EMC • EN 61000-6-2	CE, EN 55022A, EN 61000-6-4, EN 61000-6-2 Yes	CE, EN 61000-6-4; CISPR 22:2004 class A; FCC class A
Dimensions		
Width × height × depth (in mm)	262 × 139.7 × 55.5	542 × 362 × 83 (central configuration, no optical drive)
Mounting cutout/device depth (W × H × D in mm)	--	396 × 291 × 76
Operator panel (width × height in mm)	--	560 × 380

© Siemens 2019

OS Client IPC427E

Overview

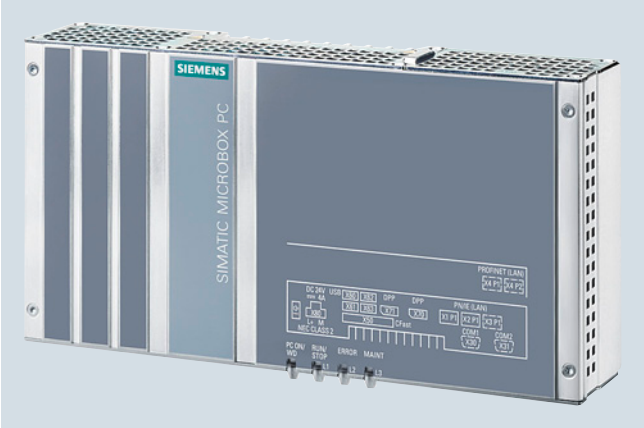

SIMATIC PCS 7 OS Client IPC427E

The SIMATIC PCS 7 OS Client IPC427E is available in two versions.

- SIMATIC PCS 7 OS Client IPC427E (HDD) with a hard disk, 2.5" SATA-HDD, 320 GB
- SIMATIC PCS 7 OS Client IPC427E (SSD) with a solid state drive, 2.5" SATA-SSD, 240 GB

Design

Both versions of the SIMATIC PCS 7 OS Client IPC427E are designed for maintenance-free 24/7 operation without the support of a fan.

The absence of rotating storage media means that the SSD version is particularly resistant to vibration and shock. When operating in a restricted access location (RAL), e.g. in a lockable control cabinet, operating temperatures from 0 °C to +50 °C are permissible for this version in a horizontal mounting position.

The compact design of the SIMATIC PCS 7 OS Client IPC427E (HDD/SSD) and the flexible mounting options (standard mounting rail, wall or portrait mounting) either horizontally or vertically facilitate space-saving installation.

Expansions/interfaces

The SIMATIC PCS 7 OS Client IPC427E (HDD/SSD) has:

- 4 high-speed USB 3.0 ports
- 2 DisplayPorts (DVI with DPP-to-DVI adapter); can be used for multi-monitor mode with two monitors
- 3 Gigabit Ethernet ports (IE/PN)

The integrated Ethernet ports are suitable for connection to a redundant terminal bus over IE-RNA (for details on implementation, refer to the function manual "High-availability process control systems", "Redundant, high availability terminal bus").

The SIMATIC PCS 7 OS Client IPC427E (HDD/SSD) is supplied without input/output devices. In addition to mouse and keyboard, two other input/output devices can be externally connected via the provided USB ports, e.g. an optical drive (DVD-ROM/DVD±RW) or smart card reader.

Monitoring functions

Configurable monitoring functions can be recorded and evaluated via SIMATIC IPC DiagMonitor and SIMATIC PCS 7 Maintenance Station. These monitoring functions include:

- Program execution (watchdog)
- Processor and board temperatures
- Enhanced diagnostics/messages, e.g. operating hours counter, hard disk status or system status, backup battery status

The "Power" and "Watchdog" signals are displayed on LEDs.

Pre-installed software

The following software is pre-installed on the SIMATIC PCS 7 OS Client IPC427E (HDD/SSD) on delivery:

- Windows 10 Enterprise 2015 LTSB, 64-bit operating system
- SIMATIC PCS 7 OS Software Client
- SIMATIC IPC DiagMonitor diagnostics software

Technical specifications

For detailed technical specifications for the SIMATIC PCS 7 OS Client IPC427E, see "Comparison of SIMATIC PCS 7 OS Clients IPC427E and IPC477E" in the catalog section "SIMATIC Microbox PC". see page 3/44

© Siemens 2019

Ordering data

	Article No.
SIMATIC PCS 7 **OS Client IPC427E** **based on SIMATIC IPC427E** SIMATIC IPC427E for use as SIMATIC PCS 7 OS Client/Batch Client Intel Core i5-6442EQ (up to 2.7 GHz, 6 MB cache); 4 GB RAM; 3 × Gigabit Ethernet (IE/PN); 4 × high-speed USB 3.0; 24 V DC power supply SIMATIC IPC DiagMonitor diagnostics software and Restore DVD sets; SIMATIC PCS 7 OS Software Client V9.0 pre-installed Note: Product package without optical drive, mouse, keyboard or monitor Windows 10 Enterprise 2015 LTSB, 64-bit operating system	
• **SIMATIC PCS 7 OS Client IPC427E (HDD)** version with 320 GB hard disk, HDD SATA	**6ES7650-0VG58-0YX0**
• **SIMATIC PCS 7 OS Client IPC427E (SSD)** version with 240 GB solid state drive, SSD SATA	**6ES7650-0VG58-0YX1**

Additional and expansion components

SIMATIC IPC, graphics adapter cable, DVI-I to VGA Length 250 mm	**6ES7648-3AB00-0XA0**
SIMATIC IPC, graphics adapter DPP to DVI Converts DisplayPort to DVI-D	**6ES7648-3AF00-0XA0**
Keyboard/mouse	
USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US-International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**

Accessories

Portrait mounting	
Portrait mounting kit For space-saving installation of the SIMATIC PCS 7 OS Client 427D (front)	**6ES7648-1AA20-0YP0**

Accessories

Portrait assembly kit


The portrait assembly kit allows space-saving installation of the SIMATIC Microbox PC in the control cabinet. The technical specifications of the SIMATIC Microbox PC correspond in this design form to those with a vertical DIN rail assembly.

Portrait mounting reduces the mounting area required (W × H in mm) from 262 × 133 to 61.5 × 315. Together with the kit, the SIMATIC Microbox PC occupies an installation depth of 149.7 mm in the control cabinet. Since all interfaces of the SIMATIC Microbox PC are accessible from the front, this type of assembly is very convenient for commissioning.

When using the portrait assembly kit for the SIMATIC Microbox PC, please also note the information on operation planning and device installation in the "SIMATIC IPC427E industrial PC" manual.

© Siemens 2019

Overview

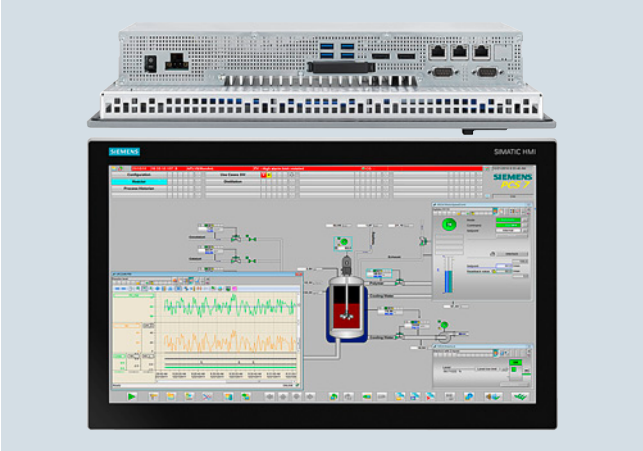

SIMATIC PCS 7 OS client IPC477E, from above and from the front

The SIMATIC PCS 7 OS client IPC477E consists of a 22" TFT single Touch Panel with integrated computing unit. It is available in two versions.

- SIMATIC PCS 7 OS client IPC477E (HDD) with a hard disk, 2.5" SATA HDD, 320 GB
- SIMATIC PCS 7 OS client IPC477E (SSD) with a solid state drive, 2.5" SATA SSD, 240 GB


Design

The design of the SIMATIC PCS 7 OS client IPC477E has been optimized for installation in the mounting cutouts of cabinets, enclosures and consoles.

Both versions of the SIMATIC PCS 7 OS client IPC477E are suitable for maintenance-free 24/7 operation without the support of a fan.

The more rugged SIMATIC PCS 7 OS client IPC477E with SSD can bear greater mechanical loads. With vertical installation in landscape format, the SIMATIC PCS 7 OS Client IPC477E is approved for operating temperatures of 0 to +45 °C.

Using a touch pen as an input aid protects the touch screen and makes it easy to achieve pin-point accuracy when operating small input boxes or buttons – especially when working with gloves.

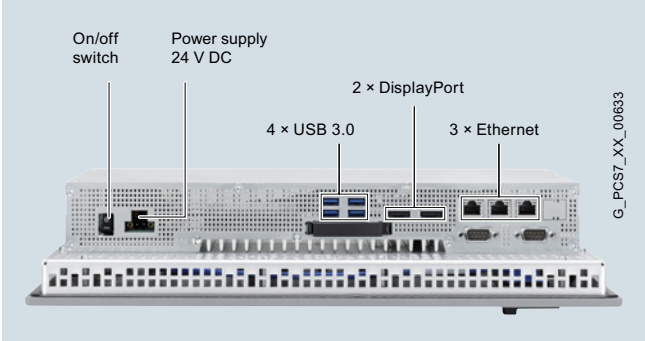

IPC477E, 22-inch, for SIMATIC PCS 7, with connections

Expansions/interfaces

The SIMATIC PCS 7 OS client IPC477E (HDD/SSD) has:

- 4 high-speed USB 3.0 ports at the back
- 1 USB port on the front
- 2 DisplayPort interfaces
- 3 Gigabit Ethernet ports (IE/PN)

The integrated Ethernet ports are suitable for connection to a redundant terminal bus (for details on implementation, refer to the function manual "High-availability process control systems", "Redundant, high availability terminal bus").

The SIMATIC PCS 7 OS client IPC477E (HDD/SSD) is supplied without input/output devices. In addition to mouse and keyboard, two other input/output devices can be externally connected via the provided USB ports, e.g. an optical drive (DVD-ROM/DVD±RW) or smart card reader.

Monitoring functions

Configurable monitoring functions can be recorded and evaluated via SIMATIC IPC DiagMonitor and SIMATIC PCS 7 Maintenance Station. These monitoring functions include:

- Program execution (watchdog)
- Processor and board temperatures
- Enhanced diagnostics/messages, e.g. operating hours counter, hard disk status or system status, backup battery status

Pre-installed software

The following software is pre-installed on the SIMATIC PCS 7 OS client IPC477E (HDD/SSD) on delivery:

- Windows 10 Enterprise 2015 LTSB, 64-bit operating system
- SIMATIC PCS 7 OS software client
- SIMATIC IPC DiagMonitor diagnostics software

© Siemens 2019

Technical specifications

For detailed technical specifications for the SIMATIC PCS 7 OS client IPC477E, see "Comparison of SIMATIC PCS 7 OS clients IPC427E and IPC477E" in the catalog section "SIMATIC Microbox PC". see page 3/44

Ordering data

	Article No.
SIMATIC PCS 7 OS client IPC477E based on SIMATIC IPC477E SIMATIC IPC477E for use as SIMATIC PCS 7 OS client/Batch client 22" Single Touch Panel; 1 920 × 1 080 pixels; Intel Core i5-6442EQ (up to 2.7 GHz, 6 MB cache); 4 GB RAM; 3 × Gigabit Ethernet (IE/PN); 4 × high-speed USB 3.0; 1 × USB 2.0; 24 V DC power supply SIMATIC IPC DiagMonitor diagnostics software and Restore DVDs; SIMATIC PCS 7 OS software client V9.0 pre-installed Note: Product package without optical drive, mouse or keyboard Windows 10 Enterprise 2015 LTSB, 64-bit operating system	
• **SIMATIC PCS 7 OS Client IPC477E (HDD)** version with 320 GB hard disk, HDD SATA	**6ES7650-0VG58-1YX0**
• **SIMATIC PCS 7OS Client IPC477E (SSD)** version with 240 GB solid state drive, SSD SATA	**6ES7650-0VG58-1YX1**

Additional and expansion components

USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US-International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**
Touch pen, thick, resistive technology For resistive touch screen, optimized for operation with gloves, including screw-on wall-mounting bracket	**6AV7672-1JB00-0AA0**

© Siemens 2019

3

Design

Mouse



SIMATIC PCS 7 Industrial Workstations, SIMATIC PCS 7 compact systems as well as OS clients based on SIMATIC BOX/ Microbox PC are delivered without a mouse. The SIMATIC HMI USB mouse is recommended as the input device for the operator-controlled stations of a SIMATIC PCS 7 system.

Keyboard



SIMATIC PCS 7 industrial workstations, SIMATIC PCS 7 compact systems as well as OS Clients based on SIMATIC BOX and Microbox PC are delivered without a keyboard.

An example of a keyboard without additional special functions that is suitable for process operation with SIMATIC PCS 7 is the USB keyboard TKL-105.

The USB keyboard TKL-105 is a very rugged keyboard that is suitable even for harsh environments. Thanks to its IP68 degree of protection, the keyboard can even be washed (dishwasher-proof). The new black color fits optimally into all environments. The housing is made of ABS with anti-microbial coating. The long-travel keys ensure excellent tactile feel and fatigue-free typing.

Technical specifications

Mouse	
SIMATIC HMI USB Mouse	
Color	Anthracite
Interfaces	USB
Dimensions (L x W x H) in mm	116 × 67.9 × 42,3
Weight, approx.	131 g
Connecting cable, cable length	1930 mm
Ambient temperature • Operation • Storage/transport	 0 …40 °C -40 … +60 °C
Supply voltage, rated value	5 V DC; via USB
Current consumption	100 mA; USB-compatible
Standards, approvals, certificates	• CE mark; WEEE (European Union) available • KC • cUlus; ICES 003 (Canada) available
Keyboard	
USB keyboard TKL-105	
Layout	Keyboard with long-travel keys, 105 keys
Color	Black
Degree of protection	IP68
Type of connection	USB 2.0 Type A
Dimensions (W × H × D) in mm	459 × 35 × 174
Weight, approx.	0.8 kg
Temperature • Operation • Storage/transport	 0 ... +70 °C -20 ... +60 °C
Approvals	CE, RoHS

Ordering data

	Article No.
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**
USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US-International	**6AV6881-0AU14-1AA0**

© Siemens 2019

Overview



Touch pen, thick, incl. wall bracket for screw mounting

Touch pens are effective input tools for operating the touch screen, which are especially helpful when working with gloves or under extreme environmental conditions.

You can use the touch pen to operate small buttons and input boxes with pint-point accuracy and also avoid scratches and soiling.

The thick touch pen for resistive touch screens offered here is suitable for all SIMATIC PCS 7 OS clients and SIMATIC PCS 7 compact systems with TFT touch panels:

- PCS 7 OS Client 477E
- PCS 7 OS Client 677D
- SIMATIC PCS 7 BOX in Design Version with Panel Front

Technical specifications

Article number	**6AV7672-1JB00-0AA0** TOUCH PEN, THICK, RESISTIVE TECHNOLOGY
General information	
Product type designation	Touch pen, thick, resistive technology
Frame size/design	
• Standard	Yes; For industrial applications
• Ergonomic	Yes; With holder
Installation type/mounting	
Wall mounting/direct mounting	Yes; Screw-on clamping holder and elastic attachment cord
Standards, approvals, certificates	
RoHS conformity	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C; At temperatures below 10 °C and above 30 °C, the use of suitable gloves is recommended.
• max.	80 °C
Relative humidity	
• Operation, max.	90 %

Article number	**6AV7672-1JB00-0AA0** TOUCH PEN, THICK, RESISTIVE TECHNOLOGY
Mechanics/material	
Material	
• Plastic	Yes; Touch pen SIMATIC HMI
• Sheet steel	Yes; Mounting
Screw type	
• Torx	Yes
Dimensions	
Height	155 mm; Length
Thickness	20 mm; Diameter
Scope of supply	
Delivery quantity in pieces	1; Optional for Extension Units of the PRO devices
Other	
Target devices	for resistive touch screens, optimized for operating while wearing gloves

Ordering data

	Article No.
Touch pen, thick, resistive technology For resistive touch screen, optimized for operation with gloves, including screw-on wall-mounting bracket	**6AV7672-1JB00-0AA0**

© Siemens 2019

Smart Card Reader

Overview



A smart card reader can be used to check operator privileges on a single station or client. The smart card reader works with SIMATIC Logon, the user administration and access control function integrated in SIMATIC PCS 7 (see section "Industrial Security", "SIMATIC Logon"), see page 15/8.

The smart card has the function of a "key" for the operator station. Inputs are only permissible as long as it is inserted in the reader. Such unambiguous identification is particularly necessary for plants having to comply with validation requirements.

Technical specifications

Type	USB chipcard reader
Interface	
Interface type	USB 2.0 CCID (Chip Card Interface Device), USB 1.1 compatible
Transmission rate	12 Mbit/s
Power supply	Via USB
Design and equipment	
Design	Desktop unit with foot for vertical positioning; adhesive pad at rear for optional mounting
Material	ABS
Color	Two shades of gray
Status display	Two-color LED
Cable length	1.8 m
Dimensions and weights	
Dimensions (L × W × D in mm)	80 × 67 × 28
Weight without foot	110 g
Weight with foot	141 g
Ambient conditions during operation	
Temperature	0 … 55 °C
Humidity	10 … 90 %
Service life/MTBF	
Insertion cycles	100 000
MTBF (Mean Time Between Failures)	500 000 h
Test symbols/approvals	• Microsoft WHQL (Windows Hardware Quality Lab) • ISO 7816 • USB 2.0 (USB 1.1 compatible) • CCID (Chip Card Interface Device) • GSA Fips201 approved product list
Safety/environmental standards	• CE • WEEE • FCC • UL • VCCI • MIC • RoHS

Ordering data

	Article No.
USB smart card reader Desktop unit with USB cable	**6ES7652-0XX02-1XC0**
SIMATIC PCS 7 TCOS 3.0 chip card for chip card reader Pack with 10 units; 1 card is required per user	**6ES7652-0XX00-1XD2**


© Siemens 2019



4/2	**Introduction**
4/3	**ES Software**
4/4	Standard Engineering Software
4/12	SIMATIC PCS 7 Logic Matrix
4/13	SIMATIC Version Cross Manager
4/14	Version Trail
4/15	SIMATIC PCS 7 Plant Automation Accelerator
4/18	Import/Export Assistant
4/19	**Simulation**
4/19	Simulation with S7-PLCSIM

© Siemens 2019

Overview

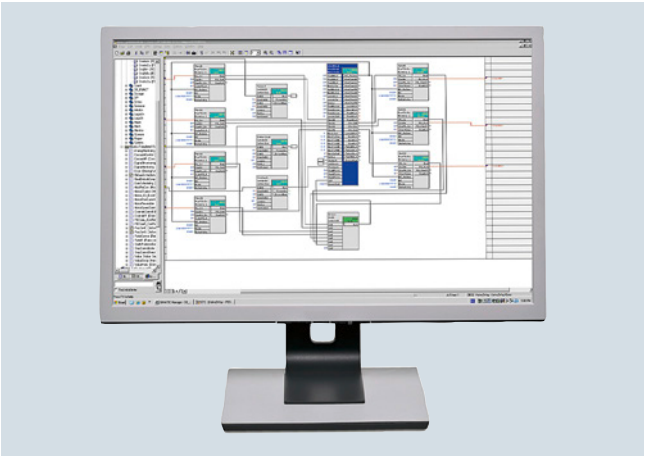

The engineering system of the SIMATIC PCS 7 process control system is based on the high-performance SIMATIC PCS7 Industrial Workstation, which can be used either in office applications or in industrial environments.

The engineering software run on this hardware can be optimally matched to different customer requirements and tasks. The basic functionality defined by the standard engineering software can be optionally expanded depending on the project-specific task and its implementation.

The software licenses provided for the engineering system can be used to configure two system variants for different applications areas:

- **Classic, dedicated engineering station**
  allows in addition to engineering a 2-hour OS test mode, but no productive operation as an operator station
- **Combined engineering/operator station for small applications**
  allows in addition to engineering also process control for small plants in productive operation

Design

The architecture of the engineering system depends on how the SIMATIC PCS 7 project is processed:

- Locally, on a central engineering station
- In the engineering network (concurrent engineering)

Central engineering station

Hardware platform for the central engineering station is the **SIMATIC PCS 7 Industrial Workstation for ES/OS single station**. This is based on a SIMATIC IPC of Rack PC design which is prepared for installation in 19" rack systems. Two versions are available for communication connection to the Industrial Ethernet plant bus:

- Communication over BCE
  Connection to plant bus with 10/100/1000 Mbps RJ45 network adapter and Basic Communication Ethernet (BCE) for communication with up to 8 automation systems (no redundancy stations)
- Communication over Industrial Ethernet
  Connection to plant bus with CP 1623/1628 communication module for communication with up to 64 automation systems

Two onboard 10/100/1000 Mbps Ethernet RJ45 ports are available for connecting to the terminal bus.

The Microsoft Windows 10 operating system and the SIMATIC PCS 7 engineering software for AS/OS are preinstalled on the SIMATIC PCS 7 Industrial Workstation. The scope of performance of the pre-installed SIMATIC PCS 7 engineering software is defined by installation of the purchased software licenses.

Engineering network

With concurrent engineering in an engineering network, the project is localized on one of the participating Engineering Stations, the "Project server". The engineering stations working as "project clients" can access the project server data over LAN/WAN. Every engineering station in the network (project server/client) is able to download configuration data to a SIMATIC PCS 7 subsystem provided it has the required communication connections.

In this architecture, it is sensible to install the project server on a **SIMATIC PCS 7 Industrial Workstation for OS servers.** The Microsoft Windows Server operating system and the SIMATIC PCS 7 OS software server are preinstalled on this (adaptation/expansion of SIMATIC PCS 7 installation required).

Two versions are also available for the communication connection to the Industrial Ethernet plant bus with the SIMATIC PCS 7 Industrial Workstation for OS servers:

- Communication over BCE
  Connection to plant bus with 10/100/1000 Mbps RJ45 network adapter and Basic Communication Ethernet (BCE) for communication with up to 8 automation systems (no redundancy stations)
- Communication over Industrial Ethernet
  Connection to plant bus with CP 1623/1628 communication module for communication with up to 64 automation systems

With the SIMATIC PCS 7 Industrial Workstation for ES/OS single stations, you can use the same hardware platform for the project clients as for the central engineering station.

Configuration can be made easier by multi-monitor mode with up to 4 process monitors, both for a central engineering station and for individual stations in an engineering network.

See section "Industrial Workstation/IPC" for ordering data and detailed information on the product package and technology of the SIMATIC PCS 7 Industrial Workstations.

© Siemens 2019

Overview

The functionality of the engineering system is largely covered by the standard engineering software. The following software options are available in addition for special functions:

- SIMATIC PCS 7 Logic Matrix
- SIMATIC Version Cross Manager
- SIMATIC Version Trail
- SIMATIC PCS 7 Plant Automation Accelerator
- SIMATIC PCS 7 Import/Export Assistant
- SIMATIC PDM Process Device Manager for SIMATIC PCS 7 (see section 7 "Plant device management")
- Engineering Process Safety (see section 14 "Safety Integrated for Process Automation")
- SIMATIC PCS 7 Maintenance Station Engineering (see section 7 "Plant Device Management")
- SIMATIC Route Control Engineering (see section 13 "Route Control")
- SIMATIC PCS 7 TeleControl OS Engineering (see Technology components, "Telecontrol technology" in the ST PCS 7 T catalog)
- SIMATIC PCS 7 PowerControl OS Engineering (see Technology components, "Switchgear automation" in the ST PCS 7 T catalog)
- S7-PLCSIM for the functional testing of CFC/SFC programs

Design

SIMATIC PCS 7 engineering system									
Versions		Classic, exclusively engineering station						Combined engineering/operator station for small applications	
Productive operation as an operator station possible		–						●	
Version		Project server		Project client		Single station		Single station	
		BCE	IE	BCE	IE	BCE	IE	BCE	IE
SIMATIC PCS 7 Industrial Workstation including operating system									
Industrial Workstation for ES/OS single station	BCE communication[1]	–	–	●	–	●	–	●	–
	IE communication	–	–	–	●	–	●	–	●
Industrial Workstation for OS server	BCE communication[1]	●	–	–	–	–	–	–	–
	IE communication	–	●	–	–	–	–	–	–
Additional Industrial Ethernet communications software									
SIMATIC NET HARDNET-IE S7 REDCONNECT PowerPack for IE communication with redundant automation systems (additive to SIMATIC NET HARDNET-IE S7)		–	●	–	●	–	●	–	●
Standard engineering software, alternatives									
SIMATIC PCS 7 Engineering Software, unlimited POs	AS and OS, including 2-hour OS test mode	●		●		●		–	
	AS	●		●		●		–	
SIMATIC PCS 7 ES single station, with 250 AS/OS Runtime POs		–		–		–		●	

Supplementary engineering software (optional)

- SIMATIC PCS 7 Logic Matrix
- Version Cross Manager
- Version Trail
- SIMATIC PCS 7 Plant Access Accelerator
- Import/Export Assistant
- Engineering Process Safety (S7 F Systems, Safety Matrix Tool)
- PCS 7 Maintenance Station Engineering
- SIMATIC Route Control Engineering
- SIMATIC PDM
- SIMATIC PCS 7 TeleControl OS Engineering[2]
- SIMATIC PCS 7 PowerControl OS Engineering[2]
- Simulation with S7-PLCSIM

Hardware and software components of the engineering system, as well as possible configurations

[1] Basic Communication Ethernet (BCE) for up to 8 automation systems (no redundant systems)

[2] Products can be found in Catalog ST PCS 7 T, SIMATIC PCS 7 technology components

Note on Microsoft SQL Server software

The "SQL Server" software from Microsoft which is delivered together with SIMATIC PCS 7 is exclusively intended for this process control system. It must not be used in any other context without previous written approval by Siemens.

© Siemens 2019

Overview

The standard engineering software provides the basic functionality for configuration of SIMATIC PCS 7 plants with:

- Automation systems
- Process I/O
- Field devices
- Communication networks
- Operator systems
- Maintenance station
- SIMATIC BATCH
- SIMATIC Route Control
- SIMATIC PCS 7 TeleControl
- SIMATIC PCS 7 PowerControl

Licensing of the standard engineering software depends on use of the engineering station as:

- Classic, dedicated engineering station (not suitable for productive operation as an operator station)
- Combined engineering/operator station for small applications (suitable for productive operation as an operator station)

Application

Classic, exclusive engineering station with unlimited number of process objects for engineering (Engineering unlimited POs)

Two software versions with unlimited engineering POs are available for the classical engineering station:

- AS/OS – for engineering of automation systems (AS) and operator systems (OS)
- AS – only for AS engineering

With the AS/OS software version, the OS configuration can be tested in an OS test mode limited to 2 hours. This OS test mode is not suitable for productive operation. After 2 hours, the engineering station automatically switches to demonstration mode.

Rental License

A 30-day or 50-hour rental license for AS engineering (unlimited POs) gives you a cost-effective alternative for short-term projects or short-term capacity bottlenecks.

The licenses for 30 days and 50 hours differ as follows with regard to runtime billing:

- With the 30-day license, the uninterruptible timer starts at the time of first usage. Time billing is thus independent of usage.
- With the 50-hour license, only the actual period of use is billed. The timer stops when the SIMATIC PCS 7 application is exited, and restarts when the application is opened again.

Combined engineering/operator station for small applications

The combined engineering/operator station is designed to support compact process control plants. This combines an unlimited AS/OS Engineering license (unlimited POs) with an AS/OS Runtime license for 250 POs. These licenses can only be used together on a station. It is not possible to separate the Engineering and Runtime licenses for use on different stations.

The runtime POs can be expanded with cumulative Runtime licenses:

- SIMATIC PCS 7 AS Runtime license for 100, 1 000 or 10 000 POs, see "Automation systems", "Modular AS 410-5H and AS 410E systems", see page 8/4.
- SIMATIC PCS 7 OS Runtime license for 100, 1 000 or 5 000 POs, see "Operator System", "OS software" under "OS standard software for single station/server/client", see page 5/6.

Division of work during engineering

To enable engineering to be carried out in the shortest possible time, it is necessary to use resources optimally. The engineering system of the SIMATIC PCS 7 process control system not only supports uniform engineering of the project on an engineering station but also provides various options for dividing the work.

Concurrent Engineering

With Concurrent Engineering multiple project engineers can work concurrently on one project in CFC and SFC, without having to split the project up into sub-projects beforehand. During commissioning, for example, charts can be used in the online (debug) mode and at the same time changes can be made to the project. The Graphics Designer supports parallel working on a project even when creating process displays.

The project is localized on one of the participating engineering stations, the "project server". The engineering stations working as "project clients" can access the project data via LAN/WAN. A specific chart can be found very quickly using a cross-project search function.

CFC and SFC charts can be opened and viewed by several project engineers concurrently. However, the system rejects concurrent write accesses to the database. If the project engineer attempts to access a chart which is already being used, a corresponding warning is output in a dialog window.

Every engineering station in the network (project server/client) is able to download configuration data to a SIMATIC PCS 7 subsystem provided it has the required communication connections.

Multiproject Engineering

Multi-project engineering allows a complex project to be divided into multiple subprojects in accordance with technological criteria so that several different teams can work on the project in parallel. To achieve this, a host "Multi-project" is defined in the SIMATIC Manager. The individual projects can be added or removed from a multiproject at any time. Similarly, projects can be divided or combined (Branch & Merge).

The subprojects in a multiproject are stored on a central server and moved to the local engineering stations for editing. The engineering performance is then not affected by network access.

Central configuration functions for multi-projects help to reduce the configuration overhead. For example, a hierarchy folder can be created in the current project and also automatically in all other projects. It cannot be modified there, but objects can be inserted. All block types used in a multi-project can also be updated centrally.

© Siemens 2019

Function

Essential tools of the standard engineering software and their functions:

SIMATIC Logon

SIMATIC Logon is a user administration and access control function integrated in the engineering system. Together with the detailed recording facilities provided by the change log, SIMATIC Logon offers plant owners exceptional system support when verifying changes.

Using SIMATIC Logon, the administrator can assign specific access privileges to groups of users, thus controlling the possibilities for data access. Access rights for stations of the process control system and operator privileges for blocks can both be set up. Configurable change logs permit the recording of all access operations to the engineering system as well as all online changes concerning the automation systems, operator systems, SIMATIC BATCH or SIMATIC Route Control.

If the modification reports are linked to the data of SIMATIC Logon during evaluation, it can be clearly proven who has carried out a specific modification and at what time. Such verifications are often the object of special sector-specific requirements, formulated, for example, in FDA 21 CFR Part 11 or GAMP.

SIMATIC Manager

The SIMATIC Manager is the control center of the engineering system. It is the integration platform for the engineering toolset as well as the configuration basis for all engineering tasks of the SIMATIC PCS 7 process control system. All aspects of the SIMATIC PCS 7 project are created, managed, archived and documented here.

The engineering toolset contains tools which are optimally matched to one another for system-wide project-oriented engineering, and which simultaneously provide the basis for asset management of the I&C equipment. These include tools for effective engineering of the following components:

- Control system hardware including distributed I/O and field devices
- Communication networks
- Automation functionality for continuous and batch processes (AS engineering)
- Operation and monitoring functionality (OS engineering)
- Mass data engineering and cooperation with CAD/CAE planning tools
- Diagnostics and asset management functionality
- Batch processes, automated with SIMATIC BATCH
- Material transport, controlled by SIMATIC Route Control
- Safety applications (Safety Integrated for Process Automation)

Technologists as well as process and production engineers can carry out planning and configuration in their familiar environments when using this range of tools as well as predefined blocks and charts.

The hardware required for use in a SIMATIC project, such as automation systems, communications components and process I/O, is stored in an electronic catalog. The hardware can be configured and configured using the HW-Config tool.

Creating hierarchy folders implements a project structure, the plant hierarchy (PH). By storing CFCs and SFCs for automation systems and pictures and reports for operator stations in a hierarchy folder along with additional documentation, the configuring engineer implicitly determines the hierarchical assignment.

Function blocks (FBs) and functions (FCs) can be encrypted and decrypted with the S7-Block Privacy application to protect know-how. Following encryption, the blocks and their attributes can no longer be modified. Only the interfaces of the blocks are then visible.

To implement the automation logic, standardized function blocks must be combined with other blocks in the graphic configuration tool CFC according to technological specifications. You can simply select predefined blocks or charts for this purpose from a catalog and then position, graphically interconnect and configure them in the working area. The process tag data relevant to operation and monitoring, such as messages and variables, are generated at the same time. The SIMATIC PCS 7 Logic Matrix can be used for fast and easy creation of the interlock logic between various Control Modules/Equipment Modules.

Sequential controls permit control and selective processing of the basic automation functions created per CFC by means of changes in operating mode and status. Convenient editing functions for the graphic configuration of sequential controls as well as powerful test and commissioning functions are offered by the SFC editor.

Complete SIMATIC PCS 7 projects or all project modifications can be compiled in one working step and downloaded to the target systems involved, e.g. to automation systems, Operator Systems or SIMATIC BATCH. The engineering system automatically ensures that the sequence is correct. The procedure is displayed and controlled in a central dialog.

A more effective method for less comprehensive changes to the standard automation, e.g. addition or modification of single process tags, is selective compilation and downloading at chart level. This can be started from the technological hierarchy, from the CFC, or from the chart folder.

The project engineer can recognize all changes since the last download by their color, and the current chart states by means of the corresponding symbols. The project engineer can make a specific choice in a dialog form for selective downloading. In association with the Version Trail, each download is automatically followed by archiving.


In the case of blocks being executed on the AS 410 automation system, it is even possible to change types during runtime by means of seamless copying (TCiR).

© Siemens 2019

4

Function (continued)

The SIMATIC Manager can also be used to organize the project data for engineering of the operator systems. All the relevant process tag data relevant to operation and monitoring is generated when the automation function is defined. A powerful Graphics Designer is available for generation of the process displays. The basis for generating process displays is provided by static symbols and dynamic block icons and faceplates that are organized in libraries and linked to the parameters of the function blocks.

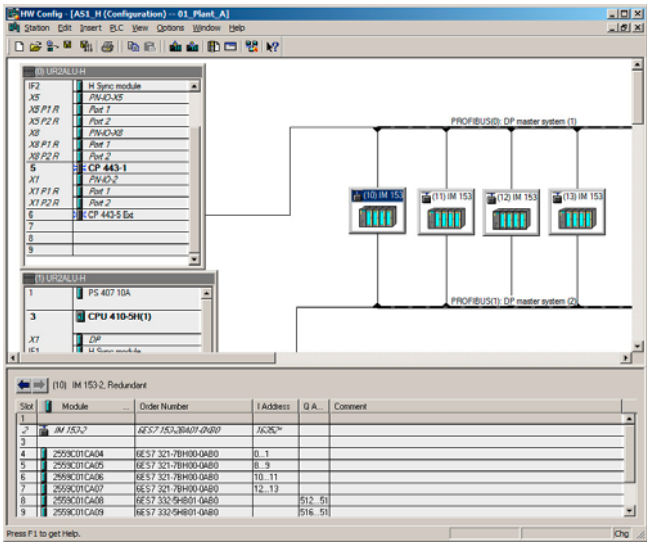

Component view: hardware configuration in the SIMATIC Manager with HW-Config

Project views

The various tasks for creating a plant project are supported by the following project views:


- **Component view (HW-Config)**
  for configuration of hardware such as automation systems, bus components or process I/O
- **Process object view**
  as the central development environment for all aspects of process tags/objects

The process object view supports the work carried out by a process engineer by providing a universal view of the process tag. It shows the plant hierarchy represented in tree form in combination with a tabular view of all aspects of the process tag/object (general, charts, blocks, parameters, signals, messages, picture objects, archive variables, hierarchy folders, equipment properties and global declarations). This provides the technologist with fast orientation.

All objects in the marked branch of the hierarchy are displayed in the table so that they can be directly processed with user-friendly edit, filter, replace, import and export functions. A special test mode offers the facility for testing process tags and CFCs online and for starting them up.

The OS areas and the image hierarchy for process control, as well as the SIMATIC PCS 7 asset management, can be derived from the technological hierarchy. Furthermore, it also forms the basis for the plant-oriented identification of process objects.

Common displays can be positioned in pictures by means of the image hierarchy, and automatically linked to lower-level images. The configuration engineer is only responsible for the correct positioning. Since the number of common display fields and their semantics can be configured, it is also possible to implement customized alarm configurations.

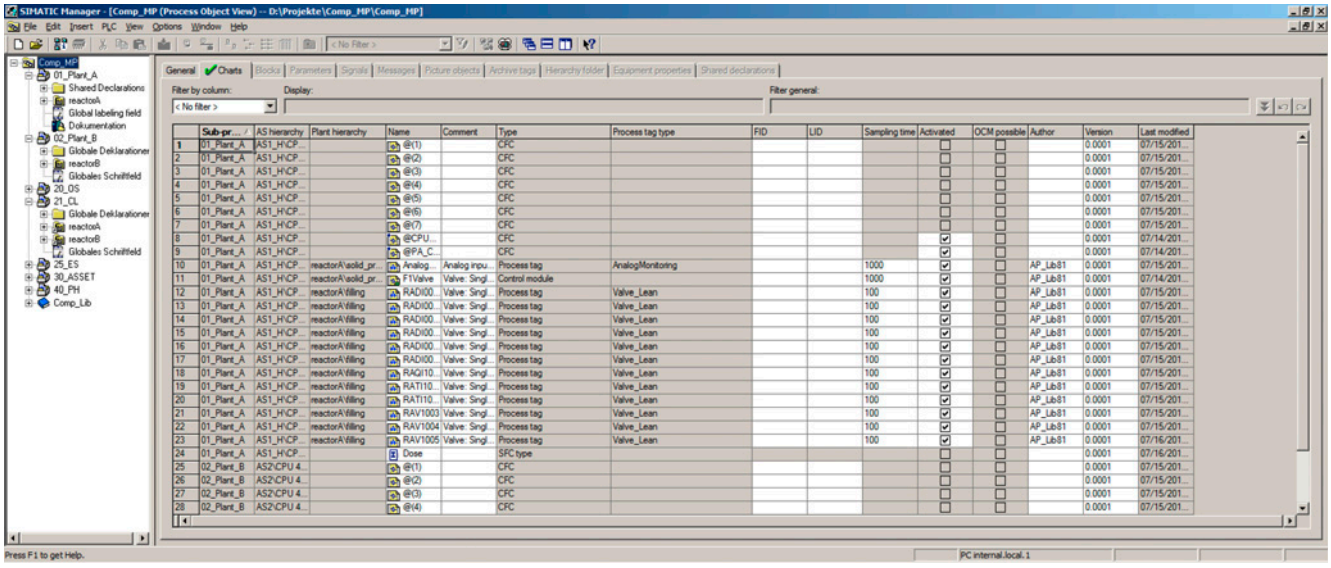


Process tags in the process object view

© Siemens 2019

Function (continued)

I&C and process messages are already pre-configured in the function blocks, and operator input messages are already pre-configured in the faceplates. These are automatically generated when the triggering event occurs. If required, message texts can be modified or message priorities defined.

Using the process object view, "Smart Alarm Hiding" can also beconfigured. This refers to the dynamic hiding of alarms that are of secondary importance to the safe and interference-free operation of the plant under certain plant conditions. Depending on the operating status of a plant unit (startup, service etc.), messages of the technological blocks grouped in this plant unit are shown or hidden in accordance with the previously set configuration. Alarms can be displayed or hidden separately for each of the maximum 32 operating states through selection of option boxes in the alarm matrix of the process object view. Although hidden alarms are not signaled visually and audibly, they are still logged and archived as before.

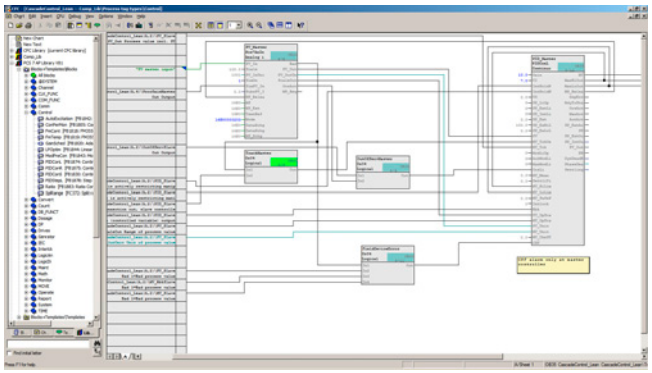

Continuous function chart

Continuous function chart (CFC)

The CFC editor permits graphic configuration of the continuous automation functions. In addition to convenient editing functions, its scope of functions also includes powerful test and commissioning functions as well as individually configurable documentation functions.

When creating a new CFC, a new runtime group with the same name as the chart is created. All the blocks that are subsequently entered in the chart are automatically added to this runtime group. Each block is therefore already assigned runtime properties when it is inserted, and configuration engineers can optimize these properties by means of modifications in the runtime editor or by using algorithms.

The algorithm first determines the optimum block sequence separately for each runtime group, and then the optimum sequence of runtime groups.

Instances of function block types can be positioned on CFCs, assigned parameters, and interconnected. Operator privilege levels can already be defined at block level for each block attribute so that finely granular operator privileges can be implemented.

Additional potential for rationalization is offered by special configuration techniques such as chart-in-chart for implementing hierarchical charts, or the multiple use of chart block types (individual control unit types and process tag types) or SFC types (standardized sequence controls) in the form of instances.

The CFC editor supports the following types of standardized software modules:

- **Function block type**
  The function block types supplied with I&C libraries are used for I&C modeling of engineering equipment such as valves or motors. The smallest standardized software modules for multiple usage have connections for actuating and control signals and for parameter assignment and monitoring functions. Some also contain interlocking functions for automatic transition to defined safety settings.
- **Process tag type**
  Process tag types implemented with function blocks each represent a standardized CFC for the basic automation of specific I&C functions, e.g. for a level controller. Their instances can be modified centrally by the type-instance concept, and also manually adapted and linked.
- **Control module type**
  The control module type (CMT) marks a new type of standardized software module that offers even more efficient engineering than classic process tag types. A CMT can contain blocks, charts, control variables (block I/Os such as signals and parameters) and messages.
  Note: As the function "Control module adjustment" is based on a basic functionality of the Version Cross Manager (VXM), you need a VXM license to use this function, see page 4/13. In the absence of a license, a message appears telling you to install Version Cross Manager. This is not actually necessary, all you need to install is a valid VXM license that will enable the relevant functionality on the engineering station.


Note:

The CFC is not just a component in the standard engineering software of the SIMATIC PCS 7 process control system. As a separate product, it can also be used together with other SIMATIC products in the context of Totally Integrated Automation (TIA). This SIMATIC CFC is a component from catalog ST 70, "SIMATIC Software" (article number of the current SIMATIC CFC V9.0, goods delivery: 6ES7658-1EX58-0YA5; online delivery: 6ES7658-1EX58-0YH5).

© Siemens 2019

4

Function (continued)

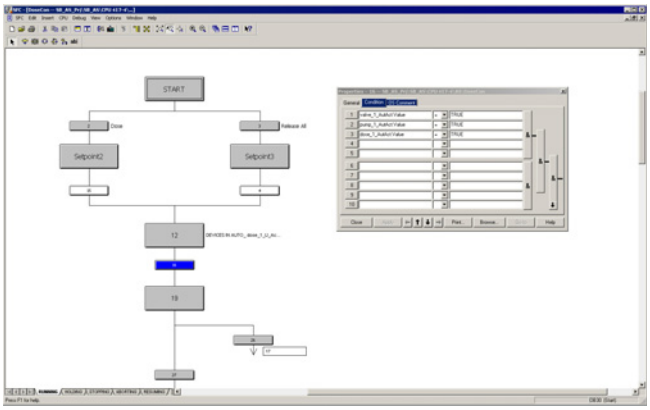

Sequential function chart

Sequential function chart (SFC)

The SFC editor is used for the graphical configuration and commissioning of sequential controls for batch production operations. It possesses convenient editing functions as well as powerful test and commissioning functions. An integrated graphical formula editor for arithmetic operations, Boolean algebra and mathematical functions enables calculations within the SFC.

Using a sequential control, basic automation functions usually created using CFC are controlled and selectively processed by means of changes in operating mode and status. Depending on the subsequent use, the sequential controls can be created either as a SFC plan or SFC type

SFC plan

The SFC can be used to implement sequence controls which can be applied once and which access several partial areas of the production plant. Each SFC plan contains standardized inputs and outputs for status information and for control by the user program or the user. The SFC plan can be positioned and linked as a block in the CFC. The required CFC block connections are selected by simple operations and connected to the steps or transitions of the step chains. A status management conforming to ISA 88 enables the configuration of up to 8 separate sequencers within a single SFC, e.g. for states such as RUNNING, HOLDING or ABORTING, or for different operating modes.

SFC type

SFC types are standardized sequential controls which can be applied repeatedly and which access one partial area of the production plant. They can be organized in libraries, and handled like normal function blocks, i.e. they can be selected from a catalog and positioned, interconnected and configured as an instance in a CFC plan.

Changes to the original automatically result in corresponding changes in all instances. An SFC type may contain up to 32 sequences. Using the function "Create/update block symbols", a block symbol is automatically positioned and interconnected in the associated process display for all SFC instances with HMI features.

I&C libraries

The use of library elements plays a major role in minimizing the amount of engineering required and thus also the project costs.

Two process control libraries are integrated in the standard engineering software of SIMATIC PCS 7:

- Advanced Process Library (current standard, pre-installed)
- PCS 7 Standard Library (former standard, can be installed subsequently if required)


Pre-configured and tested blocks, faceplates and symbols are organized in these libraries and form the basic elements for the graphic configuration of automation solutions.

The comprehensive range of blocks can be categorized as follows:

- Blocks for mathematical operations, analog and digital logic
- Interlocking blocks
- Technological function blocks with integral display, operation and signaling functions, e.g.:
  - Standard Control and Advanced Process Control blocks
  - Motor and valve blocks
  - Counter blocks
  - Dosing block
- Blocks for the integration of field devices
- Operator control and monitoring blocks
- Message and diagnostics blocks

Furthermore, pre-configured process tag types for process equipment such as pumps, valves, dosing units and controllers (cascade, spit-range) etc. extend the scope of library elements.

This is advantageous for adaptation of the user software following a system upgrade so that multiple versions of a library can exist side by side.

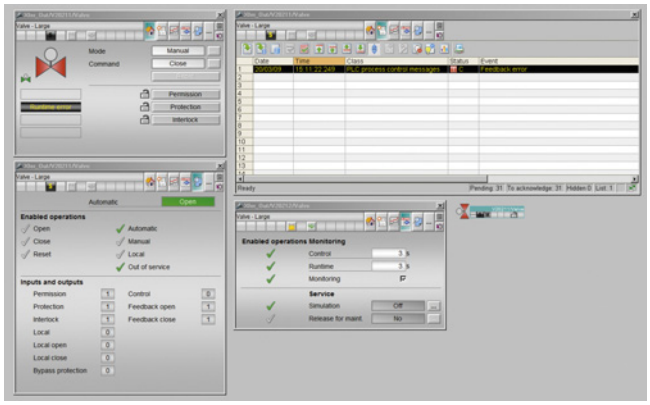

Examples of OS standard faceplates from the SIMATIC PCS 7 Advanced Process Library, valves

Advanced Process Library

The Advanced Process Library (APL) based on many years of experience of project engineers and plant owners takes into consideration current NAMUR recommendations and PNO specifications. Proven functions as well as visually attractive GUIs for a high level of operator convenience facilitate and also force interaction of operators with the plant.

© Siemens 2019

Function (continued)

Alternative, small versions of function blocks reduced to core functions, whose block icons and faceplates occupy less space in the process display, improve clarity in complex process displays.

Other features worth mentioning are:

- Special operating modes:
  - "Local" for integration and application of local control options
  - "Shutdown" for deactivating a measuring point for maintenance and service
- Several faceplate views:
  - "Preview" with information on the I/O signal status, automatic control, and possible/permissible operator inputs; display of real value for simulation
  - "Memo view" for temporary operator information
- Convenient interlocking blocks with initial signal information, can be directly called from the technological function blocks, e.g. from a motor block
- Flexible adaptation of functions in the library blocks
- Commissioning support through direct simulation on the operator station
- Protection against operator errors as the result of detailed grading of user privileges
- Explicit enabling/disabling of operations for a process tag for individual operator stations of the plant using the function "Local operator enabling"
- Integration of any compact drives and switch/starter objects via standard PROFIBUS profiles
- Coordination of multiple access operations, e.g. of SFC/SIMATIC BATCH, to equipment such as valves, dosing units or pumps
- Tacking of operator input windows facilitates repeated, successive operations
- Browser for the tag selection by status
- Customized online trends for display
- Reduced operator workload and faster operator control with tag groups assembled online for standard situations
  Note:
  SIMATIC PCS 7 Advanced Process Graphics from catalog ST PCS 7 T (SIMATIC PCS 7 technology components) is required.

Technology libraries

The additional technology libraries "Industry Library" and "Condition Monitoring Library" offered in Catalog ST PCS 7 T (SIMATIC PCS 7 technology components) expand the standard functionality of the APL. All display icons, function blocks and faceplates of these libraries are in APL design.

The Industry Library contains blocks for:

- Building automation (heating, ventilation, air conditioning)
- Operator control and monitoring using SIMATIC HMI Comfort Panels
- Integration of SIMATIC S7 Package Units and RTUs based on S7-300
- Interfacing of external Advanced Process Control systems
- Hierarchical multi-control room operation
- Other technological functions, e.g. for expanding measured value monitoring, or specifying a setpoint trend

The Condition Monitoring Library contains blocks for:

- Monitoring of centrifugal pumps (PumpMon)
- Monitoring of control valves (VlvMon)
- Online valve test during operation (PST)
- Monitoring for pressure loss, and early detection of blockages (PressDropMon)
- Detection of steady states of a dynamic process or steady state of a signal.

Advanced Process Control (APC) functions

In addition to numerous basic control functions, e.g. PID control, cascade control, split range control and ratio control, the I&C libraries of SIMATIC PCS 7 also provide function blocks and templates for advanced control functions at no extra cost.

Gain scheduling

The GainSched block allows continuous adjustment of the controller parameters in non-linear processes depending on the operating point. The block, which works in a similar manner to the polygon block, can derive three separate output values from one input value (measured variable X), which serve as regulating parameters for an interconnected controller block. Depending on the characteristic of the measured variable X, the GainSched changes the regulating parameters of the combined closed-loop controller in a sliding manner.

Override control

The outputs of two or more controllers are connected to a common final control element. The decision concerning which controller actually receives access to the final control element is made depending on the evaluation of the current process state.


Lead-lag/feed-forward control

A strong interference which can be measured is compensated in advance by feed-forward control. The control is thus limited to model uncertainties and non-measurable faults.

© Siemens 2019

4

Function (continued)

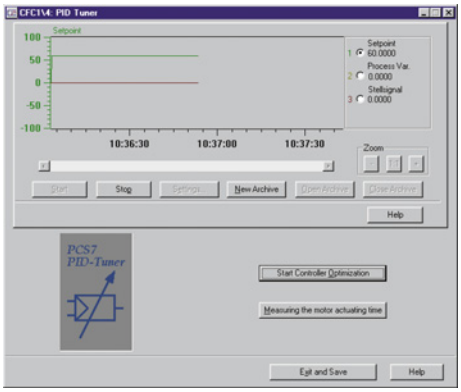

PID tuning

The integrated PID Tuner is suitable for optimization of the CTRL_PID and CTRL_S software controllers in circuits with PID, PI, or P control. On the basis of an experimentally determined model of the controlled system, favorable controller parameters for an optimum disturbance response or an optimum control response of the controller can be determined according to the procedure of absolute value optimization. Optimization can be carried out in manual or automatic mode. The typical controller values (actual value, setpoint, manipulated variable) are recorded by a trend function. The transient response of the controllers with the determined parameters can be checked by defining jumps. The controller parameters can be saved, and recalled as required.

Monitoring of the control quality

The ConPerMon block determines the control quality of a controller block (e.g. PID controller) on the basis of the online data of the setpoint, actual value and manipulated variable. Depending on deviation of the comparison quality, e.g. the control quality at commissioning, it can trigger a warning or an alarm. The faceplates of all control quality monitoring of a plant or a plant unit can be summarized in OS screens, which enables problems to be detected early on, analyzed, and specifically corrected.

Smith Predictor

The Smith Predictor can significantly improve the control quality of processes with long and relatively constant dead times. By eliminating the dead time component using a process model running parallel to the actual process, the controller can be designed for a process free of dead time, and thus set more effectively.

Model-based predictive multi-variable control

Model-based predictive multi-variable controllers (MPC) separately analyze the behavior of several interdependent variables for complex processes over a longer period. The results are used for optimized control of these variables. They eliminate adverse interactions which occur with separate control of the interdependent variables. Using a mathematical model of the process dynamics, MPCs are able to predict the future process response over a defined period of time (prediction horizon) and optimize a quality criterion on this basis.

The APL provides two multi-variable controllers with different functionalities and performance:

- MPC4x4 (ModPreCon) for up to 4 coupled manipulated variables and controlled variables
- MPC10x10 for up to 10 coupled manipulated variables and controlled variables and up to 4 measurable disturbance variables

Note:
Model-based multi-variable controllers make high demands on memory and processing time of the designated automation system. For that reason, please check the resources of the designated automation system before using them.

Graphics Designer

The project data for the engineering of the operator systems are organized with the SIMATIC Manager. All the data relevant to operation and monitoring of a process tag, such as messages and HMI variables, are generated automatically during definition of the automation function. A powerful graphics designer is available for the generation of process displays.

DOCPRO

DOCPRO is a tool for effective generation and management of plant documentation in accordance with defined standards. DOCPRO permits you to structure your project data in any manner, to process them in the form of standardized circuit manuals, and to print them in a uniform layout. You can incorporate your own cover sheets, layouts, graphics, logos or title block data. It is easy to control printing, i.e. you can specifically output individual parts of the project or all project data on the printer.

© Siemens 2019

Ordering data	Article No.
Standard engineering software	
Runs with the following operating systems (see SIMATIC PCS 7 Readme[1] for latest information):	
• Windows 7 Ultimate 64-bit	
• Windows 10 Enterprise 2015 LTSB 64-bit	
• Windows Server 2012 R2 Standard Edition 64-bit	
• Windows Server 2016 Standard Edition 64-bit	
Software for a classic, dedicated engineering station without quantity limitation (not suitable for productive operation as an operator station)	
SIMATIC PCS 7 AS/OS Engineering Software V9.0 Unlimited POs, activated for 2-hour OS test mode	
5 languages (English, German, French, Italian, Spanish), software class A, 'floating license for 1 user	
With SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7658-5AX58-0YA5**
• Online delivery License key download and online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7658-5AX58-0YH5**
SIMATIC PCS 7 AS/OS Engineering Software ASIA V9.0 2 languages (English, Chinese), software class A, floating license for 1 user	
With SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock and certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7658-5AX58-0CA5**
SIMATIC PCS 7 AS Engineering Software V9.0 Unlimited POs	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- Floating license for 1 user	**6ES7658-1AX58-0YB5**
- Rental license for 30 days (time billing independent of use)	**6ES7658-1AX58-0YA6**
- Rental License for 50 hours (time billing dependent on use)	**6ES7658-1AX58-0YB6**
• Online delivery License key download, online certificate of license Note: Email address required!	
- Floating License for 1 user	**6ES7658-1AX58-0YH5**
- Rental license for 30 days (time billing independent of use)	**6ES7658-1AX58-0YH6**

Ordering data	Article No.
Software for a combined engineering/operator station for small applications (suitable for productive operation as an operator station)	
SIMATIC PCS 7 ES single station V9.0 Including 250 AS/OS Runtime POs	
5 languages (English, German, French, Italian, Spanish), software class A, single license for 1 installation	
With SIMATIC PCS 7 Software Media Package	
- Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7651-5AA58-0YA0**
- Online delivery License key download and online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7651-5AA58-0YH0**
SIMATIC PCS 7 ES Single Station ASIA V9.0 Incl. 250 AS/OS Runtime POs	
2 languages (English, Chinese), software class A, single license for 1 installation	
With SIMATIC PCS 7 Software Media Package ASIA	
Physical delivery ASIA license key on USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	
• ASIA	**6ES7651-5AA58-0CA0**
• SN ASIA (including SOFTNET REDCONNECT)	**6ES7651-5AA58-6CA0**


[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

For more information on the Software Media Package, see "Software Media and Logistics", "PCS 7 Software Packages", see page 1/2.

© Siemens 2019

4

Overview

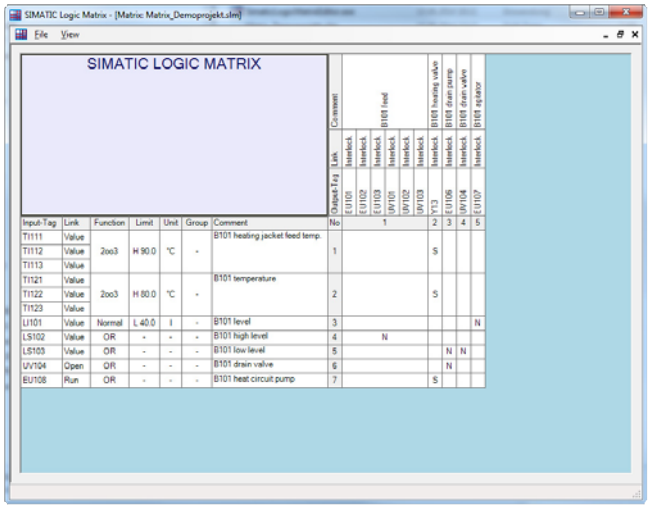

Logic Matrix Editor within the SIMATIC PCS 7 Engineering System


The SIMATIC PCS 7 Logic Matrix is based on the principle of logic creation with a cause and effect matrix - similar to the SIMATIC Safety Matrix for safety-related applications that has been established for years. It enables easy creation of the interlock logic between technological functions (e.g. control modules or equipment modules) of the automation project. There is no time-consuming configuring of the interlock logic in the CFC.

The SIMATIC PCS 7 Logic Matrix Tool, which can be opened from SIMATIC Manager, is used to create and edit the Logic Matrix oriented to one controller in each case and then to integrate the created matrix data at the chart level in the CFC project. The APL-based process tag types of the Control Module are linked with the cause or effect blocks of the Logic Matrix by templates created with the Link Type Editor of the Logic Matrix (Link Types).

The matrix table is comparable to a spreadsheet program. The configuration engineer first enters the possible events (inputs) in the horizontal lines, and then configures their type and number, logic operations, timings, alarms and possible bypass functions. He then defines possible actions (outputs) to these events in the vertical columns. The events and reactions are linked by simply clicking the cell at the intersection of the row and column.

The SIMATIC PCS 7 Safety Matrix Viewer enables operator control and monitoring of the Logic Matrix on the operator station (OS Single Station and OS Client). The Logic Matrix faceplate can also be opened via the faceplates of the technology objects which have been linked together via the cause and effect matrix.

Based on this causal chain, jumps from the Effect faceplate to the Cause faceplate and vice versa are possible via the Logic Matrix faceplate.

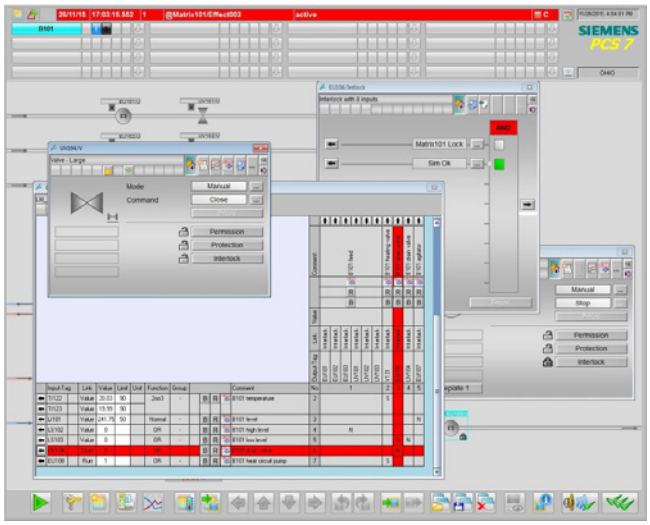

Faceplates of the Logic Matrix and the linked Control Module in the Logic Matrix Viewer of the SIMATIC PCS 7 Operator Station


Ordering data

	Article No.
SIMATIC PCS 7 Logic Matrix	
SIMATIC PCS 7 **Logic Matrix Viewer V9.0** Operator control and monitoring of the SIMATIC PCS 7 Logic Matrix via OS single station/OS client Runtime software, 2 languages (English, German), software class A Runs with the following operating systems (see SIMATIC PCS 7 Readme[1] for latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit Single license for 1 installation, without SIMATIC PCS 7 Software Media Package Goods delivery License key on USB flash drive and certificate of license	**6ES7658-1JB58-2YA0**

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

© Siemens 2019

Overview

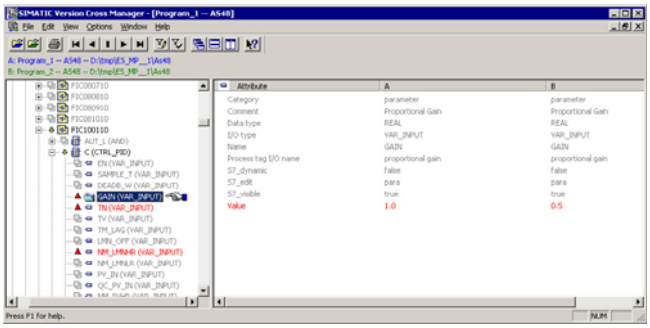

The SIMATIC Version Cross Manager is a user-friendly tool for determining the differences between various versions of individual projects or multi-projects by:

- Tracing missing, additional or differing objects by comparing hardware configuration, communication, plant hierarchy, CFC/SFC plans, SFC details, block types, messages, global tags, signals and run sequences
- Graphic display of comparison results in a combination of tree and tabular formats
- Clear hierarchical structuring according to the technological hierarchy of the plant
- Color-coded identification of the differences

Note:

As the function "Control module adjustment" is based on a basic functionality of the Version Cross Manager (VXM), you need a VXM license to use this function. In the absence of a license, a message appears telling you to install Version Cross Manager. This is not actually necessary, all you need to install is a valid VXM license that will enable the relevant functionality on the engineering station.

More information

Upgrade

You can upgrade SIMATIC PCS 7 engineering systems with engineering software V8.x to version 9.0 with SIMATIC PCS 7 Engineering Upgrade Packages AS/OS. The further developed SIMATIC Version Cross Manager V9.0 is available for use in SIMATIC PCS 7 V9.0. The upgrade to SIMATIC Version Cross Manager V9.0 is a component of the Engineering Upgrade Package AS/OS V8.x to V9.0.

For more information, see catalog ST PCS 7, "Update/Upgrade Packages", see page 16/2.

TIA applications

The Version Cross Manager is not only a software component of the SIMATIC PCS 7 Engineering System. As a separate product, it can also be used together with other SIMATIC products in the context of Totally Integrated Automation (TIA).


Ordering data

	Article No.
SIMATIC Version Cross Manager V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A Runs with the following operating systems (see VXM readme file at Siemens Industry Online Support for the latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive and certificate of license and TIA Engineering Toolset CD	**6ES7658-1CX58-2YA5**
• Online delivery License key download, online certificate of license and TIA Engineering Toolset (software download) Note: Email address required!	**6ES7658-1CX58-2YH5**
Upgrade package (only for TIA applications)	
SIMATIC Version Cross Manager upgrade from V7.1/V8.2 to V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, for operating systems see above Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license and TIA Engineering Toolset CD	**6ES7658-1CX58-2YE5**
• Online delivery License key download, online certificate of license and TIA Engineering Toolset (software download) Note: Email address required!	**6ES7658-1CX58-2YK5**

© Siemens 2019

4

Overview

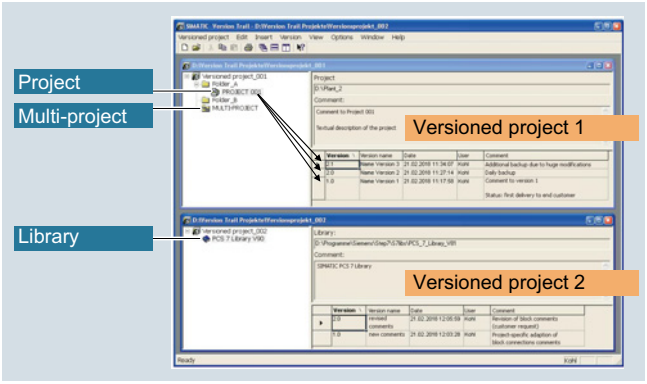

SIMATIC Version Trail is a software option for engineering which, together with the SIMATIC Logon central user administration, can assign a version history to libraries, projects and multi-projects.

Function

SIMATIC Version Trail tags the with a version ID when archiving, and enters the following information in the version history:

- Version
- Version name
- Date and time
- User
- Comment

Individual versions can be retrieved from the archive, and used further. SIMATIC Logon organizes the access protection.

Archiving and retrieval procedures can be automated on a time-driven basis. Retrieval of block parameters from the automation system can be coupled with the archiving procedure, but it can also be performed independently of this on a time-driven basis and with version assignment.

The version history managed by Version Trail can be displayed and printed. An already completed version cannot be modified at a later date. In conjunction with the Version Cross Manager, an archived version can be compared with an existing project or a second archived version.

Ordering data

	Article No.
SIMATIC Version Trail V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A	
Runs with the following operating systems (see VT readme file at Siemens Industry Online Support for the latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit	
Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license and TIA Engineering Toolset CD	**6ES7658-1FX58-2YA5**
• Online delivery License key download, online certificate of license and TIA Engineering Toolset (software download) Note: Email address required!	**6ES7658-1FX58-2YH5**
Upgrade package (only for TIA applications)	
SIMATIC Version Trail upgrade from V8.x to V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, for operating systems see above	
Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-1FX58-2YE5**
• Online delivery License key download, online certificate of license and TIA Engineering Toolset (software download) Note: Email address required!	**6ES7658-1FX58-2YK5**

More information

Upgrade

You can upgrade SIMATIC PCS 7 engineering systems with engineering software V8.x to version 9.0 with SIMATIC PCS 7 Engineering Upgrade Packages AS/OS. These upgrade packages include the upgrade for SIMATIC Version Trail from V8.x to V9.0.

For more information, see section "Update/upgrade packages".

TIA applications


SIMATIC Version Trail is not only a software component of the SIMATIC PCS 7 Engineering System. It is also a separate product which can be used in the context of Totally Integrated Automation (TIA) together with other SIMATIC products.

Note:

Please note that Version Trail cannot be used as a stand-alone application; it only runs together with SIMATIC Logon (see page 15/8).

© Siemens 2019

Overview

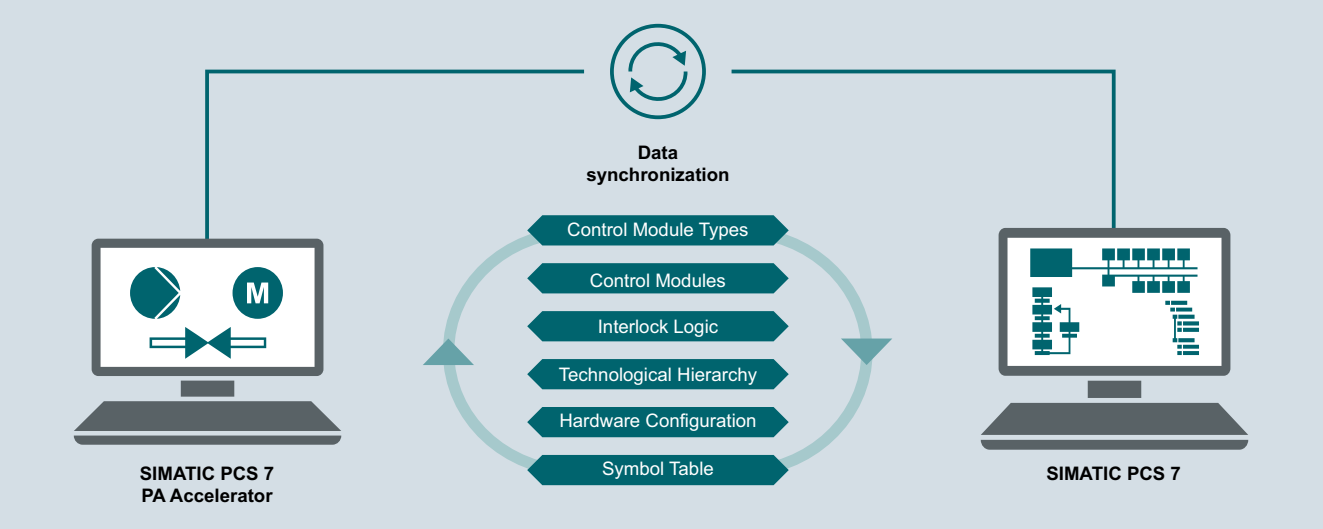


Data exchange between SIMATIC PCS 7 Plant Automation Accelerator and SIMATIC PCS 7

Performance in engineering

With regard to planning and engineering, performance can be equated with minimizing time and costs. "Integrated Engineering" offers an unique approach here: an integrated planning workflow from the description of the process to the automation program.

Using the SIMATIC PCS 7 Plant Automation Accelerator (PAA), both engineers and planning offices and end customers can significantly reduce their configuration and commissioning costs while simultaneously improving the quality of engineering.

PAA expands the functionality for plant configuration and documentation. To improve efficiency in plant engineering, the PAA provides support generating offesr with a plant topology plan and the bills of materials to the automatic generation of SIMATIC PCS 7 data from electrical and function plans.

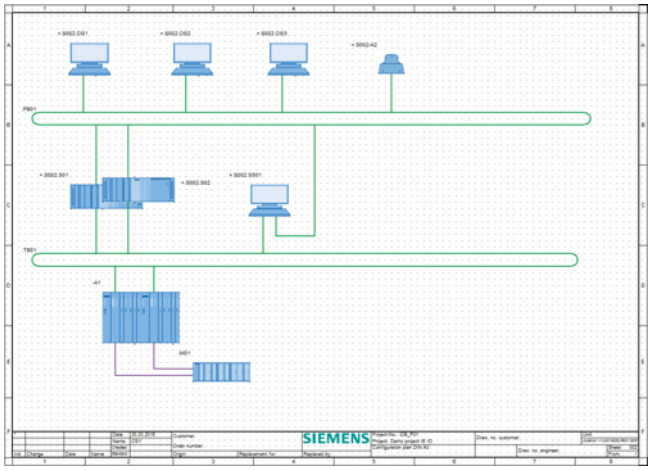

Plant topology plan

SIEMENS — Bill of material - without bundles — Cabinet

Project	Demo project IE IO		
Project-No.	iDB_P01		
Building	+0L001		
P&ID no.			
TAG-No.			
Location	+0L001G001.R001.S001	Unit	

	Name	Article description	MLFB
2	0	Rack, UR2	6ES7 400-1JA01-0AA0
3	1	Rack, UR2	6ES7 400-1JA01-0AA0
4	0	Profile rail, 483mm	6ES7 195-1GA00-0XA0
5	0	Profile rail, 483mm	6ES7 195-1GA00-0XA0
6	0	Profile rail, 483mm	6ES7 195-1GA00-0XA0
7	0	Profile rail, 483mm	6ES7 195-1GA00-0XA0
8	0	Profile rail, 483mm	6ES7 195-1GA00-0XA0
9	1	PS 405, 10A, DC 24/48/60V, DC 5V/10A	6ES7 405-0KA02-0AA0
10	3	CPU 410-5H	6ES7 410-5HX08-0AB0
11	5	CP 443-5 Ext	6GK7 443-5DX05-0XE0
12	1	PS 405, 10A, DC 24/48/60V, DC 5V/10A	6ES7 405-0KA02-0AA0
13	3	CPU 410-5H	6ES7 410-5HX08-0AB0
14	5	CP 443-5 Ext	6GK7 443-5DX05-0XE0
15	0	PS 307 AC 120/230V, DC 24V/2A	6ES7 307-1BA01-0AA0
16	2	IM 153-2 HF	6ES7 153-2BA02-0XB0
17	01	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
18	02	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
19	03	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
20	04	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
21	0	PS 307 AC 120/230V, DC 24V/2A	6ES7 307-1BA01-0AA0
22	2	IM 153-2 HF	6ES7 153-2BA02-0XB0
23	01	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
24	02	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
25	03	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
26	04	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
27	0	PS 307 AC 120/230V, DC 24V/2A	6ES7 307-1BA01-0AA0
28	2	IM 153-2 HF	6ES7 153-2BA02-0XB0
29	01	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
30	02	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
31	03	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
32	04	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
33	0	PS 307 AC 120/230V, DC 24V/2A	6ES7 307-1BA01-0AA0
34	2	IM 153-2 HF	6ES7 153-2BA02-0XB0
35	01	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
36	02	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
37	03	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
38	04	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
39	0	PS 307 AC 120/230V, DC 24V/2A	6ES7 307-1BA01-0AA0
40	2	IM 153-2 HF	6ES7 153-2BA02-0XB0
41	01	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
42	02	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
43	03	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
44	04	Bus unit, 2x40mm	6ES7 195-7HB00-0XA0
45	03	Synchronization module up to 10m	6ES7 960-1AA06-0XA0
46	04	Synchronization module up to 10m	6ES7 960-1AA06-0XA0


				Draw. no. customer			
				Status			
				Sheet	1	From	3
Ind.	Change	Date	Name	Date	18.04.2017	Name	@SETUP
Protection note							

Bills of materials

© Siemens 2019

4

Overview (continued)

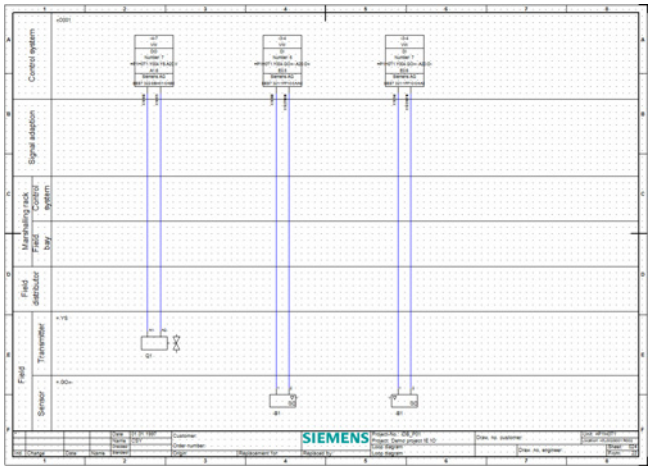

Electrical planning

If electrical planning has been carried out with planning tools from other providers, this data can be imported in Microsoft Excel format using signal or process tag lists – as in the previous product, Advanced Engineering System (AdvES).

The PAA is thus the new extended product to replace the PCS 7 Advanced Engineering System. It provides the same functions but can also operate as a project processing and documentation tool.

Benefits

- Reduced customizing and planning time with integrated processes for engineering, automation and operation
- Shorter project terms with consistent and simple data synchronization between engineering and automation
- Increased plant availability with error-free data transfer and system documentation that is always up-to-date
- Increased engineering efficiency and cost reductions with optimized change management

Function

Data changes can be undertaken at both ends and exchanged bidirectionally. If the user triggers data exchange, all changes are listed in a comparison and the user can select which changes are to be applied.

The automation hardware, the automation software and their interconnections are generated automatically when signal lists are exported from an external plan.




Engineering wizard

Engineering wizards efficiently support hardware engineering. The PAA uses the complete basic functional scope of COMOS products with

- User administration
- Change management with working layers
- Scalability


The PAA automatically generates hardware and software documents for redocumentation of existing SIMATIC PCS 7 projects.

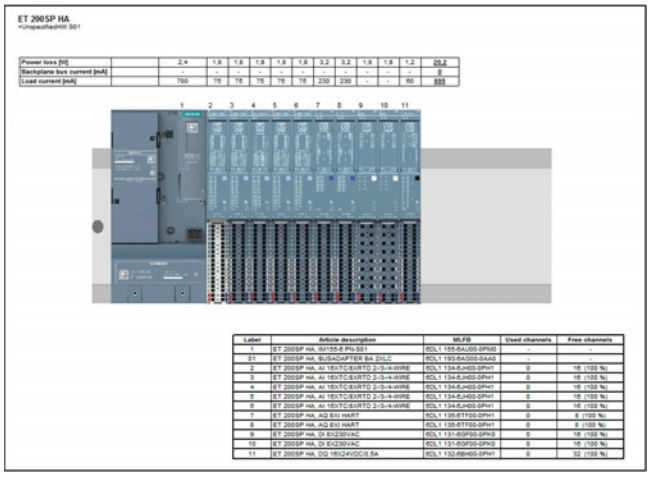

Assembly plan

© Siemens 2019

Function (continued)

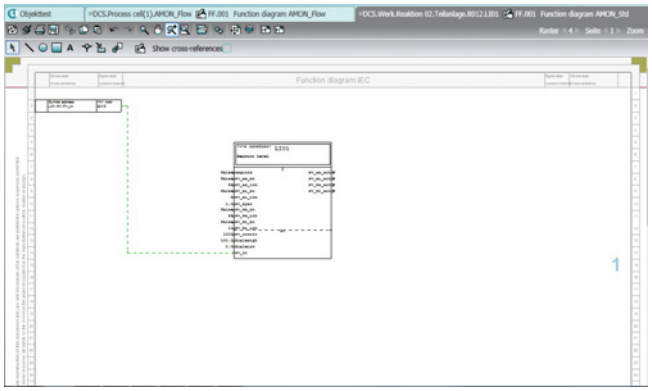

Function diagram

The PAA is thus the first product to offer the direct connection of a DCS system (SIMATIC PCS 7) to an automation-neutral tool for plant engineering (COMOS) and thus represents a significant step towards the digital plant.

More information


Ordering information

The SIMATIC PCS 7 Plant Automation Accelerator (PAA) cannot be ordered through this catalog or the Industry Mall. Please get in touch with your regional contact.

© Siemens 2019

4

Overview

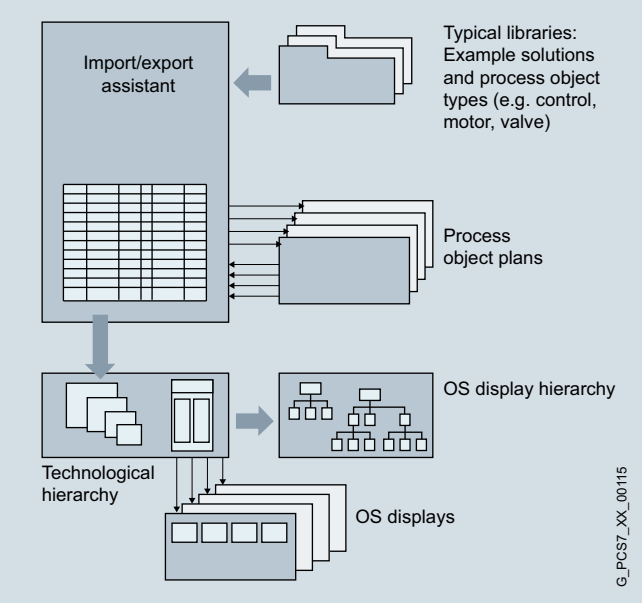

Efficient processing of mass data

The Import/Export Assistant (IEA) can be used for the rational engineering of mass data. The IEA is based on the principle of multiple application of process tag types and example solutions. It is particularly suitable for plants with numerous process tags of the same type or with multiple plant components of the same type.

Following exporting of the PCS 7 project, the data can be modified, duplicated, adapted and also reimported using the IEA editor or a spreadsheet program such as Microsoft Excel.

Comparison with the parameters optimized during commissioning is possible at a later point in time.

Function

- Generation/modification of process tag types or example solutions
- Data import
- Data export
- Matching of process tags

Ordering data

	Article No.
SIMATIC PCS 7 Import-Export Assistant V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A	
Runs with the following operating systems (see SIMATIC PCS 7 Readme[1] for latest information):	
• Windows 7 Ultimate 64-bit	
• Windows 10 Enterprise 2015 LTSB 64-bit	
• Windows Server 2012 R2 Standard Edition 64-bit	
• Windows Server 2016 Standard Edition 64-bit	
Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-1DX58-2YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-1DX58-2YH5**

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

More information


Upgrade

You can upgrade SIMATIC PCS 7 Engineering Systems with Engineering Software V8.x to Version 9.0 with SIMATIC PCS 7 Engineering Upgrade Packages AS/OS. The upgrade for upgrading the SIMATIC PCS 7 Import/Export Assistant from V8.x to V9.0 is also part of these upgrade packages.

For more information, see section "Update/upgrade packages".

© Siemens 2019

Overview

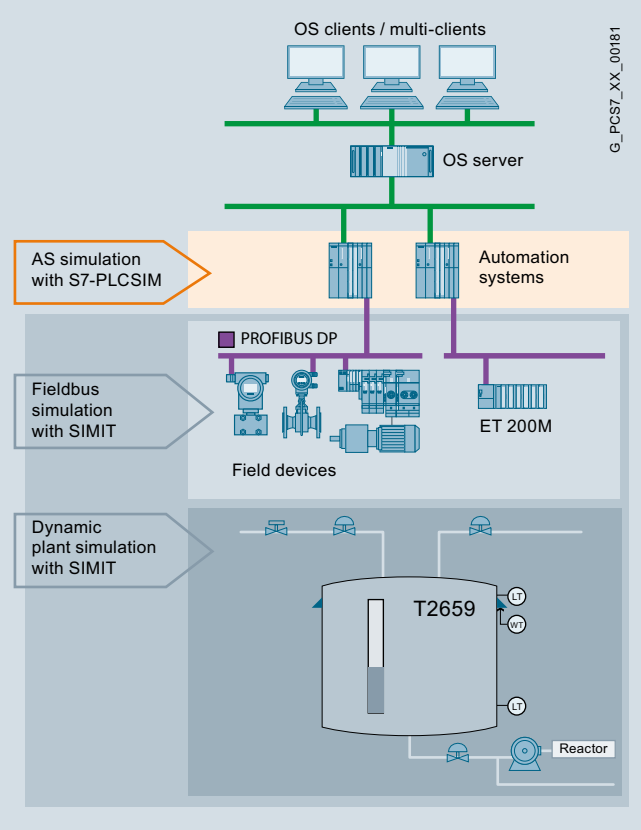

Overview of simulation software for SIMATIC PCS 7

The S7-PLCSIM simulation software supports functional testing of the user programs generated with CFC/SFC on a programming device/PC, irrespective of the availability of the target hardware. Detection and elimination of programming errors is thereby shifted to an earlier development phase. This enables faster commissioning, reduces the costs and increases the program quality.

Note:

S7?PLCSIM as of V5.4+SP8 is compatible with SIMATIC PCS 7 V9.0.

Function

S7-PLCSIM simulates a SIMATIC S7 CPU with the associated process images. The program to be tested is loaded into the simulated S7 CPU in a manner identical to the procedure with real hardware, and is executed there. S7-PLCSIM is completely integrated in STEP 7. Process data can be exchanged between S7-PLCSIM and other Windows applications via an interface.

Ordering data

	Article No.
S7-PLCSIM V5.4 (including SP) Functional testing on PC/PG of programs created with CFC/SFC 5 languages (English, German, French, Italian, Spanish) Runs with the following operating systems: • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard 64-bit Floating license for 1 user, without SIMATIC PCS 7 Software Media Package Physical delivery Software and electronic documentation on CD, license key on USB flash drive, certificate of license	**6ES7841-0CC05-0YA5**

More information

Update/Upgrade

S7-PLCSIM Versions 3.x, 4.x, 5.0, 5.2 or 5.3 can be upgraded to Version 5.4. In addition, a Software Update Service in the form of a subscription is offered for S7?PLCSIM.

For additional information, see "Update/upgrade packages", "Updates/upgrades asynchronous to the PCS 7 version" – "S7-PLCSIM simulation software upgrades", see page 16/39.

Further test and simulation programs

SIMIT Simulation Platform for testing and commissioning of project-specific user software on a partially virtual plant, see Catalog ST PCS 7 T "SIMATIC PCS 7 Process Control System – Technology components" section in "Simulations and training systems" chapter.

© Siemens 2019

Notes

© Siemens 2019



5/2 Introduction


5/5 OS Software
5/6 OS Standard Software for Single Station/Server/Client
5/11 SFC Visualization

5/12 Redundant operator systems
5/12 OS Redundancy

5/18 Operator control and monitoring via Web
5/18 SIMATIC PCS 7 Web Server

© Siemens 2019

Overview

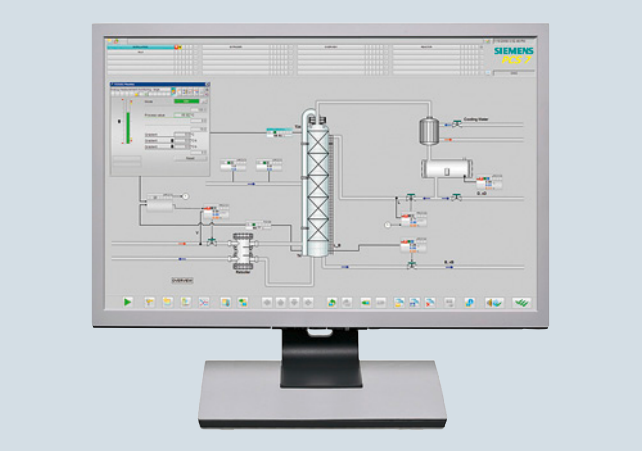

The operator system of the SIMATIC PCS 7 process control system allows easy and safe control of the process by the operating personnel. The operator can observe the process sequence by means of various views and intervene to control the system when necessary.

The operator system architecture is extremely variable and can be flexibly adapted to different plant architectures and customer requirements.

The basis is perfectly coordinated operator stations for single-user systems (OS single stations) and for multi-user systems with client/server architecture.

The system software of the operator stations can be expanded by cumulative SIMATIC PCS 7 OS Runtime licenses for 100, 1 000 and 5 000 process objects (PO) up to the following configuration limits:

- 8 500 POs per OS Single Station
- 12 000 POs per OS Server (with client/server architecture)

Benefits

- High-performance operator stations based on versatile, rugged SIMATIC PCS 7 Industrial Workstations, optimized for use in industrial environments
- Flexible, modular architecture with scalable hardware and software components for
  - Single-user system (OS single station) with up to 8 500 process objects
  - Flat system configurations based on a redundant OS Single Station pair, expandable with reference stations to up to 8 OS Single Stations.
  - Client/server multi-user systems with up to 18 OS servers/ pairs of servers for every 12 000 process objects (PO) and up to 40 OS clients
- High-performance archiving system based on Microsoft SQL Server with short-term archives and integrated archive backup, can be optionally expanded for long-term archiving with the Process Historian
- Self-diagnostics of important OS server applications
- Integration of modifications without interrupting runtime operations, and online testing through selective loading of redundant servers
- Optimized AS/OS communication: data transmission only following change in data, independent of AS reply cycle; suppression of nuisance alarms
- User-friendly process control and high operational reliability with support of multi-screen technology
- Extended status displays through combination of status/ analog values with alarm information
- Highly effective alarm management provides support for operating personnel
  - Assignment of priorities with up to 16 message priorities as additional attribute to the message classes
  - Visual and audible suppression of messages which are irrelevant to a specific operating state (dynamic or manual)
  - Suppression of sensor/actuator alarms during startup or in event of malfunction
- Centralized user administration with access control and electronic signature
- Sign-of-life monitoring for subordinate systems connected to the plant bus
- System-wide time synchronization based on UTC (Universal Time Coordinated)

© Siemens 2019

Design

All operator stations are based on modern SIMATIC PCS 7 Industrial Workstations optimized for use as OS single station, OS client or OS server. The SIMATIC PCS 7 Industrial Workstations are suitable for use in harsh industrial environments and are characterized by powerful industrial PC technology combined with a Windows Desktop operating system (Windows 7 or Windows 10) or a Windows Server operating system (Windows Server 2012) from Microsoft. Standard components and interfaces from the PC world offer generous scope for system-, customer- or sector-specific options and expansions.

The operating system and the following ES/OS software of the SIMATIC PCS 7 process control system are factory installed:

- Single station: PCS 7 Engineering Software for AS/OS including OS Runtime software
- Server: PCS 7 OS Software Server
- Client: PCS 7 OS Software Client

You only need the corresponding software licenses in order to use the pre-installed SIMATIC PCS 7 software.

Depending on the customer's particular requirements, you can equip an OS Single Station, OS Server or OS Client with optional hardware components, such as:


- Hardware and software components for redundant operation
- Signal module for audible and visual signaling of messages
- Smart card reader for access protection
- Multi-monitor graphics card for operation of up to 4 process monitors
- Process monitors for office and industrial environments

See section "Industrial Workstation/IPC" for ordering data and detailed information on the product package and technology of the SIMATIC PCS 7 Industrial Workstations.

Single-user system (OS single station)

In a single station system architecture, all operation and monitoring functions for a complete project (plant/unit) are concentrated in one station.

This OS single station can be operated on the plant bus together with other single-user systems or parallel to a multi-user system. Redundant operation of two OS single stations (SIMATIC PCS 7 Single Station Redundancy) and their expansion with reference stations into a flat system configuration with up to 8 OS Single Stations is also possible.

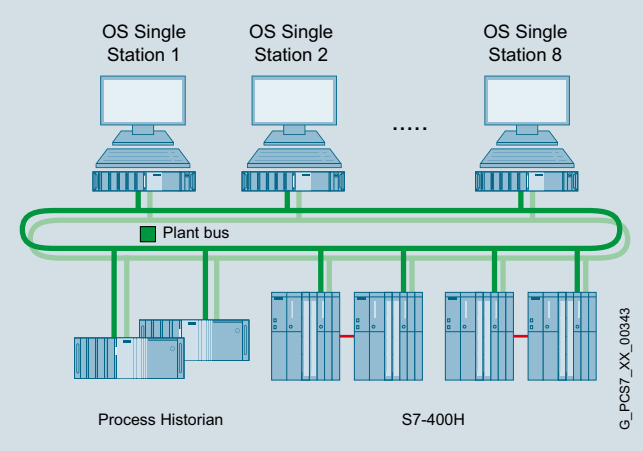

Example of a flat system architecture


Depending on the version (IE or BCE), the OS single station can be connected to the Industrial Ethernet plant bus via one of the following network components:

- IE: CP 1623 communications module (pre-installed in SIMATIC PCS 7 Industrial Workstation) or CP 1628 communications module for communication with max. 64 automation systems
- BCE: Standard Ethernet network adapter (10/100/1000 Mbps) and Basic Communication Ethernet for communication with up to 8 automation systems (no redundancy stations)

Two 10/100/1000 Mbps Ethernet RJ45 ports are always integrated onboard for use as desired.

The OS engineering is located as standard in a separate engineering system

Multi-user system with client/server architecture

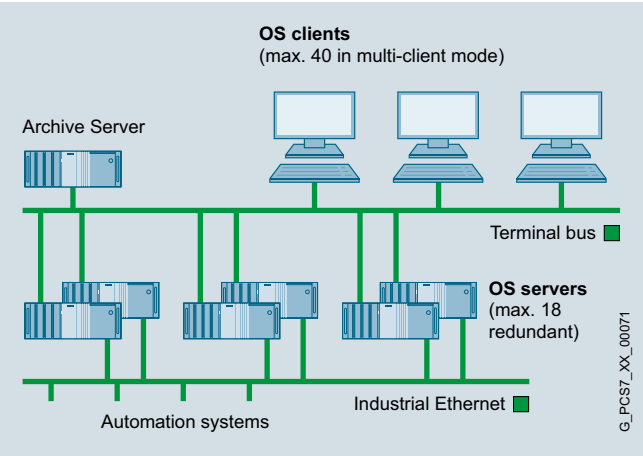

Example of multi-user system

A multiple station system consists of operator terminals (OS clients) which receive data (project data, process values, archive data, alarms and messages) from one or more OS servers over a terminal bus. The terminal bus can share the transmission medium with the plant bus or it can be designed as a separate bus (Industrial Ethernet with TCP/IP).

© Siemens 2019

Design (continued)

In this architecture, redundant OS servers may be set up to meet higher availability requirements. Critical applications running on the OS server are monitored by Health Check for software faults. If a fault is detected, switchover to the redundant system is triggered. Synchronization of the redundant OS servers takes place automatically and at high speed.

OS clients can access the data of not only one OS server/server pair, but from several OS servers/pairs of servers simultaneously (multi-client mode). This makes it possible to divide a plant into technological units and to distribute the data accordingly to several OS servers/pairs of servers. In addition to scalability, the advantage of distributed systems is the ability to decouple plant areas from each other, which results in higher availability.

The OS servers are designed in addition with client functions which permit them to access the data (archives, messages, tags, variables) from the other OS servers of the multi-user system. This means that process graphics on one OS server can also be linked with variables on other OS servers (area-independent displays).

Like the OS single stations, the OS servers can be connected to the Industrial Ethernet plant bus using one of the following network components

- IE: CP 1623 communications module (pre-installed in SIMATIC PCS 7 Industrial Workstation) or CP 1628 communications module for communication with max. 64 automation systems
- BCE: Standard Ethernet network adapter (10/100/1000 Mbps) and Basic Communication Ethernet for communication with up to 8 automation systems (no redundancy stations)

Two 10/100/1000 Mbps Ethernet RJ45 ports onboard can be used to connect to the terminal bus.

Data archiving

The OS Single Stations and OS servers already include a high-performance archiving system, configurable at run-time, based on Microsoft SQL Server with cyclic archives for short-term archiving of process values (typically for 1 to 4 weeks) and messages/events (typically for 2 months). This may be combined with an external data archiving system for long-term data storage. The Process Historian offered in the section "Process data archiving and reporting" is available for this purpose.

The archive data can be saved on all storage media supported by the operating system, for example on a NAS drive.

Technical specifications

Definitions	
OS tag	An OS tag or parameter is a defined memory location required for operating and monitoring with the operator system; values can be written into it and read from it (e.g. setpoint, actual value etc.).
Process object (PO)	A process object (PO) is synonymous with an operable and monitorable block. A PO usually has several OS tags (which can be operated and monitored). The number of OS tags differs depending on the block type. For example, motors or valves require fewer tags than closed-loop controls or dosing units.
Licensing	Licensing and license verification of the OS software for SIMATIC PCS 7 are based on the process objects. Every block fulfilling the following criteria is counted and calculated as a PO: • The block is not a driver block. • The block can be operated and monitored. • This block can handle messages. The license verification also takes into account the sum of all OS tags used.

OS quantity framework	
Max. number of OS single stations	8
Max. number of OS servers/pairs of servers	18
Max. number of automation systems per OS server/pair of servers	64
Max. number of OS clients in multi-client mode [1], per multi-user system	40
Max. number of monitors per operator station with multi-channel operation	4
Max. number of OS areas	64
Max. number of windows per monitor	1 to 16 (adjustable)
Number of trends per trend window	10
Selection time for OS area display (100 process symbols)	< 2 s
Max. number of configurable messages per server	200 000
Max. number of configurable process objects	Approx. 216 000
Max. number of configurable process tags	Approx. 128 000[2]
Integral high-performance archive system (circular buffer), based on Microsoft SQL server, for:	
• Process value archiving (per OS server/single station)	Approx. 1 500/s
• Alarm logging (per OS server/single station)	Permanent load approx. 10/s Message burst approx. 3 000 / 4 s

[1] If every OS client has access to all OS servers/pairs of servers

[2] Approx. 300 000 I/O

© Siemens 2019

Overview

The SIMATIC PCS 7 Industrial Workstation, the operating system, and the OS software are matched to one another in accordance with the application as OS single station, OS server or OS client.

Design

The OS standard software is already pre-configured for the corresponding OS single station, OS server or OS client as the target system, and pre-installed on it. You only need the corresponding software licenses in order to use it.

This basic level can be extended using additive software components and licenses.

You can equip OS Single Stations and OS Clients, for example, with SIMATIC PCS 7 SFC Visualization and Safety Matrix Viewers.

Redundant system configurations are also possible with OS single stations and OS servers. See "OS redundancy" under "Operator System" for details see page 5/12.

The following tables provide a selection aid for ordering an operator station. Depending on whether a redundant or non-redundant design is selected, the tables indicate the respectively required number of

- SIMATIC PCS 7 Industrial Workstations
- Licenses for OS standard software
- Volume licenses (quantity options)
- Licenses for optional supplementary OS software

Single-user system		
OS single station	**Redundancy**	
With Windows 10 Enterprise 2015 LTSB 64-bit operating system	**without**	**with**
SIMATIC PCS 7 Industrial Workstation for ES/OS single station		
• With BCE communication for up to 8 automation systems (no redundancy stations)	1	2
• With Industrial Ethernet (IE) communication	1	2
Additional IE communication software for industrial workstations with IE communication		
SIMATIC NET HARDNET IE S7 REDCONNECT PowerPack	1	2
OS standard software		
SIMATIC PCS 7 OS Software Single Station	1	–
SIMATIC PCS 7 Single Station Redundancy	–	1
Volume licenses and supplementary OS software (optional)		
SIMATIC PCS 7 OS Runtime License for adding OS Runtime POs	1	2
SIMATIC PCS 7 OS Archive for expansion of short-term cyclic buffer archive	1	2
SIMATIC PCS 7 SFC Visualization	1	2
SIMATIC Safety Matrix Viewer	1	2

Multi-user system with client/server architecture		
OS server	**Redundancy**	
With Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit operating system	**without**	**with**
SIMATIC PCS 7 Industrial Workstation for OS server		
• With BCE communication for up to 8 automation systems (no redundancy stations)	1	2
• With industrial Ethernet communication	1	2
Additional IE communication software for industrial workstations with IE communication		
SIMATIC NET HARDNET IE S7 REDCONNECT PowerPack	1	2
OS standard software		
SIMATIC PCS 7 OS Software Server	1	–
SIMATIC PCS 7 OS Software Server Redundancy	–	1
Volume licenses (optional)		
SIMATIC PCS 7 OS Runtime License for adding OS Runtime POs	1	2
SIMATIC PCS 7 OS Archive for expansion of short-term cyclic buffer archive	1	2
OS client		
With Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit operating system; connection for terminal bus onboard		
SIMATIC PCS 7 Industrial Workstation for OS Client		
• SIMATIC PCS 7 Industrial Workstation for OS Client, with onboard standard graphics or with multi-monitor graphics card	1	
• SIMATIC PCS 7 BOX OS Client 627D (without Panel) or 677D (with Panel)	1	
• SIMATIC PCS 7 OS Client 427E/477E (Microbox)	1	
OS standard software		
SIMATIC PCS 7 OS Software Client	1	
Supplementary OS software (optional)		
SIMATIC PCS 7 SFC Visualization	1	
SIMATIC Safety Matrix Viewer	1	
SIMATIC PCS 7 Logic Matrix Viewer (see "Engineering", "SIMATIC PCS 7 Logic Matrix" section)	1	

Note on Microsoft SQL Server software

The "SQL Server" software from Microsoft which is delivered together with SIMATIC PCS 7 is exclusively intended for this process control system.

© Siemens 2019

OS Standard Software for Single Station/Server/Client

Overview

The OS standard software is adapted to the SIMATIC PCS 7 Industrial Workstations offered (OS single station, OS server and OS client).

It can be adapted to plants of various sizes by adding cumulative SIMATIC PCS 7 OS Runtime licenses for sets of 100, 1 000 and 5 000 process objects (PO). The expansion limits are

- 8 500 POs per OS Single Station
- 12 000 POs per OS Server


The high-performance circular buffer archiving system integrated in the OS standard software for OS single station and OS server for temporary archiving can be expanded up to the maximum limit of 10 000 tags with cumulative SIMATIC PCS 7 OS volume licenses.

The OS standard software for a redundant pair of OS servers or two redundant OS single stations is combined in a package (SIMATIC PCS 7 OS Software Server Redundancy or SIMATIC PCS 7 OS Software Single Station Redundancy). See "OS redundancy" for details. see page 5/12

Subsequent conversion of the software license from OS Single Station to OS Server

It frequently happens in practice that systems based on OS single stations are later expanded to client-server configurations. The SIMATIC PCS 7 OS Software ConversionPack Single Station to Server allows you to subsequently convert the software license of your existing OS single station to an OS server license.

Function

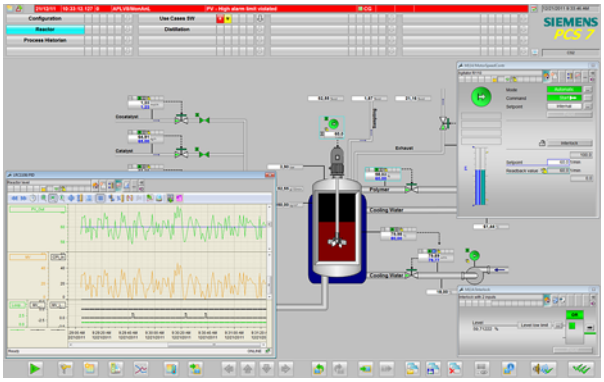

OS process control with freely-positionable windows

Graphical user interface (GUI)

The predefined user interface of the operator system has all the features typical of a control system. It is multilingual, clearly structured, ergonomic and easy to understand. Operators can survey the process extremely easily, and rapidly navigate between different views of the plant. The system supports them in this process with hierarchical display structures that can be configured as required. These facilitate the direct selection of lower-level areas during process control. The current position within the hierarchy can always be recognized in a window of the Picture Tree Manager.

Process displays and process tags can also be called directly by their name, or by a "Loop-in-alarm" starting from a selected message An online language selector permits the user to change the display language during runtime.

The project editor in the operator system offers a wide range of different image formats and resolutions for displaying process graphics:

Graphic standard	Format	Resolution	Support of multi-monitor mode
XGA	4:3	1024 × 768	Yes
XGA+	4:3	1152 × 864	Yes
SXGA	5:4	1280 × 1024	Yes
UXGA	4:3	1600 × 1200	Yes
WSXGA+	16:10	1680 × 1050	Yes
HD 1080 (Full HD)	16:9	1920 × 1080	Yes
WUXGA	16:10	1920 × 1200	Yes
WQXGA	16:10	2560 × 1600	--

Their use depends on how the graphics controller of the operator station and the process monitors controlled by it are designed.

The representative functional display of the plant is supported by a high-quality, modern design. The global appearance can be set using predefined or user-specific designs: color palette, colors, styles (fill patterns), optical effects (2D/3D, shading, transparency, colored identification of an image object when selected, etc.). These can be changed locally for each image object.

The design is also defined using a wide range of attractive elements provided by the Graphics Designer during configuration in the engineering system.


Process tag browser

The SIMATIC PCS 7 process tag browser enables status information from APL-based process tags to be displayed, filtered and sorted. Process tags that have a certain status can then be quickly identified and selected. The faceplate of a process tag can be selected directly in the process image via the Loop In function. The query results of the process tag browser can be saved and printed out.

© Siemens 2019

Function (continued)

TrendControls function for table displays and curve displays

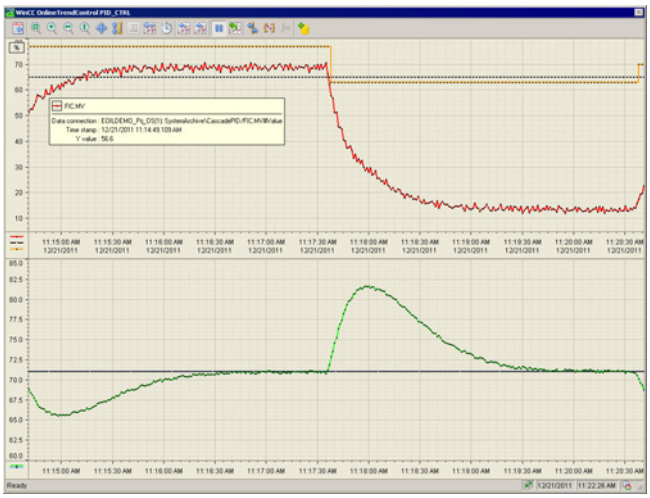

Trend window on the operator station

With TrendControls the operator can display archived values:

- Archive tags from the process value archive
- Online values of process tags from tag management

The display is in relation to time (table/trend window) or in relation to another value (function window).

The time can be defined statically (absolute, as configured) or dynamically (in relation to the actual system time) as:

- Start and end times
- Start time and period
- Start time and number of measuring points

All TrendControls have scrolling functions and a function for directly selecting the start or end.

During runtime, operators can individually adapt the TrendControls functions which have already been predefined during plant configuration, and save the settings globally or user-specific. They are able to change the data link during runtime, and to access other data. It is also possible to integrate exported archive databases online.

APL Operator Trend Control

The APL Operator Trend Control coordinated with the Advanced Process Library offers another option to the operator for flexible online compilation of trends. The values for the trend display are selected with a simple mouse click, in which case the value range and unit are adopted automatically by the process tag. The selection made can be subsequently adjusted by adding and removing values. In addition, messages corresponding to the trend selection can be called.

AlarmControl function for message display and processing

Up to 200 000 messages can be configured per OS single station/OS server:


- Predefined system messages, triggered by a system event
- Individual or group messages, initiated by a change in process states
- Operator input messages, resulting from the manual operation of objects

The message system integrated in the Operator System records these process messages and local events, saves them in message archives, and displays them using freely configurable message lists.

Flexible setting options for audio output support message signaling with a sound card or by controlling external horns via a signal module.

The "Loop-in-alarm" and "Select display using process tag" functions support the quick evaluation and resolution of faults. Using "Loop-in-alarm", the operator can jump directly from a message selected in the message window to the process display with the object which caused the fault, and can then call up the associated faceplate (loop display) through the process tag whose block icon is colored (cyan). The faceplate window (loop display) can be anchored so that it remains visible even when the display is changed.

Group displays visually signal the messages currently present in the process display. They also provide information on whether messages are disabled or not.

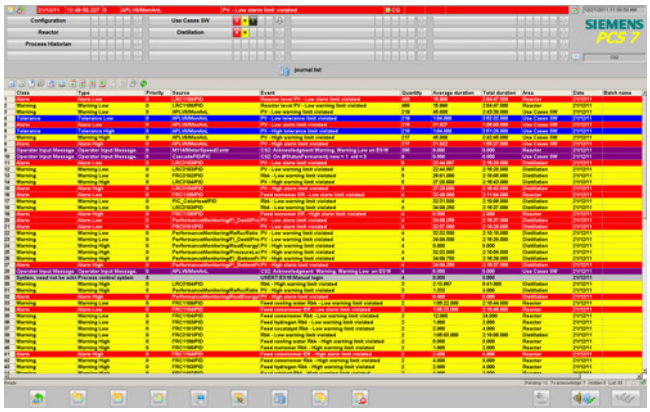

Operator station message list

Reporting and logging system

The project created during configuring is documented with the reporting system. The logging system allows an easy-to-read printout of data acquired during operation. Different types of predefined logs are available:

- Message sequence log
- Message and archive log
- Measured value log
- Operator activity log
- System message log
- User log

However, a page layout editor can be used to create completely new page layouts or to individually adapt predefined ones. Log objects to be printed are simply selected from the editor's object palette, positioned and configured.

© Siemens 2019

Function (continued)

Data archiving

The high-performance archiving system, configurable at runtime, in the OS standard software of OS Single Stations and OS Servers temporarily records process values and messages/events (alarms) in cyclic archives. Intervals of approximately 1 to 4 weeks for process values and approximately 2 months for alarms are typical for this short-term archiving. Data from the cyclic archives can be exported time-controlled or event-controlled to the Process Historian for permanent archiving. See the "Process data archiving and reporting" section for information on this.

Central user administration, access control and electronic signature

With SIMATIC Logon, the operator system has central user administration with access control that complies with the validation requirements of 21 CFR Part 11. The administrator can divide the users into groups and assign differently defined access rights (roles) to these groups. The operator obtains the specific rights when logging on within the scope of the access control. Apart from the keyboard, an optional smart card reader, for example, can be used as the logon device. In addition, SIMATIC Logon offers the "electronic signature" function.

SIMATIC Logon is fully integrated in SIMATIC PCS 7. In the context of SIMATIC PCS 7, no software licenses need be ordered for this. For more information on SIMATIC Logon and ordering data for an optional smart card reader, see "Expansion components, smart card reader" in "Industrial Workstation/IPC", see page 3/52.

© Siemens 2019

Ordering data	Article No.
OS Software Single Station	
Runs with the following operating systems (see SIMATIC PCS 7 Readme[1] for latest information):	
• Windows 7 Ultimate 64-bit	
• Windows 10 Enterprise 2015 LTSB 64-bit	
SIMATIC PCS 7 OS Software Single Station V9.0 incl. 100 OS Runtime PO 5 languages (English, German, French, Italian, Spanish), software class A, single license for 1 installation	
With SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7658-2AA58-0YA0**
• Online delivery License key download and online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7658-2AA58-0YH0**
SIMATIC PCS 7 OS Software Single Station ASIA V9.0 incl. 100 OS Runtime PO 2 languages (English, Chinese), software class A, single license for 1 installation	
With SIMATIC PCS 7 Software Media Package ASIA	
Physical delivery ASIA license key on USB hardlock and certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	
• ASIA	**6ES7658-2AA58-0CA0**
• SN ASIA (including SOFTNET REDCONNECT)	**6ES7658-2AA58-6CA0**
OS Software Server	
Runs with the following operating systems (see SIMATIC PCS 7 Readme[1] for the latest information):	
• Windows Server 2012 R2 Standard Edition 64-bit	
• Windows Server 2016 Standard Edition 64-bit	
SIMATIC PCS 7 OS Software Server V9.0 incl. 100 OS Runtime PO 5 languages (English, German, French, Italian, Spanish), software class A, single license for 1 installation	
With SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7658-2BA58-0YA0**
• Online delivery License key download and online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7658-2BA58-0YH0**

	Article No.
SIMATIC PCS 7 OS Software Server ASIA V9.0 incl. 100 OS Runtime PO 2 languages (English, Chinese), software class A, single license for 1 installation	
With SIMATIC PCS 7 Software Media Package ASIA	
Physical delivery ASIA license key on USB hardlock and certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	
• ASIA	**6ES7658-2BA58-0CA0**
• SN ASIA (including SOFTNET REDCONNECT)	**6ES7658-2BA58-6CA0**
Volume licenses (quantity options)	
Runtime licenses for PO expansion for OS Software Single Station/OS Software Server	
SIMATIC PCS 7 OS Runtime License For extending the OS Runtime POs, cumulative	
Language-neutral, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	
- 100 POs	**6ES7658-2XA00-0XB0**
- 1 000 POs	**6ES7658-2XB00-0XB0**
- 5 000 POs	**6ES7658-2XC00-0XB0**
• Online delivery License key download and online certificate of license Note: Email address required!	
- 100 POs	**6ES7658-2XA00-0XH0**
- 1 000 POs	**6ES7658-2XB00-0XH0**
- 5 000 POs	**6ES7658-2XC00-0XH0**
Expansion of integrated high-performance circular buffer archive (512 tags) of OS Single Station and OS Server	
SIMATIC PCS 7 OS Archive Cumulative archive licenses, independent of language, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	
- 1 500 tags	**6ES7658-2EA00-2YB0**
- 5 000 tags	**6ES7658-2EB00-2YB0**
- 10 000 tags	**6ES7658-2EC00-2YB0**
- 30 000 tags	**6ES7658-2ED00-2YB0**
• Online delivery License key download and online certificate of license Note: Email address required!	
- 1 500 tags	**6ES7658-2EA00-2YH0**
- 5 000 tags	**6ES7658-2EB00-2YH0**
- 10 000 tags	**6ES7658-2EC00-2YH0**
- 30 000 tags	**6ES7658-2ED00-2YH0**

© Siemens 2019

OS Standard Software for Single Station/Server/Client

Ordering data	Article No.
OS Software Client	
Runs with the following operating systems (see SIMATIC PCS 7 Readme[1] for latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit	
SIMATIC PCS 7 **OS Software Client V9.0** 5 languages (English, German, French, Italian, Spanish), software class A, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7658-2CX58-0YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7658-2CX58-0YH5**
SIMATIC PCS 7 **OS Software Client ASIA V9.0** 2 languages (English, Chinese), software class A, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license	**6ES7658-2CX58-0CB5**


	Article No.
Conversion of the software license from OS Single Station to OS Server	
Runs with the following operating systems (see SIMATIC PCS 7 Readme[1] for latest information): • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit	
SIMATIC PCS 7 **OS Conversion Pack** **Single Station to Server V9.0**	
For conversion of an operator station from OS Single Station to OS Server	
Supports all languages of the OS Software Single Station, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7658-2BA58-0YD0**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7658-2BA58-0YJ0**

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

For more information on the Software Media Package, see "Software Media and Logistics", "Software Packages", see page 1/2.

© Siemens 2019

Overview

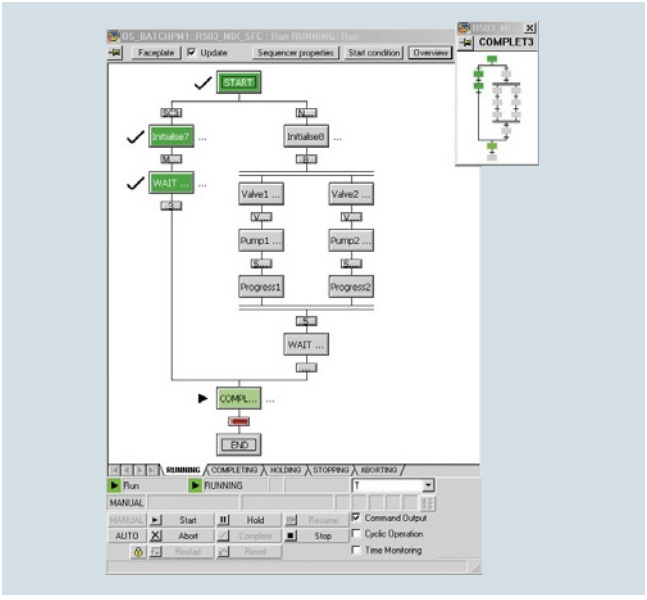

The OS standard software can be expanded with the SIMATIC PCS 7 SFC Visualization. This allows you to display and operate configured sequential controls on the engineering system.

In an overview display it is possible, for example, to open step and transition displays and to present step comments or dynamically supplied step enabling conditions.

Ordering data

	Article No.
SIMATIC PCS 7 **SFC Visualization V9.0** For displaying and operating SFC sequence controls on an operator station 6 languages (English, German, French, Italian, Spanish, Chinese), software class A Runs with the following operating systems (see SIMATIC PCS 7 Readme[1] for latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7652-0XD58-2YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7652-0XD58-2YH5**

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

© Siemens 2019

5

Overview

OS single stations and OS servers can have a redundant design if necessary. The following program packages are available:

- SIMATIC PCS 7 Single Station Redundancy for setup of redundant OS Single Stations
- SIMATIC PCS 7 Server Redundancy for setup of redundant OS servers.

For optimizing internal communication, connect the two stations of the redundant OS Single Station/OS Server pair to each other either via an RS 232 connecting cable or via an Ethernet cable, e.g. cross-over network cable with RJ45 connectors (up to 100 m). The cable material is to be ordered separately in each case:

Depending on the environmental conditions and the distance involved, the Ethernet connection between the two redundant stations can be implemented either as an electrical or optical connection. For more information, refer to the "SIMATIC PCS 7 High-availability Process Control Systems" manual; for suitable cable material and further accessories, refer to Catalog IK PI (Industrial Communication).

What further components are required depends on the plant architecture. The design of the plant bus and terminal bus is of particular importance, as well as the type and number of subordinate automation systems. The maximum requirements are determined by the redundant configuration shown in the figure with a fault-tolerant automation system and two redundant rings each for the plant bus and terminal bus.

Design


The following table provides an overview of which components are required for a redundant OS single station or OS pair of servers depending on certain criteria:

Hardware and software components		Up to 8 AS per single station or server pair	9 to 64 AS per single station or server pair	Min. 1 redundant AS
SIMATIC PCS 7 Industrial Workstation, ES/OS Single Station or OS Server version				
• Incl. Ethernet network adapter 10/100/1000 Mbps and BCE communication		2	–	–
• Incl. CP 1623/CP 1628 and SIMATIC NET HARDNET-IE S7		2 (alternative to BCE)	2	2
Software				
SIMATIC PCS 7 Single Station/Server Redundancy		1	1	1
SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack		–	–	2
Connection to redundant plant bus (2 rings)				
• BCE	Desktop adapter network card	2	–	–
• CP 1623, CP 1628	Communication module	2 (alternative to BCE)	2	2
	SIMATIC NET HARDNET-IE S7	2 (alternative to BCE)	2	2
	SIMATIC NET HARDNET-IE S7 REDCONNECT	–	–	2
Connection to redundant terminal bus with PRP (2 rings)				
SOFTNET-IE RNA communication software		1 × per PCS 7 station on the terminal bus	1 × per PCS 7 station on the terminal bus	1 × per PCS 7 station on the terminal bus
Integration of non-PRP-enabled devices in redundant terminal bus with PRP				
SCALANCE X204RNA		1 × for 2 terminal devices	1 × for 2 terminal devices	1 × for 2 terminal devices


© Siemens 2019

Design (continued)

Connection to plant bus

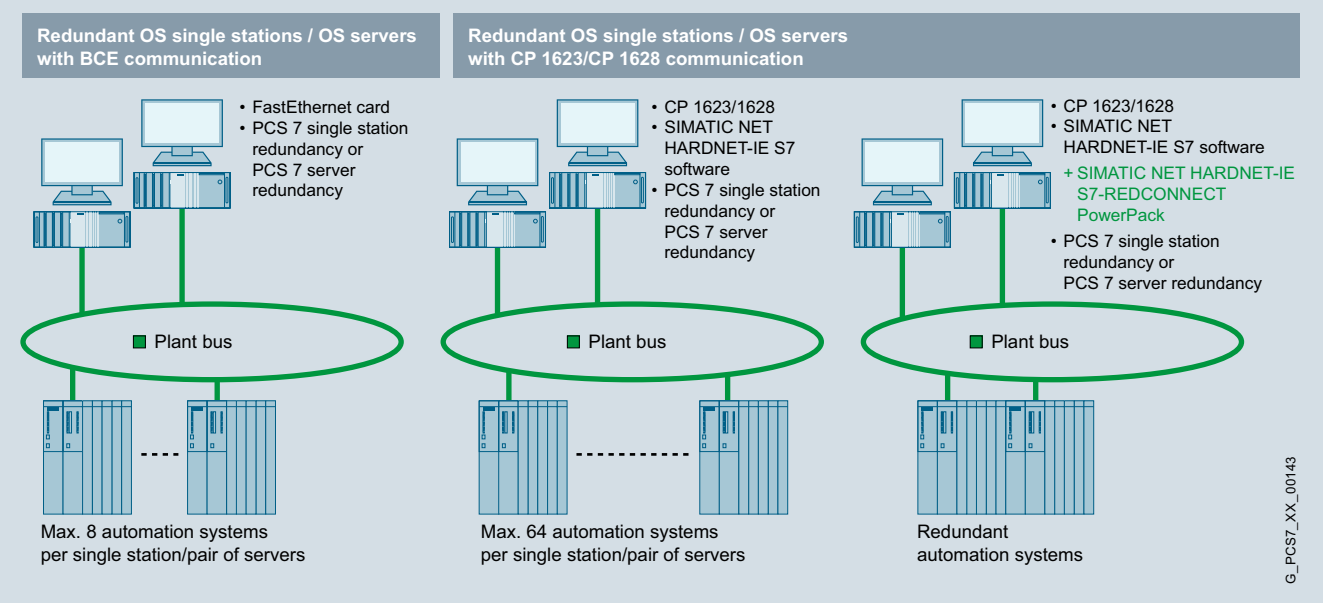

Components for connection of redundant OS single stations / OS servers on the plant bus

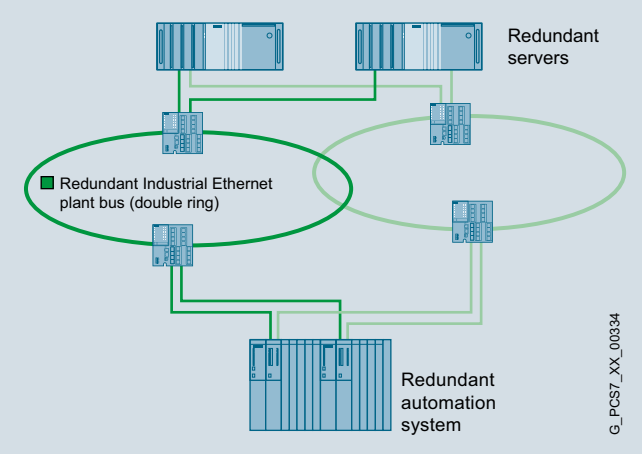

Redundant plant bus

The Operator Systems (single stations or servers) communicate with the automation systems via the Industrial Ethernet plant bus. The following special points must be observed for redundant configurations:

- BCE communication with the 10/100/1000 Mbps Ethernet card is generally sufficient even for redundant operator stations. This allows the connection of up to 8 automation systems per server pair (AS single stations only, not AS redundancy stations). The BCE license is included for the BCE versions of the SIMATIC PCS 7 Industrial Workstation. It is also valid for an additional desktop adapter network adapter.
- Industrial Ethernet communication via CP 1623 (pre-installed in the IE version of the SIMATIC PCS 7 Industrial Workstation) or CP 1628 (with extra security functions) is required in the following cases:
  - The number of automation systems per OS is larger than 8.
  - Redundant automation systems (AS redundancy stations) are used.
- The IE versions of the SIMATIC PCS 7 Industrial Workstation are equipped with a CP 1623 and SIMATIC NET HARDNET-IE S7 communication software, licensed for up to four CP 1623/ CP 1628 (4x license). If lower-level AS redundancy stations are to be connected, however, SIMATIC NET HARDNET-IE S7-REDCONNECT is required. The SIMATIC NET product HARDNET-IE S7REDCONNECT PowerPack (license for 4 units) can be used to upgrade features.
- If an operator station with BCE communication is to be upgraded for operation with AS redundancy stations, a CP 1623 or CP 1628 communication module is required in addition to the SIMATIC NET HARDNET-IE S7-REDCONNECT (4x license).
- If the plant bus is to be designed as a redundant dual ring, you require two interface modules (2 x Ethernet network adapters 10/100/1000 Mbps or 2 x CP 1623/CP 1628) per OS single station or OS server.

The communication software for CP 1623 or CP 1628 is always supplied with the SIMATIC PCS 7 software and installed in line with the operating system.

In order to activate this communication software, you may need additional licenses for the


- SIMATIC NET HARDNET-IE S7,
- SIMATIC NET HARDNET-IE S7-REDCONNECT or
- SIMATIC NET HARDNET-IE S7 REDCONNECT PowerPack communication products.

© Siemens 2019

5

Design (continued)

Connection to terminal bus

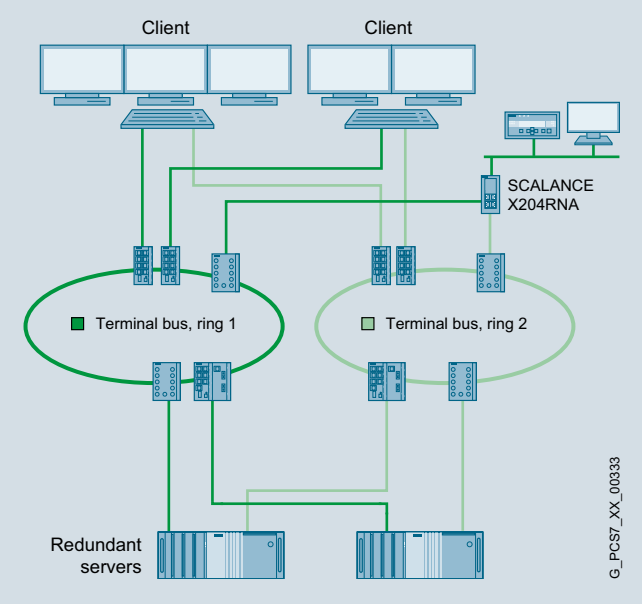

Redundant terminal bus

You can connect clients and servers to the terminal bus using integrated Industrial Ethernet interfaces or a desktop network adapter card.

A configuration with two separate rings is recommended for the redundant, fault-tolerant terminal bus. Communication is performed in this case using the Parallel Redundancy Protocol (PRP) in accordance with IEC 62439-3. Each PCS 7 station should be connected to one of two Industrial Ethernet interfaces on each of the two separate rings.

The SIMATIC NET SOFTNET-IE RNA communication software on the redundantly connected PCS 7 stations organizes communication processes based on the PRP. Therefore, SIMATIC NET SOFTNET-IE RNA communication software is required on each of the redundantly connected PCS 7 stations.

Connecting non-PRP-enabled devices

Up to 2 non-PRP-enabled devices that have only one Industrial Ethernet port, a WLAN access point or an infrastructure computer, such as DNS, WINS, DHCP or a file server, can be integrated into a redundant, fault-tolerant terminal bus with PRP via a SCALANCE X204RNA.

Product versions of the SCALANCE X204RNA:

- SCALANCE X204RNA
  Router in plastic housing with 4 electrical ports for connecting up to two non-PRP-enabled terminal devices to redundant networks
- SCALANCE X204RNA EEC
  Router in metal housing with two electric terminal device ports and two optical/electrical combo ports for network connection of up to two non-PRP-enabled terminal devices to redundant networks

SCALANCE X-200RNA is typically installed with the stations to be connected in a control cabinet.

For information on configuration and accessories such as cable material, plug connectors and transceivers, see section Communication, Industrial Ethernet, System Connection PCS 7 Systems.

For more information and technical specifications for the two SCALANCE X204RNA product versions, see Catalog IK PI.

For details on redundant SIMATIC PCS 7 configurations, refer to the manual "Fault-tolerant Process Control Systems".

Subsequent conversions

It is common practice to retroactively change or expand a plant. The following SIMATIC PCS 7 OS Software ConversionPacks support both retrofitting of the redundancy functionality, as well as the conversion from redundant OS single stations to redundant OS servers:

- SIMATIC PCS 7 OS Software ConversionPack 2x Single Station to Single Station Redundancy
  for converting two OS Single Stations to OS Single Station Redundancy
- SIMATIC PCS 7 OS Software ConversionPack 2x Server to Server Redundancy for converting two OS Servers to OS Server Redundancy
- SIMATIC PCS 7 OS Software ConversionPack Single Station Redundancy to Server Redundancy for converting two redundant OS Single Stations from OS Single Station Redundancy to OS Server Redundancy

© Siemens 2019

Ordering data	Article No.
Setup of redundant OS Single Stations	
SIMATIC PCS 7 OS Software Single Station Redundancy V9.0, incl. 100 OS Runtime PO 5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), single license for 2 installations	
With SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-3AA58-2YA0**
• Online delivery License key download and online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7652-3AA58-2YH0**
SIMATIC PCS 7 OS Software Single Station Redundancy ASIA V9.0, incl. 100 OS Runtime PO 2 languages (English, Chinese), software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), single license for 2 installations	
Physical delivery 2 × ASIA license key on USB hardlock and certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	
• ASIA	**6ES7652-3AA58-2CA0**
• SN ASIA (includingSOFTNET REDCONNECT)	**6ES7652-3AA58-6CA0**
Design of redundant OS servers	
SIMATIC PCS 7 OS Software Server Redundancy V9.0, incl. 100 OS Runtime PO 5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), single license for 2 installations	
With SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-3BA58-2YA0**
• Online delivery License key download and online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7652-3BA58-2YH0**
SIMATIC PCS 7 OS Software Server Redundancy ASIA V9.0, incl. 100 OS Runtime PO 2 languages (English, Chinese), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), single license for 2 installations	
With SIMATIC PCS 7 Software Media Package ASIA	
Physical delivery 2 × ASIA license key on USB hardlock and certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	
• ASIA	**6ES7652-3BA58-2CA0**
• SN ASIA (including SOFTNET REDCONNECT)	**6ES7652-3BA58-6CA0**
Volume licenses (quantity options)	
Runtime licenses for PO expansion for SIMATIC PCS 7 OS Single Station/OS Server (cumulative); 2 required for each	
SIMATIC PCS 7 OS Runtime License For extending the OS Runtime POs, cumulative	
Language-neutral, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	
- 100 POs	**6ES7658-2XA00-0XB0**
- 1 000 POs	**6ES7658-2XB00-0XB0**
- 5 000 POs	**6ES7658-2XC00-0XB0**
• Online delivery License key download and online certificate of license Note: Email address required!	
- 100 POs	**6ES7658-2XA00-0XH0**
- 1 000 POs	**6ES7658-2XB00-0XH0**
- 5 000 POs	**6ES7658-2XC00-0XH0**
Expansion of integral high-performance circular buffer archive (512 tags) of OS single station and OS server; 2 licenses required for each	
SIMATIC PCS 7 OS Archive Cumulative archive licenses, independent of language, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	
- 1 500 tags	**6ES7658-2EA00-2YB0**
- 5 000 tags	**6ES7658-2EB00-2YB0**
- 10 000 tags	**6ES7658-2EC00-2YB0**
- 30 000 tags	**6ES7658-2ED00-2YB0**
• Online delivery License key download and online certificate of license Note: Email address required!	
- 1 500 tags	**6ES7658-2EA00-2YH0**
- 5 000 tags	**6ES7658-2EB00-2YH0**
- 10 000 tags	**6ES7658-2EC00-2YH0**
- 30 000 tags	**6ES7658-2ED00-2YH0**

© Siemens 2019

5

Ordering data	Article No.
Conversion of two OS single stations to redundant OS single stations	
SIMATIC PCS 7 OS Software Conversion Pack 2x Single Station to Single Station Redundancy V9.0 For conversion of two OS single stations to OS single station redundancy Supports all languages of the OS Software Single Station, software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 Readme[1]) for the latest information), single license for 2 installations No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7652-3AA58-2YD0**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7652-3AA58-2YJ0**
Conversion of two redundant OS single stations to redundant OS servers	
SIMATIC PCS 7 OS Software Conversion Pack Single Station Redundancy to Server Redundancy V9.0 For the conversion of two redundant OS single stations from OS single station redundancy to OS server redundancy Supports all languages of the OS Software Single Station Redundancy, software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1]) for the latest information), single license for 2 installations No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7652-3BA58-2YC0**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7652-3BA58-1YJ0**

	Article No.
Conversion of two OS servers to redundant OS servers	
SIMATIC PCS 7 OS Software ConversionPack 2x Server to Server Redundancy V9.0 For the conversion of two OS servers to OS server redundancy Supports all languages of the OS Software Server, software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1]) for the latest information), single license for 2 installations No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7652-3BA58-2YD0**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7652-3BA58-2YJ0**
Individual components	
RS 232 connecting cable, 10 m For redundant OS single stations / OS servers	**6ES7902-1AC00-0AA0**
Add-on components for OS single stations and OS servers For connection to redundant plant bus (BCE or CP 1623/1628), for upgrading from BCE to CP 1623/1628 including communication with redundant AS	
Desktop adapter network card for BCE and as spare part for redundant terminal bus INTEL PCI network adapter for connection to Industrial Ethernet (10/100/1000 Mbps), with RJ45 connection and PCI express interface Note: License for the BCE communication with SIMATIC PCS 7 Industrial Workstations with BCE communication already included	**A5E02639550**
CP 1623 PCI Express x1 card for connection to Industrial Ethernet (10/100/1000 Mbps), with 2-port switch (RJ45)	**6GK1162-3AA00**
CP 1628 PCI Express x1 card for connecting to Industrial Ethernet (10/100/1000 Mbps), with 2-port switch (RJ45) and integrated security functions (firewall, VPN)	**6GK1162-8AA00**

© Siemens 2019

Ordering data	Article No.
Licenses may be required for activating the functionality of the CP 1623 or CP 1628 (Communications software is part of the SIMATIC PCS 7 software)	
Activation license if no redundant AS are used	
SIMATIC NET HARDNET-IE S7 V14 Runtime software, 2 languages (German/English), software class A	
License for up to 4 Industrial Ethernet CPs, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery Software and electronic manual on DVD, license key USB flash drive	**6GK1716-1CB14-0AA0**
• Online delivery Software, manual and license key download Note: Email address required!	**6GK1716-1CB14-0AK0**
Activation licenses when using redundant AS	
Alternative license for SIMATIC NET HARDNET-IE S7:	
SIMATIC NET HARDNET-IE S7-REDCONNECT V14 Runtime software, 2 languages (English, German), software class A	
License for up to 4 Industrial Ethernet CPs, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery Software and electronic manual on DVD, license key USB flash drive	**6GK1716-0HB14-0AA0**
• Online delivery Software, manual and license key download Note: Email address required!	**6GK1716-0HB14-0AK0**
Additive license for SIMATIC NET HARDNET-IE S7:	
SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack V14 Runtime software, 2 languages (English, German), software class A	
License for up to 4 Industrial Ethernet CPs, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key USB flash drive	**6GK1716-0HB14-0AC0**
• Online delivery License key download Note: Email address required!	**6GK1716-0HB14-0AK1**


	Article No.
Components for connecting SIMATIC PCS 7 stations to a redundant terminal bus with PRP protocol	
SOFTNET-IE RNA V14 Software for linking of SIMATIC PCS 7 stations to PRP-enabled networks with integrated SNMP	**6GK1711-1EW14-0AA0**
Runtime software, 2 languages (German, English), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
Goods delivery Software and electronic manual on DVD, license key USB flash drive	
SCALANCE X-204RNA Industrial Ethernet routers With integrated SNMP access, Web diagnostics and PROFINET diagnostics, for connecting to non-PRP-enabled terminal devices on PRP networks, with operating instructions, Industrial Ethernet network manual and configuration software on CD	
• **SCALANCE X204RNA** with four 100 Mbps RJ45 ports	**6GK5204-0BA00-2KB2**
• **SCALANCE X204RNA EEC** with two 100 Mbps RJ45 ports and two RJ45/SFP combo ports	**6GK5204-0BS00-3LA3**
Accessories such as cable material, plug connectors and transceivers	See section Communication, Industrial Ethernet, System Connection PCS 7 Systems

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

For more information on the Software Media Package, see the section "Software Media and Logistics", "PCS 7 Software Packages".

© Siemens 2019

Overview

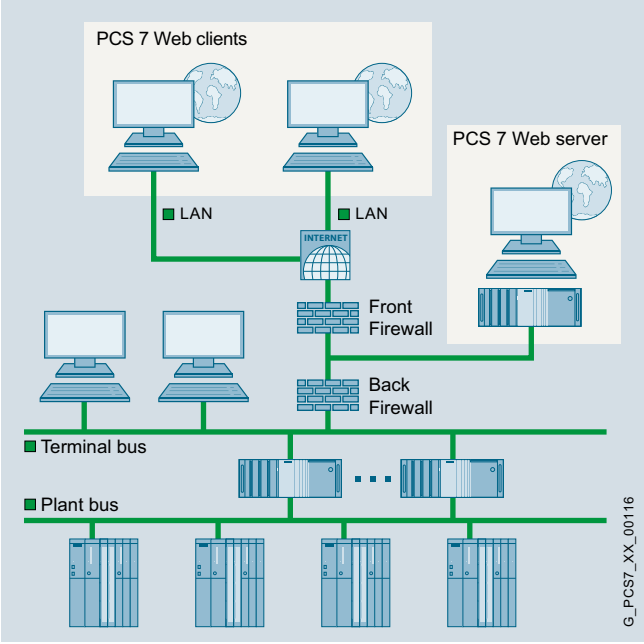

The PCS 7 Web server makes available the project data of the OS servers for PCS 7 Web clients and thus enables worldwide operator control and monitoring of a plant via intranet/Internet.

It does this by accessing project-specific process data in the lower-level OS servers using the mechanisms of a multi-client. The integrated OS user management guarantees a high degree of security here.

Application

A differentiation is basically made between the following types of application when operating and monitoring SIMATIC PCS 7 systems via the Web:

- Standard:
  Up to 100 PCS 7 Web clients access the data of **one** PCS 7 Web server over the intranet/Internet.
- Diagnostics:
  One or only a few Web clients have access to **several** PCS 7 Web servers/single-user systems for remote operation, diagnostics or monitoring.

Function



A plant can be operated and monitored via PCS 7 Web clients in the same manner as via the OS clients.

The process pictures are displayed on the PCS 7 Web clients with Internet Explorer. The PCS 7 Web clients access the project data provided by the PCS 7 Web server via an intranet or the Internet.

© Siemens 2019

Ordering data

	Article No.
"Standard" application	
SIMATIC PCS 7 **Web Server Basic V9.0** 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for latest information), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-2GX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-2GX58-2YH0**
SIMATIC PCS 7 **Web Server license (cumulative)** Language-neutral, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 1 client	**6ES7658-2GE00-0XB0**
- 5 clients	**6ES7658-2GF00-0XB0**
- 10 clients	**6ES7658-2GG00-0XB0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 1 client	**6ES7658-2GE00-0XH0**
- 5 clients	**6ES7658-2GF00-0XH0**
- 10 clients	**6ES7658-2GG00-0XH0**
"Diagnostics" application	
SIMATIC PCS 7 **Web Diagnostics Server V9.0** 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for latest information), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-2HX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-2HX58-2YH0**
SIMATIC PCS 7 **Web Diagnostics Client V9.0** 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit and Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-2JX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-2JX58-2YH0**
Additive OS Software Client license for the "Standard" and "Diagnostics" applications (required on the PCS 7 Web Server in addition to SIMATIC PCS 7 Web Server license or SIMATIC PCS 7 Web Diagnostics Server license)	
SIMATIC PCS 7 **OS Software Client V9.0**[2] 5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-2CX58-0YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-2CX58-0YH5**
SIMATIC PCS 7 **OS Software Client ASIA V9.0**[1] 2 languages (English, Chinese), software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), floating license for 1 user	
No SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license	**6ES7658-2CX58-0CB5**

1) See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

2) Deviating from the specification in the ordering data, the license of the OS Software Client in these special applications is also enabled for the server operating systems Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit.

More information

To ensure safe operation of the plant, you need to take suitable security measures that also include IT security (e.g. network segmentation). You can find more information on the topic of Industrial Security on the Internet at
www.siemens.com/industrialsecurity

© Siemens 2019

Notes

© Siemens 2019

Process Data Archiving and Reporting

6




6/2 Introduction

6/3 Process Historian and Information Server

© Siemens 2019

Overview

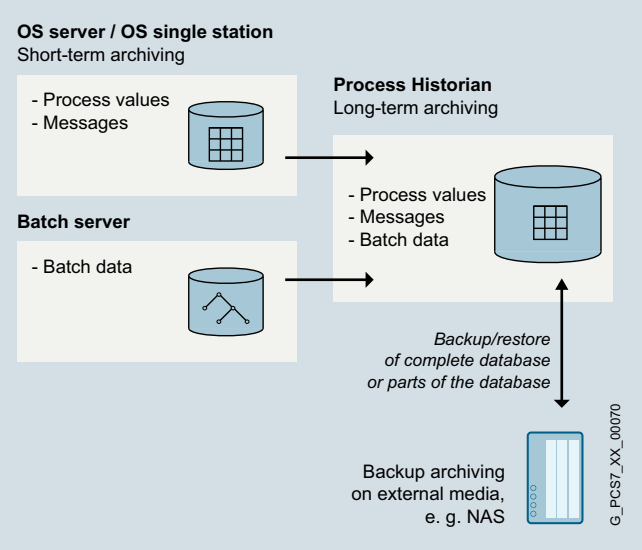

Short-term and long-term archiving

The operator system already includes a high-performance archiving system based on Microsoft SQL Server with cyclic logs for short-term archiving of process values (typically 1 to 4 weeks) and messages (typically 2 months). Data from the cyclic logs and batch data from SIMATIC BATCH can be exported time-controlled or event-controlled to the Process Historian for permanent archiving.

The Process Historian can be expanded by an Information Server to work as a reporting system. The Information Server can access the archived data in the Process Historian and in the operator stations in parallel.

Data managed in the Process Historian can be backed up on external storage media such as an NAS. This requires additional hardware and software that the utilized operating system supports.


Benefits

Process Historian

- Scalable high-performance archiving system in SIMATIC PCS 7
- No restriction with respect to single stations, servers or server pairs that can be archived
- Single or redundant configuration possible
- May be combined with Information Server for the generation of reports

© Siemens 2019

Overview

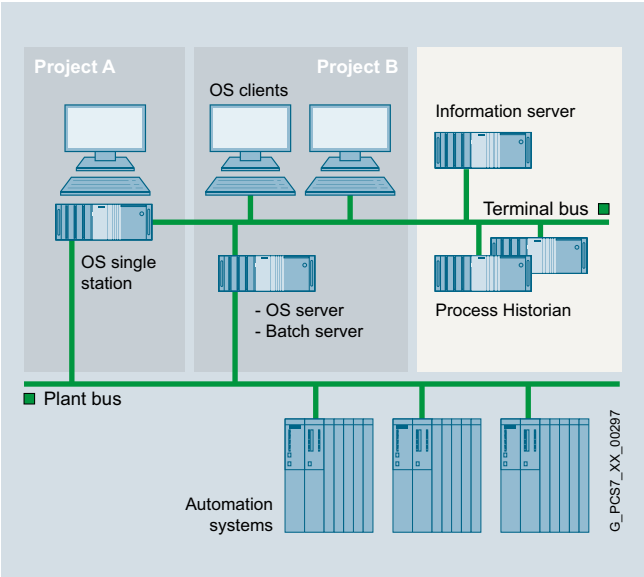

The Process Historian is used for long-term archiving of the following data from the SIMATIC PCS 7 process control system:

- OS archive data (process values and messages)
- Batch data

The process values and messages exported from the OS archives, as well as the batch data from SIMATIC BATCH are managed by the Process Historian in a central database. They can be visualized on OS clients or OS single stations either directly or with the support of the information server.

Design

Individual consultation on project-specific hardware configurations is recommended. The **PH-HW Advisor** tool is provided to determine the suitable hardware for the Process Historian:

https://support.industry.siemens.com/cs/de/en/view/109740115

If high online availability is required, a redundant Process Historian can be configured with a server pair.

The Information Server can be installed and operated on the Process Historian hardware or on separate hardware. When the Process Historian is configured redundantly, separation of the Information Server is mandatory.


Process Historian and Information Server run with the Windows Server 2012 and 2016 operating system, the Information Server can also run on separate hardware with Windows 7 or Windows 10.

The Process Historian and Information Server do not need a connection to the plant bus. They can be connected to the OS and batch servers of the SIMATIC PCS 7 system via terminal bus, e.g. via the integrated network connection (Ethernet RJ45 port onboard) of the server.

Configuration of the Process Historian

The licenses contained in the SIMATIC PCS 7 Process Historian Basic Package, SIMATIC PCS 7 Process Historian Server Redundancy or SIMATIC PCS 7 Process Historian and Information Server Basic Package are required for configuration of the Process Historian as the long-term archive of a SIMATIC PCS 7 system. These licenses must always be stored on the Process Historian server. The SIMATIC PCS 7 Process Historian Archive BATCH software product for archiving batch data from SIMATIC BATCH can be ordered optionally.

Configuration of applicative couplings with the Process Historian

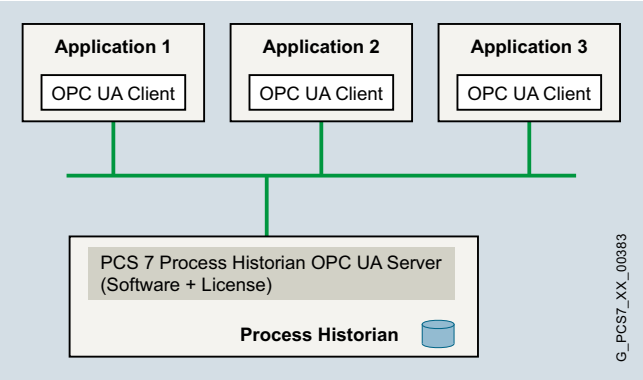


Reading of Process Historian data via OPC UA

As an OPC UA client, any applications can read the process values and messages archived in the database of the Process Historian. A SIMATIC PCS 7 Process Historian OPC UA Server is required for this on the Process Historian (software from SIMATIC PCS 7 Software Media Package plus single license for one installation).

© Siemens 2019

Design (continued)

Configuration of the Information Server

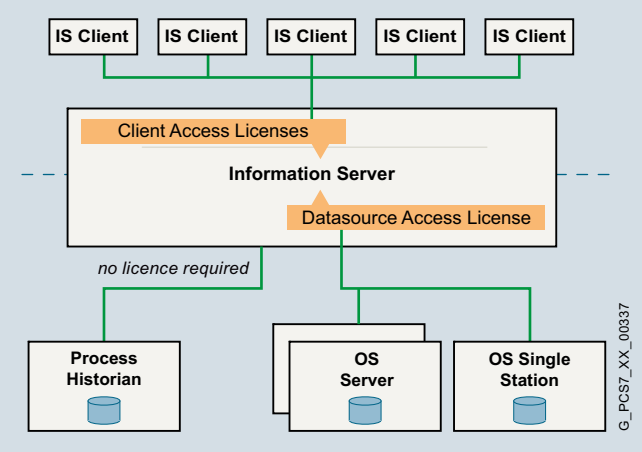

In addition to the SIMATIC PCS 7 Information Server Basic Package or the SIMATIC PCS 7 Process Historian and Information Server Basic Package, for configuration of the Information Server you require cumulative SIMATIC PCS 7 Information Server Client Access licenses corresponding to the number of clients that access the Information Server.

The Information Server is able to access one or multiple data sources in parallel. In addition to the Process Historian, this might also include archive data from operator stations (OS single station, OS server). Unlike when you access the Process Historian, you need cumulative licenses for SIMATIC PCS 7 Information Server Data Source Access to read data from OS single stations and OS servers. The license volume depends on the number of sources.

The installation of the SIMATIC PCS 7 Information Server Client Access and Data Source Access licenses is performed on the Information Server.

Software products/licenses	Single Server			Server Redundancy
	Process Historian plus Information Server	Information Server	Process Historian	Process Historian
Software products/licenses				
SIMATIC PCS 7 Process Historian and Information Server Basic Package	1	–	–	–
SIMATIC PCS 7 Information Server Basic Package	–	1	–	–
SIMATIC PCS 7 Process Historian Basic Package	–	–	1	–
SIMATIC PCS 7 Process Historian Server Redundancy	–	–	–	1
SIMATIC PCS 7 Process Historian Archive BATCH	1	–	1	2
SIMATIC PCS 7 Process Historian OPC UA Server	1	–	1	2
Quantity options/volume licenses				
SIMATIC PCS 7 Information Server Client Access licenses, cumulative (sets of 1, 3, 5, 10)	Licenses for 1 server	Licenses for 1 server	–	–
SIMATIC PCS 7 Information Server Data Source Access, cumulative source licenses (sets of 1, 3)	Licenses for 1 server	Licenses for 1 server	–	–

Configuration options

The SIMATIC PCS 7 Process Historian Conversion Pack 2x Server to Server Redundancy enables you to convert two Process Historian (PH) servers with the Process Historian Basic Package to redundant PH servers with Process Historian redundancy.

Conversion of Central Archive Server (CAS)

Change in product from CAS to Process Historian

A change in product from CAS to Process Historian is possible with products from the SIMATIC PCS 7 V8.0 range. In the separate catalog section "Previous versions", the following conversion packages are available under "SIMATIC PCS 7 V8.0, Process data archiving and reporting":

- SIMATIC PCS 7 CAS Conversion Pack "Single CAS Software V7.1+SP4/V8.0 to Process Historian Basic Package V8.0" for conversion of a single CAS to a corresponding Process Historian
- SIMATIC PCS 7 CAS Conversion Pack "Redundant CAS Software V7.1+SP4/V8.0 to Process Historian Server Redundancy V8.0" for conversion of a redundant CAS to a redundant Process Historian

The single or redundant Process Historian can subsequently be upgraded to V9.0 (for further information, see "Update/upgrade packages, Upgrades from SIMATIC PCS 7 V8.x to V 9.0, Upgrades for Process Historian and Information Server").

Migration of CAS database

The migration wizard of the Process Historian V8.2 supports the migration of CAS databases of SIMATIC PCS 7 V7.0 and higher.

© Siemens 2019

Function



Process Historian

The Process Historian can archive process values, messages, and batch data from the SIMATIC PCS 7 process control system. It is configured in a SIMATIC PCS 7 project similar to other stations of the SIMATIC PCS 7 process control system (e.g. OS Server, Batch Server, Route Control Server, OpenPCS 7 Server or all clients).

The process values and alarms managed in the database of the Process Historian on the OS clients and OS single stations can be visualized in a clear and user-friendly manner. Data selection is supported by integrated filter functions. Messages and process values can be shown in table form, and process values also in graphic form. Tables of process values can be exported in CSV format for further processing in other Windows applications, e.g. Microsoft Excel.

Any application can access the archived process values and messages in the Process Historian via OPC UA.

The data managed by Process Historian can be transferred to external storage media (Backup/Restore). This requires additional hardware and software suitable for the operating system of the Process Historian, for example NAS.


The Process Historian also supports backup and restoring of the complete database – both manually and automatically.

Archiving and visualization functions

- Real-time archiving of process values and messages from SIMATIC PCS 7 Operator Systems (OS single stations and OS servers)
- Real-time archiving for the batch data of SIMATIC BATCH
- Conversion of runtime segments in archive segments:
  - Loss-free data compression
  - Reduction of segment size in accordance with assignment and release of unused storage space
- Support of multiple SIMATIC PCS 7 projects
- Scaling relative to the basic hardware employed in terms of performance and quantity structure
- Export of all data as well as cataloging onto external storage media
- Reading the swapped-out data and cataloging from external storage media
- Data visualization on the OS clients/OS single stations:
  - Configuration of views (picture windows and masks) including the selection criteria for displaying the data
  - Visualizing of messages in table form dependent on filter functions
  - Displaying of process values in table or graphic form dependent on filter functions
  - Visualization of a batch overview (selecting the detailed log of a batch from the batch overview is possible)

© Siemens 2019

Function (continued)

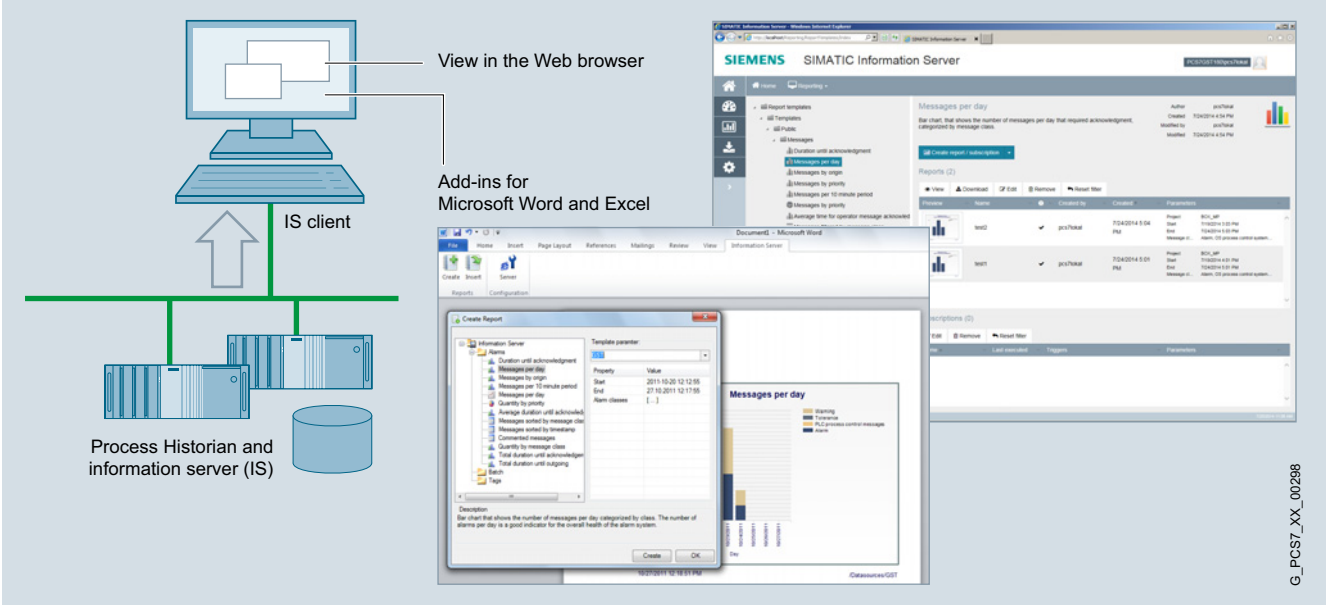

Information Server

The Information Server is the reporting system of the Process Historian. Based on the Microsoft Reporting Services, it offers web-based thin-client access to the historical data. Add-ins for Microsoft Word and Excel provide additional access to the database of the Process Historian.

Reporting functions

- Frequently used report templates for process values, messages and batches
- Open reporting system for creating any number of new report templates
- Storage of configured (parameterized) report templates for faster access
- Report export in common document formats
- Support of subscriptions for cyclic report generation including email service
- Creation and storage of role-based dashboards
- Role management for Windows users; supports workgroups and Active Directory; user rights can be assigned for specific projects
- Generation of reports and inserting as graphics in Microsoft Office Word documents
- Creation of Microsoft Excel reports for historical process values and messages as well as storage of the Excel report templates on the Information Server
- Support of subscriptions for Microsoft Excel report templates

© Siemens 2019

Ordering data	Article No.
Process Historian and Information Server on shared hardware	
SIMATIC PCS 7 Process Historian and Information Server Basic Package V9.0 For the shared installation of Process Historian and Information Server on an Industrial Workstation	
5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for latest information), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-7AX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-7AX58-2YH0**
Process Historian and Information Server on separate hardware	
SIMATIC PCS 7 Information Server Basic Package V9.0 For installation of the Information Server on a single station or server version of the Industrial Workstation, separate from the Process Historian	
5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64 Bit, Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for the latest information), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-7EX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-7EX58-2YH0**
SIMATIC PCS 7 Process Historian Basic Package V9.0 For installation of the Process Historian on a server version of the Industrial Workstation, separate from the Information Server	
5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for latest information), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-7BX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-7BX58-2YH0**
SIMATIC PCS 7 Process Historian Server Redundancy V9.0 For installation of a redundant Process Historian on server versions of two Industrial Workstations	
5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for latest information), single license for 2 installations	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-7CX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-7CX58-2YH0**

© Siemens 2019

Ordering data	Article No.
Functional options for Process Historian	
SIMATIC PCS 7 Process Historian Archive BATCH V9.0 5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for latest information), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-7DX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-7DX58-2YH0**
SIMATIC PCS 7 Process Historian OPC UA Server V9.0 for connection to third-party system	
5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for latest information), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-7FX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-7FX58-2YH0**
Quantity options for Information Server	
SIMATIC PCS 7 Information Server Client Access Cumulative Client Access licenses, independent of language, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 1 client	**6ES7652-7YA00-2YB0**
- 3 clients	**6ES7652-7YB00-2YB0**
- 5 clients	**6ES7652-7YC00-2YB0**
- 10 clients	**6ES7652-7YD00-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 1 client	**6ES7652-7YA00-2YH0**
- 3 clients	**6ES7652-7YB00-2YH0**
- 5 clients	**6ES7652-7YC00-2YH0**
- 10 clients	**6ES7652-7YD00-2YH0**

	Article No.
SIMATIC PCS 7 Information Server Data Source Access License for direct access to the archive data of operator stations (sources)	
Cumulative source licenses, independent of language, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 1 source	**6ES7652-7YE00-2YB0**
- 3 sources	**6ES7652-7YF00-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 1 source	**6ES7652-7YE00-2YH0**
- 3 sources	**6ES7652-7YF00-2YH0**
Conversion of two Process Historian servers to redundant Process Historian servers	
SIMATIC PCS 7 Process Historian Conversion Pack 2x Server to Server Redundancy V9.0 For conversion of two Process Historian (PH) servers with Process Historian Basic Package to redundant PH servers with Process Historian Redundancy	
5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard Edition 64-bit and Windows Server 2016 Standard Edition 64-bit (see SIMATIC PCS 7 Readme[1] for latest information), single license for 2 installations	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-7CX58-2YD0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-7CX58-2YJ0**

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

© Siemens 2019

Plant Device Management



7/2 SIMATIC PDM


7/14 SIMATIC PCS 7 Maintenance Station

7/19 SIMATIC PDM Maintenance Station

7/21 SIMATIC Plant Asset Maintenance Station

© Siemens 2019

Overview

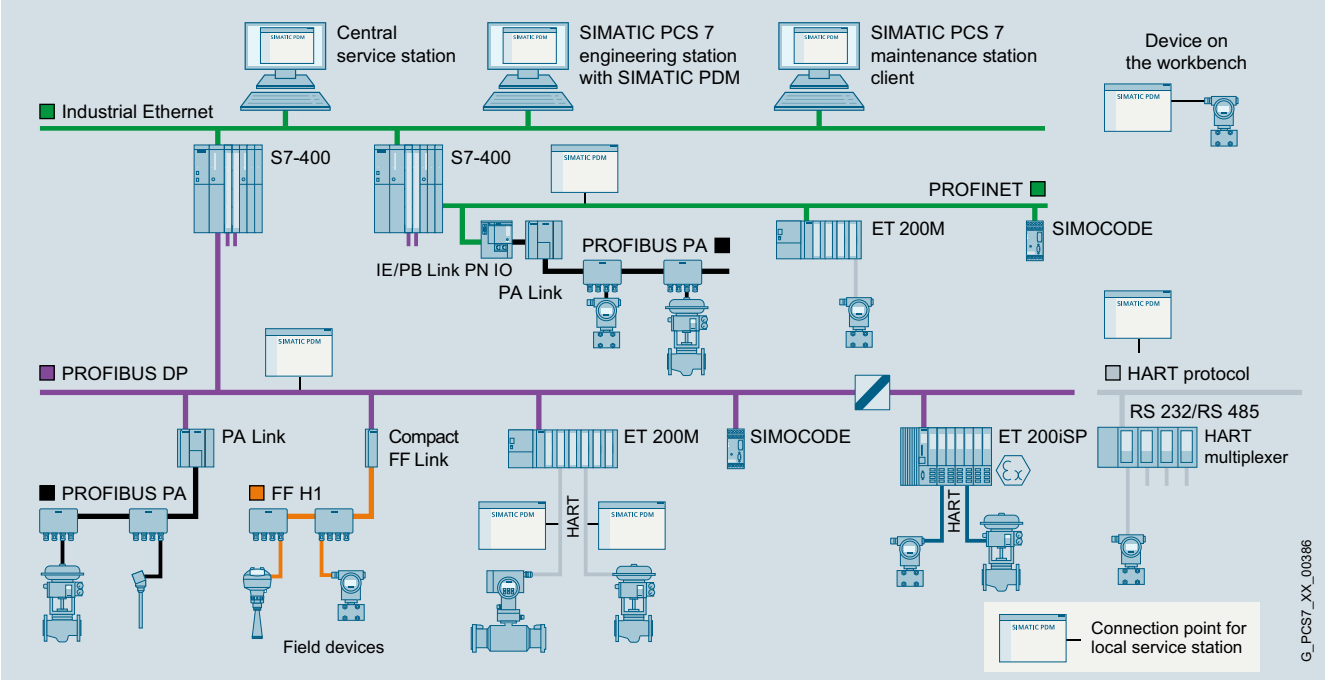

Configuration options with SIMATIC PDM

SIMATIC PDM (Process Device Manager) is a universal, vendor-independent tool for the configuration, parameter assignment, commissioning, diagnostics and servicing of intelligent field devices (sensors and actuators) and field components (remote I/Os, multiplexers, control-room devices, compact controllers), which in the following sections will be referred to simply as devices.

With *one* software product, SIMATIC PDM enables users to work with over 4 000 devices and device variants of Siemens and over 200 other manufacturers worldwide on a *single* homogeneous user interface.

The user interface satisfies the requirements of the VDI/VDE GMA 2187 and IEC 65/349/CD directives. Parameters and functions for all supported devices are displayed in a consistent and uniform fashion independent of their communications interface. Even complex devices with several hundred parameters can be represented clearly and processed quickly. Using SIMATIC PDM it is very easy to navigate in highly complex stations such as remote I/Os and even connected field devices.

From the viewpoint of device integration, SIMATIC PDM is the most powerful open process device manager on the global market. Devices not previously supported can be integrated in SIMATIC PDM by importing their device description packages (either EDD or FDI). This provides security for your investment and saves you investment costs, training expenses and follow-up costs.

SIMATIC PDM supports the operative system management in particular through:

- Uniform presentation and operation of devices
- Uniform representation of diagnostics information
- Indicators for preventive maintenance and servicing
- Detection of changes in the project and device
- Increasing the operational reliability
- Reducing the investment, operating and maintenance costs
- Quantity options for
  - Transfer of parameters between devices
  - Transfer of parameter sets to the devices
  - Export and import functions
  - Diagnostics update

© Siemens 2019

Overview (continued)

SIMATIC PDM can be used extremely flexiblly and tailored to a specific task for field device service:

- Single-point station for point-to-point connection to field devices
- Local service and parameter assignment station with connection to fieldbus segments
- Central service and parameter assignment station with connection to plant bus
- Central HART service and parameter assignment station for HART multiplexers and WirelessHART field devices
- Integrated into the SIMATIC PDM stand-alone maintenance station
- Integrated into the SIMATIC PCS 7 process control system

Maintenance personnel can assign field device parameters at mobile and stationary workstations with SIMATIC PDM. Practically every workstation integrated in the production plant can be used for configuration. Service personnel are thus able to work directly at the location of the field device, while data is stored centrally in the engineering station or maintenance station. This leads to a significant shortening of maintenance and travel times. Additional device-independent system functions support higher-level maintenance stations for creating progress lists for work and servicing.

When a maintenance station is configured in the SIMATIC PCS 7 process control system, SIMATIC PDM is integrated into it and transmits parameter data, diagnostic information and processing information. You can switch directly to the SIMATIC PDM views from the diagnostics faceplates in the maintenance station to perform diagnostics and work on the device in more detail.

A SIMATIC PDM user administration system based on SIMATIC Logon is used to assign various roles with defined function privileges to users. These function privileges refer to SIMATIC PDM system functions, e.g. writing to the device.

For all devices integrated with device description packages, SIMATIC PDM provides a range of information for display and further processing on the maintenance station, for example:

- Device type information (electronic rating plate)
- Detailed diagnostics information (manufacturer information, information on error diagnostics and troubleshooting, further documentation)
- Results of internal condition monitoring functions
- Status information (for example local configuration changes), device test completed
- Information on changes (audit trail report)
- Parameter information

© Siemens 2019

Design

Components	Product packages							
	SIMATIC PDM Stand alone				SIMATIC PDM system-integrated			
	Minimum configuration	Basic configuration	Service and parameter assignment station		in the configuration environment			
			local	central	SIMATIC S7	SIMATIC PCS 7		
	PDM Single Point	**PDM Basic**	**PDM Service**	**PDM Stand alone Server**	**PDM S7**	**PDM PCS 7**	**PDM PCS 7 Server**	**PDM PCS 7 FF**
SIMATIC PDM TAGs[1] in product package	1	4	4 + 50	4 + 100	4 + 100	4 + 100	4 + 100	4 + 100
SIMATIC PDM expansion options								
Count Relevant Licenses (accumulative) - 10 TAGs - 100 TAGs - 1 000 TAGs	*cannot be expanded*	o	o	o	o	o	o	o
SIMATIC PDM Basic		●	●	●	●	●	●	●
SIMATIC PDM Extended		o	o	●	●	●	●	●
SIMATIC PDM integration in STEP 7/ PCS 7		o	o	o	●	●	●	●
SIMATIC PDM Routing[2]		o	o	o	o	●	●	●
SIMATIC PDM Server		o	o	●	o	o	●	o
SIMATIC PDM 1 Client[3]		o	o	● (2 ×)	o	o	o	o
SIMATIC PDM Communication FOUNDATION Fieldbus		–	–	–	o	o	o	●
SIMATIC PDM HART server		o	o	o	o	–	–	–

SIMATIC PDM product structure

● Product component is part of the product package
o Optional product component for the product package; order additive
– Product component is not relevant for the product package or not available

1) For TAG definition, see "Design" section under "SIMATIC PDM TAGs"
2) In combination with SIMATIC PDM Integration in STEP 7/PCS 7
3) In combination with SIMATIC PDM Server

Customer-oriented product structure

The customer-oriented product structure of SIMATIC PDM provides optimal support for the named main use cases and enables you to adapt the scope of functions and performance to your individual requirements. The product range is organized as follows:

SIMATIC PDM Stand alone product packages

- SIMATIC PDM Single Point, a minimum configuration for single device handling
- SIMATIC PDM Basic for local service and parameter assignment stations as well as basic configuration for individual product package with optional product components
- SIMATIC PDM Service for local service and parameter assignment stations
- SIMATIC PDM Stand alone Server for central service and parameter assignment stations, e.g. for various plant units

SIMATIC PDM system-integrated product packages

- SIMATIC PDM S7 for local SIMATIC S7 engineering and service stations
- Various configurations for central SIMATIC PCS 7 engineering and service stations:
  - SIMATIC PDM PCS 7
  - SIMATIC PDM PCS 7 Server (enables device parameter assignment and diagnostics on clients of the PCS 7 engineering station and PCS 7 Maintenance Station)
  - SIMATIC PDM PCS 7-FF (supports the FOUNDATION Fieldbus H1)

In some circumstances, the product packages can be expanded with optional product components.

© Siemens 2019

Design (continued)

Product range	SIMATIC PDM V9.1							
	Single Point	Basic	Service	Stand alone Server	S7	PCS 7	PCS 7 Server	PCS 7-FF
TAGs contained	**1**	**4**	**4 + 50**	**4 + 100**	**4 + 100**	**4 + 100**	**4 + 100**	**4 + 100**
Project: Create offline	●	●	●	●	●	●	●	●
Project: Usable TAG extensions	–	●	●	●	●	●	●	●
Project: Process device network view	●	●	●	●	●	●	●	●
Project: Process device plant view	●	●	●	●	●	●	●	●
Project: Export/import devices	–	–	●	●	–	–	–	–
Project: Export/import parameters	–	o	●	●	●	●	●	●
Project: HW Config	–	o	o	o	●	●	●	●
Project: Utilization of SIMATIC PDM options	–	●	●	●	●	●	●	●
Project: Integration in STEP 7/PCS 7	–	o	o	o	●	●	●	●
Group operations	–	o	o	●	o	●	●	●
Setting device IDs	–	o	o	●	o	●	●	●
Communication: HART modem	●	●	●	●	●	–	–	–
Communication: HART interface	●	●	●	●	●	–	–	–
Communication: PROFIBUS DP/PA	●	●	●	●	●	●	●	●
Communication: HART over PROFIBUS DP	●	●	●	●	●	●	●	●
Communication: FF H1	–	–	–	–	o	o	o	●
Communication: Modbus	●	●	●	●	●	●	●	●
Communication: Ethernet	●	●	●	●	●	●	●	●
Communication: PROFINET	●	●	●	●	●	●	●	●
Communication: HART over PROFINET	●	●	●	●	●	●	●	●
Devices: Export/import parameters	–	o	o	●	●	●	●	●
Devices: Comparison of parameter values	–	o	o	●	●	●	●	●
Devices: Saving parameters	●	●	●	●	●	●	●	●
Devices: Change log (Audit Trail)	–	o	o	●	●	●	●	●
Devices: Calibration report	–	o	o	●	●	●	●	●
Devices: Print function	●	o	o	●	●	●	●	●
Devices: Document manager	–	o	o	●	●	●	●	●
Lifelist: Basic functionality	●	●	●	●	●	●	●	●
Lifelist: Expanded functionality (scan range, diagnostics, export, addressing)	–	o	o	●	●	●	●	●
Communication: Data record routing	–	o	o	o	o	●	●	●
Communication: HART multiplexer	–	o	o	o	o	–	–	–
Communication: Wireless HART	–	o	o	o	o	–	–	–
Function: HART SHC mode (increased communication speed)	●	●	●	●	●	●	●	●
Function: Device parameterization on PCS 7 maintenance station clients	–	o	o	o	o	o	●	o
Function: Device parameter assignment on SIMATIC PDM clients	–	o	o	● (2 ×)	o	o	o	o

SIMATIC PDM overview of functions and features

● Product component is part of the product package
o Optional product component for the product package; order additive
– Product component is not relevant for the product package or not available

© Siemens 2019

Design (continued)

SIMATIC PDM Stand alone product packages

SIMATIC PDM Single Point V9.1

This minimum configuration with handheld functionality is intended for handling exactly *one* field device via point-to-point coupling. It cannot be expanded with functions or with SIMATIC PDM TAG or SIMATIC PDM 1 Client licenses. Upgrading to a different product variant, e.g. SIMATIC PDM Basic, or a different product version is also not possible.

Supported communication types:

- PROFIBUS DP/PA
- HART communication (modem, RS 232 and via PROFIBUS/ PROFINET)
- Modbus
- Ethernet
- PROFINET

The functionality is matched accordingly. The device functions are supported as defined in the device description, for example:

- Managing the device library and unlimited device selection
- Parameter assignment and diagnostics according to the device description
- Exporting and importing of parameter data
- Device identification
- Lifelist
- Printing the parameter list

SIMATIC PDM Basic V9.1

SIMATIC PDM Basic is for local service and parameter assignment stations on any computers (IPC/notebook) with local connection to bus segments or direct connection to the device.

Supported communication types:

- PROFIBUS DP/PA
- HART communication (modem, RS 232 and via PROFIBUS/ PROFINET)
- Modbus
- Ethernet
- PROFINET

SIMATIC PDM Basic is equipped with all basic functions required for operation and parameter assignment of devices. That is, compared to SIMATIC PDM Single Point, it has the following additional functions:

- EDD-based diagnostics in the lifelist
- Memory function (only exporting and importing of parameter data)
- Report function
- Communication with HART field devices via remote I/Os

As a basic block for an individual configuration, SIMATIC PDM Basic can be expanded with all functional SIMATIC PDM options (PDM Routing only in combination with PDM Integration in STEP 7/PCS 7 required) as well as with cumulative sets of 10, 100 or 1 000 SIMATIC PDM TAGs. Without TAG expansion, SIMATIC PDM Basic is suitable for projects with up to 4 TAGs. SIMATIC PDM 1 Client licenses (sets of 1) can also be added in combination with the SIMATIC PDM Server option.

The SIMATIC PDM Extended option allows the activation of additional SIMATIC PDM system functions (for details, see SIMATIC PDM Extended V9.1 under "Optional product components").

SIMATIC PDM Service V9.1

With this product package for extended service, local service and parameter assignment stations can be realized on any type of computer (IPC/notebook) with a local connection to a bus segment or direct connection to field devices.

It comprises:

- SIMATIC PDM Basic (incl. 4 SIMATIC PDM TAGs)
- 50 SIMATIC PDM TAGs

Like SIMATIC PDM Basic, SIMATIC PDM Service can be expanded with all functional SIMATIC PDM options (PDM Routing only in combination with PDM Integration in STEP 7/PCS 7 required) as well as with cumulative SIMATIC PDM TAGs (sets of 10, 100 or 1 000) (see "Optional product components"). SIMATIC PDM 1 Client licenses (sets of 1) can also be added in combination with the SIMATIC PDM Server option. It is permitted to upgrade to another product version.

Note: For use of gateways and for PROFINET or Ethernet communication with field devices, SIMATIC PDM TAG licenses are charged for according to the objects configured in the process device plant view as follows:

- 10 SIMATIC PDM TAGs per S7 DSGW (data record gateway) with one PROFIBUS subnet
- 20 SIMATIC PDM TAGs per S7 DSGW with more than one PROFIBUS subnet
- 10 TAGs per IE/PB Link
- 1 TAG per field device (except in the case of special specifications)

SIMATIC PDM stand-alone server V9.1

With the SIMATIC PDM Stand alone Server product package, you can establish central service and parameter assignment stations that operate according to the client/server principle. Portals opened on licensed SIMATIC PDM clients (SIMATIC PDM sessions) enable handling of production plant field devices via the SIMATIC PDM server on the plant bus assigned via registration. The product package can be used multiple times within a plant, e.g. for various plant units. It comprises:

- SIMATIC PDM Basic (incl. 4 SIMATIC PDM TAGs)
- SIMATIC PDM Extended
- SIMATIC PDM Server
- 2 × SIMATIC PDM 1 Client
- 100 SIMATIC PDM TAGs

SIMATIC PDM Stand alone Server can be expanded with all functional SIMATIC PDM options (PDM Routing only in combination with PDM Integration in STEP 7/PCS 7 required) as well as with cumulative sets of 10, 100 or 1 000 SIMATIC PDM TAGs and SIMATIC PDM 1-client licenses (see "Optional product components"). The portals opened on these clients (SIMATIC PDM sessions) must also be licensed with the SIMATIC PDM 1-client licenses (besides the SIMATIC PDM clients). For details about this, refer to "SIMATIC PDM 1 Client" under "Optional product components". For user management of the SIMATIC PDM clients, the SIMATIC Logon product is also required. It is possible to upgrade to another product version.

Note: For use of gateways and for PROFINET or Ethernet communication with field devices, SIMATIC PDM TAG licenses are charged according to the objects configured in the process device plant view (for details, see corresponding note under SIMATIC PDM Service V9.1).

© Siemens 2019

Design (continued)

SIMATIC PDM system-integrated product packages

SIMATIC PDM S7 V9.1

The SIMATIC PDM S7 product package designed for use in a SIMATIC S7 configuration environment is intended for setup of a local SIMATIC S7 engineering and service station. It requires the installation of STEP 7 V5.5+SP4. It includes:

- SIMATIC PDM Basic (incl. 4 SIMATIC PDM TAGs)
- SIMATIC PDM Extended
- SIMATIC PDM integration in STEP 7/PCS 7
- 100 SIMATIC PDM TAGs

SIMATIC PDM S7 can be expanded with the functional options SIMATIC PDM Routing, SIMATIC PDM Communication FOUNDATION Fieldbus, SIMATIC PDM Server, and SIMATIC PDM HART Server as well as with cumulative SIMATIC PDM TAGs (sets of 10, 100 or 1 000) (see "Optional product components"). SIMATIC PDM 1 Client licenses (sets of 1) can also be added in combination with the SIMATIC PDM Server option.

SIMATIC PDM PCS 7 V9.1

The SIMATIC PDM PCS 7 product package suitable for use in a SIMATIC PCS 7 configuration environment is intended for use in a central SIMATIC PCS 7 engineering and service station. It comprises:

- SIMATIC PDM Basic (incl. 4 SIMATIC PDM TAGs)
- SIMATIC PDM Extended
- SIMATIC PDM integration in STEP 7/PCS 7
- SIMATIC PDM Routing
- 100 SIMATIC PDM TAGs

SIMATIC PDM PCS 7 can be expanded with the functional options SIMATIC PDM Communication FOUNDATION Fieldbus and SIMATIC PDM Server as well as with cumulative SIMATIC PDM TAGs (sets of 10, 100 or 1 000) (see "Optional product components"). SIMATIC PDM 1 Client licenses (sets of 1) can also be added in combination with the SIMATIC PDM Server option.

SIMATIC PDM PCS 7 Server V9.1

Instead of SIMATIC PDM PCS 7, the SIMATIC PDM PCS 7 Server product package expanded with the SIMATIC PDM Server option can also be used for a central SIMATIC PCS 7 engineering and service station. Field devices integrated using an Electronic Device Description (EDD) can then be assigned parameters on any client of the SIMATIC PCS 7 Maintenance Station as well as on local SIMATIC PDM clients. The following are components of SIMATIC PDM PCS 7 Server:

- SIMATIC PDM Basic (incl. 4 SIMATIC PDM TAGs)
- SIMATIC PDM Extended
- SIMATIC PDM integration in STEP 7/PCS 7
- SIMATIC PDM Routing
- SIMATIC PDM Server
- 100 SIMATIC PDM TAGs

SIMATIC PDM PCS 7 Server can be expanded with the functional option SIMATIC PDM Communication FOUNDATION Fieldbus as well as with cumulative sets of 10, 100 or 1 000 SIMATIC PDM TAGs and SIMATIC PDM 1-Client licenses (see "Optional product components"). The portals opened on these clients (SIMATIC PDM sessions) must also be licensed with the SIMATIC PDM 1-client licenses (besides the SIMATIC PDM clients). For details about this, refer to "SIMATIC PDM 1 Client" under "Optional product components".

SIMATIC PDM PCS 7-FF V9.1

Instead of SIMATIC PDM PCS 7, the SIMATIC PDM PCS 7-FF product package expanded with the SIMATIC PDM Communication FOUNDATION Fieldbus option can also be used for a central SIMATIC PCS 7 engineering and service station. This additionally supports parameter assignment of field devices on FOUNDATION Fieldbus H1. Components of SIMATIC PDM PCS 7-FF are:

- SIMATIC PDM Basic (incl. 4 SIMATIC PDM TAGs)
- SIMATIC PDM Extended
- SIMATIC PDM integration in STEP 7/PCS 7
- SIMATIC PDM Routing
- SIMATIC PDM Communication FOUNDATION Fieldbus
- 100 SIMATIC PDM TAGs

SIMATIC PDM PCS 7-FF V9.1 can be expanded with the functional option SIMATIC PDM Server as well as with cumulative sets of 10, 100 or 1 000 SIMATIC PDM TAGs (see "Optional product components"). SIMATIC PDM 1 Client licenses (sets of 1) can also be added in combination with the SIMATIC PDM Server option.

Optional product components

SIMATIC PDM Extended V9.1 option

The SIMATIC PDM Extended option enables you to unlock other system functions for SIMATIC PDM Basic and SIMATIC PDM, for example:

- Change log
- Calibration report
- Extended information in the Lifelist
- Export and import functions
- Print functions
- Document manager
- Comparison function
- Group operations
- Setting device IDs

This functionality is already integrated in the following product packages: SIMATIC PDM Stand alone Server, SIMATIC PDM S7, SIMATIC PDM PCS 7, SIMATIC PDM PCS 7 Server and SIMATIC PDM PCS 7-FF.

SIMATIC PDM Integration option in STEP 7/PCS 7 V9.1

This option is used for the integration of SIMATIC PDM in a SIMATIC S7 or SIMATIC PCS 7 configuration environment. SIMATIC PDM can then be started directly from the hardware configurator (HW Config) in STEP 7/SIMATIC PCS 7.

This functionality is already integrated in the product packages of category "SIMATIC PDM system-integrated" (SIMATIC PDM S7, SIMATIC PDM PCS 7, SIMATIC PDM PCS 7 Server, and SIMATIC PDM PCS 7-FF).

© Siemens 2019

Design (continued)

SIMATIC PDM Routing V9.1 option

If SIMATIC PDM is used on an engineering station, the SIMATIC PDM Routing option enables handling of every device in the field that can be configured per EDD throughout the plant and across different bus systems and remote I/Os. SIMATIC PDM Routing can be used in combination with SIMATIC PDM Integration in STEP 7/SIMATIC PCS 7.

Routing is already integrated in SIMATIC PDM PCS 7, SIMATIC PDM PCS 7 Server, and SIMATIC PDM PCS 7-FF. SIMATIC PDM Routing can be additionally installed as an option on a local SIMATIC S7 engineering and service station with SIMATIC PDM S7.

SIMATIC PDM Server V9.1 option

The server functionality can be activated in a local or central service station with this option. It enables parameter assignment of selected field devices on any client of the SIMATIC PCS 7 Maintenance Station as well as on local SIMATIC PDM clients. This functionality is already integrated in the SIMATIC PDM Stand alone Server and SIMATIC PDM PCS 7 Server. The SIMATIC PDM clients as well as the portals opened on these clients (SIMATIC PDM sessions) must be licensed with SIMATIC PDM 1 client licenses. For details about this, refer to "SIMATIC PDM 1 Client" under "Optional product components".

SIMATIC PDM Communication FOUNDATION Fieldbus V9.1 option

In a SIMATIC S7/PCS 7 configuration environment, using this option SIMATIC PDM can communicate with field devices on the FOUNDATION Fieldbus H1 via the FF link.

This functionality is already integrated in the SIMATIC PDM PCS 7-FF product package.

SIMATIC PDM HART Server V9.1 option

This option permits the use of HART multiplexers from various vendors in SIMATIC PDM. Furthermore, wireless HART field devices can also be parameterized with SIMATIC PDM.

SIMATIC PDM TAGs (version-independent)

Depending on the project size, the SIMATIC PDM TAGs supplied with a product package (except SIMATIC PDM Single Point) can be cumulatively expanded with sets of 10, 100 or 1 000 SIMATIC PDM TAGs.

A SIMATIC PDM TAG corresponds to a SIMATIC PDM object that represents the individual field devices or field components within a project, e.g. measuring instruments, positioners, switching devices or remote I/Os. SIMATIC PDM TAGs are also relevant for diagnostics with the lifelist of SIMATIC PDM. In this case, TAGs are considered to be all recognized devices with diagnostics capability, whose detailed diagnostics is effected through the device description (EDD).

SIMATIC PDM 1 Client (version-independent)

SIMATIC PDM 1 Client is a cumulative single-client license for SIMATIC PDM configurations with SIMATIC PDM server, for example SIMATIC PDM stand-alone server or SIMATIC PDM PCS 7 server. The license is used to activate registered SIMATIC PDM clients and SIMATIC PDM sessions (opened portals) on these clients.

Each "SIMATIC PDM 1 Client" license activates one SIMATIC PDM client with one SIMATIC PDM session. A SIMATIC PDM session is defined as one opened portal together with the parameter views of the field devices opened from the portal. Each additional simultaneously opened SIMATIC PDM session on this client requires its own "SIMATIC PDM 1 Client" license. For larger projects, up to 30 registered SIMATIC PDM Clients are possible.

The "SIMATIC PDM 1 Client" license must be transferred to the computer with the SIMATIC PDM Server. The SIMATIC PDM Standalone Server product package comes with 2 "SIMATIC PDM 1 Client" licenses.

SIMATIC PDM Software Media Package V9.1

The current SIMATIC PDM installation software is offered without a license in the form of the SIMATIC PDM Software Media Package. Purchasing of corresponding software licenses is necessary to unlock the product-specific functionalities.

With SIMATIC PDM product packages, when supplied via physical delivery (not with optional product components), a SIMATIC PDM Software Media Package is supplied together with each ordering item. Further SIMATIC PDM Software Media Packages must be ordered separately as required.

The software of the SIMATIC PDM Media Package without a license can be used for demonstration purposes in demo mode. The SIMATIC PDM functionality is limited as follows in demo mode:

- Stand alone mode
- Storage functions disabled
- Export and import functions disabled
- Expanded functionality disabled
- Communication functions restricted


Information on ordering and delivery

SIMATIC PDM is among the products for which the installation software is provided in the form of a software media package. Software media packages and product-specific software licenses are separate packages, which are not merged into a single delivery unit for a physical delivery.

The number of delivered software media packages can be determined by the number of ordered items. You can find more information under "Delivery form package" in the "Software Media and Logistics", "PCS 7 Software Packages" section of the ST PCS 7 catalog, see page 1/2

© Siemens 2019

Function

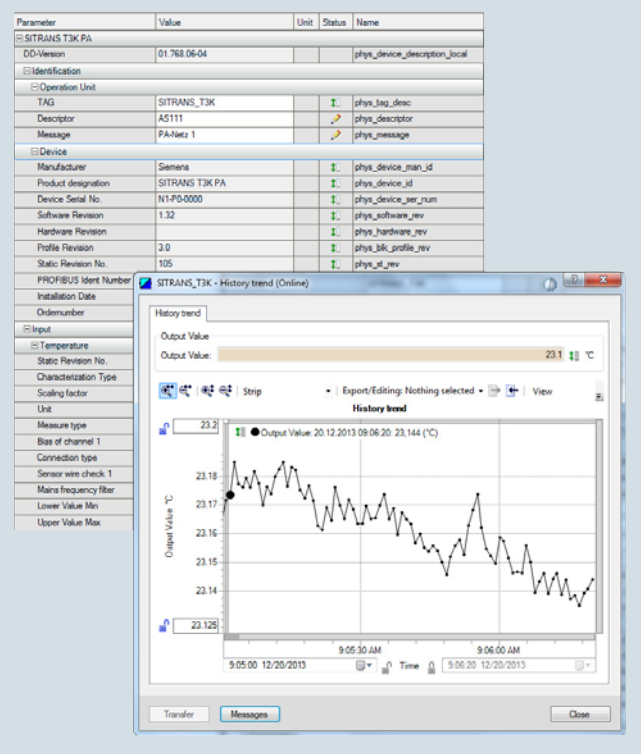

SIMATIC PDM, parameter view and trend window

SIMATIC PDM core functions

- Creation of project-specific device libraries
- Adjustment and modification of device parameters
- Comparing (e.g. project and device data)
- Plausibility testing of data input
- Device identification and testing
- Device status indication (operating modes, interrupts, states)
- Simulation
- Diagnostics (standard, detailed)
- Export/import (parameter data, logs, documents)
- Management (e.g. networks and PCs)
- Commissioning functions, e.g. measuring circuit tests of device data
- Lifecycle management functions, e.g. for device replacement
- Global and device-specific modification logbook for user operations (audit trail)
- Device-specific calibration reports
- Graphic presentations of echo envelope curves, trend displays, valve diagnosis results etc.
- Presentation of incorporated manuals
- Document manager for integration of up to 10 multimedia files

Integration

Device integration

SIMATIC PDM supports all devices defined by the Electronic Device Description (EDD) and devices described by Field Device Integration Technology (FDI Technology V1.2). EDD is standardized to EN 50391 and IEC 61804. Internationally it is the most widely used standardized technology for device integration. At the same time, it is the guideline of the established organizations for

- PROFIBUS and PROFINET (PI – PROFIBUS & PROFINET International)
- HART (FCG: Field Communication Group)
- Foundation Fieldbus (FCG: Field Communication Group)

The devices are integrated directly in SIMATIC PDM through a company-specific EDD or through the libraries of the FCG. To achieve improved transparency, they can be managed in project-specific device libraries.

Field devices are described in the EDD or FDI device description packages in terms of functionality and construction using the Electronic Device Description Language (EDDL). Using this description, SIMATIC PDM automatically creates its user interfaces with the specific device data. By simply importing the manufacturer's device-specific device description packages, you can update existing devices and integrate further devices in SIMATIC PDM.

Technical support

If you wish to use devices which cannot be found in the SIMATIC PDM device description library, we would be pleased to help you integrate them.

Support Request

You can request support by service specialists at Technical Support by using a "Support Request" on the Internet:

www.siemens.com/automation/support-request

Contacts in the Region

The Technical Support responsible for your region can be found on the Internet at:

www.automation.siemens.com/partner

Technical specifications

SIMATIC PDM V9.1	
Hardware	• PG/PC/notebook with processor corresponding to operating system requirements
Operating system (alternatives)	• Windows 7 Professional/Ultimate/ Enterprise SP1, 32-bit/64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition, 64-bit
Integration in STEP 7/PCS 7	• SIMATIC PCS 7 V8.0+SP2/V8.1/V8.2 (without Communication FOUNDATION Fieldbus) • SIMATIC PCS 7 V9.0 • STEP 7 V5.5+SP4/V5.6
SIMATIC PDM Client	• Microsoft Internet Explorer 10 or 11 • Google Chrome

© Siemens 2019

Ordering data	Article No.
SIMATIC PDM Stand alone product packages	
Minimum configuration	
SIMATIC PDM Single Point V9.1 including 1 TAG; product package for operation and configuration of one field device; communication via PROFIBUS DP/PA, HART (modem, RS 232, PROFIBUS/PROFINET), Modbus, Ethernet or PROFINET	
Additional functions or SIMATIC PDM TAGs are not possible	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC PDM Software Media Package per order item	**6ES7658-3HA68-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7658-3HA68-0YH5**
Basic configuration for individual product package as well as local service and parameter assignment stations	
SIMATIC PDM Basic V9.1 including 4 TAGs; product package for operation and configuration of field devices and components; communication via PROFIBUS DP/PA, HART (modem, RS 232, PROFIBUS/PROFINET), Modbus, Ethernet or PROFINET	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC PDM Software Media Package per order item	**6ES7658-3AB68-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7658-3AB68-0YH5**
Configuration for local service and parameter assignment station	
SIMATIC PDM Service V9.1 Product package for service and measuring circuit tests on a local service station, with • SIMATIC PDM Basic incl. 4 TAGs • 50 TAGs	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC PDM Software Media Package per order item	**6ES7658-3JD68-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7658-3JD68-0YH5**
Configuration for central service and parameter assignment station	
SIMATIC PDM stand-alone server V9.1 Product package for service and device management in plant units, with - SIMATIC PDM Basic incl. 4 TAGs - SIMATIC PDM Extended - SIMATIC PDM Server - 2 × SIMATIC PDM 1 Client - 100 TAGs	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC PDM Software Media Package per order item	**6ES7658-3TX68-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7658-3TX68-0YH5**

© Siemens 2019

Ordering data	Article No.
SIMATIC PDM system-integrated product packages	
Configuration for local SIMATIC S7 engineering and service station	
SIMATIC PDM S7 V9.1 Product package for use in a SIMATIC S7 configuration environment, with - SIMATIC PDM Basic incl. 4 TAGs - SIMATIC PDM Extended - SIMATIC PDM Integration in STEP 7/PCS 7 - 100 TAGs 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC PDM Software Media Package per order item	**6ES7658-3KD68-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7658-3KD68-0YH5**
Configuration for central SIMATIC PCS 7 engineering and service stations	
SIMATIC PDM PCS 7 V9.1 Product package for use in a SIMATIC PCS 7 configuration environment 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information) Floating license for 1 user, with - SIMATIC PDM Basic incl. 4 TAGs - SIMATIC PDM Extended - SIMATIC PDM Integration in STEP 7/PCS 7 - SIMATIC PDM Routing - 100 TAGs Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC PDM Software Media Package per order item	**6ES7658-3LD68-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7658-3LD68-0YH5**
SIMATIC PDM PCS 7-FF V9.1 Product package for use in a SIMATIC PCS 7 configuration environment, including FOUNDATION Fieldbus H1 communication 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information) Floating license for 1 user, with - SIMATIC PDM Basic incl. 4 TAGs - SIMATIC PDM Extended - SIMATIC PDM Integration in STEP 7/PCS 7 - SIMATIC PDM Routing - SIMATIC PDM Communication FOUNDATION Fieldbus - 100 TAGs Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC PDM Software Media Package per order item	**6ES7658-3MD68-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7658-3MD68-0YH5**
SIMATIC PDM PCS 7 Server V9.1 Product package for use in a SIMATIC PCS 7 configuration environment, including server functionality 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information) Single license for 1 installation, with - SIMATIC PDM Basic incl. 4 TAGs - SIMATIC PDM Extended - SIMATIC PDM Integration in STEP 7/PCS 7 - SIMATIC PDM Routing - SIMATIC PDM Server - 100 TAGs Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC PDM Software Media Package per order item	**6ES7658-3TD68-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7658-3TD68-0YH5**

© Siemens 2019

Ordering data	Article No.
Optional product components for SIMATIC PDM	
SIMATIC PDM Extended V9.1 For enabling additional system functions	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
Without SIMATIC PCS 7/SIMATIC PDM Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7658-3NX68-2YB5**
• Online delivery (without SIMATIC PCS 7/SIMATIC PDM Software Media Package) License key download and online certificate of license Note: Email address required!	**6ES7658-3NX68-2YH5**
SIMATIC PDM Integration in STEP 7/SIMATIC PCS 7 V9.1 For integration in a SIMATIC S7/ SIMATIC PCS 7 configuration environment	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
Without SIMATIC PCS 7/SIMATIC PDM Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7658-3BX68-2YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7658-3BX68-2YH5**
SIMATIC PDM Routing V9.1 For plant-wide navigation to field devices	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
Without SIMATIC PCS 7/SIMATIC PDM Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7658-3CX68-2YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-3CX68-2YH5**
SIMATIC PDM Server V9.1 For activating the server functionality	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), single license for 1 installation	
Without SIMATIC PCS 7/SIMATIC PDM Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7658-3TX68-2YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7658-3TX68-2YH5**
SIMATIC PDM Communication FOUNDATION Fieldbus V9.1 For communication with field devices on FOUNDATION Fieldbus H1	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
Without SIMATIC PCS 7/SIMATIC PDM Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7658-3QX68-2YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7658-3QX68-2YH5**
SIMATIC PDM HART Server V9.1 For using HART multiplexers as well as for configuration of wireless HART field devices	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
Without SIMATIC PCS 7/SIMATIC PDM Software Media Package	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7658-3EX68-2YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7658-3EX68-2YH5**

© Siemens 2019

Ordering data

	Article No.
SIMATIC PDM 1 Client Cumulative client license for SIMATIC PDM configurations with SIMATIC PDM Server, software class A, single license for 1 installation	
• Goods delivery License key on USB flash drive and certificate of license	**6ES7658-3UA00-2YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	**6ES7658-3UA00-2YH5**
SIMATIC PDM TAGs TAG licenses for expanding the available TAG volume, cumulative, software class A, floating license for 1 user	
• Goods delivery License key on USB flash drive and certificate of license	
- 10 TAGs	**6ES7658-3XC00-2YB5**
- 100 TAGs	**6ES7658-3XD00-2YB5**
- 1 000 TAGs	**6ES7658-3XE00-2YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	
- 10 TAGs	**6ES7658-3XC00-2YH5**
- 100 TAGs	**6ES7658-3XD00-2YH5**
- 1 000 TAGs	**6ES7658-3XE00-2YH5**

	Article No.
SIMATIC PDM **Software Media Package**	
SIMATIC PDM **Software Media Package V9.1** Installation software without license, 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard Edition 64-bit (see SIMATIC PDM V9.1 Readme for latest information)	
Without SIMATIC PCS 7 Software Media Package	
Note: Can only be used in conjunction with a valid license or in demo mode!	
• Goods delivery SIMATIC PDM and device library software on DVD	**6ES7658-3GX68-0YT8**
• Online delivery SIMATIC PDM and device library software download Note: Email address required!	**6ES7658-3GX68-0YG8**

More information

Update/Upgrade

Existing installations based on SIMATIC PDM V6.x or V8.x/V9.0 (including SP in each case) can be upgraded straight to V9.1 with upgrade packages.

Projects with SIMATIC PDM V7.0 can only be upgraded to version 9.1 by first upgrading to version 8.0. Two upgrade packages are offered for SIMATIC PDM V8.x/V9.0:


- SIMATIC PDM Upgrade Package Basic[1)] (with/without SIMATIC PDM HART Server in each case) for configurations based on:
  - SIMATIC PDM Basic
  - SIMATIC PDM Service
  - SIMATIC PDM S7
  - SIMATIC PDM PCS 7
- SIMATIC PDM Upgrade Package Complete[1)] for configurations based on:
  - SIMATIC PDM PCS 7 Server
  - SIMATIC PDM PCS 7-FF

[1)] Optional product components for SIMATIC PDM such as PDM Extended, PDM Integration in STEP 7/PCS 7, PDM Routing, PDM Server and PDM Communication FOUNDATION Fieldbus are each included in a product package listed in the SIMATIC PDM Upgrade Package Basic or SIMATIC PDM Upgrade Package Complete and are implicitly authorized to be updated via the corresponding license. The SIMATIC PDM Upgrade Package Complete is required for use of the product components PDM Server or PDM Communication FOUNDATION Fieldbus.

For more information, see the section "Update/upgrade packages", "Updates/upgrades asynchronous to the PCS 7 version" - "Upgrades SIMATIC PDM".

© Siemens 2019

Overview

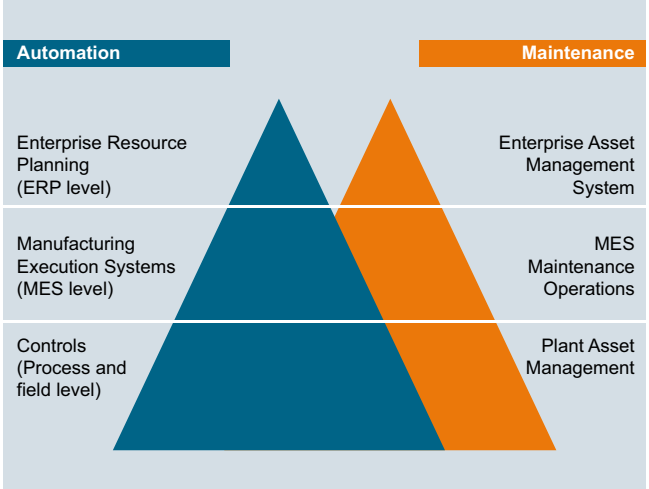


The maintenance station is specialized for plant asset management (also known as plant-floor asset management), i.e. the management of company assets that are used as fixed assets for production. Its tasks include efficient administration and management of equipment in technological systems, in particular the I&C equipment, with the objective of maintaining and increasing the value.

The following maintenance strategies are used for this purpose:

- **Corrective maintenance**
  Response to pending error and diagnostics messages
  - Failures are risked or minimized by redundant configurations
  - Maintenance in the form of repair or replacement
- **Preventive maintenance**
  Preventive diagnostics and maintenance
  - Initiation of appropriate maintenance measures before a fault actually occurs
  - Maintenance in the form of time-dependent or status-dependent maintenance (depending on degree of wear)
- **Predictive maintenance**
  Predictive diagnostics for timely detection of potential problems and determination of the remaining service life

Using the maintenance station, the maintenance engineer can check the hardware of the automation system, evaluate its diagnostics messages and information and derive maintenance measures from them. He or she is thus in a position to plan, control and document the entire maintenance cycle - starting with the arrival of a diagnostics message, continuing with the evaluation of detailed diagnostics information and the planning, initiation and tracking of maintenance measures, all the way to their completion.

SIMATIC PCS 7 Maintenance Station

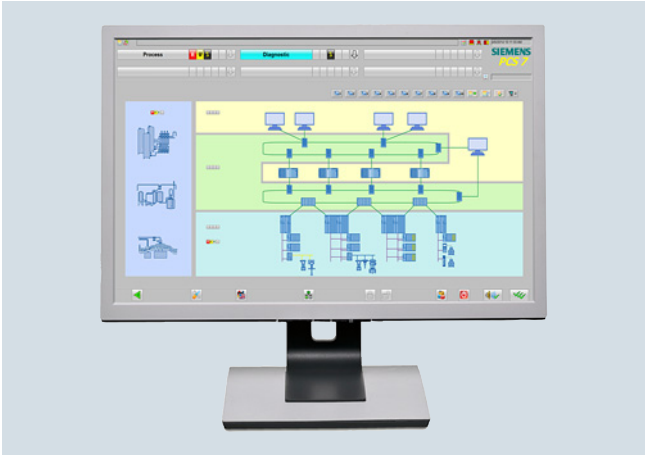

The SIMATIC PCS 7 Maintenance Station makes additional hardware or software components for plant asset management superfluous. Fully integrated in SIMATIC PCS 7, it supplements the process control system with a valuable instrument for minimizing the total cost of ownership over the complete life cycle of the plant.

Parallel to process control, the SIMATIC PCS 7 Maintenance Station provides consistent maintenance information and functions for the system components of the plant (assets):

- The plant operator receives all process-relevant information via the operator system, as well as an overview of the diagnostics status of the process control system.
- The maintenance engineer checks the hardware of the automation system using the SIMATIC PCS 7 Maintenance Station, and processes its diagnostics messages and maintenance requests.

The SIMATIC PCS 7 Maintenance Station provides maintenance and service personnel access to:

- Components of the process control system, e.g. intelligent field devices and I/O modules, fieldbuses, controllers, network components and plant buses as well as single stations, servers and clients
- Assets that do not directly belong to the process control system, such as pumps, motors, centrifuges, heat exchangers (mechanical assets) or control loops. They are represented by proxy objects in which the diagnostics rules are stored.

It is therefore no longer the case that maintenance functions and information are only available in a separate level independent of the production process.

Plant operators and service personnel are thus able to constantly act the following, for example:

- Service requests
- Service approvals
- Placing an asset in "In Service" status
- Information regarding a completed service measure

© Siemens 2019

Design



Architecture

The SIMATIC PCS 7 Maintenance Station uses hardware and software components of the engineering system (ES) and operator system (OS) for asset management. Depending on the project-specific SIMATIC PCS 7 architecture, it can be implemented on the basis of a SIMATIC PCS 7 BOX (PCS 7 BOX RTX ES/OS system or PCS 7 BOX ES/OS system), a SIMATIC PCS 7 ES single station, or a client/server combination.

As a result of the close interlacing, ES, OS, and asset management functions run on common hardware. Such a multi-functional station cannot only be used for asset management, but also for system engineering or HMI.

The following table shows possible hardware/software configurations of the SIMATIC PCS 7 Maintenance Station (MS).

SIMATIC PCS 7 Maintenance Station as	Single-user system	Single-user system	Multi-user system (client-server combination)		
Required SIMATIC PCS 7 hardware/software	**PCS 7 BOX**	**PCS 7 ES Single Station**	**PCS 7 MS/ES Client**	**PCS 7 MS Server**	**PCS 7 ES Server or Single Station**
Basic hardware					
SIMATIC PCS 7 BOX RTX ES/OS system or SIMATIC PCS 7 BOX ES/OS system	●	–	–	–	–
SIMATIC PCS 7 Industrial Workstation for ES/OS single system	–	●	●	–	● (Single Station)
SIMATIC PCS 7 Industrial Workstation for OS server	–	–	–	●	● (Server)
Required SIMATIC PCS 7 software corresponding to operating system of basic hardware (without taking into account the quantity frameworks)					
SIMATIC PCS 7 Engineering Software AS/OS	–	●	●	–	●
Optional[1]: SIMATIC PDM PCS 7 server[2]; optionally also SIMATIC PDM-FF[3]	●	●	–	–	●
SIMATIC PCS 7 OS Software Server	–	–	–	●	–
SIMATIC PCS 7 OS Software Client	–	–	●	–	–
SIMATIC PCS 7 Maintenance Station Engineering	●	●	●	–	●
SIMATIC PCS 7 Maintenance Station Runtime (basic package and additional asset TAGs)	●	●	–	●	–

1) Only when you use intelligent field devices or the AssetMon functionality

2) Allows SIMATIC PDM to be started on every MS client

3) SIMATIC PDM-FF required for plants with FOUNDATION Fieldbus H1

The MS Server can even be operated as a redundant pair of servers. The redundant MS servers must be configured like redundant OS servers and expanded by the SIMATIC PCS 7 Maintenance Station Runtime functionality.

The SIMATIC PCS 7 Maintenance Station Runtime basic package already contains 100 asset TAGs. These can be expanded by cumulative SIMATIC PCS 7 Maintenance Station Runtime licenses for 100 or 1 000 asset TAGs (Count Relevant Licenses).

© Siemens 2019

Design (continued)

The signaling system, user interface, picture hierarchy and operator prompting are based on the HMI philosophy of the operator system. The diagnostics data of all assets are displayed on uniform faceplates whose contents depend on the intelligence of the respective component. This means that working with the SIMATIC PCS 7 Maintenance Station is simple and intuitive – a time-consuming training period is not required.

The SIMATIC PCS 7 Maintenance Station uses the optional product package SIMATIC PDM PCS 7 Server for parameter assignment and diagnostics of the devices integrated via an Electronic Device Description (EDD). The optional product component SIMATIC PDM-FF is required for plants with FOUNDATION Fieldbus H1.

For editing the devices, the user receives the functional rights corresponding to their role following identification. User management and access control for the SIMATIC PCS 7 Maintenance Station is handled by SIMATIC Logon integrated in SIMATIC PCS 7.

SIMATIC PDM supplies comprehensive device information for display and further processing on the maintenance station and can be called from any SIMATIC PCS 7 Maintenance Station Client (MS Client). The display of diagnostics displays structured according to the plant hierarchy with the operating states of the SIMATIC PCS 7 components is possible both on purely MS clients and combined MS/OS clients. The faceplates of these stations can also display the enhanced diagnostics information determined by SIMATIC PDM. A device-specific call of SIMATIC PDM is also possible. However, enhanced online diagnostics functions in conjunction with HW Config can only be called on stations that are both an MS client and engineering station for SIMATIC PCS 7 at the same time.

Configuration

The SIMATIC PCS 7 Maintenance Station is based on the hardware and software project of the application which is generated during the standard configuration with the SIMATIC PCS 7 engineering system. With system support, all data relevant to the plant asset management are derived from the project data of the application, and the diagnostics screens are also generated, simply by pressing a button. The procedure is simple, and requires no additional configuration work:

- Generation of the hardware and software project of the application
- Parameter settings for optional functionalities
- System-supported generation of the diagnostics screens with all components present in the project, including the picture hierarchy based on the project's hardware structure
- Compilation of the configuration data, and downloading to the operator station and Maintenance Station with subsequent test and commissioning phase

The names of imported pictures, icons, etc. can be permanently changed for further use in the maintenance project.

Conformity to international standards, specifications, and recommendations


Plant asset management with the SIMATIC PCS 7 Maintenance Station conforms to international standards, specifications, and recommendations. It is based on the NAMUR requirements (process control standards committee in the chemical and pharmaceutical industries) defined for systems for plant asset management and for status messages from field devices:

- NAMUR recommendation NE129 (requirements for systems for plant asset management)
- NAMUR recommendation NE 105 (requirements for the integration of fieldbus devices in engineering tools)
- NAMUR recommendation NE107 (status messages from field devices "Device failure", "Maintenance requirements", "Function check")

In addition, it also observes IEC 61804-2 for describing devices by means of the Electronic Device Description Language (EDDL) and specifications made by the PROFIBUS & PROFINET International (PI) organization, e.g.:

- PROFIBUS Profile Guidelines Identification & Maintenance Functions
- PROFIBUS PA Profile for Process Control Devices

Function

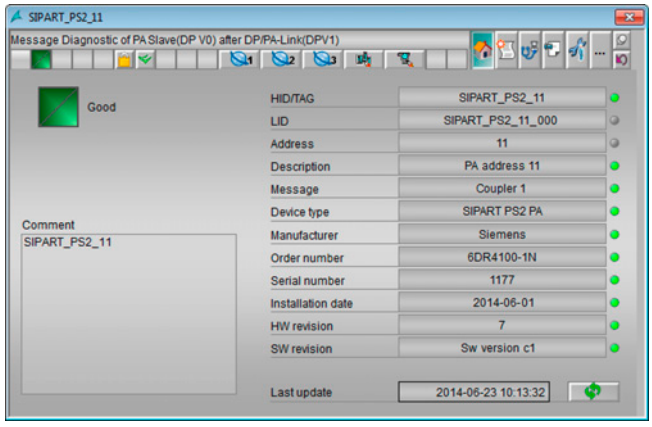

Diagnostics message of a component in the "Identity" faceplate view

The SIMATIC PCS 7 Maintenance Station provides maintenance engineers with comprehensive maintenance information on the system components (assets) of the plant. Starting from the overview display, maintenance engineers can navigate to the diagnostics displays of the subordinate hardware levels to obtain information on the diagnostics status of individual plant areas or components. If a fault is signaled in the overview display, the "Loop in alarm" function permits rapid switching to the diagnostics faceplate of the associated component.

The scope of information available depends on the individual possibilities of the asset, and is filtered according to the user's area of responsibility.

The following information is available, for example:

- Display of diagnostics status detected by the system
- Information on the component, such as process tag name, manufacturer or serial number
- Display of diagnostics messages of an individual component
- Visualization of the type and current state of the initiated maintenance measure

© Siemens 2019

Function (continued)

Information on mechanical assets

For mechanical assets without self-diagnostics (pumps, motors, etc.), the AssetMon function block can determine inadmissible operating states from various measured values and their deviations from a defined normal status. These are displayed as maintenance alarms on the SIMATIC PCS 7 Maintenance Station. AssetMon is able to process up to 3 analog values and up to 16 binary values.

In addition, AssetMon is suitable for implementation of:


- Individual diagnostics structures
- Project-specific diagnostics rules
- Condition monitoring functions

Enhanced information for assets according to IEC 61804-2

Further information can be called for assets described by the electronic device description (EDD) according to IEC 61804-2. This information is automatically read out of the components and made available by SIMATIC PDM in the background.

- Device type information (electronic rating plate)
- Detailed diagnostics information
  - Device-specific information from the vendor
  - Information on fault diagnostics and troubleshooting
  - Additional documentation
- Results of internal condition monitoring functions
- Status information (e.g. local configuration changes)
- Information on changes (audit trail report)
- Parameter information

Visualization of the maintenance information

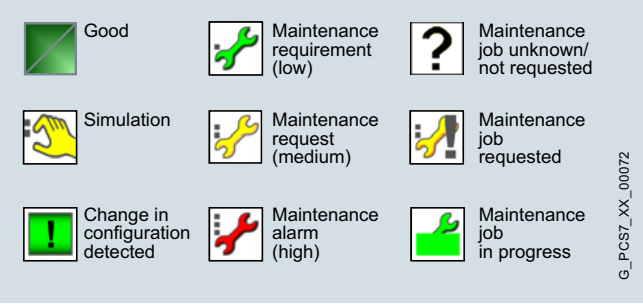

Uniform symbols for visualization of the maintenance status as well as operator prompting

The hierarchical structuring of information and the uniform symbols support the overview, facilitate orientation, and permit the maintenance engineer to rapidly access detailed information starting from the plant overview.

The symbol set defined for the plant asset management contains symbols which identify the diagnostic status of the devices/components, the relevance of the maintenance request, and the status of the maintenance measure.

Group displays in the plant overview visualize the diagnostics status of the subordinate structures/components according to a type of traffic light with red, yellow or green.

In line with their signficance, the components described with a device description package in SIMATIC PDM can be marked as follows and also directly filtered using these features:

- Normal
- Important
- Safety Instrumented Function (SIF)
- Device checked
- Project-specific write protection

Diagnostics screens display the status of components and subordinate devices/components through standardized symbols with the following elements:

- Bitmap of component
- Tag identification of component
- Maintenance state display
- Group display for diagnostics status of subordinate components

Clicking an element in the symbol display either opens the subordinate hierarchy level or a component faceplate. The component faceplate offers various views of the associated component with additional device-specific information, e.g. an identification, message or maintenance view.

© Siemens 2019

Ordering data

	Article No.
SIMATIC PCS 7 Maintenance Station Runtime Basic Package V9.0 including SNMP OPC server license and 100 asset TAGs	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A	
Runs with the following operating systems (see SIMATIC PCS 7 V9.0 Readme for latest information):	
• Windows 7 Ultimate 64-bit	
• Windows 10 Enterprise 2015 LTSB 64-bit	
• Windows Server 2012 R2 Standard Edition 64-bit	
• Windows Server 2016 Standard 64-bit	
Single license for 1 installation, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-7GB58-0YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-7GB58-0YH0**
SIMATIC PCS 7 Maintenance Station Runtime Asset TAGs for adding asset TAGs, cumulative	
Language-neutral, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 asset TAGs	**6ES7658-7GB00-2YB0**
- 1 000 asset TAGs	**6ES7658-7GC00-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 asset TAGs	**6ES7658-7GB00-2YH0**
- 1 000 asset TAGs	**6ES7658-7GC00-2YH0**

	Article No.
Maintenance Station Engineering	
SIMATIC PCS 7 Maintenance Station Engineering V9.0	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A	
Runs with the following operating systems (see SIMATIC PCS 7 V9.0 Readme for latest information):	
• Windows 7 Ultimate 64-bit	
• Windows 10 Enterprise 2015 LTSB 64-bit	
• Windows Server 2012 R2 Standard Edition 64-bit	
• Windows Server 2016 Standard 64-bit	
Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-7GX58-0YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-7GX58-0YH5**

Asset TAGs


Asset TAGs license the number of asset objects that are monitored with the SIMATIC PCS 7 Maintenance Station. An asset object represents individual hardware components within a SIMATIC PCS 7 project, e.g.

- Measuring devices monitored per EDD, positioners, switching devices, or remote I/O stations
- Basic devices or Ethernet components monitored per OPC coupling in the Maintenance Station

The asset TAGs of the SIMATIC PCS 7 Maintenance Station Runtime licenses (sets of 100 and 1 000) are cumulative (Count Relevant Licenses).

© Siemens 2019

Overview

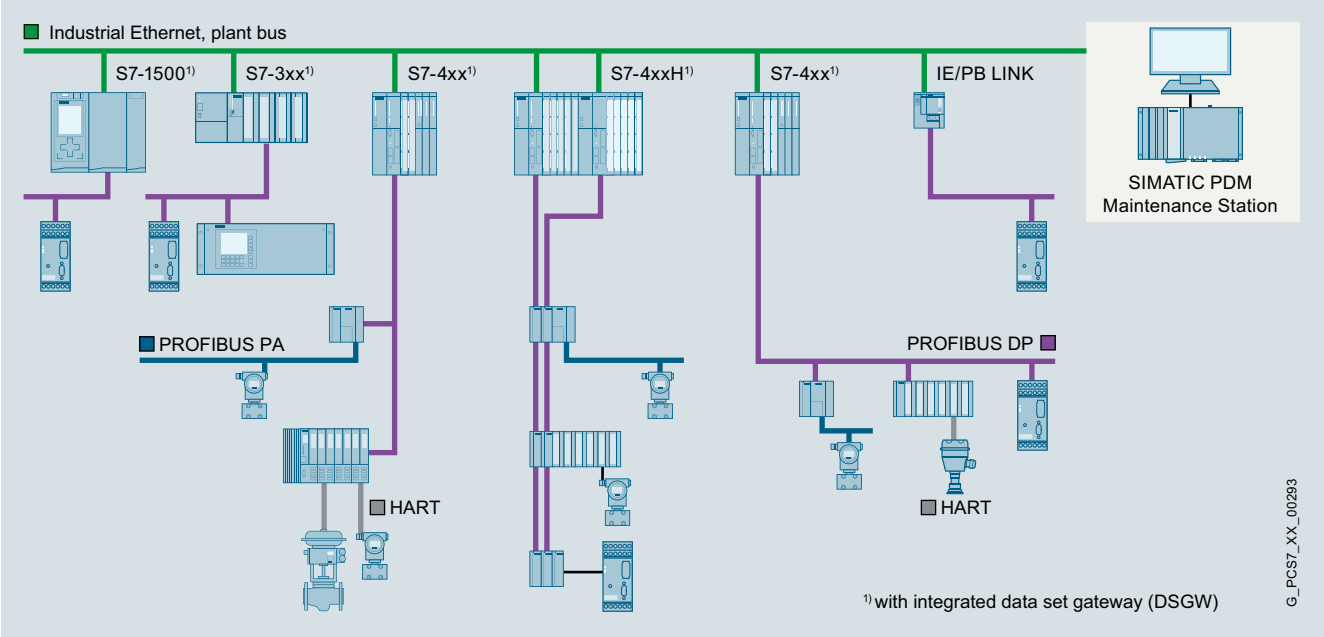

Integration of the system-independent SIMATIC PDM Maintenance Station in SIMATIC and SIMATIC PCS 7 to connect to the plant bus

In contrast to SIMATIC PCS 7 Maintenance Station, which is seamlessly integrated into the SIMATIC PCS 7 process control system, SIMATIC PDM Maintenance Station operates on separate hardware, independent of the automation projects and the employed automation systems (controllers). It integrates field devices and components via their Electronic Device Description and uses the communication paths of SIMATIC PDM to exchange information.

Note:

The SIMATIC PDM Maintenance Station is based on software components from SIMATIC PCS 7.

Application

The SIMATIC PDM Maintenance Station is suitable for all projects which use communication modes supported by SIMATIC PDM as well as field devices described by an Electronic Device Description (EDD/FDI).

Field devices and field components which were integrated into SIMATIC PDM using an EDD/FDI device description can be monitored and evaluated.

It is also easy to monitor and diagnose HART field devices and field components connected to HART multiplexers or communicating via Wireless HART on site.

The SIMATIC PDM Maintenance Station is especially suited to the following tasks:

- Implementation of small to medium-sized service projects. Up to 500 devices can be managed per maintenance station.
- Greater quantities can be attained by using multiple SIMATIC PDM Maintenance Stations.
- Configuration of unit-granular maintenance stations or standalone solutions.
- Formation of up to three field device groups for cyclic data export functions.
- Maintenance station retrofitting in SIMATIC S7/SIMATIC PCS 7 projects independent of the project version.
- Implementation of maintenance stations in SIMATIC S7/ SIMATIC PCS 7 projects without "Plant-wide data record routing" functionality.
- Separate technological projects and service projects.
- Implementation of maintenance stations in projects without SIMATIC S7/SIMATIC PCS 7 automation systems (controllers).

© Siemens 2019

Design



SIMATIC PDM Maintenance Station is based on the hardware of the Microbox SIMATIC IPC427E, equipped with a 240 GB SSD as a data storage medium. Due to its exceptional physical properties, it is suited for 24-hour continuous operation at temperatures from 0 to 50 °C.

Expansions/interfaces

The SIMATIC PDM Maintenance Station has:

- 4 USB interfaces (3.0, high current)
- 2 COM interfaces (RS 232/RS 485/RS 422, selectable)
- 2 DisplayPort graphics interfaces
- 3 Ethernet interfaces 10/100/1000 Mbps (RJ45)

It is supplied without input/output devices. In addition to mouse and keyboard, two other input/output devices can be externally connected via the provided USB ports, e.g. an optical drive (DVD-ROM/DVD±RW) or smart card reader USB.

Pre-installed software

The following software is factory installed on the SIMATIC PDM Maintenance Station:

- Operating system Windows 7 Ultimate 32-bit, MUI (English, German, French, Italian, Spanish, Chinese)
- SIMATIC IPC DiagMonitor diagnostics software
- Maintenance Station software:
  - SIMATIC PCS 7 V8.2 Software Selection
  - SIMATIC PDM V9.0.1 for stand-alone mode (Basic + 128 TAGs + Routing)
  - EDD device description library (Device Library) 01#2016
  - WinAC RTX 2010

Function

The functionality of the SIMATIC PDM Maintenance Station is largely based on the SIMATIC PCS 7 Maintenance Station and the SIMATIC PDM Process Device Manager for stand-alone operation. The operator interfaces are comparable with those of the SIMATIC PCS 7 Maintenance Station configured as single station. SIMATIC PDM integrates the intelligent field devices (sensors/actuators) and field components (remote I/Os, multiplexers, control room devices, compact controllers, etc.) via their Electronic Device Description (EDD).

For communication with field devices/components, SIMATIC PDM Maintenance Station uses the SIMATIC PDM communication paths over the following communication interfaces:

- Industrial Ethernet
- PROFIBUS DP
- PROFIBUS PA
- HART on PROFIBUS
- HART multiplexer
- WirelessHART
- MODBUS (on request)

The diagnostic information is determined over a cyclic polling algorithm. Polling can be parameterized for every single field device in the SIMATIC PDM Maintenance Station in cycles of 10 min/1 h/12 h/1 d.

Ordering data


	Article No.
SIMATIC PDM Maintenance Station	
• V3.0 based on IPC427E, Xeon E3-1505L	**6ES7650-0RJ03-0YX0**
• Upgrade package from V2.0 to V3.0 single license	**6ES7651-5GX03-0YE5**

Additional and expansion components

SIMATIC PDM TAGs TAG licenses for expanding the available TAG volume, cumulative, software class A, floating license for 1 user	
• Goods delivery License key on USB flash drive and certificate of license	
- 10 TAGs	**6ES7658-3XC00-2YB5**
- 100 TAGs	**6ES7658-3XD00-2YB5**
- 1 000 TAGs	**6ES7658-3XE00-2YB5**
• Online delivery License key download and online certificate of license Note: Email address required!	
- 10 TAGs	**6ES7658-3XC00-2YH5**
- 100 TAGs	**6ES7658-3XD00-2YH5**
- 1 000 TAGs	**6ES7658-3XE00-2YH5**
Keyboard/mouse	
USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**

© Siemens 2019

Overview

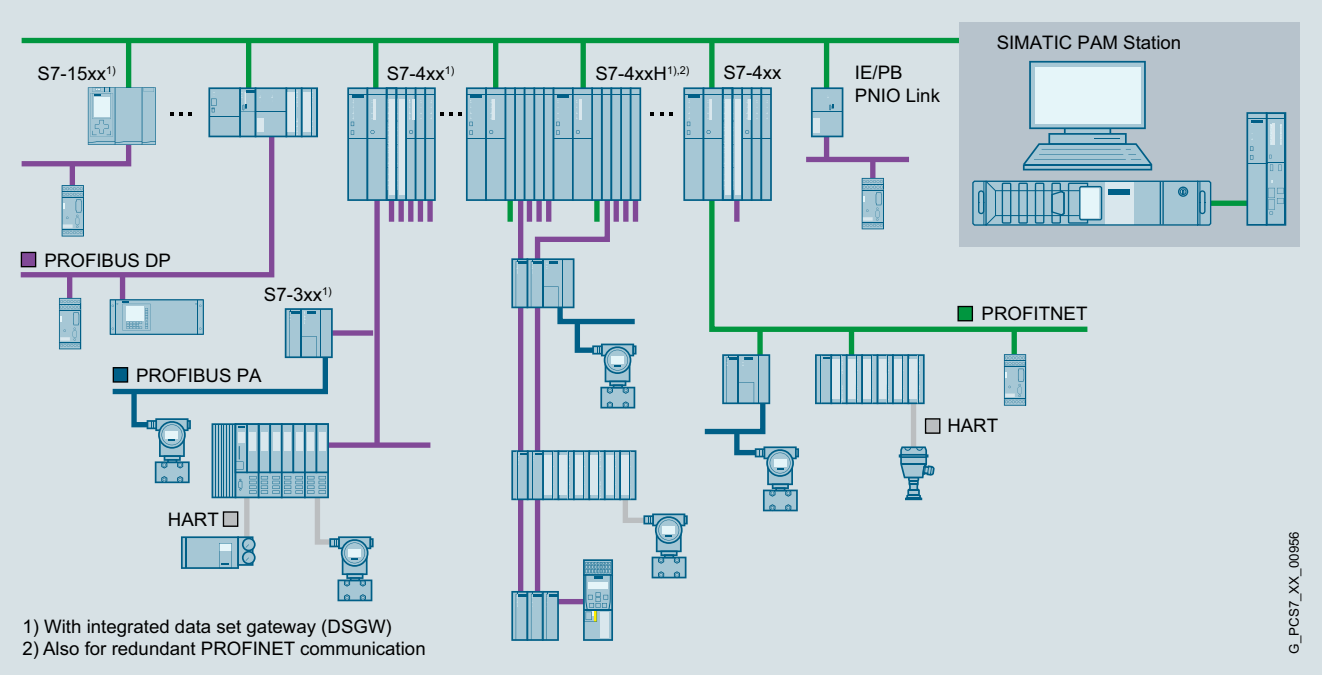

SIMATIC Plant Asset Maintenance (PAM) Station

In contrast to SIMATIC PCS 7 Maintenance Station, which is seamlessly integrated into the SIMATIC PCS 7 process control system, the SIMATIC Plant Asset Maintenance (PAM) Station operates on separate hardware, independent of the automation projects and the employed automation systems (controllers). It integrates field devices and components via its Electronic Device Description and can read and process process data and diagnostic information directly from the SIMATIC controllers. To exchange information, the station uses the SIMATIC PDM communication paths and connections to the SIMATIC controllers configured on the SIMATIC PAM station.

Note:

- The SIMATIC PAM station is based on SIMATIC PCS 7 software components.
- The device management and integration functions are based on SIMATIC PDM.

© Siemens 2019

Application

The SIMATIC PAM Station, designed for use as a single-station (single station) or as a multi-station (server station), represents an extension of the already proven portfolio of maintenance stations from the SIMATIC PCS 7 product family by a further independent product variant. The SIMATIC PAM station, which can be used as a stand-alone unit, works independently of the automation projects and the automation systems (controllers) used for them. It is primarily designed for the management of maintenance, diagnostic and condition monitoring functions of package units that work with SIMATIC controllers. It offers the possibility of diagnostic acquisition of all packaging unit components, field device management, acquisition and forwarding of parameterization, diagnostic and status data from field devices and monitoring of SIMATIC IPC stations, SCALANCE network components on the plant bus. It combines the mechanisms for diagnosis and communication of EDD/DD/FDI-based field devices via SIMATIC PDM and components described via SNMP profiles with the functions of the SIMATIC PCS 7 Maintenance Station for up to 100 package units.

The SIMATIC PAM station is particularly suitable for the following tasks:

- Implementation of medium to large-sized service projects. Up to 100 SIMATIC controllers with 200 field devices/field stations each can be managed by one maintenance station.
- Monitoring and diagnostics of up to 500 components (SIMATIC IPC or SCALANCE switch) on the plant bus, which are described via an SNMP profile file.
- Higher configuration limits can be achieved using multiple SIMATIC PAM stations.
- Configuration of unit-granular maintenance stations or stand-alone solutions.
- Formation of up to three field device groups for cyclic data export functions.
- Processing and monitoring of up to three analog status values in condition monitoring functions.
- Reading and processing of diagnostic information from the data repository of the package units.
- Maintenance station retrofitting in SIMATIC S7/SIMATIC PCS 7 projects independent of the project version.
- Implementation of maintenance stations in SIMATIC S7/ SIMATIC PCS 7 projects without plant-wide data record routing functionality.
- Optionally as single-user or client/server system. Separate technological and service projects.

Design

The SIMATIC PAM Station based on software components of the SIMATIC PCS 7 product family. Installation is performed as a package installation by the SIMATIC PCS 7 Multimedia Package.

The SIMATIC PAM Station was developed and tested for the following hardware:

- SIMATIC IPC 547G or 647G as SIMATIC PAM operator station
- SIMATIC AS-Station 410 as SIMATIC PAM signal processing station

The SIMATIC PAM Station contains the following software components:

- Compact/reduced/changed SIMATIC PCS 7 software package, based on the current SIMATIC PCS 7 software version release
- SIMATIC PDM as server application in the variant integrated in SIMATIC PCS 7
- The current EDD/FDI device description library of SIMATIC PDM at the time of delivery.

Function

The functionality of the SIMATIC PAM Station is largely based on the SIMATIC PCS 7 Maintenance Station and the SIMATIC PDM Process Device Manager for stand-alone operation. The user interfaces are comparable to those of the SIMATIC PCS 7 Maintenance Station. SIMATIC PDM integrates the intelligent field devices (sensors/actuators) and field components (remote I/Os, multiplexers, control room devices, compact controllers, etc.) via their Electronic Device Description (EDD) or FDI Device Description Package.

For communication with the field devices/components, the SIMATIC PAM station uses the SIMATIC PDM communication paths via the following communication interfaces:

- PROFINET
- PROFIBUS DP
- PROFIBUS PA via PROFIBUS DP
- PROFIBUS PA via PROFINET
- HART on PROFIBUS
- HART on PROFINET
- HART multiplexer
- WirelessHART

The diagnostic information is determined over a cyclic polling algorithm. Polling can be parameterized for each individual field device in the SIMATIC PAM station in cycles of 10 min/1 h/12 h/1 d.

Optionally, additional status values, diagnostic and detailed diagnostic information can be read in cycle times of approx. 1 sec via data blocks configured in the SIMATIC controllers of the package units and used for message generation and processing in condition monitoring functions.

Numerous SIMATIC PCS 7 system functions are available as options in the SIMATIC PAM station.

© Siemens 2019

Ordering data

	Article No.
SIMATIC PAM Station Software Server V1.0 incl. 1000 MS Runtime PO	
5 languages (English, German, French, Italian, Spanish) Software class A, single license for 1 installation With SIMATIC PCS 7 Software Media Package	
License frame for up to 1000 MS RT PO (OS RT PO, PDM TAG, MS RT PO) 1000 MS RT PO	
• Goods delivery License key on USB flash drive, Certificate of License Bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7658-7QC01-0YB0**
• Online delivery License key download and online certificate of license Combined with SIMATIC PCS 7 Software Media Package (software download and online Certificate of License) Note: E-mail address required!	**6ES7658-7QC01-0YH0**
SIMATIC PAM Station Software Server ASIA V1.0 incl. 1000 MS Runtime PO	
2 languages (English, Chinese) Software class A, single license for 1 installation With SIMATIC PCS 7 Software Media Package ASIA	
License frame for up to 1000 MS RT PO (OS RT PO, PDM TAG, MS RT PO) 1000 MS RT PO	
• Goods delivery ASIA license key on USB hardlock and Certificate of License; Bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7658-7QC01-0CB0**
SIMATIC PAM Station Software Update Service (SUS)	
Subscription for 1 year with automatic extension Requirement: current software version Software Media Package SIMATIC PCS 7 Software Media Package SIMATIC PDM	
• Goods delivery License key on USB flash drive and Certificate of License	**6ES7658-7QC00-0YL8**

Additional and expansion components

	Article No.
SIMATIC PCS 7 Maintenance Station Runtime Asset TAGs	
OS Runtime License for extending the MS Runtime PO, cumulative, language-independent, software class A, single license for 1 installation without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and Certificate of License	
- 100 MS RT PO	**6ES7658-7GB00-2YB0**
- 1 000 MS RT PO	**6ES7658-7GC00-2YB0**
• Online delivery License key download and online Certificate of License Note: E-mail address required!	
- 100 MS RT PO	**6ES7658-7GB00-2YH0**
- 1 000 MS RT PO	**6ES7658-7GC00-2YH0**
SIMATIC PDM TAGs	
TAG licenses for expanding the available TAG volume, cumulative, software class A, floating license for 1 user	
• Online delivery License key download and online Certificate of License	
- 10 PDM TAG	**6ES7658-3XC00-2YB5**
- 100 PDM TAG	**6ES7658-3XD00-2YB5**
- 1000 PDM TAG	**6ES7658-3XE00-2YB5**
• Online delivery License key download and online Certificate of License Note: E-mail address required!	
- 10 TAG	**6ES7658-3XC00-2YH5**
- 100 TAG	**6ES7658-3XD00-2YH5**
- 1000 TAG	**6ES7658-3XE00-2YH5**
Keyboard/mouse	
USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**

© Siemens 2019

Notes

© Siemens 2019



8/2	**Introduction**
8/4	**Modular AS 410-5H and AS 410E systems**
8/10	Standard automation systems
8/15	High availability automation systems
8/21	Safety-related automation systems
8/29	**Complementary S7-400 systems**
8/31	Standard automation systems
8/35	High availability automation systems
8/41	Safety-related automation systems
8/46	**SIPLUS Automation Systems**
8/47	**Embedded systems**
8/47	Microbox Automation System

© Siemens 2019

Overview



SIMATIC PCS 7 automation systems in various designs: Modular S7-400 systems plus Microbox system

Automation systems are available in different designs for the SIMATIC PCS 7 process control system. The automation performance can therefore be finely scaled within wide limits.

The automation systems offered can be classified as follows:

- Modular systems of the S7-400 series with hardware controller in the versions "Standard", "High availability" and "Safety-related"
  - AS 410-5H/AS 410E automation systems
  - Complementary S7-400 systems
- Embedded systems with software controller
  - Microbox automation system SIMATIC PCS 7 RTX in product versions SIMATIC PCS 7 AS RTX PROFIBUS and SIMATIC PCS 7 AS RTX PROFINET

Application

Automation system with APL	AS 412H	AS 414-3	AS 414-3IE	AS 414H	AS 416-2	AS 416-3	AS 416-3IE	AS 416H	AS 417-4	AS 417H	AS RTX
	AS 410 with CPU 410-5H										
	AS 410E[1]										
Analog value measurements	10	150	150	100	300	500	500	400	800	600	300
Digital value measurements	20	300	300	250	600	1 000	1 000	800	1 400	1 000	600
PID controls	5	50	50	50	100	200	200	150	250	200	200
Motors	7	75	75	75	150	250	250	200	450	400	150
Valves	7	75	75	75	150	250	250	200	450	400	250
SFC	0	15	15	15	60	100	100	100	200	200	100
Steps	0	150	150	150	700	1 000	1 000	1 000	2 000	2 000	800
Dosing	0	5	5	3	20	25	25	25	50	50	50
Digital inputs DI	30	450	450	300	900	1 500	1 500	1 200	2 200	1 800	1 200
Digital outputs DO	10	150	150	110	300	500	500	400	750	650	400
Analog inputs AI	15	225	225	150	450	750	750	600	1 100	900	600
Analog outputs AO	5	75	75	50	150	250	250	200	350	350	200
Process objects (PO)	30	450	450	350	900	1 500	1 500	1 200	2 200	2 000	1 200

Typical mixed configuration limits for SIMATIC PCS 7 automation systems, based on the SIMATIC PCS 7 Advanced Process Library (APL)

[1] up to 200 process objects

Note:

The values quoted here are not AS-specific maximum values for the particular item. Instead, they represent a typical distribution of the available total capacity of the AS during mixed operation of all the items of a contiguous block.

The number of process objects is not an absolute value, but depends on the library used as well as on the number and type of blocks used in the application.

© Siemens 2019

Application (continued)

Modular automation systems of the S7-400 range

AS type	CPU	Interfaces			
		PN/IE (2 ports)	MPI/DP	DP	DP module as optional plug-in
Standard systems					
AS 410S	CPU 410-5H Process Automation and CPU 410E	2	–	1	–
AS 414-3	CPU 414-3	–	1	1	1
AS 414-3IE	CPU 414-3 PN/DP	1	1	–	1
AS 416-2	CPU 416-2	–	1	1	–
AS 416-3	CPU 416-3	–	1	1	1
AS 416-3IE	CPU 416-3 PN/DP	1	1	–	1
AS 417-4	CPU 417-4	–	1	1	2
High availability and safety-related systems					
AS 410H/F/FH	CPU 410-5H Process Automation and CPU 410E (1 × or 2 ×)	2	–	1	–
AS 412H/F/FH	CPU 412-5H (1 × or 2 ×)	1	1	1	–
AS 414H/F/FH	CPU 414-5H (1 × or 2 ×)	1	1	1	–
AS 416H/F/FH	CPU 416-5H (1 × or 2 ×)	1	1	1	–
AS 417H/F/FH	CPU 417-5H (1 × or 2 ×)	1	1	1	–

The rugged automation systems of the S7-400 series are suitable for universal use. They are characterized by high processing and communication performance. The product range offered basically differs in the following features:

- **AS 410-5H/AS 410E automation systems**
  - Preferred systems for new plants with SIMATIC PCS 7
  - Suitable for SIMATIC PCS 7 as of V8.0+SP1[1)] or as of V9.0 (AS 410E)
  - Standard systems, fault-tolerant systems, and safety-related systems are based on the very same CPU
  - Performance of the general-purpose CPU 410-5H is scalable and expandable based on the number of process objects
  - Changes in the type of module during operation (TCiR) possible together with the SIMATIC PCS 7 Engineering System V8.1 and higher
  - Redundant PROFINET configurations and configuration changes during operation for PROFINET in singular and redundant applications
- **Complementary S7-400 systems**
  - Can be used in plants with SIMATIC PCS 7 V8/V7
  - As an alternative to AS 410-5H/AS 410E, primarily in systems with SIMATIC PCS 7 V7
  - Scalable based on types of CPU differing in performance

The CPU for all automation systems of the S7-400 series is already equipped as standard with the PROFIBUS DP fieldbus connection. Depending on the type of CPU, one or two further PROFIBUS DP interfaces are possible directly on the CPU using additive IF 964 DP interface modules. If required, up to 10 PROFIBUS communication modules can be additionally operated on each CPU.

S7-400 automation systems can be integrated via a PROFINET interface into the CPU in PROFINET IO, some types via communication module CP 443-1 as well.

1) An additional Hardware Upgrade Package (HUP CPU 410-5H) is required for SIMATIC PCS 7 V8.0+SP1

Embedded automation systems

The embedded automation system SIMATIC PCS 7 AS RTX is a low-priced compact Microbox system with excellent physical properties. It is especially well-suited for plant-level use in the low to medium performance range or as an OEM product, e.g. in Package Units. Depending on the selected product variant, it is possible to connect the process I/O via a routing-capable PROFIBUS DP interface (SIMATIC PCS 7 AS RTX PROFIBUS) or a PROFINET interface (SIMATIC PCS 7 AS RTX PROFINET).

More information

Online configurators

Selected SIMATIC S7-400 components are combined as "AS bundles" according to the task involved for the modular SIMATIC PCS 7 automation systems. Configurators are available in the Industry Mall help you to assemble the AS bundles:

- Online configurators for AS 410 automation systems
  - SIMATIC PCS 7 AS 410 Single Station configurator
  - SIMATIC PCS 7 AS 410 Redundancy Station configurator
- Online configurators for complementary S7-400 systems
  - SIMATIC PCS 7 AS Single Station configurator
  - SIMATIC PCS 7 AS Redundancy Station configurator

© Siemens 2019

Overview

With the rugged all-round AS 410 system, the SIMATIC PCS 7 process control system offers an exclusive automation system from the SIMATIC S7-400 series, which can be used in all domains due to its versatility.

The rugged AS 410 is a modern, future-oriented, all-round system for the process industry. Its versatility means it can be used in all areas – as a standard AS 410S system, as a high-availability AS 410H or as safety-related AS 410F/FH. More and more innovative functions are being exclusively combined with this automation system, for example redundant PROFINET configurations and configuration changes during operation for PROFINET in singular and redundant applications

With its high-performance hardware and optimized firmware, the innovative **CPU 410-5H Process Automation** of the AS 410 covers the entire performance range of conventional AS 412 to AS 417 automation systems. Its automation performance can be scaled with system expansion cards based on the number of SIMATIC PCS 7 process objects (POs) as follows:

- 100 POs
- 500 POs
- 1 000 POs
- 1 600 POs
- ≥ 2 000 POs (PO 2k+)

The type reduction to a single CPU offers numerous advantages. It significantly simplifies selection and configuration of the automation system as well as spare part inventory and plant expansion.

The AS 410E automation system with **CPU 410E Process Automation** is a cost-saving alternative for small applications. Based on CPU 410-5H hardware, it offers the same benefits for applications with up to 200 PO.

Design

Similar to all SIMATIC PCS 7 automation systems of the S7-400 series, AS 410 automation systems are available as "AS bundles" as follows:

- Individual components bundled per system in one delivery
- Pre-assembled and tested complete systems (no extra charge compared to delivery of individual components)

The AS bundles come furnished with the SIMATIC PCS 7 Runtime license for 100 process objects (PO). Building on this, the number of process objects can be increased with cumulative AS Runtime licenses for 100, 1 000 or 10 000 POs.

The configuration of the AS bundles as well as the Article No.'s can be defined by selecting pre-configured ordering units. System-specific ordering configurations are available in tabular form for this purpose in the sections "Standard automation systems", "Fault-tolerant automation systems" and "Safety-related automation systems".

For interactive configuration of AS bundles, there are also two online configurators available in the Industry Mall:

- SIMATIC PCS 7 AS 410 Single Station configurator
- SIMATIC PCS 7 AS 410 Redundancy Station configurator

CPU, aluminum rack (except UR1), optionally redundant or redundant power supply modules (in 4 A and 10 A versions), communication modules and sync modules of the SIMATIC PCS 7 AS 410 bundles have an additional coating (conformal coating).

AS 410 bundles for operating temperatures up to 70 °C


The AS 410 bundles are usually designed for operating temperatures up to 60 °C. Additional designs are available for extreme conditions; these are permitted for operating temperatures up to 70 °C. Their components mainly carry the designation "XTR" (extended temperature range) in their names. All components of the "AS 410 bundles for the extended temperature range (XTR)" also have an additional coating (conformal coating).

The Article No.'s of the AS 410 bundles for the extended temperature range (XTR) can be defined in the sections "Standard automation systems", "High availability automation systems" and "Safety-related automation systems" by means of an individual configuration table.

© Siemens 2019

Design (continued)

Flexible and scalable availability

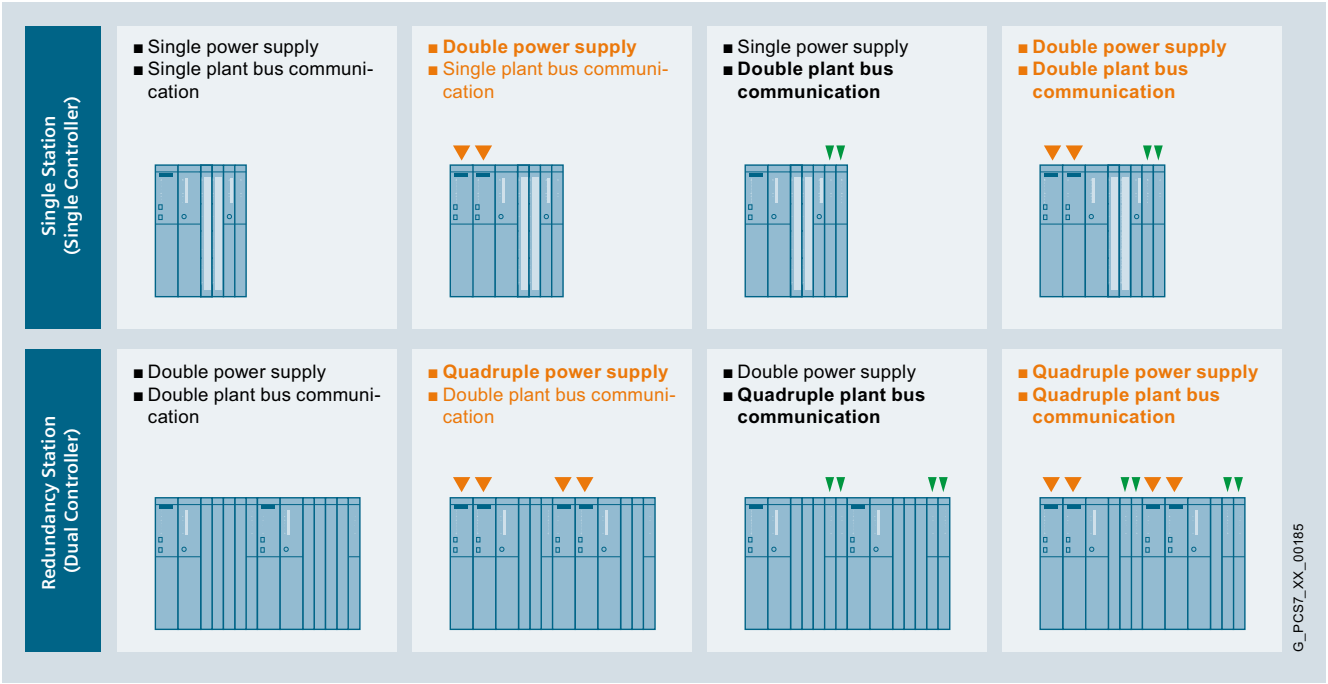

A particular characteristic of the modular S7-400 systems is the flexible and scalable availability of various components.


For a SIMATIC PCS 7 AS Single Station of the AS 410 type, you have the option of specifically increasing the availability by implementing a redundant configuration of the power supply or the Industrial Ethernet communications module, and combining these measures.

Even the AS Redundancy Station of the AS 410 type with its redundant CPUs offers significantly higher availability. It operates according to the 1oo2 principle, in which a switch is made from the active subsystem to the standby system in the event of a fault. Starting from here, you can double the power supply or the Industrial Ethernet communications module for each subsystem, and combine these measures.

© Siemens 2019

Design (continued)

CPU 410-5H Process Automation: the "all-rounder" for process automation

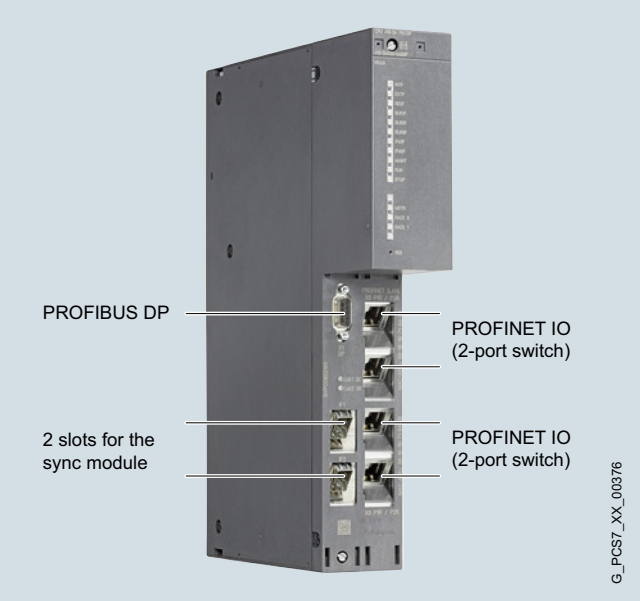

CPU 410-5H Process Automation

The CPU 410-5H Process Automation is at the heart of the standard automation systems as well as the high-availability and safety-related AS 410 automation systems. With expansion cards for 100 PO, 500 PO, 1 000 PO, 1 600 PO and ≥ 2 000 PO (PO 2k+), you can define your performance for your specific application with up to around 2 600 PO.

If the performance limit defined by the system expansion card is reached during configuration, commissioning or operation, a subsequent increase in performance is possible without replacing the hardware by using an appropriate number of CPU 410 Expansion Packs 100 POs/500 POs.

As shown in the figure, CPU 410-5H Process Automation is equipped with two PROFINET IO interfaces (2-port switch in each case) for up to 250 I/O devices and a PROFIBUS DP interface for up to 96 PROFIBUS DP slaves. Two integrated slots allow the synchronization of two redundant subsystems via sync modules and sync cables (FOC).

CPU 410-5H Process Automation supports NTP as well as S7 time synchronization.

Other features include:

- Integrated 48 MB load memory and 32 MB RAM each for program and data
- Cycle time up to 10 ms/9 process tasks
- Total number of I/Os (on PROFIBUS DP and PROFINET IO) approx. 7 500, 16 KB each for inputs and outputs
- Additional protection of the circuit board with coating (conformal coating)
- Expanded temperature range during operation up to 70 °C (as of product version 2)
- High-precision time stamping
- Recessed RESET button
- Preset hardware parameters (PCS 7 skinning)
- Changes in the type of module during operation (TCiR) in association with the SIMATIC PCS 7 Engineering System V8.1 and higher



CPU 410E for small applications

The cost-saving CPU 410E is available for small applications, for which it offers the same benefits as the CPU 410-5H in terms of

- Flexibility
  - Standard, high-availability and fail-safe applications
  - Identical hardware as with CPU 410-5H
- Ruggedness
  - Conformal coating
  - Extended temperature range up to 70 °C
- Secure investment
  - 1 PROFIBUS and 2 PROFINET interfaces
  - Innovations in firmware updates

Restrictions compared to CPU 410-5H relate to the number of POs, RAM and I/O data. The following table shows the main differences between and features common to the two CPUs.

	CPU 410E	CPU 410-5H
RAM (for program and data)	4 MB	32 MB
Load memory (integrated, non-volatile)	48 MB	48 MB
CPU processing times for bit operations, typ.	7.5 ns	7.5 ns
I/O data	1536 bytes inputs/outputs	16 KB inputs/outputs
Number of process objects	Up to 200	100 to 2 k+

© Siemens 2019

Accessories (continued)

I/O connection via PROFIBUS DP

The distributed process I/O can be integrated into a PROFIBUS DP segment either directly or via a lower-level fieldbus (PROFIBUS PA or FOUNDATION Fieldbus H1). For details, see the "Industrial Communication" chapter, "PROFIBUS DP", "PROFIBUS PA" and "FOUNDATION Fieldbus H1" sections.

PROFIBUS DP segments with distributed process I/O can be operated on a PROFIBUS DP interface in the CPU and on additive CP 443-5 Extended (conformal coating) PROFIBUS DP interfaces. You can configure up to 4 individual or redundant CP 443-5 Extended PROFIBUS DP interfaces (conformal coating) for an automation system using the configurators for SIMATIC PCS 7 automation systems in the Industry Mall as well as in the catalog sections "Standard automation systems", "High-availability automation systems" and "Safety-related automation systems".

You can additionally implement further PROFIBUS interfaces using separately ordered CP 443-5 Extended PROFIBUS DP interfaces (conformal coating). According to the manual, up to 10 CP 443-5 Extended interfaces (conformal coating) can be operated in one automation system.

I/O connection via PROFINET IO

It is easy to efficiently connect AS 410 automation systems to remote I/O stations via the PROFINET IO interfaces integrated in the CPU 410-5H Process Automation, for example to remote ET 200M or ET 200SP HA I/O stations (see also section "Industrial Communication" chapter, "PROFINET" section). PROFINET IO interfaces made available by additive communication modules of type CP 443-1 cannot be used.

Accessories

Backup batteries

Lithium backup batteries of type AA with 2.3 Ah are used in the power supply modules of all SIMATIC PCS 7 automation systems of the S7-400 range (AS bundles). Since lithium batteries are easily inflammable, more rigorous transport and storage regulations apply to them.

To avoid subjecting the AS bundles to these more rigorous transport and storage regulations, the backup batteries must be ordered and delivered separately (Article No. 6ES7971-0BA00 or 6ES7971-0BA02).

The following backup batteries are required depending on the configuration of the AS bundles:

- SIMATIC PCS 7 AS Single Station with
  - 1 power supply module: 2 units
  - 2 redundant power supply modules: 4 units
- SIMATIC PCS 7 AS Redundancy Station with
  - 2 power supply modules: 4 units
  - 2 x 2 redundant power supply modules: 8 units

© Siemens 2019

Technical specifications

Article number	**6ES7410-5HX08-0AB0** PCS 7 CPU410-5H F. S7-400/S7-400H/F/FH	**6ES7410-5HM08-0AB0** PCS 7 CPU 410E F. S7-400/S7-400H/F/FH
General information		
Product type designation	CPU 410-5H Process Automation	CPU 410E Process Automation
Design of PLC basic unit	With Conformal Coating (ISA-S71.04 severity level G1; G2; G3) and operating temperature to 70 °C	With Conformal Coating (ISA-S71.04 severity level G1; G2; G3) and operating temperature to 70 °C
Product function		
• SysLog	Yes; via TCP; up to 4 receivers can be parameterized; buffer capacity max. 3 200 entries	Yes; via TCP; up to 4 receivers can be parameterized; buffer capacity max. 3 200 entries
• Field interface security	Yes	Yes
Engineering with		
• Programming package	SIMATIC PCS 7 V9.0 or higher	SIMATIC PCS 7 V9.0 or higher
Power loss		
Power loss, typ.	10 W	10 W
Memory		
PCS 7 process objects	100 ... approx. 2 600, adjustable with System Expansion Card	200; Max.; with PO200M System Expansion Card
CPU processing times		
CPU speed	450 MHz; Multi-processor system	450 MHz; Multi-processor system
average processing time of PCS 7 typicals	110 µs; with APL typicals	110 µs; with APL typicals
Process tasks, max.	9; Individually adjustable from 10 ms to 5 s	9; Individually adjustable from 10 ms to 5 s
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
S7 times		
• Number	2 048	2 048
Data areas and their retentivity		
retentive data area in total	Total working and load memory (with backup battery)	Total working and load memory (with backup battery)
Address area		
I/O address area		
• Inputs	16 kbyte; max., dependent on the System Expansion Card used	2 048 byte; max. 1 536 byte usable for input and output data
• Outputs	16 kbyte; max., dependent on the System Expansion Card used	2 048 byte; max. 1 536 byte usable for input and output data
Digital channels		
• Inputs	131 072; max., dependent on the System Expansion Card used	16 384; max., dependent on the System Expansion Card used
• Outputs	131 072; max., dependent on the System Expansion Card used	16 384; max., dependent on the System Expansion Card used
Analog channels		
• Inputs	8 192; max., dependent on the System Expansion Card used	1 024; max., dependent on the System Expansion Card used
• Outputs	8 192; max., dependent on the System Expansion Card used	1 024; max., dependent on the System Expansion Card used

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7410-5HX08-0AB0** PCS 7 CPU410-5H F. S7-400/S7-400H/F/FH	**6ES7410-5HM08-0AB0** PCS 7 CPU 410E F. S7-400/S7-400H/F/FH
Interfaces		
Number of PROFINET interfaces	2	2
Number of RS 485 interfaces	1; PROFIBUS DP	1; PROFIBUS DP
Number of other interfaces	2; 2x synchronization	2; 2x synchronization
1. Interface		
Interface type	Integrated	Integrated
DP master		
• Transmission rate, max.	12 Mbit/s	12 Mbit/s
• Number of DP slaves, max.	96	96
• Number of slots per interface, max.	1 632	1 632
2. Interface		
Interface type	PROFINET	PROFINET
Isolated	Yes	Yes
Autonegotiation	Yes	Yes
Autocrossing	Yes	Yes
System redundancy	Yes	Yes
Interface types		
• Number of ports	2	2
• integrated switch	Yes	Yes
PROFINET IO Controller		
• Transmission rate, max.	100 Mbit/s	100 Mbit/s
3. Interface		
Interface type	PROFINET	PROFINET
PROFINET IO Controller		
• Transmission rate, max.	100 Mbit/s	100 Mbit/s
4. Interface		
Interface type	Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)
Plug-in interface modules	Synchronization module 6ES7960-1AA06-0XA0, 6ES7960-1AB06-0XA0 or 6ES7960-1AA08-0XA0	Synchronization module 6ES7960-1AA06-0XA0, 6ES7960-1AB06-0XA0 or 6ES7960-1AA08-0XA0
5. Interface		
Interface type	Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)
Plug-in interface modules	Synchronization module 6ES7960-1AA06-0XA0, 6ES7960-1AB06-0XA0 or 6ES7960-1AA08-0XA0	Synchronization module 6ES7960-1AA06-0XA0, 6ES7960-1AB06-0XA0 or 6ES7960-1AA08-0XA0
Protocols		
Supports protocol for PROFINET IO	Yes	Yes
PROFINET CBA	No	No
PROFIsafe	Yes	Yes
PROFIBUS	Yes	Yes
AS-Interface	Yes; Via add-on	Yes; Via add-on
Protocols (Ethernet)		
• TCP/IP	Yes	Yes
Further protocols		
• Foundation Fieldbus	Yes; via DP/FF Link	Yes; via DP/FF Link
• MODBUS	Yes; Via add-on	Yes; Via add-on
Standards, approvals, certificates		
Use in hazardous areas		
• ATEX	ATEX II 3G Ex nA IIC T4 Gc	ATEX II 3G Ex nA IIC T4 Gc
Ambient conditions		
Ambient temperature during operation		
• min.	0 °C	0 °C
• max.	70 °C	70 °C
Dimensions		
Width	50 mm	50 mm
Height	290 mm	290 mm
Depth	219 mm	219 mm
Weights		
Weight, approx.	1.1 kg	1.1 kg

© Siemens 2019

Overview



Standard AS 410S automation system

The AS 410S modular standard automation systems are suitable for general use. These are always your first choice if high availability through redundancy and safety-related functions are not relevant for the application.

In the range from 100 to approx. 2 600 POs, their performance can be customized to meet the task at hand using system expansion cards.

An AS 410S is also the base system for a fault-tolerant (AS 410H) or a safety-related automation system (AS 410F, AS 410FH). Your decision for the AS 410S is therefore not final, you can remain flexible. If the task changes, the automation system can be used differently at any time and the target system can be expanded accordingly.

Design

Individual configuration of AS bundles

The configuration of the standard automation systems as well as the Article No.'s can be defined by selecting pre-configured ordering units.

Typical combinations can be selected from the tables in section "Ordering data" of the paper catalog. The complete range is available to you via the SIMATIC PCS 7 AS 410 Single Station online configurator in the Industry Mall.

Subsequent increase in performance

If the performance limit defined by the ordered system expansion card is reached during configuration, commissioning or operation, a subsequent increase in performance is possible by using an appropriate number of CPU 410 Expansion Packs 100 POs/500 POs. Hardware modifications are not necessary.


I/O connection via PROFIBUS DP

Several PROFIBUS DP segments with distributed process I/Os can be operated on one standard automation system.
A PROFIBUS DP interface is already integrated in the CPU 410-5H Process Automation. Up to four additional PROFIBUS DP interfaces can be configured using additive PROFIBUS DP interface modules CP 443-5.

I/O connection via PROFINET IO

Standard AS 410S automation systems can only be connected to remote I/O stations via the two PROFINET interfaces (each with 2-port switch) integrated in the CPU 410-5H Process Automation, for example to remote ET 200M/ET 200SP HA I/O stations (see also "Industrial Communication" chapter, "PROFINET" section).

The availability of the I/O devices can be increased by a ring topology with media redundancy (MRP). If the transmission link in the ring is interrupted at a given location, for example, due to a break in the ring cable or the failure of a station, the redundancy manager, e.g. the CPU, immediately activates the alternative communication path.

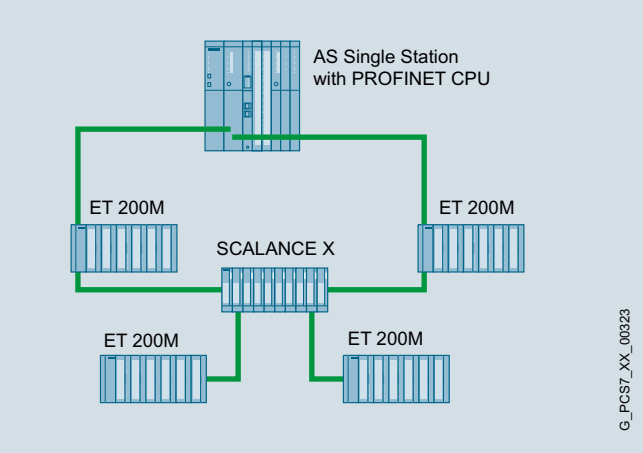

Example for PROFINET IO communication with media redundancy

Industrial Ethernet (IE) plant bus communication

If the PROFINET interfaces integrated in the CPU are not used for PROFINET IO, they can then also be used for the connection to the Industrial Ethernet plant bus. Otherwise, the AS 410S standard automation system can be connected to the Industrial Ethernet plant bus via the CP 443-1 communication module (conformal coating). If necessary, the availability of plant bus communication can be increased by using a second CP 443-1 communication module (conformal coating).

Redundant power supply

If you have two separate power supply networks for your plant, you can increase the availability of the AS 410S standard automation systems by using two redundant power supplies.

Runtime licenses

The AS bundles come furnished with the SIMATIC PCS 7 Runtime license for 100 POs. The number of process objects can be extended by additional Runtime licenses for 100, 1 000 or 10 000 POs. The process objects of additional Runtime licenses can be added to process objects which already exist. The number and type (e.g. 100 or 1000) of additional Runtime licenses is irrelevant with regard to the implementable quantity framework.

© Siemens 2019

Ordering data

Standard automation systems with CPU 410-5H

	Article No.								
AS 410S CPU 410-5H with PROFIBUS DP and PROFINET IO interface 32 MB RAM (16 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7654-**								
	■	**C**	■	**0**	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
System expansion card										
• System expansion card 100 POs			**J**							
• System expansion card 500 POs			**L**							
• System expansion card 1 000 POs			**N**							
• System expansion card 1 600 POs			**P**							
• System expansion card PO 2k+ (≥ 2 000)			**Q**							
• System expansion card 0 PO (blank)			**R**							
Additive Industrial Ethernet interfaces[1]										
• Without CP 443-1				**0**						
• 1 × CP 443-1[2]				**3**						
• 2 × CP 443-1[2]				**4**						
Racks										
• UR2 (9 slots), aluminum[1][2]					**3**					
• UR2 (9 slots), steel[1]					**4**					
• UR1 (18 slots), aluminum					**5**					
• UR1 (18 slots), steel					**6**					
• CR3 (4 slots), aluminum[2][3]					**7**					
Power supply (without backup batteries)										
• 1 × PS 407, 4 A for 120/230 V UC[2][4]						**A**				
• 1 × PS 407, 10 A for 120/230 V UC						**B**				
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy[2]						**C**				
• 1 × PS 407, 20 A for 120/230 V UC						**D**				
• 2 × PS 407, 10 A for 120/230 V UC, redundant[2]						**E**				
• 1 × PS 405, 4 A for 24 V DC[2][4]						**F**				
• 1 × PS 405, 10 A for 24 V DC						**G**				
• 1 × PS 405, 10 A for 24 V DC, optional redundancy[2]						**H**				
• 1 × PS 405, 20 A for 24 V DC						**J**				
• 2 × PS 405, 10 A for 24 V DC, redundant[2]						**K**				
Additive PROFIBUS DP interfaces[1]										
• Without CP 443-5 Extended										**0**
• 1 × CP 443-5 Extended[2]										**1**
• 2 × CP 443-5 Extended[2]										**2**
• 3 × CP 443-5 Extended[2]										**3**
• 4 × CP 443-5 Extended[2]										**4**

[1] Up to 5 CPs (Industrial Ethernet/PROFIBUS) can be plugged into the UR2 rack with a single power supply, or up to 3 with a redundant power supply.
[2] Conformal coating
[3] Only in conjunction with 4 A power supplies
[4] Only in conjunction with CR3 rack

Standard automation systems with CPU 410-5H for the expanded temperature range (XTR)

	Article No.								
AS 410S CPU 410-5H with PROFIBUS DP and PROFINET IO interface 32 MB RAM (16 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7654-**								
	■	**C**	■	**0**	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
System expansion card										
• System expansion card 100 POs			**J**							
• System expansion card 500 POs			**L**							
• System expansion card 1 000 POs			**N**							
• System expansion card 1 600 POs			**P**							
• System expansion card PO 2k+ (≥ 2 000)			**Q**							
• System expansion card 0 PO (blank)			**R**							
Additive Industrial Ethernet interfaces										
• Without CP 443-1				**0**						
Racks										
• UR2 XTR (9 slots), aluminum[1]						**3**				
• CR3 XTR, 4 slots, aluminum[2]						**7**				
Power supply (without backup batteries)										
• 1 × PS 407, 4 A XTR for 120/230 V UC[3]							**A**			
• 1 × PS 407, 10 A XTR for 120/230 V UC, optional redundancy							**C**			
• 2 × PS 407, 10 A XTR for 120/230 V UC, redundant							**E**			
• 1 × PS 405, 4 A XTR for 24 V DC[3]							**F**			
• 1 × PS 405, 10 A XTR for 24 V DC, optional redundancy							**H**			
• 2 × PS 405, 10 A XTR for 24 V DC, redundant							**K**			
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**

[1] Only in conjunction with 10 A power supplies
[2] Only in conjunction with 4 A power supplies
[3] Only in conjunction with CR3 rack

8

© Siemens 2019

Ordering data (continued)

Standard automation systems with CPU 410E

	Article no.								
AS 410SE CPU 410E with PROFIBUS DP and PROFINET IO interface 4 MB RAM (2 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs and PO 200M system expansion card	**6ES7654-**								
	■	**E**	**K**	**0**	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
Additive Industrial Ethernet ports[1]										
• Without CP 443-1					**0**					
• 1 × CP 443-1[2]					**3**					
• 2 × CP 443-1[2]					**4**					
Racks										
• UR2 (9 slots), aluminum[1][2]						**3**				
• UR2 (9 slots), steel[1]						**4**				
• CR3 (4 slots), aluminum[2][3]						**7**				
Power supply (without backup batteries)										
• 1 × PS 407, 4 A for 120/230 V UC[2][4]							**A**			
• 1 × PS 407, 10 A for 120/230 V UC							**B**			
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy[2]							**C**			
• 2 × PS 407, 10 A for 120/230 V UC, redundant[2]							**E**			
• 1 × PS 405, 4 A for 24 V DC[2][4]							**F**			
• 1 × PS 405, 10 A for 24 V DC							**G**			
• 1 × PS 405, 10 A for 24 V DC, optional redundancy[2]							**H**			
• 2 × PS 405, 10 A for 24 V DC, redundant[2]							**K**			
Additive PROFIBUS DP interfaces[1]										
• Without CP 443-5 Extended										**0**
• 1 × CP 443-5 Extended[2]										**1**
• 2 × CP 443-5 Extended[2]										**2**
• 3 × CP 443-5 Extended[2]										**3**
• 4 × CP 443-5 Extended[2]										**4**

[1] Up to 5 CPs (Industrial Ethernet/PROFIBUS) can be plugged into the UR2 rack with a single power supply, or up to 3 with a redundant power supply.

[2] Conformal coating

[3] Only in conjunction with 4 A power supplies

[4] Only in conjunction with CR3 rack

Standard automation systems with CPU 410E for the expanded temperature range (XTR)

	Article no.								
AS 410SE CPU 410E with PROFIBUS DP and PROFINET IO interface 4 MB RAM (2 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs and PO 200M system expansion card	**6ES7654-**								
	■	**E**	**K**	**0**	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
Additive Industrial Ethernet ports										
• Without CP 443-1					**0**					
Racks										
• UR2 XTR (9 slots), aluminum[1]							**3**			
• CR3 XTR, 4 slots, aluminum[2]							**7**			
Power supply (without backup batteries)										
• 1 × PS 407, 4 A XTR for 120/230 V UC[3]								**A**		
• 1 × PS 407, 10 A XTR for 120/230 V UC, optional redundancy								**C**		
• 2 × PS 407, 10 A XTR for 120/230 V UC, redundant								**E**		
• 1 × PS 405, 4 A XTR for 24 V DC[3]								**F**		
• 1 × PS 405, 10 A XTR for 24 V DC, optional redundancy								**H**		
• 2 × PS 405, 10 A XTR for 24 V DC, redundant								**K**		
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**

[1] Only in conjunction with 10 A power supplies

[2] Only in conjunction with 4 A power supplies

[3] Only in conjunction with CR3 rack

© Siemens 2019

Ordering data

Individual components

	Article No.
Individual components for AS 410S standard automation systems	
CPU 410-5H Process Automation as spare part Conformal coating; for operating temperature up to 70 °C 32 MB RAM integrated (16 MB each for program and data); module occupies 2 slots	**6ES7410-5HX08-0AB0**
CPU 410-5H Process Automation 100 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 100 PO	**6ES7654-5CJ00-0XF0**
CPU 410-5H Process Automation 500 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 500 PO	**6ES7654-5CL00-0XF0**
CPU 410-5H Process Automation 1 000 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 1 000 PO	**6ES7654-5CN00-0XF0**
CPU 410-5H Process Automation 1 600 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 1 600 PO	**6ES7654-5CP00-0XF0**
CPU 410-5H Process Automation PO 2k+ Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for PO 2k+ (≥ 2 000)	**6ES7654-5CQ00-0XF0**
CPU 410 expansion pack For subsequent increase in performance of the CPU 410-5H process automation Upgrade option for 1 installation, independent of language No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs	**6ES7653-2CA00-0XE0**
- 500 POs	**6ES7653-2CC00-0XE0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs	**6ES7653-2CA00-0XK0**
- 500 POs	**6ES7653-2CC00-0XK0**

	Article No.
SIMATIC NET CP 443-1 (conformal coating) Communication module for connecting SIMATIC S7-400 to Industrial Ethernet through TCP/IP, ISO, and UDP; PROFINET IO controller, MRP; integrated real-time switch ERTEC with two ports; 2 x RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with or without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection over IP access list, initialization over LAN 10/100 Mbps; with electronic manual on DVD	**6GK7443-1EX30-0XE1**
SIMATIC NET CP 443-5 Extended (conformal coating) Communication module for connection of SIMATIC S7-400 to PROFIBUS as DP master or for S7 communication, for increasing the number of DP lines, for data set routing with SIMATIC PDM and for 10-ms time stamping, electronic manual on CD; module occupies 1 slot	**6GK7443-5DX05-0XE1**
PS 407 power supply module with battery compartment for 2 backup batteries, module occupies 2 slots	
• **4 A XTR** (conformal coating; for operating temperature up to 70 °C) 120/230 V UC; 5 V DC/4 A, 24 V DC/0.5 A	**6ES7407-0DA02-0AA1**
• **10 A** 120/230 V UC; 5 V DC/10 A, 24 V DC/1 A	**6ES7407-0KA02-0AA0**
• **10 A XTR, optional redundancy** (conformal coating; for operating temperature up to 70 °C) 120/230 V UC/; 5 V DC/10 A, 24 V DC/1 A	**6ES7407-0KR02-0AA1**
• **20 A** 120/230 V UC; 5 V DC/20 A, 24 V DC/1 A	**6ES7407-0RA02-0AA0**
PS 405 power supply module with battery compartment for 2 backup batteries, module occupies 2 slots	
• **4 A XTR** (conformal coating; for operating temperature up to 70 °C) 24/48/60 V DC; 5 V DC/4 A, 24 V DC/0.5 A	**6ES7405-0DA02-0AA1**
• **10 A** 24/48/60 V DC; 5 V DC/10 A, 24 V DC/1 A	**6ES7405-0KA02-0AA0**
• **10 A XTR, optional redundancy** (conformal coating; for operating temperature up to 70 °C) 24/48/60 V DC/; 5 V DC/10 A, 24 V DC/1 A	**6ES7405-0KR02-0AA1**
• **20 A** 24/48/60 V DC; 5 V DC/20 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0RA02-0AA0**

© Siemens 2019

Standard automation systems

Ordering data	Article No.
Backup battery for PS 405/407, type AA, 3.6 V, 2.3 Ah	**6ES7971-0BA00**
XTR backup battery for PS 405/407, type AA, 3.6 V, 2.3 Ah; for operating temperature up to 70 °C	**6ES7971-0BA02**
Aluminum rack	
• UR1, 18 slots	**6ES7400-1TA11-0AA0**
• UR2 XTR, 9 slots (conformal coating; for operating temperature up to 70 °C)	**6ES7400-1JA11-0AA1**
• CR3 XTR, 4 slots (conformal coating; for operating temperature up to 70 °C)	**6ES7401-1DA01-0AA1**
Steel rack	
• UR1, 18 slots	**6ES7400-1TA01-0AA0**
• UR2, 9 slots	**6ES7400-1JA01-0AA0**
Individual components for AS 410E standard automation systems	
CPU 410E Process Automation as spare part Conformal coating; for operating temperatures up to 70 °C 4 MB RAM integrated (2 MB each for program and data); module occupies 2 slots	**6ES7410-5HM08-0AB0**
System expansion card PO 200M	**6ES7653-2CB00-0XB0**

	Article No.
Runtime licenses for SIMATIC PCS 7 automation systems (can be added to existing licenses)	
SIMATIC PCS 7 AS Runtime license Language-neutral, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs	**6ES7653-2BA00-0XB5**
- 1 000 POs	**6ES7653-2BB00-0XB5**
- 10 000 POs	**6ES7653-2BC00-0XB5**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs	**6ES7653-2BA00-0XH5**
- 1 000 POs	**6ES7653-2BB00-0XH5**
- 10 000 POs	**6ES7653-2BC00-0XH5**

© Siemens 2019

Overview



Redundancy Station AS 410H

High availability automation systems are used to reduce the risk of production failures. The higher investment costs for high availability automation systems are frequently negligible compared to the costs resulting from production failures. The higher the costs of a production failure, the more worthwhile it is to use a high availability system.

High availability SIMATIC PCS 7 automation systems can be used in a system configuration on their own or together with standard and safety-related automation systems.

Design

The AS 410H, which consists of two redundant, galvanically isolated subsystems, can be mounted on a UR2-H compact rack with a split backplane bus or on two separate racks (UR1 or UR2). The configuration in two racks has the advantage that the redundant subsystems are spatially separated (for example, by a fire-proof wall) and can be located far apart from each other. Depending on the sync modules used, distances from 10 m to 10 km are possible between the two subsystems. As a result of the electrical isolation, the system is also resistant to EMC interference.

Individual configuration of AS bundles

The configuration of the high availability automation systems and the Article No.'s can be defined by selecting pre-configured ordering units.

Typical combinations can be selected from the tables in section "Ordering data" of the paper catalog. The complete range for selection is available via the SIMATIC PCS 7 AS 410 Redundancy Station online configurator in the Industry Mall.

Ordering information:

- For an AS 410H redundant configuration based on two AS Single Stations (AS 410S), you also require 4 sync modules (up to 10 m or up to 10 km) and 2 fiber-optic sync cables. The selection depends on the distance between the two AS single stations.
- FO sync cables longer than 1 m must always be ordered separately (2 cables required in each case).

Subsequent increase in performance/ Use of redundant PROFINET (R1)

If the performance limit defined by the ordered system expansion card is reached during configuration, commissioning or operation, a subsequent increase in performance is possible by using an appropriate number of CPU 410 Expansion Packs 100 POs/500 POs. Hardware modifications are not necessary.

Aside from increasing performance, the redundancy functions of PROFINET can also be expanded. If a redundant PROFINET (R1) is to be used in place of PROFINET system redundancy (S2), this function can be expanded with the "CPU 410 Expansion Pack PN Red".

I/O connection via PROFIBUS DP

The distributed process I/O can be integrated into a PROFIBUS DP segment either directly or via a lower-level fieldbus (PROFIBUS PA or FOUNDATION Fieldbus H1).

Several PROFIBUS DP segments with distributed process I/Os can be operated on an AS 410H high availability automation system. A PROFIBUS DP interface is integrated in each of the two CPUs 410-5H Process Automation. Up to four more PROFIBUS DP interfaces with add-on CP 443-5 PROFIBUS DP interfaces (conformal coating) can be configured for each redundant subsystem.

With redundant PROFIBUS DP lines, the process I/Os can be connected to an AS 410H as follows:

- ET 200M remote I/Os stations with two IM 153-2 High Feature interface modules on a special bus module
- ET 200iSP remote I/Os stations with two IM 152-1 on a special terminal module
- Field devices on the PROFIBUS PA over a PA link to two redundant IM 153-2 High Feature interface modules
- Field devices on the FOUNDATION Fieldbus H1 via a redundant Compact FF Link pair
- Non-redundant PROFIBUS DP devices, e.g. ET 200S or ET 200pro remote I/O stations per Y-Link


© Siemens 2019

Design (continued)

I/O connection via PROFINET IO

High availability AS 410H automation systems can be connected via PROFINET IO with remote I/O stations, for example, ET 200M or ET 200SP remote I/O stations. Only the PROFINET interfaces integrated in the CPUs can be used for this on the automation system.

The maximum availability with minimum error reaction times is achieved by the AS 410H when used in conjunction with system redundancy of the I/O devices. System redundancy refers to a type of PROFINET IO communication in which each I/O device establishes a communication link to each of the two CPUs of an AS 410H over the topological network. Then, the failure of a CPU does not automatically lead to failure of the connected I/O devices.

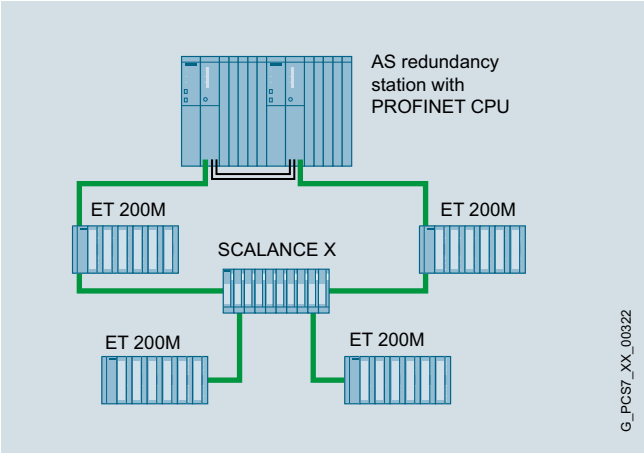

PROFINET IO communication with system redundancy

Communication via the Industrial Ethernet (IE) plant bus

If the PROFINET interfaces integrated in the CPUs of the AS 410H are not used for PROFINET IO, they can then also be used for the connection to the Industrial Ethernet plant bus. Otherwise, the two subsystems of the AS 410H can be connected to the plant bus using one CP 443-1 communication module (conformal coating) each.

The plant bus can be implemented in the form of a ring structure, which can also be configured with redundant architecture if the availability requirements are high. When there are two redundant rings it makes sense to configure two IE interface/communication modules in each case and to distribute their connections between the two rings (4-way connection). Double faults such as failure of the switch on ring 1 with simultaneous interruption of the bus cable on ring 2 can thus be tolerated.

Runtime licenses

The automation systems come furnished with the SIMATIC PCS 7 AS Runtime license for 100 process objects (PO). The number of process objects can be extended by additional Runtime licenses for 100, 1 000 or 10 000 POs. The process objects of additional Runtime licenses can be added to process objects which already exist. The number and type (e.g. 100 or 1000) of additional Runtime licenses are irrelevant.

© Siemens 2019

Ordering data

High-availability automation systems with CPU 410-5H

	Article No.								
AS 410H (Redundancy Station) 2 × CPU 410-5H with PROFIBUS DP and PROFINET IO interface 32 MB RAM (16 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7656-**								
	■	**C**	■	■	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
System expansion card										
• 2 × system expansion card 100 POs			**J**							
• 2 × system expansion card 500 POs			**L**							
• 2 × system expansion card 1 000 POs			**N**							
• 2 × system expansion card 1 600 POs			**P**							
• 2 × system expansion card PO 2k+ (≥ 2 000)			**Q**							
• 2 × System Expansion Card 0 PO (blank)			**R**							
Sync modules and cables										
• 2 × 2 sync modules[2] for distances up to 10 m and 2 × FO sync cable, 1 m				**3**						
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing				**4**						
Additive Industrial Ethernet interfaces[1]										
• Without CP 443-1					**0**					
• 2 × 1 CP 443-1[2]					**3**					
• 2 × 2 CP 443-1[2]					**4**					
Racks										
• 1 × UR2-H (2 × 9 slots), aluminum[1][2]						**1**				
• 1 × UR2-H (2 × 9 slots), steel[1]						**2**				
• 2 × UR2 (9 slots), aluminum[1][2]						**3**				
• 2 × UR2 (9 slots), steel[1]						**4**				
• 2 × CR3 (4 slots), aluminum[2][3]						**7**				
Power supply (without backup batteries)										
• 2 × PS 407, 4 A for 120/230 V AC/DC[2][4]							**A**			
• 2 × PS 407, 10 A for 120/230 V AC/DC							**B**			
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy[2]							**C**			
• 2 × PS 407, 20 A for 120/230 V AC/DC							**D**			
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC, redundant[2]							**E**			
• 2 × PS 405, 4 A for 24 V DC[2][4]							**F**			
• 2 × PS 405, 10 A for 24 V DC							**G**			
• 2 × PS 405, 10 A for 24 V DC, optional redundancy[2]							**H**			
• 2 × PS 405, 20 A for 24 V DC							**J**			
• 2 × 2 PS 405, 10 A for 24 V DC, redundant[2]							**K**			
Additive PROFIBUS DP interfaces[1]										
• Without CP 443-5 Extended										**0**
• 2 × 1 CP 443-5 Extended[2]										**1**
• 2 × 2 CP 443-5 Extended[2]										**2**
• 2 × 3 CP 443-5 Extended[2]										**3**
• 2 × 4 CP 443-5 Extended[2]										**4**

[1] In configurations with UR2/UR2-H racks, up to 5 CPs (Industrial Ethernet/PROFIBUS) can be configured with a single power supply per subsystem, or up to 3 CPs per subsystem with a redundant power supply.

[2] Conformal coating

[3] Only in conjunction with 4 A power supplies

[4] Only in conjunction with CR3 rack

High-availability automation systems with CPU 410-5H for the expanded temperature range (XTR)

	Article No.								
AS 410H (Redundancy Station) 2 × CPU 410-5H with PROFIBUS DP and PROFINET IO interface 32 MB RAM (16 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7656-**								
	■	**C**	■	■	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
System expansion card										
• 2 × system expansion card 100 POs			**J**							
• 2 × system expansion card 500 POs			**L**							
• 2 × system expansion card 1 000 POs			**N**							
• 2 × system expansion card 1 600 POs			**P**							
• 2 × system expansion card PO 2k+ (≥ 2 000)			**Q**							
• 2 × System Expansion Card 0 PO (blank)			**R**							
Sync modules and cables										
• 2 × 2 sync modules V8 XTR for distances up to 10 m and 2 × FO sync cable, 1 m				**3**						
Additive Industrial Ethernet interfaces										
• Without CP 443-1					**0**					
Racks										
• 1 × UR2-H XTR (2 × 9 slots), aluminum[1]						**1**				
• 2 × UR2 XTR (9 slots), aluminum[1]						**3**				
• 2 x CR3 XTR, 4 slots, aluminum[2]						**7**				
Power supply (without backup batteries)										
• 2 × PS 407, 4 A XTR for UC 120/230 V[3]							**A**			
• 2 × PS 407, 10 A XTR for 120/230 V AC/DC, optional redundancy							**C**			
• 2 × 2 PS 407, 10 A XTR for 120/230 V AC/DC, redundant							**E**			
• 2 × PS 405, 4 A XTR for 24 V DC[3]							**F**			
• 2 × PS 405, 10 A XTR for 24 V DC, optional redundancy							**H**			
• 2 × 2 PS 405, 10 A XTR for 24 V DC, redundant							**K**			
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**

[1] Only in conjunction with 10 A power supplies

[2] Only in conjunction with 4 A power supplies

[3] Only in conjunction with CR3 rack

© Siemens 2019

Ordering data (continued)

High-availability automation systems with CPU 410E

	Article no.								
AS 410HE (Redundancy Station) 2 × CPU 410E with PROFIBUS DP and PROFINET IO interface 4 MB RAM (2 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs and PO 200M system expansion card	**6ES7656-**								
	■	**E**	**K**	■	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
Sync modules and cables										
• 2 × 2 sync modules[2] for distances up to 10 m and 2 × FO sync cable, 1 m				**3**						
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing				**4**						
Additive Industrial Ethernet ports[1]										
• Without CP 443-1					**0**					
• 2 × 1 CP 443-1[2]					**3**					
• 2 × 2 CP 443-1[2]					**4**					
Racks										
• 1 × UR2-H (2 × 9 slots), aluminum[1)2)]						**1**				
• 1 × UR2-H (2 × 9 slots), steel[1)]						**2**				
• 2 × UR2 (9 slots), aluminum[1)2)]						**3**				
• 2 × UR2 (9 slots), steel[1)]						**4**				
• 2 × CR3 (4 slots), aluminum[2)3)]						**7**				
Power supply (without backup batteries)										
• 2 × PS 407, 4 A for 120/230 V UC[2)4)]							**A**			
• 2 × PS 407, 10 A for 120/230 V UC							**B**			
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy[2)]							**C**			
• 2 × 2 PS 407, 10 A for 120/230 V UC, redundant[2)]							**E**			
• 2 × PS 405, 4 A for 24 V DC[2)4)]							**F**			
• 2 × PS 405, 10 A for 24 V DC							**G**			
• 2 × PS 405, 10 A for 24 V DC, optional redundancy[2)]							**H**			
• 2 × 2 PS 405, 10 A for 24 V DC, redundant[2)]							**K**			
Additive PROFIBUS DP interfaces[1)]										
• Without CP 443-5 Extended										**0**
• 2 × 1 CP 443-5 Extended[2)]										**1**
• 2 × 2 CP 443-5 Extended[2)]										**2**
• 2 × 3 CP 443-5 Extended[2)]										**3**
• 2 × 4 CP 443-5 Extended[2)]										**4**

1) In configurations with UR2/UR2-H racks, up to 5 CPs (Industrial Ethernet/PROFIBUS) can be configured with a single power supply per subsystem, or up to 3 CPs per subsystem with a redundant power supply.
2) Conformal coating
3) Only in conjunction with 4 A power supplies
4) Only in conjunction with CR3 rack

High-availability automation systems with CPU 410E for the expanded temperature range (XTR)

	Article no.								
AS 410HE (Redundancy Station) 2 × CPU 410E with PROFIBUS DP and PROFINET IO interface 4 MB RAM (2 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs and PO 200M system expansion card	**6ES7656-**								
	■	**E**	**K**	■	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
Sync modules and cables										
• 2 × 2 sync modules V8 XTR for distances up to 10 m and 2 × FO sync cable, 1 m				**3**						
Additive Industrial Ethernet ports										
• Without CP 443-1					**0**					
Racks										
• 1 × UR2-H XTR (2 × 9 slots), aluminum[1)]							**1**			
• 2 × UR2 XTR (9 slots), aluminum[1)]							**3**			
• 2 x CR3 XTR, 4 slots, aluminum[2)]							**7**			
Power supply (without backup batteries)										
• 2 × PS 407, 4 A XTR for 120/230 V UC[3)]								**A**		
• 2 × PS 407, 10 A XTR for 120/230 V UC, optional redundancy								**C**		
• 2 × 2 PS 407, 10 A XTR for 120/230 V UC, redundant								**E**		
• 2 × PS 405, 4 A XTR for 24 V DC[3)]								**F**		
• 2 × PS 405, 10 A XTR for 24 V DC, optional redundancy								**H**		
• 2 × 2 PS 405, 10 A XTR for 24 V DC, redundant								**K**		
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**

1) Only in conjunction with 10 A power supplies
2) Only in conjunction with 4 A power supplies
3) Only in conjunction with CR3 rack

© Siemens 2019

Ordering data

Individual components

	Article No.
Individual components of the fault-tolerant SIMATIC PCS 7 AS 410H automation systems	
CPU 410-5H Process Automation as spare part Conformal coating; for operating temperature up to 70 °C 32 MB RAM integrated (16 MB each for program and data); module occupies 2 slots	**6ES7410-5HX08-0AB0**
CPU 410-5H Process Automation 100 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 100 PO	**6ES7654-5CJ00-0XF0**
CPU 410-5H Process Automation 500 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 500 PO	**6ES7654-5CL00-0XF0**
CPU 410-5H Process Automation 1 000 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 1 000 PO	**6ES7654-5CN00-0XF0**
CPU 410-5H Process Automation 1 600 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 1 600 PO	**6ES7654-5CP00-0XF0**
CPU 410-5H Process Automation PO 2k+ Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for PO 2k+ (≥ 2 000)	**6ES7654-5CQ00-0XF0**
CPU 410 expansion pack For subsequent increase in performance of the CPU 410-5H process automation independent of language, no SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs, license for upgrading of 1 CPU	**6ES7653-2CA00-0XE0**
- 500 POs, license for upgrading of 1 CPU	**6ES7653-2CC00-0XE0**
- PN RED for use of redundant PROFINET (R1), with 2 licenses for upgrading of an H System	**6ES7653-2CX01-0XE0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs, license for upgrading of 1 CPU	**6ES7653-2CA00-0XK0**
- 500 POs, license for upgrading of 1 CPU	**6ES7653-2CC00-0XK0**
- PN RED for use of redundant PROFINET (R1), with 2 licenses for upgrading of an H System	**6ES7653-2CX01-0XK0**

	Article No.
Sync set For coupling two redundant CPUs; for distances up to	
• 10 m, consisting of 4 sync modules for up to 10 m and 2 fiber-optic sync cables, 1 m each	**6ES7656-7XX30-0XE0**
• 10 km, consisting of 4 sync modules for up to 10 km Note: please order fiber-optic sync cables (2 units) in the required length separately.	**6ES7656-7XX40-0XE0**
Sync module For coupling two redundant CPUs; 2 modules required for each CPU; for distances up to	
• 10 m	**6ES7960-1AA06-0XA0**
• 10 km	**6ES7960-1AB06-0XA0**
Sync module V8 XTR (Conformal coating; for operating temperature up to 70 °C) For coupling two redundant CPUs; 2 modules required for each CPU; for distances up to 10 m	**6ES7960-1AA08-0XA0**
Sync cable (fiber-optic cable) For connecting two redundant CPUs, 2 cables required for each redundant automation system	
• 1 m	**6ES7960-1AA04-5AA0**
• 2 m	**6ES7960-1AA04-5BA0**
• 10 m	**6ES7960-1AA04-5KA0**
Other lengths	On request
SIMATIC NET CP 443-1 (conformal coating) Communication module for connecting SIMATIC S7-400 to Industrial Ethernet through TCP/IP, ISO and UDP; PROFINET IO controller, MRP; integrated real-time switch ERTEC with 2 ports; 2 x RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with or without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection over IP access list, initialization over LAN 10/100 Mbit/s; with electronic manual on DVD	**6GK7443-1EX30-0XE1**
SIMATIC NET CP 443-5 Extended (conformal coating) Communication module for connection of SIMATIC S7-400 to PROFIBUS as DP master or for S7 communication, for increasing the number of DP lines, for data set routing with SIMATIC PDM and for 10-ms time stamp, electronic manual on CD; module occupies 1 slot	**6GK7443-5DX05-0XE1**

8

© Siemens 2019

Ordering data

	Article No.
PS 407 power supply module with battery compartment for 2 backup batteries, module occupies 2 slots	
• **4 A XTR** (conformal coating; for operating temperature up to 70 °C) 120/230 V UC; 5 V DC/4 A, 24 V DC/0.5 A	**6ES7407-0DA02-0AA1**
• **10 A** 120/230 V AC/DC; 5 V DC/10 A, 24 V DC/1 A	**6ES7407-0KA02-0AA0**
• **10 A XTR, optional redundancy** (conformal coating; for operating temperature up to 70 °C) 120/230 V UC/; 5 V DC/10 A, 24 V DC/1 A	**6ES7407-0KR02-0AA1**
• **20 A** 120/230 V AC/DC; 5 V DC/20 A, 24 V DC/1 A	**6ES7407-0RA02-0AA0**
PS 405 power supply module with battery compartment for 2 backup batteries, module occupies 2 slots	
• **4 A XTR** (conformal coating; for operating temperature up to 70 °C) 24/48/60 V DC; 5 V DC/4 A, 24 V DC/0.5 A	**6ES7405-0DA02-0AA1**
• **10 A** 24/48/60 V DC; 5 V DC/10 A, 24 V DC/1 A	**6ES7405-0KA02-0AA0**
• **10 A XTR, optional redundancy** (conformal coating; for operating temperature up to 70 °C) 24/48/60 V DC/; 5 V DC/10 A, 24 V DC/1 A	**6ES7405-0KR02-0AA1**
• **20 A** 24/48/60 V DC; 5 V DC/20 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0RA02-0AA0**
Backup battery for PS 405/407, type AA, 3.6 V, 2.3 Ah	**6ES7971-0BA00**
XTR backup battery for PS 405/407, type AA, 3.6 V, 2.3 Ah; for operating temperature up to 70 °C	**6ES7971-0BA02**
Aluminum rack	
• UR1, 18 slots	**6ES7400-1TA11-0AA0**
• UR2 XTR, 9 slots (conformal coating; for operating temperature up to 70 °C)	**6ES7400-1JA11-0AA1**
• UR2-H XTR, for divided central controllers; 2 × 9 slots (conformal coating; for operating temperature up to 70 °C)	**6ES7400-2JA10-0AA1**
• CR3 XTR, 4 slots (conformal coating; for operating temperature up to 70 °C)	**6ES7401-1DA01-0AA1**
Steel rack	
• UR1, 18 slots	**6ES7400-1TA01-0AA0**
• UR2, 9 slots	**6ES7400-1JA01-0AA0**
• UR2-H, for divided central controllers; 2 × 9 slots	**6ES7400-2JA00-0AA0**

	Article No.
Individual components for AS 410HE high-availability automation systems	
CPU 410E Process Automation as spare part Conformal coating; for operating temperatures up to 70 °C 4 MB RAM integrated (2 MB each for program and data); module occupies 2 slots	**6ES7410-5HM08-0AB0**
System expansion card PO 200M	**6ES7653-2CB00-0XB0**
Runtime licenses for SIMATIC PCS 7 automation systems (can be added to existing licenses)	
SIMATIC PCS 7 A S Runtime license Language-neutral, floating license for 1 user No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs	**6ES7653-2BA00-0XB5**
- 1 000 POs	**6ES7653-2BB00-0XB5**
- 10 000 POs	**6ES7653-2BC00-0XB5**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs	**6ES7653-2BA00-0XH5**
- 1 000 POs	**6ES7653-2BB00-0XH5**
- 10 000 POs	**6ES7653-2BC00-0XH5**
Y-Link	
Y-Link For connection of devices with only 1 PROFIBUS DP interface to a redundant automation system	**6ES7197-1LA12-0XA0**

Options

Y-Link

- Bus coupler for transition from a redundant PROFIBUS DP master system to a single-channel PROFIBUS DP master system
- For connection of devices with only one PROFIBUS DP interface to the redundant PROFIBUS DP master system

The Y-link comprises:

- 2 IM 153-2 High Feature Outdoor high feature interface modules
- One Y coupler including RS 485 repeater
- One BM IM/IM bus module for two IM 153-2 High Feature Outdoor modules
- One BM Y coupler bus module

Evaluation of the Y-Link diagnostics (and hence indirectly of the connected DP standard slaves) is supported by driver blocks.

© Siemens 2019

Overview



AS Single Station AS 410F

Safety-related automation systems are used for critical applications where a fault could endanger life or result in damage to the plant or the environment. These F/FH systems also referred to as "fail-safe automation systems" detect both faults in the process and their own internal faults in association with the safety-related F modules of the ET 200 distributed I/O systems or fail-safe transmitters connected directly via the fieldbus. They automatically transfer the plant to a safe state in the event of a fault.

Design

The PROFIsafe profile allows safety-related communication between the automation system (controller) and the process I/O via both PROFIBUS and PROFINET. The decision for choosing either PROFINET IO or the PROFIBUS DP/PA fieldbuses has a significant influence on the architecture of the safety-related system.

For information on the safety-related design versions with PROFIBUS DP/PA and PROFINET IO, refer to the section "Safety Integrated for Process Automation", "Introduction".

The safety-related SIMATIC PCS 7 automation systems are based either on the hardware of the AS 410S standard automation system (F systems) or the hardware of the AS 410H high availability automation system (FH systems), which have been supplemented with safety functions using S7 F systems.

In accordance with the design variant, they are categorized as:

- **AS Single Station AS 410F** with only one CPU (safety-related)
- **AS Redundancy Station AS 410FH** with two redundant CPUs (safety-related and high availability)

The availability can be flexibly increased with a redundant design for the power supply or the Industrial Ethernet communications module (for details, see the section "Modular S7-400 systems" under "Flexible and scalable availability").

All AS 410F/FH systems are TÜV-certified and comply with the safety requirements up to SIL 3 according to IEC 61508.

In these systems with multitasking capability, several programs can be executed simultaneously in one CPU – basic process control (BPCS) applications or also safety-related applications. The programs are reaction-free, i.e. faults in BPCS applications have no effect on safety-related applications, and vice versa. Special tasks with very short response times can also be implemented.

The redundant FH systems operating according to the 1-out-of-2 principle consist of two subsystems of identical design. These are electrically isolated from each other to achieve optimum EMC, and are synchronized with each other via fiber-optic cables. In case of an error, there is a bumpless switchover from the active subsystem to the reserve system. The two subsystems can be present in the same rack or separated by up to 10 km. The spatial separation provides additional security in the case of extreme influences in the environment of the active subsystem, e.g. resulting from a fire.

The redundancy of the FH systems is only used to increase the availability. It is not relevant to processing of the safety functions and the associated fault detection.

© Siemens 2019

Design (continued)

Individual configuration of AS bundles

Configuration of the safety-related automation systems as well as the Article No.'s can be defined by selecting pre-configured ordering units.

Typical combinations for the respective system can be selected using tables in the "Ordering data" section. These are divided into:

- AS Single Station AS 410F with one CPU
- AS Redundancy Station AS 410FH with two redundant CPUs, mounted on one common rack (UR2-H) or two separate racks (UR2)

The complete range for selection is available using two correspondingly structured online configurators in the Industry Mall:

- SIMATIC PCS 7 AS 410 Single Station configurator
- SIMATIC PCS 7 AS 410 Redundancy Station configurator

System expansion cards including an S7 F systems Runtime license should be selected here for safety-related AS 410 F/FH automation systems.

FO sync cables longer than 1 m must always be ordered separately (2 cables required in each case).

The components suitable for engineering the safety-related applications can be ordered in the section "Safety Integrated for Process Automation":

- S7 F Systems
  F programming tool with F block library for programming safety-related user programs on the engineering system
- SIMATIC Safety Matrix
  Convenient safety lifecycle tool for configuration, operation and servicing

Subsequent increase in performance/ Use of redundant PROFINET (R1)

If the performance limit defined by the ordered system expansion card is reached during configuration, commissioning or operation, a subsequent increase in performance is possible by using an appropriate number of CPU 410 Expansion Packs 100 POs/500 POs. Hardware modifications are not necessary.

Aside from increasing performance, the redundancy functions of PROFINET can also be expanded. If a redundant PROFINET (R1) is to be used in place of PROFINET system redundancy (S2), this function can be expanded with the "CPU 410 Expansion Pack PN Red".

I/O connection via PROFIBUS DP

The distributed process I/O can be integrated into a PROFIBUS DP segment either directly or via a lower-level PROFIBUS PA fieldbus. Several PROFIBUS DP segments with distributed process I/Os can be operated on an AS 410F/FH automation system.

A PROFIBUS DP interface is already integrated in each CPU 410-5H Process Automation. Using the online configurator in the Industry Mall or in the Ordering data, up to four additional PROFIBUS DP interfaces can be configured with additive CP 443-5 PROFIBUS DP interfaces (conformal coating) for each AS 410F as well as for each subsystem of the AS 410FH.

Connection of the process I/Os to two redundant PROFIBUS DP lines of an FH system (AS Redundancy Station) is carried out as described in the section "High availability automation systems".

The FOUNDATION Fieldbus (FF) H1 and the FF devices are not supported by Safety Integrated for Process Automation.

I/O connection via PROFINET IO

Safety-related AS 410F/FH automation systems can be connected via PROFINET IO with remote I/O stations, for example, ET 200M or ET 200SP remote I/O stations. Only the two PROFINET interfaces (2-port switches) integrated in the CPU can be used for this on the automation system. You can find more information in the section "Safety Integrated for Process Automation", "Introduction".

Communication over the plant bus

If the PROFINET interfaces integrated in the CPU of the safety-related automation systems are not used for PROFINET IO, they are then available for connection to the Industrial Ethernet plant bus. Otherwise, the AS 410F and the two subsystems of the AS 410FH can be connected to the plant bus via one CP 443-1 (conformal coating) communication module each.

The plant bus can be implemented in the form of a ring structure, which can also be configured with redundant architecture if the availability requirements are high. When there are two redundant rings, it makes sense to configure two IE interface/communication modules per AS (AS 410F) or AS subsystem (AS 410FH) and to distribute their connections over the two rings (4-way connection). Double faults such as failure of the switch on ring 1 with simultaneous interruption of the bus cable on ring 2 can thus be tolerated.

Runtime licenses

Safety-related automation systems come furnished with the SIMATIC PCS 7 AS Runtime license for 100 process objects (PO) and the S7 F Systems RT license. The 100 POs of the SIMATIC PCS 7 AS Runtime license can be expanded by additional Runtime licenses for 100, 1 000 or 10 000 POs. The process objects of additional Runtime licenses can be added to process objects which already exist. The number and type (e.g. 100 or 1000) of additional Runtime licenses are irrelevant.

© Siemens 2019

Ordering data

Safety-related automation systems with CPU 410-5H

	Article No.								
AS 410F (Single Station) CPU 410-5H with PROFIBUS DP and PROFINET IO interface 32 MB RAM (16 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7654-**	■	**C**	■	**0**	■	-	■	■	**F**	■
Type of delivery											
• Individual components, unassembled	**5**										
• Pre-assembled and tested	**6**										
System expansion card											
• System expansion card 100 POs including S7 F Systems Runtime License			**A**								
• System expansion card 500 POs including S7 F Systems Runtime License			**C**								
• System expansion card 1 000 POs including S7 F Systems Runtime License			**E**								
• System expansion card 1 600 POs including S7 F Systems Runtime license			**F**								
• System expansion card PO 2k+ (≥ 2 000) including S7 F Systems Runtime License			**G**								
• System expansion card 0 PO (blank) including S7 F Systems Runtime license			**H**								
Additive Industrial Ethernet interfaces[1]											
• Without CP 443-1					**0**						
• 1 × CP 443-1[2]					**3**						
• 2 × CP 443-1[2]					**4**						
Racks											
• UR2 (9 slots), aluminum[1][2]						**3**					
• UR2 (9 slots), steel[1]						**4**					
• UR1 (18 slots), aluminum						**5**					
• UR1 (18 slots), steel						**6**					
• CR3 (4 slots), aluminum[2][3]						**7**					
Power supply (without backup batteries)											
• 1 × PS 407, 4 A for 120/230 V UC[2][4]							**A**				
• 1 × PS 407, 10 A for 120/230 V UC							**B**				
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy[2]							**C**				
• 1 × PS 407, 20 A for 120/230 V UC							**D**				
• 2 × PS 407, 10 A for 120/230 V UC, redundant[2]							**E**				
• 1 × PS 405, 4 A for 24 V DC[2][4]							**F**				
• 1 × PS 405, 10 A for 24 V DC							**G**				
• 1 × PS 405, 10 A for 24 V DC, optional redundancy[2]							**H**				
• 1 × PS 405, 20 A for 24 V DC							**J**				
• 2 × PS 405, 10 A for 24 V DC, redundant[2]							**K**				
Additive PROFIBUS DP interfaces[1]											
• Without CP 443-5 Extended											**0**
• 1 × CP 443-5 Extended[2]											**1**
• 2 × CP 443-5 Extended[2]											**2**
• 3 × CP 443-5 Extended[2]											**3**
• 4 × CP 443-5 Extended[2]											**4**

[1] Up to 5 CPs (Industrial Ethernet/PROFIBUS) can be plugged into the UR2 rack with a single power supply, or up to 3 with a redundant power supply.

[2] Conformal coating

[3] Only in conjunction with 4 A power supplies

[4] Only in conjunction with CR3 rack

	Article No.								
AS 410FH (Redundancy Station) 2 × CPU 410-5H with PROFIBUS DP and PROFINET IO interface 32 MB RAM (16 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7656-**	■	**C**	■	■	-	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
System expansion card										
• 2 × System expansion card 100 POs including S7 F Systems Runtime License			**A**							
• 2 × system expansion card 500 POs including S7 F Systems Runtime License			**C**							
• 2 × system expansion card 1 000 POs including S7 F Systems Runtime license			**E**							
• 2 × System expansion card 1 600 POs including S7 F Systems Runtime License			**F**							
• 2 × System expansion card PO 2k+ (≥ 2 000) including S7 F Systems Runtime license			**G**							
• 2 × System expansion card 0 PO (blank) including S7 F Systems Runtime license			**H**							
Sync modules and cables										
• 2 × 2 sync modules[2] for distances up to 10 m and 2 × FO sync cable, 1 m				**3**						
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing				**4**						
Additive Industrial Ethernet interfaces[1]										
• Without CP 443-1					**0**					
• 2 × 1 CP 443-1[2]					**3**					
• 2 × 2 CP 443-1[2]					**4**					
Racks										
• 1 × UR2-H (2 × 9 slots), aluminum[1][2]						**1**				
• 1 × UR2-H (2 × 9 slots), steel[1]						**2**				
• 2 × UR2 (9 slots), aluminum[1][2]						**3**				
• 2 × UR2 (9 slots), steel[1]						**4**				
• 2 x CR3 (4 slots), aluminum[2][3]						**7**				
Power supply (without backup batteries)										
• 2 × PS 407, 4 A for 120/230 V UC[2][4]							**A**			
• 2 × PS 407, 10 A for 120/230 V UC							**B**			
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy[2]							**C**			
• 2 × PS 407, 20 A for 120/230 V UC							**D**			
• 2 × 2 PS 407, 10 A for 120/230 V UC, redundant[2]							**E**			
• 2 × PS 405, 4 A for 24 V DC[2][4]							**F**			
• 2 × PS 405, 10 A for 24 V DC							**G**			
• 2 × PS 405, 10 A for 24 V DC, optional redundancy[2]							**H**			
• 2 × PS 405, 20 A for 24 V DC							**J**			
• 2 × 2 PS 405, 10 A for 24 V DC, redundant[2]							**K**			
Additive PROFIBUS DP interfaces[1]										
• Without CP 443-5 Extended										**0**
• 2 × 1 CP 443-5 Extended[2]										**1**
• 2 × 2 CP 443-5 Extended[2]										**2**
• 2 × 3 CP 443-5 Extended[2]										**3**
• 2 × 4 CP 443-5 Extended[2]										**4**

[1] In configurations with UR2/UR2-H racks, up to 5 CPs (Industrial Ethernet/PROFIBUS) can be configured with a single power supply per subsystem, or up to 3 CPs per subsystem with a redundant power supply.

[2] Conformal coating

[3] Only in conjunction with 4 A power supplies

[4] Only in conjunction with CR3 rack

© Siemens 2019

Ordering data (continued)

Safety-related automation systems with CPU 410-5H for the expanded temperature range (XTR)

	Article No.								
AS 410F (Single Station) CPU 410-5H with PROFIBUS DP and PROFINET IO interface 32 MB RAM (16 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7654-**	■	**C**	■	**0**	■	**-**	■	■	**F**	■
Type of delivery											
• Individual components, unassembled	**5**										
• Pre-assembled and tested	**6**										
System expansion card											
• System expansion card 100 POs including S7 F Systems Runtime License			**A**								
• System expansion card 500 POs including S7 F Systems Runtime License			**C**								
• System expansion card 1 000 POs including S7 F Systems Runtime License			**E**								
• System expansion card 1 600 POs including S7 F Systems Runtime license			**F**								
• System expansion card PO 2k+ (≥ 2 000) including S7 F Systems Runtime License			**G**								
• System expansion card 0 PO (blank) including S7 F Systems Runtime license			**H**								
Additive Industrial Ethernet interfaces											
• Without CP 443-1					**0**						
Racks											
• UR2 XTR (9 slots), aluminum[1]							**3**				
• CR3 XTR, 4 slots, aluminum[2]							**7**				
Power supply (without backup batteries)											
• 1 × PS 407, 4 A XTR for 120/230 V UC[3]								**A**			
• 1 × PS 407, 10 A XTR for 120/230 V UC, optional redundancy								**C**			
• 2 × PS 407, 10 A XTR for 120/230 V UC, redundant								**E**			
• 1 × PS 405, 4 A XTR for 24 V DC[3]								**F**			
• 1 × PS 405, 10 A XTR for 24 V DC, optional redundancy								**H**			
• 2 × PS 405, 10 A XTR for 24 V DC, redundant								**K**			
Additive PROFIBUS DP interfaces											
• Without CP 443-5 Extended											**0**

[1] Only in conjunction with 10 A power supplies
[2] Only in conjunction with 4 A power supplies
[3] Only in conjunction with CR3 rack

	Article No.								
AS 410FH (Redundancy Station) 2 × CPU 410-5H with PROFIBUS DP and PROFINET IO interface 32 MB RAM (16 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7656-**	■	**C**	■	■	■	**-**	■	■	**F**	■
Type of delivery											
• Individual components, unassembled	**5**										
• Pre-assembled and tested	**6**										
System expansion card											
• 2 × System expansion card 100 POs including S7 F Systems Runtime License			**A**								
• 2 × system expansion card 500 POs including S7 F Systems Runtime License			**C**								
• 2 × system expansion card 1 000 POs including S7 F Systems Runtime license			**E**								
• 2 × System expansion card 1 600 POs including S7 F Systems Runtime License			**F**								
• 2 × System expansion card PO 2k+ (≥ 2 000) including S7 F Systems Runtime license			**G**								
• 2 × System expansion card 0 PO (blank) including S7 F Systems Runtime license			**H**								
Sync modules and cables											
• 2 × 2 sync modules V8 XTR for distances up to 10 m and 2 × FO sync cable, 1 m					**3**						
Additive Industrial Ethernet interfaces											
• Without CP 443-1							**0**				
Racks											
• 1 × UR2-H XTR (2 × 9 slots), aluminum[1]								**1**			
• 2 × UR2 XTR (9 slots), aluminum[1]								**3**			
• 2 × CR3 XTR, 4 slots, aluminum[2]								**7**			
Power supply (without backup batteries)											
• 2 × PS 407, 4 A XTR for 120/230 V UC[3]									**A**		
• 2 × PS 407, 10 A XTR for 120/230 V UC, optional redundancy									**C**		
• 2 × 2 PS 407, 10 A XTR for 120/230 V UC, redundant									**E**		
• 2 × PS 405, 4 A XTR for 24 V DC[3]									**F**		
• 2 × PS 405, 10 A XTR for 24 V DC, optional redundancy									**H**		
• 2 × 2 PS 405, 10 A XTR for 24 V DC, redundant									**K**		
Additive PROFIBUS DP interfaces											
• Without CP 443-5 Extended											**0**

[1] Only in conjunction with 10 A power supplies
[2] Only in conjunction with 4 A power supplies
[3] Only in conjunction with CR3 rack

© Siemens 2019

Ordering data (continued)

Safety-related automation systems with CPU 410E

	Article no.								
AS 410FE (Single Station) CPU 410E with PROFIBUS DP and PROFINET IO interface 4 MB RAM (2 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs and PO 200M system expansion card	**6ES7654-**								
	■	**E**	**B**	**0**	■	-	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
Additive Industrial Ethernet ports[1]										
• Without CP 443-1				**0**						
• 1 × CP 443-1[2]				**3**						
• 2 × CP 443-1[2]				**4**						
Racks										
• UR2 (9 slots), aluminum[1)2)]						**3**				
• UR2 (9 slots), steel[1)]						**4**				
• CR3 (4 slots), aluminum[2)3)]						**7**				
Power supply (without backup batteries)										
• 1 × PS 407, 4 A for 120/230 V UC[2)4)]								**A**		
• 1 × PS 407, 10 A for 120/230 V UC								**B**		
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy[2)]								**C**		
• 2 × PS 407, 10 A for 120/230 V UC, redundant[2)]								**E**		
• 1 × PS 405, 4 A for 24 V DC[2)4)]								**F**		
• 1 × PS 405, 10 A for 24 V DC								**G**		
• 1 × PS 405, 10 A for 24 V DC, optional redundancy[2)]								**H**		
• 2 × PS 405, 10 A for 24 V DC, redundant[2)]								**K**		
Additive PROFIBUS DP interfaces[1]										
• Without CP 443-5 Extended										**0**
• 1 × CP 443-5 Extended[2)]										**1**
• 2 × CP 443-5 Extended[2)]										**2**
• 3 × CP 443-5 Extended[2)]										**3**
• 4 × CP 443-5 Extended[2)]										**4**

1) Up to 5 CPs (Industrial Ethernet/PROFIBUS) can be plugged into the UR2 rack with a single power supply, or up to 3 with a redundant power supply.
2) Conformal coating
3) Only in conjunction with 4 A power supplies
4) Only in conjunction with CR3 rack

	Article no.								
AS 410FHE (Redundancy Station) 2 × CPU 410E with PROFIBUS DP and PROFINET IO interface 4 MB RAM (2 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs and PO 200M system expansion card	**6ES7656-**								
	■	**E**	**B**	■	■	-	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
Sync modules and cables										
• 2 × 2 sync modules[2)] for distances up to 10 m and 2 × FO sync cable, 1 m				**3**						
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing				**4**						
Additive Industrial Ethernet ports[1]										
• Without CP 443-1					**0**					
• 2 × 1 CP 443-1[2)]					**3**					
• 2 × 2 CP 443-1[2)]					**4**					
Racks										
• 1 × UR2-H (2 × 9 slots), aluminum[1)2)]							**1**			
• 1 × UR2-H (2 × 9 slots), steel[1)]							**2**			
• 2 × UR2 (9 slots), aluminum[1)2)]							**3**			
• 2 × UR2 (9 slots), steel[1)]							**4**			
• 2 x CR3 (4 slots), aluminum[2)3)]							**7**			
Power supply (without backup batteries)										
• 2 × PS 407, 4 A for 120/230 V UC[2)4)]								**A**		
• 2 × PS 407, 10 A for 120/230 V UC								**B**		
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy[2)]								**C**		
• 2 × PS 407, 20 A for 120/230 V UC								**D**		
• 2 × 2 PS 407, 10 A for 120/230 V UC, redundant[2)]								**E**		
• 2 × PS 405, 4 A for 24 V DC[2)4)]								**F**		
• 2 × PS 405, 10 A for 24 V DC								**G**		
• 2 × PS 405, 10 A for 24 V DC, optional redundancy[2)]								**H**		
• 2 × PS 405, 20 A for 24 V DC								**J**		
• 2 × 2 PS 405, 10 A for 24 V DC, redundant[2)]								**K**		
Additive PROFIBUS DP interfaces[1]										
• Without CP 443-5 Extended										**0**
• 2 × 1 CP 443-5 Extended[2)]										**1**
• 2 × 2 CP 443-5 Extended[2)]										**2**
• 2 × 3 CP 443-5 Extended[2)]										**3**
• 2 × 4 CP 443-5 Extended[2)]										**4**

1) In configurations with UR2/UR2-H racks, up to 5 CPs (Industrial Ethernet/PROFIBUS) can be configured with a single power supply per subsystem, or up to 3 CPs per subsystem with a redundant power supply.
2) Conformal coating
3) Only in conjunction with 4 A power supplies
4) Only in conjunction with CR3 rack

© Siemens 2019

Ordering data (continued)

Safety-related automation systems with CPU 410E for the expanded temperature range (XTR)

	Article no.								
AS 410FE (Single Station) CPU 410E with PROFIBUS DP and PROFINET IO interface 4 MB RAM (2 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs and PO 200M system expansion card	**6ES7654-**								
	■	**E**	**B**	**0**	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
Additive Industrial Ethernet ports										
• Without CP 443-1				**0**						
Racks										
• UR2 XTR (9 slots), aluminum[1]							**3**			
• CR3 XTR, 4 slots, aluminum[2]							**7**			
Power supply (without backup batteries)										
• 1 × PS 407, 4 A XTR for 120/230 V UC[3]								**A**		
• 1 × PS 407, 10 A XTR for 120/230 V UC, optional redundancy								**C**		
• 2 × PS 407, 10 A XTR for 120/230 V UC, redundant								**E**		
• 1 × PS 405, 4 A XTR for 24 V DC[3]								**F**		
• 1 × PS 405, 10 A XTR for 24 V DC, optional redundancy								**H**		
• 2 × PS 405, 10 A XTR for 24 V DC, redundant								**K**		
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**

[1] Only in conjunction with 10 A power supplies
[2] Only in conjunction with 4 A power supplies
[3] Only in conjunction with CR3 rack

	Article no.								
AS 410FHE (Redundancy Station) 2 × CPU 410E with PROFIBUS DP and PROFINET IO interface 4 MB RAM (2 MB each for program and data) with SIMATIC PCS 7 AS Runtime license for 100 POs and PO 200M system expansion card	**6ES7656-**								
	■	**E**	**B**	■	■	**-**	■	■	**F**	■
Type of delivery										
• Individual components, unassembled	**5**									
• Pre-assembled and tested	**6**									
Sync modules and cables										
• 2 × 2 sync modules V8 XTR for distances up to 10 m and 2 × FO sync cable, 1 m				**3**						
Additive Industrial Ethernet ports										
• Without CP 443-1					**0**					
Racks										
• 1 × UR2-H XTR (2 × 9 slots), aluminum[1]							**1**			
• 2 × UR2 XTR (9 slots), aluminum[1]							**3**			
• 2 × CR3 XTR, 4 slots, aluminum[2]							**7**			
Power supply (without backup batteries)										
• 2 × PS 407, 4 A XTR for 120/230 V UC[3]								**A**		
• 2 × PS 407, 10 A XTR for 120/230 V UC, optional redundancy								**C**		
• 2 × 2 PS 407, 10 A XTR for 120/230 V UC, redundant								**E**		
• 2 × PS 405, 4 A XTR for 24 V DC[3]								**F**		
• 2 × PS 405, 10 A XTR for 24 V DC, optional redundancy								**H**		
• 2 × 2 PS 405, 10 A XTR for 24 V DC, redundant								**K**		
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**

[1] Only in conjunction with 10 A power supplies
[2] Only in conjunction with 4 A power supplies
[3] Only in conjunction with CR3 rack

© Siemens 2019

Ordering data

Individual components

	Article No.
Individual components of the safety-related SIMATIC PCS 7 AS 410F and AS 410FH automation systems	
S7 F Systems RT License For processing safety-related user programs, for one AS 410F/FH system each	**6ES7833-1CC00-6YX0**
CPU 410-5H Process Automation as spare part Conformal coating; for operating temperature up to 70 °C 32 MB RAM integrated (16 MB each for program and data); module occupies 2 slots	**6ES7410-5HX08-0AB0**
CPU 410-5H Process Automation 100 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 100 PO	**6ES7654-5CJ00-0XF0**
CPU 410-5H Process Automation 500 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 500 PO	**6ES7654-5CL00-0XF0**
CPU 410-5H Process Automation 1 000 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 1 000 PO	**6ES7654-5CN00-0XF0**
CPU 410-5H Process Automation 1 600 PO Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for 1 600 PO	**6ES7654-5CP00-0XF0**
CPU 410-5H Process Automation PO 2k+ Bundle CPU bundle, consisting of CPU 410-5H Process Automation and PCS 7 system expansion card for PO 2k+ (≥ 2 000)	**6ES7654-5CQ00-0XF0**
CPU 410 expansion pack For subsequent increase in performance of the CPU 410-5H process automation independent of language, no SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs, license for upgrading of 1 CPU	**6ES7653-2CA00-0XE0**
- 500 POs, license for upgrading of 1 CPU	**6ES7653-2CC00-0XE0**
- PN RED for use of redundant PROFINET (R1), with 2 licenses for upgrading of an H System	**6ES7653-2CX01-0XE0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs, license for upgrading of 1 CPU	**6ES7653-2CA00-0XK0**
- 500 POs, license for upgrading of 1 CPU	**6ES7653-2CC00-0XK0**
- PN RED for use of redundant PROFINET (R1), with 2 licenses for upgrading of an H System	**6ES7653-2CX01-0XK0**

	Article No.
Sync set For coupling two redundant CPUs; for distances up to	
• 10 m, consisting of 4 sync modules for up to 10 m and 2 fiber-optic sync cables, 1 m each	**6ES7656-7XX30-0XE0**
• 10 km, consisting of 4 sync modules for up to 10 km Note: please order fiber-optic sync cables (2 units) in the required length separately.	**6ES7656-7XX40-0XE0**
Sync module For coupling two redundant CPUs; 2 modules required for each CPU, for distances up to	
• 10 m	**6ES7960-1AA06-0XA0**
• 10 km	**6ES7960-1AB06-0XA0**
Sync module V8 XTR (Conformal coating; for operating temperature up to 70 °C) For coupling two redundant CPUs; 2 modules required for each CPU; for distances up to 10 m	**6ES7960-1AA08-0XA0**
Sync cable (fiber-optic cable) For connecting two redundant CPUs, 2 cables required for each redundant automation system	
• 1 m	**6ES7960-1AA04-5AA0**
• 2 m	**6ES7960-1AA04-5BA0**
• 10 m	**6ES7960-1AA04-5KA0**
Other lengths	On request
SIMATIC NET CP 443-1 (conformal coating) Communication module for connecting SIMATIC S7-400 to Industrial Ethernet through TCP/IP, ISO and UDP; PROFINET IO controller, MRP; integrated real-time switch ERTEC with 2 ports; 2 x RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with or without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection over IP access list, initialization over LAN 10/100 Mbps; with electronic manual on DVD	**6GK7443-1EX30-0XE1**
SIMATIC NET CP 443-5 Extended (conformal coating) Communication module for connection of SIMATIC S7-400 to PROFIBUS as DP master or for S7 communication, for increasing the number of DP lines, for data set routing with SIMATIC PDM and for 10-ms time stamp, electronic manual on CD; module occupies 1 slot	**6GK7443-5DX05-0XE1**

8

© Siemens 2019

8

Ordering data	Article No.
PS 407 power supply module with battery compartment for 2 backup batteries, module occupies 2 slots	
• **4 A XTR** (conformal coating; for operating temperature up to 70 °C) 120/230 V UC; 5 V DC/4 A, 24 V DC/0.5 A	**6ES7407-0DA02-0AA1**
• **10 A** 120/230 V UC; 5 V DC/10 A, 24 V DC/1 A	**6ES7407-0KA02-0AA0**
• **10 A XTR, optional redundancy** (conformal coating; for operating temperature up to 70 °C) 120/230 V UC/; 5 V DC/10 A, 24 V DC/1 A	**6ES7407-0KR02-0AA1**
• **20 A** 120/230 V UC; 5 V DC/20 A, 24 V DC/1 A	**6ES7407-0RA02-0AA0**
PS 405 power supply module with battery compartment for 2 backup batteries, module occupies 2 slots	
• **4 A XTR** (conformal coating; for operating temperature up to 70 °C) 24/48/60 V DC; 5 V DC/4 A, 24 V DC/0.5 A	**6ES7405-0DA02-0AA1**
• **10 A** 24/48/60 V DC; 5 V DC/10 A, 24 V DC/1 A	**6ES7405-0KA02-0AA0**
• **10 A XTR, optional redundancy** (conformal coating; for operating temperature up to 70 °C) 24/48/60 V DC/; 5 V DC/10 A, 24 V DC/1 A	**6ES7405-0KR02-0AA1**
• **20 A** 24/48/60 V DC; 5 V DC/20 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0RA02-0AA0**
Backup battery for PS 405/407, type AA, 3.6 V, 2.3 Ah	**6ES7971-0BA00**
XTR backup battery for PS 405/407, type AA, 3.6 V, 2.3 Ah; for operating temperature up to 70 °C	**6ES7971-0BA02**
Aluminum rack	
• UR1, 18 slots	**6ES7400-1TA11-0AA0**
• UR2 XTR, 9 slots (conformal coating; for operating temperature up to 70 °C)	**6ES7400-1JA11-0AA1**
• UR2-H XTR, for divided central controllers; 2 × 9 slots (conformal coating; for operating temperature up to 70 °C)	**6ES7400-2JA10-0AA1**
• CR3 XTR, 4 slots (conformal coating; for operating temperature up to 70 °C)	**6ES7401-1DA01-0AA1**
Steel rack	
• UR1, 18 slots	**6ES7400-1TA01-0AA0**
• UR2, 9 slots	**6ES7400-1JA01-0AA0**
• UR2-H, for divided central controllers; 2 × 9 slots	**6ES7400-2JA00-0AA0**

	Article No.
Individual components for safety-related AS 410FE automation systems	
CPU 410E Process Automation as spare part Conformal coating; for operating temperatures up to 70 °C 4 MB RAM integrated (2 MB each for program and data); module occupies 2 slots	**6ES7410-5HM08-0AB0**
System expansion card PO 200M	**6ES7653-2CB00-0XB0**
Runtime licenses for SIMATIC PCS 7 automation systems (can be added to existing licenses)	
SIMATIC PCS 7 AS Runtime license Language-neutral, floating license for 1 user No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs	**6ES7653-2BA00-0XB5**
- 1 000 POs	**6ES7653-2BB00-0XB5**
- 10 000 POs	**6ES7653-2BC00-0XB5**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs	**6ES7653-2BA00-0XH5**
- 1 000 POs	**6ES7653-2BB00-0XH5**
- 10 000 POs	**6ES7653-2BC00-0XH5**
AS 410F/FH Engineering See section "Safety Integrated for Process Automation", S7 F Systems	
Y-Link	
Y-Link For connection of devices with only one PROFIBUS DP interface to a redundant automation system	**6ES7197-1LA12-0XA0**

© Siemens 2019

Overview

With the S7-400 automation systems, which are scalable via different types of CPU, you have an alternative to AS 410 automation systems. The systems that can be used in plants with SIMATIC PCS 7 V7/V8 can be classified as follows:

- Standard automation systems
- High availability automation systems
- Safety-related automation systems

Standard automation systems

The AS 414-3, AS 414-3IE, AS 416-2, AS 416-3, AS 416-3IE and AS 417-4 standard automation systems are extremely robust and feature high processing and communication performance.

The AS 414-3 and AS 414-3IE are tailored for smaller-scale applications with smaller quantity structures. This allows for a low-cost starter solution with a modular and scalable system based on the S7-400 controller range. Larger quantity frameworks can be implemented with the AS 416-2, AS416-3/416-3IE and AS 417-4 automation systems. These systems are preferred for medium and large-sized plants.

High availability automation systems

The aim in using high availability automation systems is to minimize the risk of a production outage. In accordance with their basic design, these systems are categorized as:

- AS Single Stations: AS 412-5-1H, AS 414-5-1H, AS 416-5-1H, and AS 417-5-1H with only one CPU, e.g. for the following applications:
  - Subsequent expansion to a redundant system
  - Redundant configuration on UR1 racks, comprising 2 single stations, 4 sync modules, and 2 sync fiber-optic cables
- AS Redundancy Stations: AS 412-5-2H, AS 414-5-2H, AS 416-5-2H and AS 417-5-2H with two redundant CPUs, mounted on one common rack (UR2-H) or two separate racks (UR2)

Safety-related automation systems

Safety-related automation systems (F/FH systems) are available for safety-relevant applications in which an incident can result in danger to persons, plant damage or environmental pollution. These are based on the hardware of the high availability automation systems, which is expanded by safety functions with S7 F systems.

In accordance with the design variant, they are categorized as:

- **AS Single Stations**
  AS 412F, AS 414F, AS 416F, and AS 417F with only one CPU (safety-related)
- **AS Redundancy Stations**
  AS 412FH, AS 414FH, AS 416FH, and AS 417FH with two redundant CPUs (safety-related and high availability)

The safety-related F/FH systems collaborate with safety-related F modules of the ET 200 distributed I/O systems or fail-safe transmitters connected directly via the fieldbus to detect not only faults in the process, but also their own, internal faults. They automatically transfer the plant to a safe state in the event of a fault. The redundancy of the FH systems is only used to increase the availability. It is not relevant to processing of the safety functions and the associated fault detection.

All F/FH systems are TÜV-certified and comply with the safety requirements up to SIL 3 according to IEC 61508.

Design

Racks

Automation systems based on only one CPU (AS Single Station) can be mounted on a UR1 rack (18 slots) or UR2 rack (9 slots).

The automation systems (AS Redundancy Station) consisting of two electrically isolated redundant subsystems can be mounted on a UR2-H compact rack with divided backplane bus or on two separate racks (UR1 or UR2). The design with two racks allows physical separation of the redundant subsystems, e.g. by a fireproof partition and over a distance of up to 10 km. As a result of the galvanic isolation, the system is insensitive to electromagnetic interferences.

Redundant power supply

If you have two separate power supply networks for your system, you can increase the availability of the automation systems with redundant power supplies (2 power supplies for one AS Single Station or 1 or 2 power supplies for each subsystem of an AS Redundancy Station).

Communication via the Industrial Ethernet (IE) plant bus

Each standard automation system is connected to the Industrial Ethernet plant bus by means of a CP 443-1 communication module.

If the PN/IE interfaces integrated in the CPUs of the high availability and safety-related automation systems are not used for PROFINET IO, they can then also be used for the connection to the Industrial Ethernet plant bus. Otherwise, the 1H/F systems (AS Single Station) and the two subsystems of the 2H/FH systems (AS Redundancy Station) can be connected to the plant bus via one CP 443-1 communication module each.

I/O connection via PROFIBUS DP

The distributed process I/O can be integrated into a PROFIBUS DP segment either directly or via a lower-level fieldbus (PROFIBUS PA or FOUNDATION Fieldbus H1).

Several PROFIBUS DP segments with distributed process I/O can be operated on a standard automation system, an 1H/F system (AS Single Station), or a 2H/FH system (AS Redundancy Station). The following table provides an overview of the number and type of configurable PROFIBUS DP interfaces.

© Siemens 2019

Design (continued)

AS type	PROFIBUS interfaces							
	1	2	3	4	5	6	7	8
AS 412-5-1H/AS 412F	MPI/DP	DP	CP	CP	CP	CP		
AS 412-5-2H/AS 412FH	MPI/DP	DP	CP	CP	CP	CP		
AS 414-5-1H/AS 414F	MPI/DP	DP	CP	CP	CP	CP		
AS 414-5-2H/AS 414FH	MPI/DP	DP	CP	CP	CP	CP		
AS 416-5-1H/AS 416F	MPI/DP	DP	CP	CP	CP	CP		
AS 416-5-2H/AS 416FH	MPI/DP	DP	CP	CP	CP	CP		
AS 417-5-1H/AS 417F	MPI/DP	DP	CP	CP	CP	CP		
AS 417-5-2H/AS 417FH	MPI/DP	DP	CP	CP	CP	CP		
AS 416-2	MPI/DP	DP	CP	CP	CP	CP		
AS 414-3IE	MPI/DP	IF	CP	CP	CP	CP		
AS 416-3IE	MPI/DP	IF	CP	CP	CP	CP		
AS 414-3	MPI/DP	DP	IF	CP	CP	CP	CP	
AS 416-3	MPI/DP	DP	IF	CP	CP	CP	CP	
AS 417-4	MPI/DP	DP	IF	IF	CP	CP	CP	CP

Overview of number and type of configurable PROFIBUS interfaces

MPI/DP = Integrated MPI/DP interface (for up to 32 PROFIBUS DP nodes)
DP = Integrated PROFIBUS DP interface
IF = Optional PROFIBUS DP interface module
CP = Additive CP 443-5 Extended PROFIBUS DP interface

8

I/O connection via PROFINET (PN)

Standard automation systems, high availability and safety-oriented automation systems (AS Single Stations and AS Redundancy Stations) can be networked simply and effectively with ET 200M remote I/O stations over PROFINET IO. If a PN/IE interface is integrated in the CPU of the automation system (AS 414-3IE, AS 416-3IE, and all H/F/FH systems), then it is to be used for connecting ET 200M remote I/O stations via PROFINET IO. In standard automation systems, the PN/IE interfaces of type CP 443-1 communication modules can also be used for PROFINET IO.

The maximum availability with minimum error handling times is achieved by the AS Redundancy Station (2 H/FH systems) in conjunction with the system redundancy of the I/O devices. System redundancy refers to a type of PROFINET IO communication where each I/O device establishes a communication connection to each of the two CPUs of an AS Redundancy Station over the topological network.

Runtime licenses

Each automation system comes furnished with the SIMATIC PCS 7 AS Runtime license for 100 process objects (PO). Safety-related automation systems are additionally furnished with the S7 F Systems RT license. The 100 POs of the SIMATIC PCS 7 AS Runtime license can be expanded by additional Runtime licenses for 100, 1 000 or 10 000 POs. The process objects of additional Runtime licenses can be added to process objects which already exist. The number and type (e.g. 100 or 1000) of additional Runtime licenses are irrelevant.

Individual configuration of AS bundles

The various versions of the SIMATIC PCS 7 automation systems AS 412 to AS 417 are available as AS bundles as follows:

- Individual components, combined per station in one consignment
- Preassembled and tested complete systems (no extra charge compared to delivery of individual components)

Typical combinations can be selected from tables in the section "Ordering data".

The complete range is available to you via two configurators in the Industry Mall:

- SIMATIC PCS 7 AS Single Station configurator
- SIMATIC PCS 7 AS Redundancy Station configurator

Ordering information

- For a redundant configuration based on 2 AS Single Stations, you additionally require 4 sync modules (up to 10 m or 10 km) and 2 fiber-optic sync cables. The selection depends on the distance between the two AS Single Stations.
- FO sync cables longer than 1 m must always be ordered separately (2 cables required in each case).

Accessories

Backup batteries

Lithium backup batteries of type AA with 2.3 Ah are used in the power supply modules of all SIMATIC PCS 7 automation systems AS 412 to AS 417. Since lithium batteries are easily inflammable, more rigorous transport and storage regulations apply to them.

To avoid subjecting the AS bundles to these more rigorous transport and storage regulations, the backup batteries must be ordered and delivered separately (Article No. 6ES7971-0BA00).

The following backup batteries are required depending on the configuration of the AS bundles:

- SIMATIC PCS 7 AS Single Station:
  - With 1 power supply module: 2 units
  - With 2 redundant power supply modules: 4 units
- SIMATIC PCS 7 AS Redundancy Station:
  - With 2 power supply modules: 4 units
  - With 2 x 2 redundant power supply modules: 8 units

© Siemens 2019

Ordering data

Configuration tables for standard automation systems

	Article No.								
AS 414-3 with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 3 interfaces (MPI/DP and slot for IF module) 4 MB RAM (2 MB each for program and data)	**6ES7654-**				-			G	
Type of delivery									
• Individual components, not pre-assembled	**7**								
• Pre-assembled and tested	**8**								
Memory card									
• Memory card 2 MB RAM (up to approx. 100 POs)		**B**							
• Memory card 4 MB RAM (up to approx. 210 POs)		**C**							
• Memory card 8 MB RAM (up to approx. 800 POs)		**D**							
CPU type									
• CPU 414-3 (up to approx. 450 POs)			**C**						
Additive IF 964-DP interface module									
• Without additive IF 964-DP				**0**					
• 1 × IF 964-DP				**1**					
Interface to Industrial Ethernet/PROFINET plant bus									
• 1 × CP 443-1EX30					**3**				
• 2 × CP 443-1EX30					**4**				
Racks									
• UR2 (9 slots), aluminum						**3**			
• UR2 (9 slots), steel						**4**			
• UR1 (18 slots), aluminum						**5**			
• UR1 (18 slots), steel						**6**			
Power supply (without backup batteries)									
• 1 × PS 407, 10 A for 120/230 V UC							**B**		
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy							**C**		
• 1 × PS 407, 20 A for 120/230 V UC							**D**		
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy							**E**		
• 1 × PS 405, 10 A for 24 V DC							**G**		
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**		
• 1 × PS 405, 20 A for 24 V DC							**J**		
• 2 × PS 405, 10 A for 24 V DC, optional redundancy							**K**		
Additive PROFIBUS DP interfaces									
• Without CP 443-5 Extended									**0**
• 1 × CP 443-5 Extended									**1**
• 2 × CP 443-5 Extended									**2**
• 3 × CP 443-5 Extended[1)]									**3**
• 4 × CP 443-5 Extended[1)]									**4**

[1)] With the UR2 rack in combination with a redundant power supply, the number of additive CP 443-5 Extended is limited to 2.

	Article No.								
AS 416-2 with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 2 interfaces (MPI/DP and DP) 8 MB RAM (4 MB each for program and data)	**6ES7654-**				-			G	
Type of delivery									
• Individual components, not pre-assembled	**7**								
• Pre-assembled and tested	**8**								
Memory card									
• Memory card 4 MB RAM (up to approx. 210 POs)		**C**							
• Memory card 8 MB RAM (up to approx. 800 POs)		**D**							
• Memory card 16 MB RAM (up to approx. 3 000 POs)		**E**							
CPU type									
• CPU 416-2 (up to approx. 900 POs)			**G**						
Additive IF 964-DP interface module									
• Without additive IF 964-DP				**0**					
Interface to Industrial Ethernet/PROFINET plant bus									
• 1 × CP 443-1EX30					**3**				
• 2 × CP 443-1EX30					**4**				
Racks									
• UR2 (9 slots), aluminum						**3**			
• UR2 (9 slots), steel						**4**			
• UR1 (18 slots), aluminum						**5**			
• UR1 (18 slots), steel						**6**			
Power supply (without backup batteries)									
• 1 × PS 407, 10 A for 120/230 V UC							**B**		
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy							**C**		
• 1 × PS 407, 20 A for 120/230 V UC							**D**		
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy							**E**		
• 1 × PS 405, 10 A for 24 V DC							**G**		
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**		
• 1 × PS 405, 20 A for 24 V DC							**J**		
• 2 × PS 405, 10 A for 24 V DC, optional redundancy							**K**		
Additive PROFIBUS DP interfaces									
• Without CP 443-5 Extended									**0**
• 1 × CP 443-5 Extended									**1**
• 2 × CP 443-5 Extended									**2**
• 3 × CP 443-5 Extended									**3**
• 4 × CP 443-5 Extended[1)]									**4**

[1)] With the UR2 rack in combination with a redundant power supply, the number of additive CP 443-5 Extended is limited to 3.

© Siemens 2019

Ordering data (continued)

	Article No.									
AS 416-3 with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 3 interfaces (MPI/DP, DP and slot for IF module) 16 MB RAM (8 MB each for program and data)	**6ES7654-**					-			G	
Type of delivery										
• Individual components, not pre-assembled	**7**									
• Pre-assembled and tested	**8**									
Memory card										
• Memory card 4 MB RAM (up to approx. 210 POs)		**C**								
• Memory card 8 MB RAM (up to approx. 800 POs)		**D**								
• Memory card 16 MB RAM (up to approx. 2 100 POs)		**E**								
CPU type										
• CPU 416-3 (up to approx. 1 500 POs)			**H**							
Additive IF 964-DP interface module										
• Without additive IF 964-DP				**0**						
• 1 × IF 964-DP				**1**						
Interface to Industrial Ethernet/PROFINET plant bus										
• 1 × CP 443-1EX30					**3**					
• 2 × CP 443-1EX30					**4**					
Racks										
• UR2 (9 slots), aluminum						**3**				
• UR2 (9 slots), steel						**4**				
• UR1 (18 slots), aluminum						**5**				
• UR1 (18 slots), steel						**6**				
Power supply (without backup batteries)										
• 1 × PS 407, 10 A for 120/230 V UC							**B**			
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy							**C**			
• 1 × PS 407, 20 A for 120/230 V UC							**D**			
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy							**E**			
• 1 × PS 405, 10 A for 24 V DC							**G**			
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**			
• 1 × PS 405, 20 A for 24 V DC							**J**			
• 2 × PS 405, 10 A for 24 V DC, optional redundancy							**K**			
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**
• 1 × CP 443-5 Extended										**1**
• 2 × CP 443-5 Extended										**2**
• 3 × CP 443-5 Extended[1)]										**3**
• 4 × CP 443-5 Extended[1)]										**4**

[1)] With the UR2 rack in combination with a redundant power supply, the number of additive CP 443-5 Extended is limited to 2.

	Article No.									
AS 417-4 with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 4 interfaces (MPI/DP, DP and 2 slots for IF modules) 30 MB RAM (15 MB each for program and data)	**6ES7654-**					-			G	
Type of delivery										
• Individual components, not pre-assembled	**7**									
• Pre-assembled and tested	**8**									
Memory card										
• Memory card 8 MB RAM (up to approx. 800 POs)		**D**								
• Memory card 16 MB RAM (up to approx. 2 100 POs)		**E**								
• Memory card 64 MB RAM (> 2 100 POs)		**G**								
CPU type										
• CPU 417-4 (up to approx. 2 200 POs)			**K**							
Additive IF 964-DP interface module										
• Without additive IF 964-DP				**0**						
• 1 × IF 964-DP				**1**						
• 2 × IF 964-DP				**2**						
Interface to Industrial Ethernet/PROFINET plant bus										
• 1 × CP 443-1EX30					**3**					
• 2 × CP 443-1EX30					**4**					
Racks										
• UR2 (9 slots), aluminum						**3**				
• UR2 (9 slots), steel						**4**				
• UR1 (18 slots), aluminum						**5**				
• UR1 (18 slots), steel						**6**				
Power supply (without backup batteries)										
• 1 × PS 407, 10 A for 120/230 V UC							**B**			
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy							**C**			
• 1 × PS 407, 20 A for 120/230 V UC							**D**			
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy							**E**			
• 1 × PS 405, 10 A for 24 V DC							**G**			
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**			
• 1 × PS 405, 20 A for 24 V DC							**J**			
• 2 × PS 405, 10 A for 24 V DC, optional redundancy							**K**			
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**
• 1 × CP 443-5 Extended										**1**
• 2 × CP 443-5 Extended										**2**
• 3 × CP 443-5 Extended[1)]										**3**
• 4 × CP 443-5 Extended[1)]										**4**

[1)] With the UR2 rack in combination with a redundant power supply, the number of additive CP 443-5 Extended is limited to 2.

© Siemens 2019

Ordering data (continued)

	Article No.
AS 414-3IE with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 2 DP interfaces (MPI/DP and slot for IF module) 4 MB RAM (2 MB each for program and data)	**6ES7654-** ■ ■ ■ ■ ■ - ■ ■ G ■
Type of delivery	
• Individual components, not pre-assembled	**7**
• Pre-assembled and tested	**8**
Memory card	
• Memory card 2 MB RAM (up to approx. 100 POs)	**B**
• Memory card 4 MB RAM (up to approx. 210 POs)	**C**
• Memory card 8 MB RAM (up to approx. 800 POs)	**D**
CPU type	
• CPU 414-3 PN/DP (up to approx. 450 POs)	**D**
Additive IF 964-DP interface module	
• Without additive IF 964-DP	**0**
• 1 × IF 964-DP	**1**
Interface to Industrial Ethernet/PROFINET plant bus	
• Integrated, without CP 443-1	**0**
• 1 × CP 443-1EX30	**3**
• 2 × CP 443-1EX30	**4**
Racks	
• UR2 (9 slots), aluminum	**3**
• UR2 (9 slots), steel	**4**
• UR1 (18 slots), aluminum	**5**
• UR1 (18 slots), steel	**6**
Power supply (without backup batteries)	
• 1 × PS 407, 10 A for 120/230 V UC	**B**
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy	**C**
• 1 × PS 407, 20 A for 120/230 V UC	**D**
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy	**E**
• 1 × PS 405, 10 A for 24 V DC	**G**
• 1 × PS 405, 10 A for 24 V DC, optional redundancy	**H**
• 1 × PS 405, 20 A for 24 V DC	**J**
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	**K**
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	**0**
• 1 × CP 443-5 Extended	**1**
• 2 × CP 443-5 Extended	**2**
• 3 × CP 443-5 Extended	**3**
• 4 × CP 443-5 Extended[1)]	**4**

[1)] With the UR2 rack in combination with a redundant power supply, the number of additive CP 443-5 Extended is limited to 3.

	Article No.
AS 416-3IE with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 2 DP interfaces (MPI/DP and slot for IF module) 16 MB RAM (8 MB each for program and data)	**6ES7654-** ■ ■ ■ ■ ■ - ■ ■ G ■
Type of delivery	
• Individual components, not pre-assembled	**7**
• Pre-assembled and tested	**8**
Memory card	
• Memory card 4 MB RAM (up to approx. 210 POs)	**C**
• Memory card 8 MB RAM (up to approx. 800 POs)	**D**
• Memory card 16 MB RAM (up to approx. 2 100 POs)	**E**
CPU type	
• CPU 416-3 PN/DP (up to approx. 1 500 POs)	**J**
Additive IF 964-DP interface module	
• Without additive IF 964-DP	**0**
• 1 × IF 964-DP	**1**
Interface to Industrial Ethernet/PROFINET plant bus	
• Integrated, without CP 443-1	**0**
• 1 × CP 443-1EX30	**3**
• 2 × CP 443-1EX30	**4**
Racks	
• UR2 (9 slots), aluminum	**3**
• UR2 (9 slots), steel	**4**
• UR1 (18 slots), aluminum	**5**
• UR1 (18 slots), steel	**6**
Power supply (without backup batteries)	
• 1 × PS 407, 10 A for 120/230 V UC	**B**
• 1 × PS 407, 10 A for 120/230 V UC, optional redundancy	**C**
• 1 × PS 407, 20 A for 120/230 V UC	**D**
• 2 × PS 407, 10 A for 120/230 V UC, optional redundancy	**E**
• 1 × PS 405, 10 A for 24 V DC	**G**
• 1 × PS 405, 10 A for 24 V DC, optional redundancy	**H**
• 1 × PS 405, 20 A for 24 V DC	**J**
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	**K**
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	**0**
• 1 × CP 443-5 Extended	**1**
• 2 × CP 443-5 Extended	**2**
• 3 × CP 443-5 Extended	**3**
• 4 × CP 443-5 Extended[1)]	**4**

[1)] With the UR2 rack in combination with a redundant power supply, the number of additive CP 443-5 Extended is limited to 3.

© Siemens 2019

8

Ordering data	Article No.
Individual components of standard automation systems	
CPU 414-3 RAM 4 MB (2 MB each for program and data); module occupies 2 slots	**6ES7414-3XM07-0AB0**
CPU 416-2 RAM 8 MB (4 MB each for program and data); module occupies 1 slot	**6ES7416-2XP07-0AB0**
CPU 416-3 RAM 16 MB (8 MB each for program and data); module occupies 2 slots	**6ES7416-3XS07-0AB0**
CPU 417-4 32 MB RAM integrated (16 MB each for program and data); module occupies 2 slots	**6ES7417-4XT07-0AB0**
CPU 414-3 PN/DP RAM 4 MB (2 MB each for program and data); module occupies 2 slots	**6ES7414-3EM07-0AB0**
CPU 416-3 PN/DP RAM 16 MB (8 MB each for program and data); module occupies 2 slots	**6ES7416-3ES07-0AB0**
Memory card RAM	
• 2 MB	**6ES7952-1AL00-0AA0**
• 4 MB	**6ES7952-1AM00-0AA0**
• 8 MB	**6ES7952-1AP00-0AA0**
• 16 MB	**6ES7952-1AS00-0AA0**
• 64 MB	**6ES7952-1AY00-0AA0**
Memory Card Flash EPROM Only required to update firmware	
• 16 MB	**6ES7952-1KS00-0AA0**
CP 443-1 Communication module for connecting SIMATIC S7-400 to Industrial Ethernet via TCP/IP, ISO and UDP; PROFINET IO controller, MRP; integrated real-time switch ERTEC with two ports; 2 × RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with or without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection via IP access list, initialization via LAN 10/100 Mbps; with electronic manual on DVD	**6GK7443-1EX30-0XE0**
CP 443-5 Extended Communication module for connection of SIMATIC S7-400 to PROFIBUS as DP master or for S7 communication, for increasing the number of DP lines, for data set routing with SIMATIC PDM and for 10-ms time stamping, electronic manual on CD; module occupies 1 slot	**6GK7443-5DX05-0XE0**
IF 964-DP Interface module for connection of another PROFIBUS DP line, for plugging into a free DP module slot of the CPU	**6ES7964-2AA04-0AB0**

	Article No.
PS 407 power supply module; 10 A 120/230 V UC; 5 V DC/10 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7407-0KA02-0AA0**
PS 407 power supply module; 10 A, optional redundancy 120/230 V UC; 5 V DC/10 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7407-0KR02-0AA0**
PS 407 power supply module; 20 A 120/230 V UC; 5 V DC/20 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7407-0RA02-0AA0**
PS 405 power supply module; 10 A 24 V DC; 5 V DC/10 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0KA02-0AA0**
PS 405 power supply module; 10 A, optional redundancy 24 V DC; 5 V DC/10 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0KR02-0AA0**
PS 405 power supply module; 20 A 24 V DC; 5 V DC/20 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0RA02-0AA0**
Backup battery Type AA, 2.3 Ah	**6ES7971-0BA00**
Aluminum UR1 rack 18 slots	**6ES7400-1TA11-0AA0**
Aluminum UR2 rack 9 slots	**6ES7400-1JA11-0AA0**
Steel UR1 rack 18 slots	**6ES7400-1TA01-0AA0**
Steel UR2 rack 9 slots	**6ES7400-1JA01-0AA0**
Runtime licenses for SIMATIC PCS 7 automation systems (can be added to existing licenses)	
SIMATIC PCS 7 AS Runtime license Language-neutral, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs	**6ES7653-2BA00-0XB5**
- 1 000 POs	**6ES7653-2BB00-0XB5**
- 10 000 POs	**6ES7653-2BC00-0XB5**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs	**6ES7653-2BA00-0XH5**
- 1 000 POs	**6ES7653-2BB00-0XH5**
- 10 000 POs	**6ES7653-2BC00-0XH5**

© Siemens 2019

Ordering data

Configuration tables for high availability automation systems

	Article No.								
AS 412-5-1H (Single Station) with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2 port switch) 1 MB RAM (512 KB each for program and data)	**6ES7654-**					-			G
Type of delivery									
• Individual components, not pre-assembled	**7**								
• Pre-assembled and tested	**8**								
Memory card									
• Memory card 1 MB RAM (up to approx. 30 POs)		**A**							
• Memory card 2 MB RAM (up to approx. 100 POs)		**B**							
CPU type									
• CPU 412-5H (up to approx. 30 POs)			**A**						
Additive IF 964-DP interface module									
• Without additive IF 964-DP				**0**					
Interface to Industrial Ethernet plant bus									
• Without interface module					**0**				
• 1 × CP 443-1EX30[1]					**3**				
• 2 × CP 443-1EX30 for redundant interface[1]					**4**				
Racks									
• UR2 (9 slots), aluminum						**3**			
• UR2 (9 slots), steel						**4**			
• UR1 (18 slots), aluminum						**5**			
• UR1 (18 slots), steel						**6**			
Power supply (without backup batteries)									
• 1 × PS 407, 10 A for 120/230 V AC/DC							**B**		
• 1 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy							**C**		
• 1 × PS 407, 20 A for 120/230 V AC/DC							**D**		
• 2 × PS 407, 10 A for 120/230 V AC/DC (redundant)							**E**		
• 1 × PS 405, 10 A for 24 V DC							**G**		
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**		
• 1 × PS 405, 20 A for 24 V DC							**J**		
• 2 × PS 405, 10 A for 24 V DC (redundant)							**K**		
Additive PROFIBUS DP interfaces									
• Without CP 443-5 Extended									**0**
• 1 × CP 443-5 Extended									**1**
• 2 × CP 443-5 Extended[1]									**2**
• 3 × CP 443-5 Extended[1]									**3**
• 4 × CP 443-5 Extended[1]									**4**

[1] Up to 5 CPs can be plugged into the UR2 rack with a single power supply or up to 3 with a redundant power supply.

	Article No.								
AS 414-5-1H (Single Station) with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2 port switch) 4 MB RAM (2 MB each for program and data)	**6ES7654-**					-			G
Type of delivery									
• Individual components, not pre-assembled	**7**								
• Pre-assembled and tested	**8**								
Memory card									
• Memory card 2 MB RAM (up to approx. 100 POs)		**B**							
• Memory card 4 MB RAM (up to approx. 210 POs)		**C**							
CPU type									
• CPU 414-5H (up to approx. 350 POs)			**E**						
Additive IF 964-DP interface module									
• Without additive IF 964-DP				**0**					
Interface to Industrial Ethernet plant bus									
• Without interface module					**0**				
• 1 × CP 443-1EX30[1]					**3**				
• 2 × CP 443-1EX30 for redundant interface[1]					**4**				
Racks									
• UR2 (9 slots), aluminum						**3**			
• UR2 (9 slots), steel						**4**			
• UR1 (18 slots), aluminum						**5**			
• UR1 (18 slots), steel						**6**			
Power supply (without backup batteries)									
• 1 × PS 407, 10 A for 120/230 V AC/DC							**B**		
• 1 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy							**C**		
• 1 × PS 407, 20 A for 120/230 V AC/DC							**D**		
• 2 × PS 407, 10 A for 120/230 V AC/DC (redundant)							**E**		
• 1 × PS 405, 10 A for 24 V DC							**G**		
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**		
• 1 × PS 405, 20 A for 24 V DC							**J**		
• 2 × PS 405, 10 A for 24 V DC (redundant)							**K**		
Additive PROFIBUS DP interfaces									
• Without CP 443-5 Extended									**0**
• 1 × CP 443-5 Extended									**1**
• 2 × CP 443-5 Extended[1]									**2**
• 3 × CP 443-5 Extended[1]									**3**
• 4 × CP 443-5 Extended[1]									**4**

[1] Up to 5 CPs can be plugged into the UR2 rack with a single power supply or up to 3 with a redundant power supply.

© Siemens 2019

Ordering data (continued)

	Article No.
AS 416-5-1H (Single Station) with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2 port switch) 16 MB RAM (6 MB for program and 10 MB for data)	**6ES7654-** ■ ■ ■ ■ ■ - ■ ■ G ■
Type of delivery	
• Individual components, not pre-assembled	7
• Pre-assembled and tested	8
Memory card	
• Memory card 4 MB RAM (up to approx. 210 POs)	C
• Memory card 8 MB RAM (up to approx. 800 POs)	D
• Memory card 16 MB RAM (up to approx. 2 100 POs)	E
CPU type	
• CPU 416-5H (up to approx. 1 200 POs)	P
Additive IF 964-DP interface module	
• Without additive IF 964-DP	0
Interface to Industrial Ethernet plant bus	
• Without interface module	0
• 1 × CP 443-1EX30[1]	3
• 2 × CP 443-1EX30 for redundant interface[1]	4
Racks	
• UR2 (9 slots), aluminum	3
• UR2 (9 slots), steel	4
• UR1 (18 slots), aluminum	5
• UR1 (18 slots), steel	6
Power supply (without backup batteries)	
• 1 × PS 407, 10 A for 120/230 V AC/DC	B
• 1 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	C
• 1 × PS 407, 20 A for 120/230 V AC/DC	D
• 2 × PS 407, 10 A for 120/230 V AC/DC (redundant)	E
• 1 × PS 405, 10 A for 24 V DC	G
• 1 × PS 405, 10 A for 24 V DC, optional redundancy	H
• 1 × PS 405, 20 A for 24 V DC	J
• 2 × PS 405, 10 A for 24 V DC (redundant)	K
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	0
• 1 × CP 443-5 Extended	1
• 2 × CP 443-5 Extended[1]	2
• 3 × CP 443-5 Extended[1]	3
• 4 × CP 443-5 Extended[1]	4

[1] Up to 5 CPs can be plugged into the UR2 rack with a single power supply or up to 3 with a redundant power supply.

	Article No.
AS 417-5-1H (Single Station) with SIMATIC PCS 7 AS Runtime license for 100 POs CPU with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2 port switch) 32 MB RAM (16 MB each for program and data)	**6ES7654-** ■ ■ ■ ■ ■ - ■ ■ G ■
Type of delivery	
• Individual components, not pre-assembled	7
• Pre-assembled and tested	8
Memory card	
• Memory card 4 MB RAM (up to approx. 210 POs)	C
• Memory card 8 MB RAM (up to approx. 800 POs)	D
• Memory card 16 MB RAM (up to approx. 2 100 POs)	E
• Memory card 64 MB RAM	G
CPU type	
• CPU 417-5H (up to approx. 2 000 POs)	M
Additive IF 964-DP interface module	
• Without additive IF 964-DP	0
Interface to Industrial Ethernet plant bus	
• Without interface module	0
• 1 × CP 443-1EX30[1]	3
• 2 × CP 443-1EX30 for redundant interface[1]	4
Racks	
• UR2 (9 slots), aluminum	3
• UR2 (9 slots), steel	4
• UR1 (18 slots), aluminum	5
• UR1 (18 slots), steel	6
Power supply (without backup batteries)	
• 1 × PS 407, 10 A for 120/230 V AC/DC	B
• 1 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	C
• 1 × PS 407, 20 A for 120/230 V AC/DC	D
• 2 × PS 407, 10 A for 120/230 V AC/DC (redundant)	E
• 1 × PS 405, 10 A for 24 V DC	G
• 1 × PS 405, 10 A for 24 V DC, optional redundancy	H
• 1 × PS 405, 20 A for 24 V DC	J
• 2 × PS 405, 10 A for 24 V DC (redundant)	K
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	0
• 1 × CP 443-5 Extended	1
• 2 × CP 443-5 Extended[1]	2
• 3 × CP 443-5 Extended[1]	3
• 4 × CP 443-5 Extended[1]	4

[1] Up to 5 CPs can be plugged into the UR2 rack with a single power supply or up to 3 with a redundant power supply.

© Siemens 2019

Ordering data (continued)

	Article No.
AS 412-5-2H (Redundancy Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7656-**
2 × CPU each with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2-port switch)	
2 × 1 MB RAM (512 KB each for program and data)	
Type of delivery	
• Individual components, not pre-assembled	**7**
• Pre-assembled and tested	**8**
Memory card	
• 2 × Memory Card 1 MB RAM (up to approx. 30 POs)	**A**
• 2 × Memory Card 2 MB RAM (up to approx. 100 POs)	**B**
CPU type	
• 2 × CPU 412-5H (up to approx. 30 POs)	**A**
Sync modules and cables	
• 2 × 2 sync modules for distances up to 10 m and 2 × FO sync cable, 1 m	**3**
Interface to Industrial Ethernet plant bus	
• Without interface module	**0**
• 2 × CP 443-1EX30 for redundant interface[1)]	**3**
• 2 × 2 CP 443-1EX30 for 4-way connection[1)]	**4**
Racks	
• 1 × UR2-H (2 × 9 slots), aluminum	**1**
• 1 × UR2-H (2 × 9 slots), steel	**2**
• 2 × UR2 (9 slots), aluminum	**3**
• 2 × UR2 (9 slots), steel	**4**
Power supply (without backup batteries)	
• 2 × PS 407, 10 A for 120/230 V AC/DC	**B**
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	**C**
• 2 × PS 407, 20 A for 120/230 V AC/DC	**D**
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC (redundant)	**E**
• 2 × PS 405, 10 A for 24 V DC	**G**
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	**H**
• 2 × PS 405, 20 A for 24 V DC	**J**
• 2 × 2 PS 405, 10 A for 24 V DC (redundant)	**K**
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	**0**
• 2 × CP 443-5 Extended	**1**
• 2 × 2 CP 443-5 Extended[1)]	**2**
• 2 × 3 CP 443-5 Extended[1)]	**3**
• 2 × 4 CP 443-5 Extended[1)]	**4**

[1)] Up to 5 CPs can be plugged in per subsystem with a single power supply or up to 3 with a redundant power supply.

	Article No.
AS 414-5-2H (Redundancy Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7656-**
2 × CPU each with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2-port switch)	
2 × 4 MB RAM (2 MB each for program and data)	
Type of delivery	
• Individual components, not pre-assembled	**7**
• Pre-assembled and tested	**8**
Memory card	
• 2 × Memory Card 2 MB RAM (up to approx. 100 POs)	**B**
• 2 × Memory Card 4 MB RAM (up to approx. 210 POs)	**C**
CPU type	
• 2 × CPU 414-5H (up to approx. 350 POs)	**E**
Sync modules and cables	
• 2 × 2 sync modules for distances up to 10 m and 2 × FO sync cable, 1 m	**3**
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing	**4**
Interface to Industrial Ethernet plant bus	
• Without interface module	**0**
• 2 × CP 443-1EX30 for redundant interface[1)]	**3**
• 2 × 2 CP 443-1EX30 for 4-way connection[1)]	**4**
Racks	
• 1 × UR2-H (2 × 9 slots), aluminum	**1**
• 1 × UR2-H (2 × 9 slots), steel	**2**
• 2 × UR2 (9 slots), aluminum	**3**
• 2 × UR2 (9 slots), steel	**4**
Power supply (without backup batteries)	
• 2 × PS 407, 10 A for 120/230 V AC/DC	**B**
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	**C**
• 2 × PS 407, 20 A for 120/230 V AC/DC	**D**
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC (redundant)	**E**
• 2 × PS 405, 10 A for 24 V DC	**G**
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	**H**
• 2 × PS 405, 20 A for 24 V DC	**J**
• 2 × 2 PS 405, 10 A for 24 V DC (redundant)	**K**
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	**0**
• 2 × CP 443-5 Extended	**1**
• 2 × 2 CP 443-5 Extended[1)]	**2**
• 2 × 3 CP 443-5 Extended[1)]	**3**
• 2 × 4 CP 443-5 Extended[1)]	**4**

[1)] Up to 5 CPs can be plugged in per subsystem with a single power supply or up to 3 with a redundant power supply.

© Siemens 2019

Ordering data (continued)

	Article No.
AS 416-5-2H (Redundancy Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7656-**
2 × CPU each with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2-port switch)	
2 × 16 MB RAM (6 MB each for program and 10 MB each for data)	
	■ ■ ■ ■ ■ - ■ ■ F ■
Type of delivery	
• Individual components, not pre-assembled	7
• Pre-assembled and tested	8
Memory card	
• 2 × Memory Card 4 MB RAM (up to approx. 210 POs)	C
• 2 × Memory Card 8 MB RAM (up to approx. 800 POs)	D
• 2 × Memory Card 16 MB RAM (up to approx. 2 100 POs)	E
CPU type	
• 2 × CPU 416-5H (up to approx. 1 200 POs)	P
Sync modules and cables	
• 2 × 2 sync modules for distances up to 10 m and 2 × FO sync cable, 1 m	3
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing	4
Interface to Industrial Ethernet plant bus	
• Without interface module	0
• 2 × CP 443-1EX30 for redundant interface[1)]	3
• 2 × 2 CP 443-1EX30 for 4-way connection[1)]	4
Racks	
• 1 × UR2-H (2 × 9 slots), aluminum	1
• 1 × UR2-H (2 × 9 slots), steel	2
• 2 × UR2 (9 slots), aluminum	3
• 2 × UR2 (9 slots), steel	4
Power supply (without backup batteries)	
• 2 × PS 407, 10 A for 120/230 V AC/DC	B
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	C
• 2 × PS 407, 20 A for 120/230 V AC/DC	D
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC (redundant)	E
• 2 × PS 405, 10 A for 24 V DC	G
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	H
• 2 × PS 405, 20 A for 24 V DC	J
• 2 × 2 PS 405, 10 A for 24 V DC (redundant)	K
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	0
• 2 × CP 443-5 Extended	1
• 2 × 2 CP 443-5 Extended[1)]	2
• 2 × 3 CP 443-5 Extended[1)]	3
• 2 × 4 CP 443-5 Extended[1)]	4

[1)] Up to 5 CPs can be plugged in per subsystem with a single power supply or up to 3 with a redundant power supply.

	Article No.
AS 417-5-2H (Redundancy Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7656-**
2 × CPU each with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2-port switch)	
2 × 32 MB RAM (16 MB each for program and data)	
	■ ■ ■ ■ ■ - ■ ■ F ■
Type of delivery	
• Individual components, not pre-assembled	7
• Pre-assembled and tested	8
Memory card	
• 2 × Memory Card 4 MB RAM (up to approx. 210 POs)	C
• 2 × Memory Card 8 MB RAM (up to approx. 800 POs)	D
• 2 × Memory Card 16 MB RAM (up to approx. 2 100 POs)	E
CPU type	
• 2 × CPU 417-5H (up to approx. 2 000 POs)	M
Sync modules and cables	
• 2 × 2 sync modules for distances up to 10 m and 2 × FO sync cable, 1 m	3
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing	4
Interface to Industrial Ethernet plant bus	
• Without interface module	0
• 2 × CP 443-1EX30 for redundant interface[1)]	3
• 2 × 2 CP 443-1EX30 for 4-way connection[1)]	4
Racks	
• 1 × UR2-H (2 × 9 slots), aluminum	1
• 1 × UR2-H (2 × 9 slots), steel	2
• 2 × UR2 (9 slots), aluminum	3
• 2 × UR2 (9 slots), steel	4
Power supply (without backup batteries)	
• 2 × PS 407, 10 A for 120/230 V AC/DC	B
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	C
• 2 × PS 407, 20 A for 120/230 V AC/DC	D
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC (redundant)	E
• 2 × PS 405, 10 A for 24 V DC	G
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	H
• 2 × PS 405, 20 A for 24 V DC	J
• 2 × 2 PS 405, 10 A for 24 V DC (redundant)	K
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	0
• 2 × CP 443-5 Extended	1
• 2 × 2 CP 443-5 Extended[1)]	2
• 2 × 3 CP 443-5 Extended[1)]	3
• 2 × 4 CP 443-5 Extended[1)]	4

[1)] Up to 5 CPs can be plugged in per subsystem with a single power supply or up to 3 with a redundant power supply.

© Siemens 2019

Ordering data

Individual components of high availability automation systems

	Article No.
Individual components of the high availability SIMATIC PCS 7 automation systems	
CPU 412-5H PN/DP 1 MB RAM (512 KB each for program and data) Module occupies 2 slots	**6ES7412-5HK06-0AB0**
CPU 414-5H PN/DPfev 4 MB RAM (2 MB each for program and data) Module occupies 2 slots	**6ES7414-5HM06-0AB0**
CPU 416-5H PN/DP 16 MB RAM (6 MB for program and 10 MB for data) Module occupies 2 slots	**6ES7416-5HS06-0AB0**
CPU 417-5H PN/DP 32 MB RAM (16 MB each for program and data) Module occupies 2 slots	**6ES7417-5HT06-0AB0**
Sync set For linking the two redundant 412-5H, 414-5H, 416-5H or 417-5H CPUs; for distances up to	
• 10 m, consisting of 4 sync modules for up to 10 m and 2 fiber-optic sync cables, 1 m each	**6ES7656-7XX30-0XE0**
• 10 km, consisting of 4 sync modules for up to 10 km Note: please order fiber-optic sync cables (2 units) in the required length separately.	**6ES7656-7XX40-0XE0**
Sync module For linking the two 412-5H, 414-5H, 416-5H or 417-5H CPUs; 2 modules required per CPU	
For distances of up to	
• 10 m	**6ES7960-1AA06-0XA0**
• 10 km	**6ES7960-1AB06-0XA0**
Sync cable (fiber-optic cable) For connecting the two 412-5H, 414-5H, 416-5H or 417-5H CPUs; each redundant automation system requires 2 cables	
• 1 m	**6ES7960-1AA04-5AA0**
• 2 m	**6ES7960-1AA04-5BA0**
• 10 m	**6ES7960-1AA04-5KA0**
Other lengths	On request

	Article No.
Memory card RAM	
• 1 MB	**6ES7952-1AK00-0AA0**
• 2 MB	**6ES7952-1AL00-0AA0**
• 4 MB	**6ES7952-1AM00-0AA0**
• 8 MB	**6ES7952-1AP00-0AA0**
• 16 MB	**6ES7952-1AS00-0AA0**
• 64 MB	**6ES7952-1AY00-0AA0**
Memory Card Flash-EPROM Only required to update firmware. Alternative: firmware update via the engineering system	
• 16 MB	**6ES7952-1KS00-0AA0**
CP 443-1 Communication module for connecting SIMATIC S7-400 to Industrial Ethernet via TCP/IP, ISO and UDP; PROFINET IO controller, MRP; integrated real-time switch ERTEC with two ports; 2 × RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with or without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection via IP access list, initialization via LAN 10/100 Mbit/s; with electronic manual on DVD	**6GK7443-1EX30-0XE0**
CP 443-5 Extended Communication module for connection of SIMATIC S7-400 to PROFIBUS as DP master or for S7 communication, for increasing the number of DP lines, for data set routing with SIMATIC PDM and for 10-ms time stamping, electronic manual on CD; module occupies 1 slot	**6GK7443-5DX05-0XE0**

8

© Siemens 2019

Ordering data	Article No.
PS 407 power supply module; 10 A 120/230 V AC/DC; 5 V DC/10 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7407-0KA02-0AA0**
PS 407 power supply module; 10 A, optional redundancy 120/230 V AC/DC; 5 V DC/10 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7407-0KR02-0AA0**
PS 407 power supply module; 20 A 120/230 V AC/DC; 5 V DC/20 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7407-0RA02-0AA0**
PS 405 power supply module; 10 A 24 V DC; 5 V DC/10 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0KA02-0AA0**
PS 405 power supply module; 10 A, optional redundancy 24 V DC; 5 V DC/10 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0KR02-0AA0**
PS 405 power supply module; 20 A 24 V DC; 5 V DC/20 A, 24 V DC/1 A; with battery compartment for 2 backup batteries, module occupies 2 slots	**6ES7405-0RA02-0AA0**
Backup battery Type AA, 2.3 Ah	**6ES7971-0BA00**

	Article No.
Aluminum UR1 rack 18 slots	**6ES7400-1TA11-0AA0**
Aluminum UR2 rack 9 slots	**6ES7400-1JA11-0AA0**
Aluminum UR2-H rack For divided central controllers; 2 × 9 slots	**6ES7400-2JA10-0AA0**
Steel UR1 rack 18 slots	**6ES7400-1TA01-0AA0**
Steel UR2 rack 9 slots	**6ES7400-1JA01-0AA0**
Steel UR2-H rack For divided central controllers; 2 × 9 slots	**6ES7400-2JA00-0AA0**
Runtime licenses for SIMATIC PCS 7 automation systems (can be added to existing licenses)	See "Individual components of standard automation systems"

© Siemens 2019

Ordering data

Configuration tables for safety-related automation systems

	Article No.								
AS 412F (Single Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7654-**								
	■	■	■	■	**-**	■	■	**G**	■
CPU with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2 port switch)									
1 MB RAM (512 KB each for program and data)									
Type of delivery									
• Individual components, not pre-assembled	**7**								
• Pre-assembled and tested	**8**								
Memory card									
• Memory card 1 MB RAM (up to approx. 30 POs)		**A**							
• Memory card 2 MB RAM (up to approx. 100 POs)		**B**							
CPU type									
• CPU 412-5H with S7 F Systems RT license (up to approx. 30 POs)			**B**						
Additive interface modules									
• Without additive interface module				**0**					
Interface to Industrial Ethernet plant bus									
• Without interface module					**0**				
• 1 × CP 443-1EX30[1)]					**3**				
• 2 × CP 443-1EX30 for redundant interface[1)]					**4**				
Racks									
• UR2 (9 slots), aluminum						**3**			
• UR2 (9 slots), steel						**4**			
• UR1 (18 slots), aluminum						**5**			
• UR1 (18 slots), steel						**6**			
Power supply (without backup batteries)									
• 1 × PS 407, 10 A for 120/230 V AC/DC							**B**		
• 1 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy							**C**		
• 1 × PS 407, 20 A for 120/230 V AC/DC							**D**		
• 2 × PS 407, 10 A for 120/230 V AC/DC (redundant)							**E**		
• 1 × PS 405, 10 A for 24 V DC							**G**		
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**		
• 1 × PS 405, 20 A for 24 V DC							**J**		
• 2 × PS 405, 10 A for 24 V DC (redundant)							**K**		
Additive PROFIBUS DP interfaces									
• Without CP 443-5 Extended								**0**	
• 1 × CP 443-5 Extended								**1**	
• 2 × CP 443-5 Extended[1)]								**2**	
• 3 × CP 443-5 Extended[1)]								**3**	
• 4 × CP 443-5 Extended[1)]								**4**	

[1)] Up to 5 CPs can be plugged into the UR2 rack with a single power supply or up to 3 with a redundant power supply.

	Article No.								
AS 414F (Single Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7654-**								
	■	■	■	■	**-**	■	■	**G**	■
CPU with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2 port switch)									
4 MB RAM (2 MB each for program and data)									
Type of delivery									
• Individual components, not pre-assembled	**7**								
• Pre-assembled and tested	**8**								
Memory card									
• Memory card 2 MB RAM (up to approx. 100 POs)		**B**							
• Memory card 4 MB RAM (up to approx. 210 POs)		**C**							
CPU type									
• CPU 414-5H with S7 F Systems RT license (up to approx. 350 POs)			**F**						
Additive interface modules									
• Without additive interface module				**0**					
Interface to Industrial Ethernet plant bus									
• Without interface module					**0**				
• 1 × CP 443-1EX30[1)]					**3**				
• 2 × CP 443-1EX30 for redundant interface[1)]					**4**				
Racks									
• UR2 (9 slots), aluminum						**3**			
• UR2 (9 slots), steel						**4**			
• UR1 (18 slots), aluminum						**5**			
• UR1 (18 slots), steel						**6**			
Power supply (without backup batteries)									
• 1 × PS 407, 10 A for 120/230 V AC/DC							**B**		
• 1 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy							**C**		
• 1 × PS 407, 20 A for 120/230 V AC/DC							**D**		
• 2 × PS 407, 10 A for 120/230 V AC/DC (redundant)							**E**		
• 1 × PS 405, 10 A for 24 V DC							**G**		
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**		
• 1 × PS 405, 20 A for 24 V DC							**J**		
• 2 × PS 405, 10 A for 24 V DC (redundant)							**K**		
Additive PROFIBUS DP interfaces									
• Without CP 443-5 Extended								**0**	
• 1 × CP 443-5 Extended								**1**	
• 2 × CP 443-5 Extended[1)]								**2**	
• 3 × CP 443-5 Extended[1)]								**3**	
• 4 × CP 443-5 Extended[1)]								**4**	

[1)] Up to 5 CPs can be plugged into the UR2 rack with a single power supply or up to 3 with a redundant power supply.

© Siemens 2019

Ordering data (continued)

	Article No.									
AS 416F (Single Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7654-**									
	■	■	■	■	■	-	■	■	G	■
CPU with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2 port switch)										
16 MB RAM (6 MB for program and 10 MB for data)										
Type of delivery										
• Individual components, not pre-assembled	**7**									
• Pre-assembled and tested	**8**									
Memory card										
• Memory card 4 MB RAM (up to approx. 210 POs)		**C**								
• Memory card 8 MB RAM (up to approx. 800 POs)		**D**								
• Memory card 16 MB RAM (up to approx. 2 100 POs)		**E**								
CPU type										
• CPU 416-5H with S7 F Systems RT license (up to approx. 1 200 POs)			**Q**							
Additive IF 964-DP interface module										
• Without additive IF 964-DP				**0**						
Interface to Industrial Ethernet plant bus										
• Without interface module					**0**					
• 1 × CP 443-1EX30[1]					**3**					
• 2 × CP 443-1EX30 for redundant interface[1]					**4**					
Racks										
• UR2 (9 slots), aluminum						**3**				
• UR2 (9 slots), steel						**4**				
• UR1 (18 slots), aluminum						**5**				
• UR1 (18 slots), steel						**6**				
Power supply (without backup batteries)										
• 1 × PS 407, 10 A for 120/230 V AC/DC							**B**			
• 1 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy							**C**			
• 1 × PS 407, 20 A for 120/230 V AC/DC							**D**			
• 2 × PS 407, 10 A for 120/230 V AC/DC (redundant)							**E**			
• 1 × PS 405, 10 A for 24 V DC							**G**			
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**			
• 1 × PS 405, 20 A for 24 V DC							**J**			
• 2 × PS 405, 10 A for 24 V DC (redundant)							**K**			
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**
• 1 × CP 443-5 Extended										**1**
• 2 × CP 443-5 Extended[1]										**2**
• 3 × CP 443-5 Extended[1]										**3**
• 4 × CP 443-5 Extended[1]										**4**

[1] Up to 5 CPs can be plugged into the UR2 rack with a single power supply or up to 3 with a redundant power supply.

	Article No.									
AS 417F (Single Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	**6ES7654-**									
	■	■	■	■	■	-	■	■	G	■
CPU with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2 port switch)										
32 MB RAM (16 MB each for program and data)										
Type of delivery										
• Individual components, not pre-assembled	**7**									
• Pre-assembled and tested	**8**									
Memory card										
• Memory card 4 MB RAM (up to approx. 210 POs)		**C**								
• Memory card 8 MB RAM (up to approx. 800 POs)		**D**								
• Memory card 16 MB RAM (up to approx. 2 100 POs)		**E**								
CPU type										
• CPU 417-5H with S7 F Systems RT license (up to approx. 2 000 POs)			**N**							
Additive interface modules										
• Without additive interface module				**0**						
Interface to Industrial Ethernet plant bus										
• Without interface module					**0**					
• 1 × CP 443-1EX30[1]					**3**					
• 2 × CP 443-1EX30 for redundant interface[1]					**4**					
Racks										
• UR2 (9 slots), aluminum						**3**				
• UR2 (9 slots), steel						**4**				
• UR1 (18 slots), aluminum						**5**				
• UR1 (18 slots), steel						**6**				
Power supply (without backup batteries)										
• 1 × PS 407, 10 A for 120/230 V AC/DC							**B**			
• 1 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy							**C**			
• 1 × PS 407, 20 A for 120/230 V AC/DC							**D**			
• 2 × PS 407, 10 A for 120/230 V AC/DC (redundant)							**E**			
• 1 × PS 405, 10 A for 24 V DC							**G**			
• 1 × PS 405, 10 A for 24 V DC, optional redundancy							**H**			
• 1 × PS 405, 20 A for 24 V DC							**J**			
• 2 × PS 405, 10 A for 24 V DC (redundant)							**K**			
Additive PROFIBUS DP interfaces										
• Without CP 443-5 Extended										**0**
• 1 × CP 443-5 Extended										**1**
• 2 × CP 443-5 Extended[1]										**2**
• 3 × CP 443-5 Extended[1]										**3**
• 4 × CP 443-5 Extended[1]										**4**

[1] Up to 5 CPs can be plugged into the UR2 rack with a single power supply or up to 3 with a redundant power supply.

© Siemens 2019

Ordering data (continued)

	Article No.
AS 412FH (Redundant Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	6ES7656-
2 × CPU each with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2-port switch)	
2 × 1 MB RAM (512 KB each for program and data)	
Type of delivery	
• Individual components, not pre-assembled	7
• Pre-assembled and tested	8
Memory card	
• 2 × Memory Card 1 MB RAM (up to approx. 30 POs)	A
• 2 × Memory Card 2 MB RAM (up to approx. 100 POs)	B
CPU type	
• 2 × CPU 412-5H with S7 F Systems RT license (up to approx. 30 POs)	B
Sync modules and cables	
• 2 × 2 sync modules for distances up to 10 m and 2 × FO sync cable, 1 m	3
Interface to Industrial Ethernet plant bus	
• Without interface module	0
• 2 × CP 443-1EX30 for redundant interface[1)]	3
• 2 × 2 CP 443-1EX30 for 4-way connection[1)]	4
Racks	
• 1 × UR2-H (2 × 9 slots), aluminum	1
• 1 × UR2-H (2 × 9 slots), steel	2
• 2 × UR2 (9 slots), aluminum	3
• 2 × UR2 (9 slots), steel	4
Power supply (without backup batteries)	
• 2 × PS 407, 10 A for 120/230 V AC/DC	B
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	C
• 2 × PS 407, 20 A for 120/230 V AC/DC	D
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC (redundant)	E
• 2 × PS 405, 10 A for 24 V DC	G
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	H
• 2 × PS 405, 20 A for 24 V DC	J
• 2 × 2 PS 405, 10 A for 24 V DC (redundant)	K
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	0
• 2 × CP 443-5 Extended	1
• 2 × 2 CP 443-5 Extended[1)]	2
• 2 × 3 CP 443-5 Extended[1)]	3
• 2 × 4 CP 443-5 Extended[1)]	4

[1)] Up to 5 CPs can be plugged in per subsystem with a single power supply or up to 3 with a redundant power supply.

	Article No.
AS 414FH (Redundant Station) with SIMATIC PCS 7 AS Runtime license for 100 POs	6ES7656-
2 × CPU each with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2-port switch)	
2 × 4 MB RAM (2 MB each for program and data)	
Type of delivery	
• Individual components, not pre-assembled	7
• Pre-assembled and tested	8
Memory card	
• 2 × Memory Card 2 MB RAM (up to approx. 100 POs)	B
• 2 × Memory Card 4 MB RAM (up to approx. 210 POs)	C
CPU type	
• 2 × CPU 414-5H with S7 F Systems RT license (up to approx. 350 POs)	F
Sync modules and cables	
• 2 × 2 sync modules for distances up to 10 m and 2 × FO sync cable, 1 m	3
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing	4
Interface to Industrial Ethernet plant bus	
• Without interface module	0
• 2 × CP 443-1EX30 for redundant interface[1)]	3
• 2 × 2 CP 443-1EX30 for 4-way connection[1)]	4
Racks	
• 1 × UR2-H (2 × 9 slots), aluminum	1
• 1 × UR2-H (2 × 9 slots), steel	2
• 2 × UR2 (9 slots), aluminum	3
• 2 × UR2 (9 slots), steel	4
Power supply (without backup batteries)	
• 2 × PS 407, 10 A for 120/230 V AC/DC	B
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	C
• 2 × PS 407, 20 A for 120/230 V AC/DC	D
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC (redundant)	E
• 2 × PS 405, 10 A for 24 V DC	G
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	H
• 2 × PS 405, 20 A for 24 V DC	J
• 2 × 2 PS 405, 10 A for 24 V DC (redundant)	K
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	0
• 2 × CP 443-5 Extended	1
• 2 × 2 CP 443-5 Extended[1)]	2
• 2 × 3 CP 443-5 Extended[1)]	3
• 2 × 4 CP 443-5 Extended[1)]	4

[1)] Up to 5 CPs can be plugged in per subsystem with a single power supply or up to 3 with a redundant power supply.

© Siemens 2019

Ordering data (continued)

	Article No.
AS 416FH (Redundancy Station) with SIMATIC PCS 7 AS Runtime license for 100 POs 2 × CPU each with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2-port switch) 2 × 16 MB RAM (6 MB each for program and 10 MB each for data)	**6ES7656-** ■ ■ ■ ■ ■ - ■ ■ F ■
Type of delivery	
• Individual components, not pre-assembled	**7**
• Pre-assembled and tested	**8**
Memory card	
• 2 × Memory Card 4 MB RAM (up to approx. 210 POs)	**C**
• 2 × Memory Card 8 MB RAM (up to approx. 800 POs)	**D**
• 2 × Memory Card 16 MB RAM (up to approx. 2 100 POs)	**E**
CPU type	
• 2 × CPU 416-5H with S7 F Systems RT license (up to approx. 1 200 POs)	**Q**
Sync modules and cables	
• 2 × 2 sync modules for distances up to 10 m and 2 × FO sync cable, 1 m	**3**
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing	**4**
Interface to Industrial Ethernet plant bus	
• Without interface module	**0**
• 2 × CP 443-1EX30 for redundant interface[1)]	**3**
• 2 × 2 CP 443-1EX30 for 4-way connection[1)]	**4**
Racks	
• 1 × UR2-H (2 × 9 slots), aluminum	**1**
• 1 × UR2-H (2 × 9 slots), steel	**2**
• 2 × UR2 (9 slots), aluminum	**3**
• 2 × UR2 (9 slots), steel	**4**
Power supply (without backup batteries)	
• 2 × PS 407, 10 A for 120/230 V AC/DC	**B**
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	**C**
• 2 × PS 407, 20 A for 120/230 V AC/DC	**D**
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC (redundant)	**E**
• 2 × PS 405, 10 A for 24 V DC	**G**
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	**H**
• 2 × PS 405, 20 A for 24 V DC	**J**
• 2 × 2 PS 405, 10 A for 24 V DC (redundant)	**K**
Additive PROFIBUS DP interfaces	
• Without CP 443-5 Extended	**0**
• 2 × CP 443-5 Extended	**1**
• 2 × 2 CP 443-5 Extended[1)]	**2**
• 2 × 3 CP 443-5 Extended[1)]	**3**
• 2 × 4 CP 443-5 Extended[1)]	**4**

[1)] Up to 5 CPs can be plugged in per subsystem with a single power supply or up to 3 with a redundant power supply.

	Article No.
AS 417FH (Redundant Station) with SIMATIC PCS 7 AS Runtime license for 100 POs 2 × CPU each with 2 PROFIBUS interfaces (MPI/DP master and DP master) and 1 PN/IE interface (2-port switch) 2 × 32 MB RAM (16 MB each for program and data)	**6ES7656-** ■ ■ ■ ■ ■ - ■ ■ F ■
Type of delivery	
• Individual components, not pre-assembled	**7**
• Pre-assembled and tested	**8**
Memory card	
• 2 × Memory Card 4 MB RAM (up to approx. 210 POs)	**C**
• 2 × Memory Card 8 MB RAM (up to approx. 800 POs)	**D**
• 2 × Memory Card 16 MB RAM • (up to approx. 2 100 POs)	**E**
CPU type	
• 2 × CPU 417-5H with S7 F Systems RT license (up to approx. 2 000 POs)	**N**
Sync modules and cables	
• 2 × 2 sync modules for distances up to 10 m and 2 × FO sync cable, 1 m	**3**
• 2 × 2 sync modules for up to 10 km and 2 × FO sync cable, 1 m, for testing	**4**
Interface to Industrial Ethernet plant bus	
• Without interface module	**0**
• 2 × CP 443-1EX30 for redundant interface[1)]	**3**
• 2 × 2 CP 443-1EX30 for 4-way connection[1)]	**4**
Racks	
• 1 × UR2-H (2 × 9 slots), aluminum	**1**
• 1 × UR2-H (2 × 9 slots), steel	**2**
• 2 × UR2 (9 slots), aluminum	**3**
• 2 × UR2 (9 slots), steel	**4**
Power supply (without backup batteries)	
• 2 × PS 407, 10 A for 120/230 V AC/DC	**B**
• 2 × PS 407, 10 A for 120/230 V AC/DC, optional redundancy	**C**
• 2 × PS 407, 20 A for 120/230 V AC/DC	**D**
• 2 × 2 PS 407, 10 A for 120/230 V AC/DC (redundant)	**E**
• 2 × PS 405, 10 A for 24 V DC	**G**
• 2 × PS 405, 10 A for 24 V DC, optional redundancy	**H**
• 2 × PS 405, 20 A for 24 V DC	**J**
• 2 × 2 PS 405, 10 A for 24 V DC (redundant)	**K**
Additive PROFIBUS DP interfaces[1)]	
• Without CP 443-5 Extended	**0**
• 2 × CP 443-5 Extended	**1**
• 2 × 2 CP 443-5 Extended[1)]	**2**
• 2 × 3 CP 443-5 Extended[1)]	**3**
• 2 × 4 CP 443-5 Extended[1)]	**4**

[1)] Up to 5 CPs can be plugged in per subsystem with a single power supply or up to 3 with a redundant power supply.

© Siemens 2019

Ordering data

Individual components of safety-related automation systems

	Article No.
Individual components of the safety-related SIMATIC PCS 7 automation systems	
S7 F Systems RT License For processing safety-related user programs, for one AS 412F/FH, AS 414F/FH, AS 416F/FH or AS 417F/FH system	**6ES7833-1CC00-6YX0**
CPU 412-5H PN/DP 1 MB RAM (512 KB each for program and data) Module occupies 2 slots	**6ES7412-5HK06-0AB0**
CPU 414-5H PN/DP 4 MB RAM (2 MB each for program and data) Module occupies 2 slots	**6ES7414-5HM06-0AB0**
CPU 416-5H PN/DP 16 MB RAM (6 MB for program and 10 MB for data) Module occupies 2 slots	**6ES7416-5HS06-0AB0**
CPU 417-5H PN/DP 32 MB RAM (16 MB each for program and data) Module occupies 2 slots	**6ES7417-5HT06-0AB0**
Sync set For linking the two redundant 412-5H, 414-5H, 416-5H or 417-5H CPUs; for distances up to	
• 10 m, consisting of 4 sync modules for up to 10 m and 2 fiber-optic sync cables, 1 m each	**6ES7656-7XX30-0XE0**
• 10 km, consisting of 4 sync modules for up to 10 km Note: please order fiber-optic sync cables (2 units) in the required length separately.	**6ES7656-7XX40-0XE0**
Sync module For connection of the two CPU 412-5H, 414-5H, 416-5H or 417-5H; 2 modules required for each CPU, for distances up to	
• 10 m	**6ES7960-1AA06-0XA0**
• 10 km	**6ES7960-1AB06-0XA0**
Sync cable (fiber-optic cable) For connecting the two 412-5H, 414-5H, 416-5H or 417-5H CPUs; each redundant automation system requires 2 cables	
• 1 m	**6ES7960-1AA04-5AA0**
• 2 m	**6ES7960-1AA04-5BA0**
• 10 m	**6ES7960-1AA04-5KA0**
Other lengths	On request
Memory card RAM	
• 1 MB	**6ES7952-1AK00-0AA0**
• 2 MB	**6ES7952-1AL00-0AA0**
• 4 MB	**6ES7952-1AM00-0AA0**
• 8 MB	**6ES7952-1AP00-0AA0**
• 16 MB	**6ES7952-1AS00-0AA0**
• 64 MB	**6ES7952-1AY00-0AA0**
Memory Card Flash-EPROM Only required to update firmware; alternative: firmware update via the engineering system	
• 16 MB	**6ES7952-1KS00-0AA0**

	Article No.
CP 443-1 Communication module for connecting SIMATIC S7-400 to Industrial Ethernet via TCP/IP, ISO and UDP; PROFINET IO controller, MRP; integrated real-time switch ERTEC with two ports; 2 × RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with or without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection via IP access list, initialization via LAN 10/100 Mbit/s; with electronic manual on DVD	**6GK7443-1EX30-0XE0**
CP 443-5 Extended Communication module for connection of SIMATIC S7-400 to PROFIBUS as DP master or for S7 communication, for increasing the number of DP lines, for data set routing with SIMATIC PDM and for 10-ms time stamping, electronic manual on CD; module occupies 1 slot	**6GK7443-5DX05-0XE0**
PS 407 power supply module with battery compartment for 2 backup batteries, module occupies 2 slots	
• **10 A** 120/230 V AC/DC; 5 V DC/10 A, 24 V DC/1 A	**6ES7407-0KA02-0AA0**
• **10 A, redundant** 120/230 V AC/DC; 5 V DC/10 A, 24 V DC/1 A	**6ES7407-0KR02-0AA0**
• **20 A** 120/230 V AC/DC; 5 V DC/20 A, 24 V DC/1 A	**6ES7407-0RA02-0AA0**
PS 405 power supply module with battery compartment for 2 backup batteries, module occupies 2 slots	
• **10 A** 24 V DC; 5 V DC/10 A, 24 V DC/1 A	**6ES7405-0KA02-0AA0**
• **10 A, redundant** 24 V DC; 5 V DC/10 A, 24 V DC/1 A	**6ES7405-0KR02-0AA0**
• **20 A** 24 V DC; 5 V DC/20 A, 24 V DC/1 A	**6ES7405-0RA02-0AA0**
Backup battery Type AA, 2.3 Ah	**6ES7971-0BA00**
Aluminum rack	
• UR1, 18 slots	**6ES7400-1TA11-0AA0**
• UR2, 9 slots	**6ES7400-1JA11-0AA0**
• UR2-H, for divided central controllers; 2 × 9 slots	**6ES7400-2JA10-0AA0**
Steel rack	
• UR1, 18 slots	**6ES7400-1TA01-0AA0**
• UR2, 9 slots	**6ES7400-1JA01-0AA0**
• UR2-H, for divided central controllers; 2 × 9 slots	**6ES7400-2JA00-0AA0**
Runtime licenses for SIMATIC PCS 7 automation systems (can be added to existing licenses)	See "Individual components of standard automation systems"

8

© Siemens 2019

Overview



The SIMATIC PCS 7 automation systems are extremely rugged, both electrically and mechanically. For extreme ambient conditions, hardened and refined SIPLUS extreme products are another alternative, especially in the case of:

- High humidity
- Condensation
- Chemically, mechanically or biologically active materials

You can find an overview of the complete SIPLUS extreme product range online at:

www.siemens.com/siplus

Under "Devices for extreme requirements > Controllers > Advanced Controllers", you will find conversion tools that display the SIPLUS S7-400 articles for the corresponding SIMATIC S7-400 articles.

© Siemens 2019

Overview



SIMATIC PCS 7 AS RTX with DIN rail, front view

SIMATIC PCS 7 AS RTX

SIMATIC PCS 7 AS RTX is an excellent alternative to S7-400 design standard automation systems, especially for small applications, due to the following characteristics:

- Resistant to vibration and shock thanks to:
  - Compact and robust design
  - Complete absence of fans and rotating storage media
- Maintenance-free, 24-hour continuous operation at operating temperatures from 0 to 50 °C in an RAL environment (RAL = restricted access location), for example, in a lockable control cabinet

Depending on the preferred communication in the field, the following design versions are available:

- SIMATIC PCS 7 AS RTX PROFIBUS for connecting PROFIBUS DP
- SIMATIC PCS 7 AS RTX PROFINET for connecting PROFINET IO


Application

As a result of its exceptional physical properties and small dimensions, the SIMATIC PCS 7 AS RTX Microbox automation system is exceptionally suitable for industrial use at plant level. Possible fields of application:

- Small production applications
- Package units
- Laboratory automation

SIMATIC PCS 7 AS RTX can also be combined with SIMATIC PCS 7 BOX or automation systems of S7-400 design within a plant.

Design

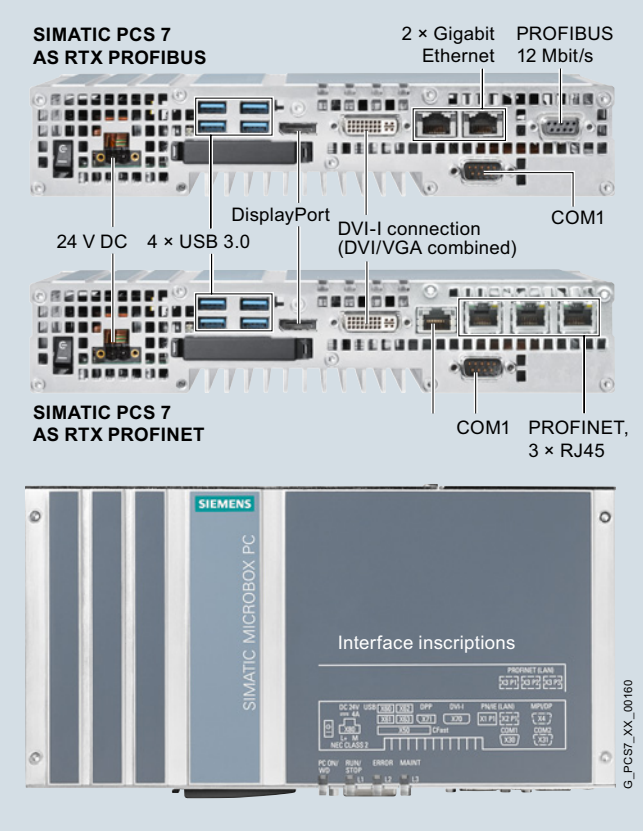

Design of the SIMATIC PCS 7 AS RTX

The two versions of the SIMATIC PCS 7 AS RTX Microbox automation system, (PROFIBUS/PROFINET), are based on a SIMATIC IPC427D with a system-specific configuration.

The compact design and flexible installation options of the SIMATIC IPC427D (DIN rail, wall or portrait mounting in horizontal or vertical orientation) support space-saving designs of SIMATIC PCS 7 plants. A DIN rail and bracket for wall mounting are supplied with SIMATIC PCS 7 AS RTX (PROFIBUS/PROFINET).

The following are pre-installed on the built-in solid state disk (SATA SSD 80 GB, eMLC):

- Windows 7 Ultimate 32-bit operating system, multi-language (English, German, French, Italian, Spanish, Chinese)
- WinAC RTX 2010 controller software
- SIMATIC IPC DiagMonitor diagnostics software

The pre-installed software is also supplied on a Restore DVD.

The SIMATIC PCS 7 AS RTX has an integral power supply with electrical isolation.

© Siemens 2019

Design (continued)

Configurable monitoring functions can be recorded and evaluated via SIMATIC IPC DiagMonitor and SIMATIC PCS 7 Maintenance Station. These monitoring functions include:

- Program execution (watchdog)
- Processor and board temperatures
- Enhanced diagnostics/messages, e.g. operating hours counter, hard disk status or system status, backup battery status

The "Power" and "Watchdog" signals are displayed on LEDs.

One (SIMATIC PCS 7 AS RTX PROFINET) or two (SIMATIC PCS 7 AS RTX PROFIBUS) Ethernet interfaces 10/100/1000 Mbps (RJ45) are available for the plant bus communication with the engineering station, operator stations, maintenance station and other SIMATIC PCS 7 system components.

ET 200M, ET 200iSP, ET 200S and ET 200pro remote I/O stations can be linked to a comprehensive range of low-cost signal/function modules as well as intelligent field/process devices on the PROFIBUS PA via the PROFIBUS DP interface integrated in SIMATIC PCS 7 AS RTX PROFIBUS. With this CP 5622-compatible interface, the SIMATIC PCS 7 AS RTX also supports routing from the engineering system up to the field devices connected via PROFIBUS.

With SIMATIC PCS 7 AS RTX PROFINET, the PROFIBUS interface is replaced by a PROFINET interface with 3 ports that are based on CP 1616. Sensors/actuators can thus be integrated in remote ET 200M or ET 200SP I/O stations via PROFINET IO.

The SIMATIC PCS 7 AS RTX is configured using the engineering system of the SIMATIC PCS 7 process control system.

The engineering system also administers the AS Runtime licenses of the SIMATIC PCS 7 AS RTX. The scope of delivery of the SIMATIC PCS 7 AS RTX already includes an AS Runtime license for 100 POs. This can be expanded by further AS Runtime licenses for 100 POs or 1 000 POs up to the limit of 2 000 POs. The process objects of additional AS Runtime licenses are then added to process objects which already exist.

8

Technical specifications

SIMATIC PCS 7 AS RTX (Microbox), based on SIMATIC IPC427D	
Design and equipment features	
Design versions	• SIMATIC PCS 7 AS RTX PROFIBUS • SIMATIC PCS 7 AS RTX PROFINET
Design	• Compact Microbox PC without panel • DIN rail or wall mounting; horizontal (preferred) or vertical • Portrait assembly; vertical
Degree of protection according to EN 60529 (front/rear)	IP20
CPU	
• Processor	Intel Core i7-3517UE 1.7 GHz
• Second Level Cache	4 MB
Main memory	4 GB DDR3-SDRAM 1066 (1 SO-DIMM module without ECC)
Graphics	
• Graphics controller	Intel HD4000 integrated in the chipset
• Graphics memory	32 ... 512 MB shared memory
• Resolutions, color-depth, frequencies	
- DVI-I	Up to 1920 × 1200, 60 Hz
- Display port (DPP)	Up to 1920 × 1200, 60 Hz
Storage media	
• Solid state drive	1 × 2.5" SATA-SSD 80 GB (eMLC)
• CD-ROM / DVD-RW, diskette	Connectable via USB (not included in scope of delivery)

Interfaces	
• PROFIBUS/MPI (SIMATIC PCS 7 AS RTX PROFIBUS only)	CP 5622 onboard, 1 × 9-pin sub D socket. 12 Mbit/s (electrically isolated)
• PROFINET (SIMATIC PCS 7 AS RTX PROFINET only)	CP 1616 onboard, 3 × RJ45 socket; integrated 3-port real-time switch
• Ethernet	
- PCS 7 AS RTX PROFIBUS	2 × Ethernet ports (RJ45) Intel 82579LM and Intel 82574L; 10/100/1000 Mbit/s, electrically isolated, teaming-capable
- PCS 7 AS RTX PROFINET	1 × Ethernet port (RJ45); 10/100/1000 Mbit/s, isolated
• USB	4 × USB 3.0, max. 2 can be simultaneously operated as high current
• Serial	1 × COM1 RS 232, 115 Kbps max., 9-pin sub D connector
• Parallel	-
• Graphics connection	1 × DVI-I (DVI/VGA combined) 1 × DisplayPort (DPP); DVI via DPP-to-DVI adapter
• Keyboard, mouse	Connectable via USB (not included in scope of delivery)
LED displays	• PC ON/WD for power supply and watchdog • L1, L2 and L3 freely programmable by the user
Software (pre-installed and on Restore DVD)	
Operating system	Windows 7 Ultimate SP1, 32-bit, multi-language (English, German, French, Italian, Spanish, Chinese)
Controller software	WinAC RTX 2010
System-tested SIMATIC industrial software	SIMATIC IPC DiagMonitor

© Siemens 2019

Technical specifications (continued)

Monitoring and diagnostic functions	
Watchdog	• Monitoring of program execution • Restart can be parameterized following faults • Monitoring time adjustable in the software
Temperature	• Processor • Basic module • Close to RAM (via SIMATIC IPC DiagMonitor and SIMATIC PCS 7 Asset Management)
Storage media	S.M.A.R.T. functionality
Battery monitoring	Battery status register readable; residual life after reaching the warning level at least 1 month
Operating hours counter	(via SIMATIC IPC DiagMonitor and SIMATIC PCS 7 Asset Management)
Noise emission	
Operation	< 40 dB (A) to DIN 45635-1
Electromagnetic compatibility (EMC)	
Emitted interference	EN 61000-6-3, EN 61000-6-4, CISPR220 Class B FCC Class A
Immunity to conducted interference on the supply lines	± 2 kV (according to IEC 61000-4-4; burst) ± 1 kV (according to IEC 61000-4-5; symmetrical surge) ± 2 kV (according to IEC 61000-4-5; asymmetrical surge)
Immunity to interference on signal lines	± 1 kV (according to IEC 61000-4-4; burst; length < 3 m) ± 2 kV (according to IEC 61000-4-4; burst; length > 3 m) ± 2 kV (according to IEC 61000-4-5; surge; length > 30 m)
Immunity to static discharge	± 6 kV contact discharge ± 8 kV air discharge
Immunity to high-frequency irradiation	10 V/m, 80 ... 1 000 MHz and 1.4 ... 2 GHz, 80 % AM according to IEC 61000-4-3 1 V/m, 2 ... 2.7 GHz, 80 % AM according to IEC 61000-4-3 10 V, 10 kHz ... 80 MHz, 80 % AM according to IEC 61000-4-6
Immunity to magnetic fields	100 A/m; 50/60 Hz according to IEC 61000-4-8
Climatic conditions	
Temperature	Tested according to IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14
• During operation, horizontal installation (preferred position)	
- Operation with SSD and max. 2 expansion modules (max. load 10 W)	0 ... +40 °C[1]
- Operation with SSD in RAL[2] and max. 2 expansion modules (max. load 10 W)	0 ... +50 °C[1]
• During operation, vertical/portrait mounting	
- Operation with SSD (without expansion module)	0 ... +40 °C[1]
- Operation with SSD in RAL[2] and max. 2 expansion modules (max. load 10 W)	0 ... +45 °C[1]
• Storage/transport (with SSD)	-40 ... +70 °C
• Gradient	
- During operation	Max. 10 °C/h
- Storage/transport	20 °C/h; no condensation
Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30
• During operation	5 ... 80 % at 25 °C (no condensation)
• Storage/transport	5 ... 95 % at 25 °C (no condensation)
Atmospheric pressure	Tested according to IEC 60068-2-78, IEC 60068-2-30
• During operation	1080 ... 795 hPa, corresponds to a elevation of -1 000 ... 2 000 m
• Storage/transport	1080 ... 660 hPa, corresponds to an elevation of -1 000 ... 3 500 m
Mechanical environmental conditions	
Vibrations	Tested according to IEC 60068-2-6
• During operation with SSD	5 ... 9 Hz: 3.5 mm 9 ... 500 Hz: 9.8 m/s²
• Storage/transport	5 ... 9 Hz: 3.5 mm, 9 ... 500 Hz: 9.8 m/s²
Shock	Tested according to IEC 60068-2-27
• During operation with SSD	150 m/s², 11 ms
• Storage/transport	250 m/s², 6 ms
Standards, specifications, approvals	
Protection class	Protection class I according to IEC 61140
CE in conformity with 2004/108/EC, 2006/95/EC	Yes
Area of application: Industry	
• Interference emission	EN 61000-6-4: 2007
• Noise immunity	EN 61000-6-2: 2005
Area of application: Residential, business, trade, small enterprise	
• Emitted interference	EN 61000-6-3: 2007
• Noise immunity	EN 61000-6-1: 2007
cULus	Underwriters Laboratories (UL) according to Standard UL 60950-1 and UL 508 as well as Canadian National Standard CAN/CSA-C22.2 No. 60950-1 (I.T.E) and CAN/CSA-C22.2 No. 142 (IND.CONT.EQ)
USA: FCC Rules, Part 15, Class A	Yes
Canada: ICES-003, Class A; NMB-003, Class A	Yes
Australia/New Zealand: EN 61000-6-4:2007	Yes
Korea: Korean Certification (KC Mark)	Yes
Special features	
Quality assurance	according to ISO 9001
Power supply (electrically isolated)	
Power supply	24 V DC (19.2 ... 28.8 V)
Short-term voltage dip	Min. 15 ms (at 20.4 V) Max. 10 events per hour; recovery time of at least 1 s
Max. power consumption (at 24 V DC)	64.8 W
Dimensions and weights	
Dimensions (W x H x D in mm)	262 × 133 × 50.5
Weight	approx. 2 kg

[1] If the "Turbo Mode Level" setting in BIOS Setup "Power" menu is not set to "Temperature optimized", the maximum ambient temperature must be reduced by 5 °C.

[2] RAL = Restricted Access Location: Installation of device in operating environment with restricted access, e.g. a locked switchgear cabinet

© Siemens 2019


Ordering data

	Article No.
SIMATIC PCS 7 AS RTX PROFIBUS Assembled and pre-installed SIMATIC PCS 7 automation system based on SIMATIC IPC427D, prepared for connection of the process I/O via PROFIBUS DP; with: • Intel Core I7-3517UE, 2 × 1.7 GHz, 4 MB Second Level Cache; 4.0 GB DDR3 SDRAM 1066 (1 SO-DIMM module); SSD SATA, 80 GB, 2 × Ethernet 10/100/1000 Mbps (RJ45) onboard, 1 × CP 5622 onboard; 4 × USB 3.0 (high current); 24 V DC power supply • Windows 7 Ultimate 32-bit operating system, multi-language (English, German, French, Italian, Spanish, Chinese), WinAC RTX 2010 controller software and SIMATIC IPC DiagMonitor diagnostic software, pre-installed on SSD 80 GB and restore DVD • Mounting hardware: DIN rail and bracket for wall mounting • SIMATIC PCS 7 AS Runtime license for 100 PO	**6ES7654-0UE23-0XX1**
SIMATIC PCS 7 AS RTX PROFINET Assembled and pre-installed SIMATIC PCS 7 automation system based on SIMATIC IPC427D, prepared for connection of the process I/O via PROFINET IO; with: • Intel Core I7-3517UE, 2 × 1.7 GHz, 4 MB second level cache; 4.0 GB DDR3 SDRAM 1066 (1 SO-DIMM module); SSD SATA, 80 GB, 1 × Ethernet 10/100/1000 Mbps (RJ45) onboard, 1 × CP 1616 onboard (3 ports); 4 × USB 3.0 (high current); 24 V DC power supply • Windows 7 Ultimate 32-bit operating system, multi-language (English, German, French, Italian, Spanish, Chinese), WinAC RTX 2010 controller software and SIMATIC IPC DiagMonitor diagnostic software, pre-installed on SSD 80 GB and restore DVD • Mounting hardware: DIN rail and bracket for wall mounting • SIMATIC PCS 7 AS Runtime license for 100 PO	**6ES7654-0UE23-0XX2**

	Article No.
Additional and expansion components	
SIMATIC PCS 7 AS Runtime license (can be added to existing licenses) Language-neutral, floating license for 1 user No SIMATIC PCS 7 Software Media Package • Physical delivery License key on USB flash drive, certificate of license	
- 100 POs	**6ES7653-2BA00-0XB5**
- 1 000 POs	**6ES7653-2BB00-0XB5**
• Online delivery License key download, online certificate of license Note: E-mail address required!	
- 100 POs	**6ES7653-2BA00-0XH5**
- 1 000 POs	**6ES7653-2BB00-0XH5**
Portrait mounting	
Portrait assembly kit For space-saving installation of the SIMATIC PCS 7 AS RTX based on SIMATIC IPC427D (ports at front)	**6ES7648-1AA20-0YP0**

Accessories

Portrait assembly kit

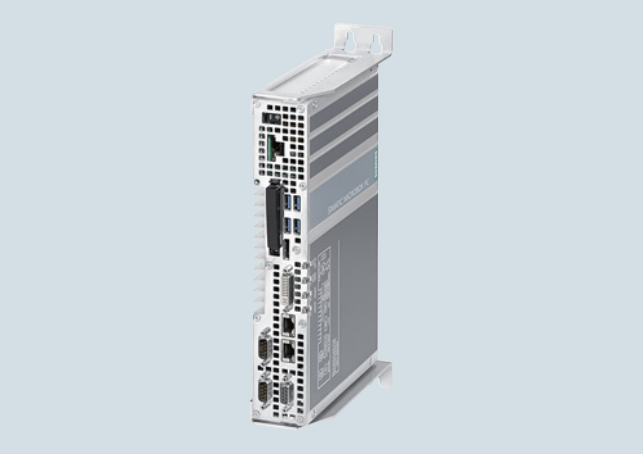

SIMATIC PCS 7 AS RTX with portrait assembly kit, interfaces at front

The portrait mounting kit allows space-saving installation of the SIMATIC PCS 7 AS RTX in the control cabinet. The technical specifications correspond in this design form to those with a vertical standard rail mounting.

Portrait mounting reduces the mounting area required (W × H in mm) from 262 × 133 to 61.5 × 315. Together with the kit, the SIMATIC PCS 7 AS RTX requires a mounting depth of 149.7 mm in the control cabinet. Since all ports of the SIMATIC PCS 7 AS RTX are accessible from the front, this type of mounting is very convenient for commissioning.

When using the portrait mounting kit for the SIMATIC PCS 7 AS RTX, read also the information on operation planning and device installation in the "SIMATIC IPC427D Industrial PC" manual.



© Siemens 2019



9/2 SIMATIC PCS 7 BOX

© Siemens 2019

Overview

		PCS 7 BOX RTX		PCS 7 BOX	
		ES/OS system	OS Runtime	ES/OS system	OS Runtime
System functionality		ES + OS + AS	OS + AS	ES + OS	OS
Possible controller combinations	WinAC RTX controller integrated				
	PCS 7 AS RTX PROFIBUS or PCS 7 AS RTX PROFINET as additional controller				
	Modular AS 41x, AS 41xH or AS 41xF (AS Single or AS Redundancy Station) as additional controller				

System overview of SIMATIC PCS 7 BOX compact systems



SIMATIC PCS 7 BOX are space-saving and at the same time very rugged industrial PC systems for economical entry into process automation with SIMATIC PCS 7. They are available as compact systems with SIMATIC PCS 7 functionality for engineering (ES), automation (AS), operator control and monitoring (OS), and also as OS Runtime systems without an engineering component.

SIMATIC PCS 7 BOX for operation as a client in an operator system or in SIMATIC BATCH can be found in the section "Industrial Workstation/IPC" under "SIMATIC BOX PC", see page 3/37

Product versions

The first criterion for choosing the offered SIMATIC PCS 7 BOX product versions is the decision between integrated or swapped-out automation functionality (AS):

- **AS integrated**:
  SIMATIC PCS 7 BOX RTX with internal WinAC RTX software controller and Windows 7 Ultimate SP1 (32-bit) operating system; optionally with integrated PROFIBUS or PROFINET interface
- **AS separate**:
  SIMATIC PCS 7 BOX with Windows 10 IoT Enterprise 2015 LTSB (64-bit) operating system and external controller:
  - Microbox automation system as SIMATIC PCS 7 AS RTX PROFIBUS or SIMATIC PCS 7 AS RTX PROFINET
  - Modular automation system of the S7-400 series, including PROFIBUS and PROFINET interface, as AS Single Station or AS Redundancy Station

This selection is associated with the decision for a specific controller type. It depends on the price/performance ratio as well as on the hardware and software functions that are possible with the various controller combinations (see table in the "Function" section).

Depending on the integration of the engineering component (ES) in the system functionality, there is then a further differentiation within the preselection:

- ES/OS system:
  - SIMATIC PCS 7 BOX RTX with ES + OS + AS functionality
  - SIMATIC PCS 7 BOX with ES + OS functionality
- OS Runtime system:
  - SIMATIC PCS 7 BOX RTX with OS + AS functionality
  - SIMATIC PCS 7 BOX with OS functionality

A complete process control system for small applications can be implemented by expanding further with process I/O:

- Distributed process I/O at PROFIBUS: Sensors/actuators on ET 200M, ET 200iSP and ET 200pro remote I/O stations, as well as directly connected field devices/process devices (with WinAC RTX and in combination with PCS 7 AS RTX PROFIBUS or AS S7-400)
- Field devices/process devices at FOUNDATION Fieldbus (in combination with AS S7-400)
- Distributed process I/O at PROFINET: Sensors/actuators on ET 200M and ET 200SP remote I/O stations, as well as directly connected field devices/process devices (with WinAC RTX as well as in combination with AS S7-400 or PCS 7 AS RTX PROFINET)

© Siemens 2019

Application

The SIMATIC PCS 7 BOX compact systems are ideally suitable for use at process level, especially for:

- Small production applications
- Enclosed subprocesses (package units)
- Automation of a laboratory or test center


As fully-fledged members of the SIMATIC PCS 7 family, SIMATIC PCS 7 BOX systems work with the PCS 7 standard system software; they are scalable and can be extended without a break in compatibility.

The application is limited to 2 000 POs (process objects) in accordance with the Engineering and OS Runtime licenses. The max. number of POs of the AS Runtime licenses depends on the type of controller (for more information on this, see below under "Design", software and licenses).

As an ES/OS system, expanded by software licenses that can be ordered separately for SIMATIC PDM and SIMATIC PCS 7 Maintenance Station, SIMATIC PCS 7 BOX can also be operated as a maintenance station. For additional information on this, please refer to the chapter "Plant Device Management".

SIMATIC PCS 7 BOX systems with a separate, external controller are also suitable for SIMATIC BATCH (up to 10 units) or as a Web server for up to two Web clients.

Design

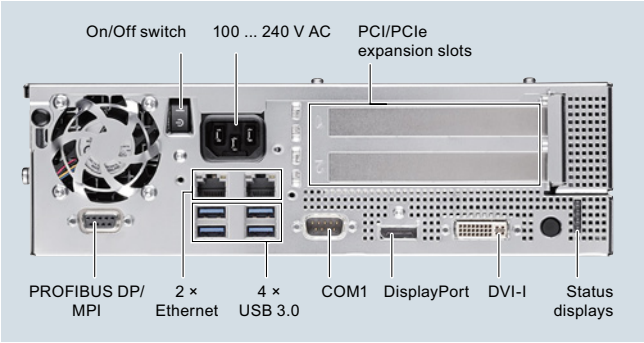

SIMATIC PCS 7 BOX RTX design

System platform for all offered SIMATIC PCS 7 BOX product versions is the sturdy industrial SIMATIC IPC627D which can be used in accordance with its CE marking in industrial environments as well as in domestic, business and commercial environments.

Special properties and equipment features

The SIMATIC Box PC, based on Intel Core i3 or Xeon processor technology combines high performance with compact design. Additionally, it has the following features:

- Stable platform available for a period of about 5 years with embedded Intel components (spare parts supply and repairs for approx. 5 years)
- Rugged metal enclosure with IP20 degree of protection with high electromagnetic compatibility.
- Powerful and energy-saving Intel multi-core processors XEON E3 or Core i3
- Powerful Intel graphics controller HD Graphics 4600 onboard, integrated in the processor:
  - 2 digital interfaces DVI-I and DisplayPort (DVI-D via DisplayPort DVI adapter)
  - Analog VGA connection via DVI-I adapter to VGA or DisplayPort to VGA
- Support of multi-monitor mode with two process monitors via onboard graphics:
  - 1 × Process monitor at DVI-I connection
  - 1 × Process monitor at DisplayPort via DisplayPort to DVI-D adapter cable
- Alternative design version of panel front: SIMATIC PCS 7 BOX with fixed 22" TFT display with touch screen, resolution 1920 × 1080
- Flexible installation in various positions with mounting brackets or portrait installation kits
- High shock/vibration resistance in all possible mounting positions
- Variable power supply: 24 V DC or 110/230 V AC (100 ... 240 V)
- Maximum processor performance up to an ambient temperature of 55 °C
- Integrated drives:
  - 1 × Optical drive SATA DVD±R/RW
    or as alternative:
  - 1 × Hard disk SATA 3.5" (HDD), 250 GB
  - 1 × Solid State Drive SATA 2.5" (SSD), 240 GB
  - 1 × RAID 1, 320 GB (2 × 320 GB HDD, mirror disks)
- Numerous high-performance interfaces:
  - 4 × USB 3.0 (SuperSpeed), external
  - 1 × USB 3.0 (SuperSpeed), internal, e.g. for ASIA license key, hardlock USB
  - 1 × USB 3.0 (SuperSpeed) external, on front (Panel Front design version only)
  - 1 × Serial (COM1)
  - 1 × DVI-I interface (DVI/VGA combined; VGA via adapter cable)
  - 1 × DisplayPort (DVI-D or VGA via adapter cable)
  - 2 × Ethernet 10/100/1000 Mbps (RJ45)
  - 1 x PROFIBUS DP (CP 5622-compatible)
  - 1 × PROFINET IO (CP 1616-compatible; alternative to PROFIBUS DP)
  - 1 × PCI-Express x16 (185 mm) and 1 × PCI (185 mm), vacant for expansions
- Integrated diagnostic displays (4 dual-color LEDs for status display of the operating state)
- Monitoring and diagnostics functions available in combination with the SIMATIC IPC DiagMonitor diagnostics software for:
  - Temperatures
  - Backup battery voltage
  - HDD/SSD status (S.M.A.R.T.)
  - System status (Watchdog)
  - Fan speed
  - Operating hours counter
- Certifications for worldwide marketing (cULus)
- Fast restoration of the factory state with supplied Restore DVD

Product version SIMATIC PCS 7 BOX RTX

A WinAC RTX 2010 software controller is already integrated in the SIMATIC PCS 7 BOX RTX. The SIMATIC PCS 7 BOX product version with integrated controller is characterized by an exceptionally good price/performance ratio and very fast program execution. The controller generates only a low base load, and shows its strengths particularly with applications that involve real-time requirements and deterministic dynamic response.

In a direct comparison, product versions with external controllers offer slightly more functionality, resulting in additional application possibilities (see table in the section "Function").

© Siemens 2019

Design (continued)

Design versions/expandability

The SIMATIC PCS 7 BOX in standard design is a compact computing unit with HMI devices (mouse, keyboard, process monitor) that can be ordered separately and are connected by means of integrated ports/interfaces.


The device is equipped with four USB 3.0 ports for mouse and keyboard as well as additional USB input/output devices, e.g. chip card reader USB.

Two process monitors can be controlled in multi-monitor mode via the integrated digital graphic interfaces DVI-I and DVI-D (via adapter cable at the DisplayPort). The selection of the process monitors depends on the technical data of the integrated graphics as well as the image formats and resolutions which can be adjusted in the project editor of the OS software (see section: Operator System, OS Software, Introduction).

As an alternative to the SIMATIC PCS 7 BOX in standard design, we are offering a built-in unit with Panel Front according to SIMATIC IPC677D which can be mounted in mounting cutouts of control cabinets, enclosures or consoles as well as on swivel arms.


With the built-in unit, a panel with 22" TFT display and touch screen is permanently connected with the computing unit. The 22" TFT display has a resolution of 1920 × 1080 pixels. An additional USB 3.0 port for connection of external I/O devices is available on the panel front on the left below the display.

Using a touch pen as an input aid protects the touch screen and makes it easy to achieve pin-point accuracy when operating small input boxes or buttons – especially when working with gloves.

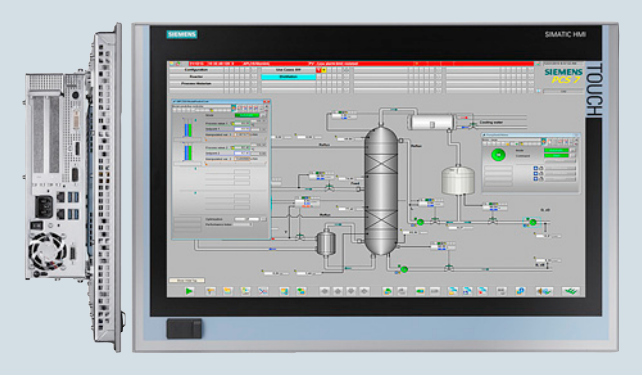

SIMATIC PCS 7 BOX with Panel Front, side and front views

Stand-alone operation/plant network

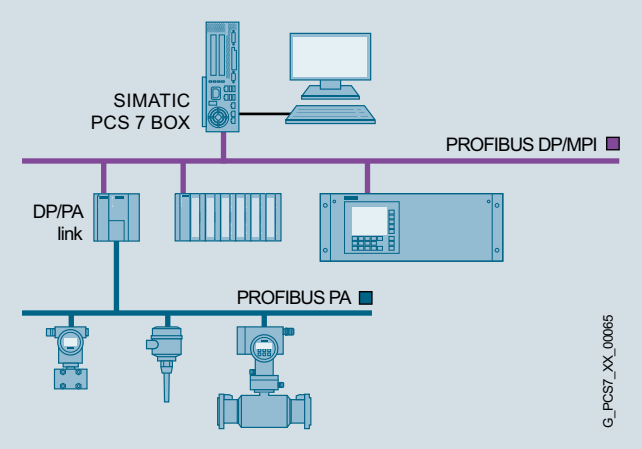


SIMATIC PCS 7 BOX in stand-alone mode

SIMATIC PCS 7 BOX systems can be operated in stand-alone mode and also in the system network with other SIMATIC PCS 7 system components.

A system produced with the SIMATIC PCS 7 BOX can be expanded at any time with additional SIMATIC PCS 7 hardware and software components. It is just as easy to integrate SIMATIC PCS 7 BOX into existing SIMATIC PCS 7 systems. The connections to the plant bus and terminal bus are usually made via the integrated Ethernet interfaces.

In association with the redundant AS 41xH modular controllers, however, an additional CP 1623 or CP 1628 communication module with appropriate communications software is required for the Industrial Ethernet plant bus (see section Industrial Communication, Industrial Ethernet, System connection of PCS 7), see page 10/59

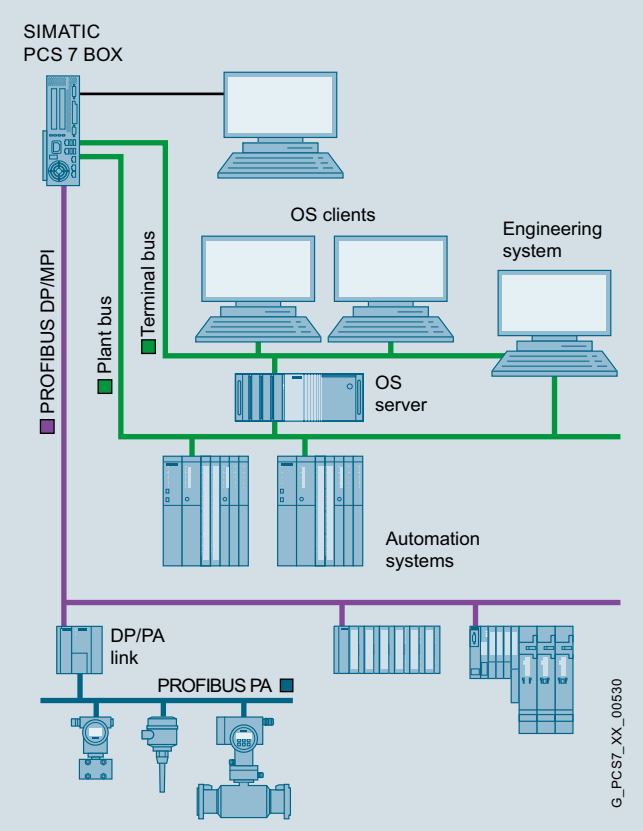

Example of SIMATIC PCS 7 BOX integration in a SIMATIC PCS 7 plant network

Engineering

The SIMATIC PCS 7 BOX can be configured by using either the engineering software integrated in the system or a central engineering system. OS-specific configuration changes can be loaded online, i.e. terminated without the OS process mode.

Individual product configuration

By selecting predefined equipment features, you can individually configure the SIMATIC PCS 7 BOX with the desired article numbers. To do so, selection tables are available in the "Ordering data" section of the PDF and in the printed edition of the catalog.

A configurator in the Industry Mall allows you to interactively select and order SIMATIC PCS 7 BOX compact systems.

© Siemens 2019

Design (continued)

Software and licenses

	PCS 7 BOX RTX		PCS 7 BOX		
	ES/OS system	OS Runtime	ES/OS system	OS Runtime	PC spare part
Article No.	6ES7650-4B..0-3**R**..	6ES7650-4B..0-3**S**..	6ES7650-4B.82-3**T**..	6ES7650-4B.82-3**U**..	6ES7650-4B…-8**X**..
System functionality	ES + OS + AS	OS + AS	ES + OS	OS	None (without PCS 7 software/licenses)
Supplied PCS 7 software/licenses (incl. SP)					
SIMATIC PCS 7 Runtime license RTX, Article No. 6ES7650-1CL00-2XB5	●	●			
SIMATIC WinAC RTX 2010, Article No. 6ES7671-0RC08-0YA0	●	●			
SIMATIC PCS 7 ES Single Station V9.0, with 250 AS/OS Runtime POs, article no. 6ES7651-5AA58-0YA0	●		●		
SIMATIC PCS 7 OS Software Single Station V9.0 (250 OS Runtime POs), as for article no. 6ES7658-2AA58-0YA0 but with 250 OS Runtime POs		●		●	
SIMATIC PCS 7 AS Runtime license for 250 AS RT POs		●			
SIMATIC PCS 7 BCE V9.0 Runtime license, article no. 6ES7650-1CD58-2YB5			●	●	
SIMATIC PCS 7 V9.0 Software Media Package, article no. 6ES7658-4XX58-0YT8	●	●	●	●	
Software types of delivery					
Pre-installation on system hard disk corresponds to content of Restore DVD Set 1	●	●			
Pre-installation on system hard disk corresponds to content of Restore DVD Set 2			●	●	
Restore DVD Set 1[1]: Windows 7 Ultimate SP1, 32-bit operating system with default settings for optimized PCS 7 operation including PCS 7 software installation for SIMATIC PCS 7 BOX RTX operation	●	●			
Restore DVD Set 2[1]: Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system with default settings for optimized PCS 7 operation including PCS 7 software installation for SIMATIC PCS 7 BOX operation			●	●	
With Windows 7 Ultimate 32-bit/64-bit or Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system recovery CD					●

[1] Within the Restore DVD Sets, you also have the option of installing purely the operating system including drivers and default settings for optimized PCS 7 operation, but without PCS 7 software.

Software and licenses of the SIMATIC PCS 7 BOX product versions

On delivery, the individual SIMATIC PCS 7 BOX product versions are equipped as follows with process objects for process mode:



Product version	Engineering POs	Runtime POs	
	AS and OS	AS	OS
SIMATIC PCS 7 BOX RTX ES/OS system	unlimited	250	250
SIMATIC PCS 7 BOX RTX OS Runtime	unlimited	250	250
SIMATIC PCS 7 BOX ES/OS System	unlimited	250	250
SIMATIC PCS 7 BOX OS Runtime	unlimited	–	250
SIMATIC PCS 7 BOX spare part (without licenses, without pre-installation)	–	–	–

The OS Runtime licenses of the SIMATIC PCS 7 BOX product versions are limited according to the envisaged field of application to 2 000 POs (process objects). The limit for the AS Runtime PO is defined by the type of controller. Type-specific limit data can be found in the table "Typical mixed configuration limits" in "Automation systems" chapter, "Introduction" section, in the selection tables of the AS ordering data, and in the SIMATIC PCS 7 AS Single Station and SIMATIC PCS 7 AS Redundancy Station configuration wizards. The engineering license for AS and OS is always unlimited.

The supplied OS Runtime POs can be extended by cumulative OS Runtime licenses for 100 and 1 000 POs up to the upper limit of 2 000 POs. Analogous to this, SIMATIC PCS 7 BOX product versions with integrated or separate automation functionality of the upper limit of the controller can be expanded by cumulative AS Runtime licenses for 100 and 1 000 POs.

© Siemens 2019

Function

System configuration	PCS 7 BOX RTX			
				
	WinAC RTX controller integrated	**PCS 7 AS RTX PROFIBUS/ PROFINET (Microbox) as separate controller**	**Modular AS 41x (AS Single Station) as separate controller**	**Modular AS 41xH or AS 41xF (AS Single Station or AS Redundancy Station) as separate controller**
Supported functions and limits:				
Software				
AS/OS Engineering	●	●	●	●
OS Runtime Single Station up to 2 000 OS Runtime PO	●	●	●	●
PCS 7 APL	●	●	●	●
SIMATIC PDM PCS 7	●	●	●	●
SIMATIC PCS 7 Maintenance Station	●	●	●	●
SIMATIC BATCH up to 10 units		●	●	●
Web server, for up to 2 Web clients		●	●	●
OS Single Station Redundancy		●	●	●
S7 F Systems				●
SIMATIC Safety Matrix				●
Hardware				
Controller (AS) independent of the BOX PC system		●	●	●
AS-to-AS communication	●	●	●	●
Routing	●[1)]	●[1)2)]	●	●
PROFIBUS DP/PA	●	● (PCS 7 AS RTX PROFIBUS)	●	●
FOUNDATION Fieldbus (FF)			●	●
PROFINET IO	●	● (PCS 7 AS RTX PROFINET)	●	●
Configuration in RUN (CiR)			●	●
High-precision time stamps			●	●
S7 Block Privacy			●	●
Block type change in Run (TCiR)			● (AS 410)	● (AS 410)
Retentive AS data	● (Only with UPS)	● (Only with UPS)	●	●
Max. AS quantity structure[3)]	WinAC RTX 2010 up to 1 200 AS Runtime PO	WinAC RTX 2010 up to 1 200 AS Runtime PO	Depending on the type of the AS 41x, up to 2 000 AS Runtime PO	Depending on the type of the AS 41xH or AS 41xF, up to 2 000 AS Runtime PO

1) The PROFIBUS routing functionality of the WinAC RTX 2010 can only be used with the onboard CP 5622 of the SIMATIC IPC627D (PCS 7 BOX RTX) and IPC427D (PCS 7 AS RTX PROFIBUS).

2) The PROFINET routing functionality of the WinAC RTX 2010 can only be used with the onboard CP 1616 of the SIMATIC IPC427D (PCS 7 BOX RTX PROFINET).

3) Typical mixed quantity structures based on the SIMATIC PCS 7 Advanced Process Library (APL)

Supported hardware and software functionality depending on the system configuration

© Siemens 2019

Technical specifications

SIMATIC PCS 7 BOX basic hardware: SIMATIC IPC627D	Standard design	Panel front design
Design and equipment features		
Design	Rack-mountable device with sturdy metal enclosure, suitable for wall and portrait mounting	Rack-mounted device with rugged metal enclosure and Panel Front, suitable for mounting in control cabinets, enclosures, consoles and on swivel arms; max. mounting angle ±20° from the vertical
Degree of protection	IP20	Computer unit and rear of panel IP20; panel front IP65
Processor	• Intel Xeon E3-1268L v3, 4 cores, 8 threads, 2.3 (3.3) GHz, GT2, 8 MB cache, Turbo Boost, VT-d, iAMT • Intel Core i3-4330TE, 2 cores, 4 threads, 2.4 GHz, GT2, 4 MB cache, VT-x	
Chipset	Intel C226 (DH82C226 PCH)	
Main memory		
• Type	DDR3-1600 SDRAM (PC3-12800) DIMM	
• Maximum configuration	16 GB DDR3 SDRAM (2 sockets)	
• Standard configuration	Alternatives: • 8 GB DDR3 SDRAM without ECC • 8 GB DDR3 SDRAM with ECC	
Graphics		
• Graphic controller	Onboard Intel graphics controller HD Graphics P4600; 2-D and 3-D engine integrated in processor	
• Graphics memory	Dynamic Video Memory (uses up to 512 MB RAM)	
• Resolutions, frequencies, colors of the onboard graphics		
- DVI	1920 × 1200 at 60 Hz, 24-bit color depth	
- Display port	3840 × 2160 at 130 Hz, 30-bit color depth	
• Color display (panel front)	–	22" TFT display with touch screen
- Resolution (W × H in pixels)	–	1920 × 1080
- Luminance (cd/m²), up to	–	400
- Horizontal/vertical viewing angle	–	170°/170°
- MTBF LED backlight	–	80 000 h
Free expansion slots	1 × PCI (185 mm) 1 × PCI Express x16 (185 mm)	
RAID controller	Intel PCH RAID controller onboard with Intel Rapid Storage Technology	
Drives		
• Hard disk (HDD)/ Solid State Drive (SSD), alternatives	• 1 × 3.5" HDD SATA, 250 GB • 1 × 2.5" SSD SATA, 240 GB • 320 GB RAID 1 (2 × 320 GB HDD SATA, data mirroring)	
• Optical drive	1 × Slimline SATA DVD±R/RW	
• Floppy disk drive	No (can be connected with USB; not included in the scope of delivery)	
Interfaces		
PROFIBUS/MPI, isolated		
• Version	1 × 9-pin sub D socket, CP 5622-compatible	
• Transmission rate	9.6 kbps to 12 Mbps	
PROFINET, isolated (alternative to PROFIBUS/MPI)	3 × 10/100 Mbps, (RJ45), CP 1616-compatible	
Ethernet	2 × 10/100/1000 Mbps (RJ45), Intel WGI217LM (AMT interface) and Intel WGI210IT	
USB		
• External	4 × USB 3.0 (max. 2 high-current at the same time)	4 × USB 3.0 (max. 2 high-current at the same time) 1 × USB 3.0 high-current on Panel Front
• Internal	1 × USB 3.0 high-current for internal USB flash drive/dongle	
Serial	1 × COM1 (V.24), 9-pin sub-D connector	
Parallel	–	
Graphics connection	• 1 × DVI-I (DVI/VGA combined) • 1 × DisplayPort	
Keyboard, mouse	Connectable via USB (keyboard and mouse not included in scope of delivery)	

© Siemens 2019

Technical specifications (continued)

SIMATIC PCS 7 BOX basic hardware: SIMATIC IPC627D	Standard design	Panel front design
Operating system and diagnostics software		
Operating system • SIMATIC PCS 7 BOX RTX • SIMATIC PCS 7 BOX	Windows 7 Ultimate SP1 (32-bit), multi-language (English, German, French, Italian, Spanish, Chinese), pre-installed on hard disk and enclosed on Restore DVD set, no activation required Windows 10 IoT Enterprise 2015 LTSB (64-bit) operating system, multi-language (English, German, French, Italian, Spanish, Chinese), pre-installed on hard disk and enclosed on Restore DVD set, no activation required	
System-tested SIMATIC industrial software	SIMATIC IPC DiagMonitor	
Monitoring and diagnostics functions		
Display elements	4 × dual-color LEDs for status display of the operating state: • PC ON/WD (Watchdog) • RUN/STOP • ERROR • MAINT	
SIMATIC IPC DiagMonitor diagnostics software • Temperature (overtemperature/undertemperature) • Battery voltage • Storage media • Watchdog	 • Processor temperature • Temperature close to the RAM chips • Temperature of the basic module Backup battery Monitoring of HDD/SSD with S.M.A.R.T. functionality System monitoring; possible reactions: Hardware or software reset	
Fans	Monitoring of the fan speed	
Operating hours counter	Information about the total runtime	
Safety		
Protection class	Protection class I according to IEC 61140	
Safety directives	EN 60950-1; UL60950-1 CAN/CSA C22.2 No 60950-1-07 UL508 CSA C22.2 No. 142	EN 60950-1 UL508 CSA C22.2 No. 142
Noise emission		
Operation	< 55 dB(A) according to EN ISO 7779	
Electromagnetic compatibility (EMC)		
Interference emission	EN 61000-6-3 EN 61000-6-4 CISPR22 class B FCC class A	EN 61000-6-3 EN 61000-6-4 CISPR22 class A FCC class A
Immunity to conducted interference on the supply lines	±2 kV (according to IEC 61000-4-4; burst) ±1 kV (according to IEC 61000-4-5; symmetrical surge) ±2 kV (according to IEC 61000-4-5; asymmetrical surge)	
Immunity to interference on signal lines	±1 kV; (according to IEC 61000-4-4; burst; length < 3 m) ±2 kV; (according to IEC 61000-4-4; burst; length > 3 m) ±2 kV (according to IEC 61000-4-5; surge; length > 30 m)	
Immunity to static discharge	±6 kV contact discharge (according to IEC 61000-4-2) ±8 kV air discharge (according to IEC 61000-4-2)	
Immunity to radio frequency interference	10 V/m, 80 ... 1 000 MHz and 1.4 ... 2 GHz, 80 % AM (to IEC 61000-4-3) 3 V/m, 2 ... 2.7 GHz, 80 % AM (to IEC 61000-4-3) 10 V/m, 10 kHz ... 80 MHz, 80 % AM (to IEC 61000-4-6)	
Immunity to magnetic fields	100 A/m, 50/60 Hz (according to IEC 61000-4-8)	

© Siemens 2019

Technical specifications (continued)

SIMATIC PCS 7 BOX basic hardware: SIMATIC IPC627D	Standard design	Panel front design
Climatic conditions		
Temperature	Tested according to IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14	
• Operation	• +5 ... +45 °C (with DVD writer, only up to +40 °C) • +5 ... +50 °C (power USB and PCI/PCIe expansions max. 20 W) • +5 ... +55 °C (power USB and PCI/PCIe expansions max. 10 W)	• Horizontal, vertical installation: +5 ... +45 °C (with DVD writer, only up to +40 °C) • Horizontal, angled installation: +5 ... +40 °C (power USB and PCI/PCIe expansions max. 30 W; no DVD operation) • Vertical, vertical installation: +5 ... +45 °C (power USB and PCI/PCIe expansions max. 30 W; no DVD operation)
• Operation, with cabinet installation		
- External temperature 40 °C	–	• Internal temperature max. +50 °C (max. power of all slots 15 W)
- External temperature 45 °C	–	• Internal temperature max. +45°C with maximum configuration (power of all slots 30 W)
• Storage/transport	-20 … +60 °C	
• Gradient		
- Operation	Max. 10 °C/h	
- Storage	20 °C/h, no condensation	
Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30	
• Operation	5 ... 80 % at 25 °C (no condensation)	
• Storage/transport	5 ... 95 % at 25 °C (no condensation)	
Atmospheric pressure		
• Operation	1 080 to 795 hPa (corresponds to an altitude of 1 000 to 2 000 m)	
• Storage/transport	1 080 to 660 hPa (corresponds to an altitude of 1 000 to 3 500 m)	
Mechanical environmental conditions		
Vibrations	Tested according to IEC 60068-2-6	
• Operation	10 … 58 Hz: 0.075 mm / 58 … 500 Hz: 9.8 m/s²	
- Limitation with DVD writer	10 … 58 Hz: 0.019 mm / 58 … 500 Hz: 2.5 m/s²	
- Limitation with portrait assembly	10 … 58 Hz: 0.0375 mm / 58 … 500 Hz: 4.9 m/s²	–
• Storage/transport	5 … 9 Hz: 3.5 mm, 9 to 500 Hz: 9.8 m/s²	
Shock resistance	Tested according to IEC 60068-2-27, IEC 60068-2-29	
• Operation	50 m/s², 30 ms	
- Limitation with portrait assembly	25 m/s², 30 ms	–
• Storage/transport	250 m/s², 6 ms	
Standards, specifications, approvals		
CE - Residential, business and commercial operations, and small businesses		
• Interference emission	EN 61000-6-3: 2007 +A1:2011	–
• Noise immunity	EN 61000-6-1: 2007	–
CE industrial environment		
• Interference emission	EN 61000-6-4: 2007 +A1:2011	EN 61000-6-4: 2007
• Noise immunity	EN 61000-6-2: 2005	EN 61000-6-2: 2005
Certificates and approvals		
Quality assurance system according to ISO 9001:2008	According to DQS certificate 001323 QM08	
cULus	Underwriters Laboratories (UL) complying with standard UL 60950-1, CAN/CSA-C22.2 No. 60950-1 (I.T.E), UL 508 and CAN/CSA-C22.2 No. 142 (IND.CONT.EQ)	Underwriters Laboratories (UL) complying with standard UL 508 and CAN/CSA-C22.2 No. 142 (IND.CONT.EQ)
FCC USA	FCC Rules, Part 15, Class A	
Canada	ICES-003, Class B; NMB-003, Class B	ICES-003, Class A; NMB-003, Class A
Australia/New Zealand	EN 61000-6-3:2007	EN 61000-6-4:2007
Korea	Korean Certification (KC Mark)	

© Siemens 2019

Technical specifications (continued)

SIMATIC PCS 7 BOX basic hardware: SIMATIC IPC627D	Standard design	Panel front design
Power supply		
Supply voltage (AC)	Nominal 100 ... 240 V AC (-15 %/+10 %), wide range	
Supply voltage (DC)	Nominal 24 V DC (-20 %/+20 %), SELV, isolated	
AC input current	Continuous current up to 1.7 A (up to 50 A for 1 ms at startup)	
DC input current	Continuous current up to 7.1 A (up to 14 A for 30 ms at startup)	
Brief voltage interruption according to NAMUR	max. 20 ms (at 0.85 rated voltage) (max. 10 events per hour; recovery time of at least 1 s)	
Max. power consumption • Active power (AC/DC) • Apparent power (AC)	 176 W 190 VA	
Max. current output (+12 V DC)	12.5 A	
Dimensions and weights		
External dimensions including DVD writer (W × H × D in mm)	312 × 267 × 105	560 × 380 × 139 (148 incl. front USB port)
Mounting cutout (W × H in mm)	–	541 × 362
Mounting depth including DVD writer (D in mm)	–	133
Weight	Approx. 7 kg	Approx. 16 kg
System software and licenses (incl. SP)		
SIMATIC PCS 7 BOX RTX ES/OS system (WinAC RTX 2010 integrated)	• SIMATIC PCS 7 ES Single Station V9.0 with 250 AS/OS Runtime POs • WinAC RTX 2010 and PCS 7 RTX license on USB flash drive	
PCS 7 BOX RTX OS Runtime (WinAC RTX 2010 integrated)	• SIMATIC PCS 7 OS Software Single Station V9.0 (250 OS Runtime POs) • SIMATIC PCS 7 AS Runtime license for 250 AS Runtime POs • WinAC RTX 2010 and PCS 7 RTX license on USB flash drive	
SIMATIC PCS 7 BOX ES/OS System	• SIMATIC PCS 7 ES Single Station V9.0 with 250 AS/OS Runtime POs • SIMATIC PCS 7 BCE V9.0 Runtime license	
SIMATIC PCS 7 BOX OS Runtime	• SIMATIC PCS 7 OS Software Single Station V9.0 (250 OS Runtime POs) • SIMATIC PCS 7 BCE V9.0 Runtime license	
Restore DVDs/preinstallation		
• Restore DVD Set 1 for SIMATIC PCS 7 BOX RTX	Windows 7 Ultimate SP1 operating system (32-bit), multi-language (English, German, French, Italian, Spanish, Chinese), with default settings for optimized SIMATIC PCS 7 operation including PCS 7 software installation for SIMATIC PCS 7 BOX TRX	
• Restore DVD Set 2 for SIMATIC PCS 7 BOX	Windows 10 IoT Enterprise 2015 LTSB operating system (64-bit), multi-language (English, German, French, Italian, Spanish, Chinese), with default settings for optimized SIMATIC PCS 7 operation including PCS 7 software installation for SIMATIC PCS 7 BOX	

© Siemens 2019

Ordering data

SIMATIC PCS 7 BOX RTX (AS integrated)

	Article No.									
SIMATIC PCS 7 BOX System	**6ES7650-**									
PC type: SIMATIC IPC627D	**4**	**B**	■	■	**0**	**-**	**3**	■	■	■
2 × 10/100/1000 Mbps Ethernet RJ45; graphics onboard, 4 × USB 3.0; 1 × serial (COM1); 1 × PCI, 1 × PCIe (X16)										
SIMATIC PCS 7 software version V9.0 pre-installed										
Windows 7 Ultimate 32-bit operating system, multi-language (English, German, French, Italian, Spanish, Chinese)										
Processor and storage media										
• Intel Core i3-4330TE processor (2 cores/ 4 threads, 2.4 GHz, 4 MB cache, VT-x); main memory 8 GB, DDR3 1600, DIMM; 250 GB HDD SATA; DVD±R/RW			**A**							
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM; 240 GB SSD; DVD±R/RW			**B**							
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM, ECC; RAID1, 2 × 320 GB SATA (2.5"); DVD±R/RW			**C**							
Communication interfaces										
• PROFIBUS onboard (CP 5622 compatible)				**0**						
• PROFINET onboard (CP 1616 compatible)				**1**						
System type										
• PCS 7 V9.0 BOX RTX ES/OS system (WinAC RTX 2010)								**R**		
• PCS 7 V9.0 BOX RTX OS Runtime (WinAC RTX 2010)								**S**		
Panel front										
• Without panel									**A**	
• 22" Single Touch, 1920 × 1080 pixels									**B**	
Power supply, country-specific power supply cord										
• 110/230 V AC industrial power supply to NAMUR;										
- Power supply cord for Europe										**0**
- Power supply cord for the UK										**1**
- Power supply cord for Switzerland										**2**
- Power supply cord for the USA										**3**
- Power supply cord for Italy										**4**
- Power supply cord for China										**5**
• 24 V DC industrial power supply										**6**

SIMATIC PCS 7 BOX without WinAC RTX (AS separate)

	Article No.									
SIMATIC PCS 7 BOX System	**6ES7650-**									
PC type: SIMATIC IPC627D	**4**	**B**	■	**8**	**2**	**-**	**3**	■	■	■
2 × 10/100/1000 Mbps Ethernet RJ45; graphics onboard, 4 × USB 3.0; 1 × serial (COM1); 1 × PCI, 1 × PCIe (X16)										
SIMATIC PCS 7 software version V9.0 pre-installed										
Windows 10 IoT Enterprise 2015 LTSB 64-bit operating system, multi-language (English, German, French, Italian, Spanish, Chinese)										
Without additional communications interfaces										
Processor and storage media										
• Intel Core i3-4330TE processor (2 cores/ 4 threads, 2.4 GHz, 4 MB cache, VT-x); main memory 8 GB, DDR3 1600, DIMM; 250 GB SATA; DVD±R/RW			**A**							
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM; 240 GB SSD; DVD±R/RW			**B**							
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM, ECC; RAID1, 2 × 320 GB SATA (2.5"); DVD±R/RW			**C**							
System type										
• PCS 7 V9.0 BOX ES/OS system							**T**			
• PCS 7 V9.0 BOX OS Runtime							**U**			
Panel front										
• Without panel									**A**	
• 22" Single Touch, 1920 × 1080 pixels									**B**	
Power supply, country-specific power supply cord										
• 110/230 V AC industrial power supply to NAMUR;										
- Power supply cord for Europe										**0**
- Power supply cord for the UK										**1**
- Power supply cord for Switzerland										**2**
- Power supply cord for the USA										**3**
- Power supply cord for Italy										**4**
- Power supply cord for China										**5**
• 24 V DC industrial power supply										**6**

© Siemens 2019

Ordering data (continued)

SIMATIC PCS 7 BOX System as a spare part

	Article No.								
SIMATIC PCS 7 BOX PC spare part PC type: SIMATIC IPC627D 2 × 10/100/1000 Mbps Ethernet RJ45; graphics onboard, 4 × USB 3.0; 1 × serial (COM1); 1 × PCI, 1 × PCIe (X16) Without pre-installation, without SIMATIC PCS 7 Restore DVD sets	**6ES7650-**								
	4	**B**	■	■	■	**-**	**8**	**X**	■	■
Processor and storage media										
• Intel Core i3-4330TE processor (2 cores/ 4 threads, 2.4 GHz, 4 MB cache, VT-x); main memory 8 GB, DDR3 1600, DIMM; 250 GB SATA; DVD±R/RW		**A**							
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM; 240 GB SSD; DVD±R/RW		**B**							
• Xeon E3-1268Lv3 processor (4 cores/8 threads, 2.3 (3.3) GHz, 8 MB cache, VT-d, AMT); main memory 8 GB DDR3 1600, DIMM, ECC; RAID1, 2 × 320 GB SATA (2.5"); DVD±R/RW		**C**							
Communication interfaces									
• PROFIBUS onboard (CP 5622 compatible)			**0**						
• PROFINET onboard (CP 1616 compatible)			**1**						
• Without additional communication modules			**8**						
Operating system									
• Windows 7 Ultimate 32-bit, multi-language (English, German, French, Italian, Spanish, Chinese)				**0**					
• Windows 7 Ultimate 64-bit, multi-language (English, German, French, Italian, Spanish, Chinese)				**1**					
• Windows 10 IoT Enterprise 2015 LTSB 64-bit, multi-language (English, German, French, Italian, Spanish, Chinese)				**2**					
• Without operating system				**8**					
Panel front									
• Without panel								**A**	
• 22" Single Touch, 1920 × 1080 pixels								**B**	
Power supply, country-specific power supply cord									
• 110/230 V AC industrial power supply to NAMUR;									
- Power supply cord for Europe									**0**
- Power supply cord for the UK									**1**
- Power supply cord for Switzerland									**2**
- Power supply cord for the USA									**3**
- Power supply cord for Italy									**4**
- Power supply cord for China									**5**
• 24 V DC industrial power supply									**6**

Additional and expansion components

Additional and expansion components	
Runtime licenses for PO expansion	
SIMATIC PCS 7 OS Runtime license (cumulative) For extending the OS Runtime POs	
Language-neutral, software class A, single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs	**6ES7658-2XA00-0XB0**
- 1 000 POs	**6ES7658-2XB00-0XB0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs	**6ES7658-2XA00-0XH0**
- 1 000 POs	**6ES7658-2XB00-0XH0**
SIMATIC PCS 7 AS Runtime license (cumulative) Language-neutral, floating license for 1 user	
Without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 100 POs	**6ES7653-2BA00-0XB5**
- 1 000 POs	**6ES7653-2BB00-0XB5**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 100 POs	**6ES7653-2BA00-0XH5**
- 1 000 POs	**6ES7653-2BB00-0XH5**
Further SIMATIC PCS 7 system software SIMATIC PDM and SIMATIC PCS 7 Maintenance Station see "Plant Device Management" section	

© Siemens 2019

Ordering data

	Article No.
Keyboard, mouse, input aids, miscellaneous	
USB keyboard TKL-105 Color: black	
• Keyboard layout, German	**6AV6881-0AU14-0AA0**
• Keyboard layout, US-International	**6AV6881-0AU14-1AA0**
SIMATIC HMI USB mouse Optical mouse with scroll wheel and USB connection, color anthracite	**6AV2181-8AT00-0AX0**
Touch pen, thick, resistive technology For resistive touch screen, optimized for operation with gloves, including screw-on wall-mounting bracket	**6AV7672-1JB00-0AA0**
Memory expansion	
• 2 GB DDR3 1600 SDRAM, DIMM	**6ES7648-2AJ50-0MA0**
• 4 GB DDR3 1600 SDRAM, DIMM	**6ES7648-2AJ60-0MA0**
• 8 GB DDR3 1600 SDRAM, DIMM	**6ES7648-2AJ70-0MA0**
• 8 GB DDR3 1600 SDRAM, DIMM, ECC	**6ES7648-2AJ70-1MA0**
Adapter cable	
• DisplayPort to DVI-D for onboard graphics	**6ES7648-3AF00-0XA0**
• DisplayPort to VGA for onboard graphics	**6ES7648-3AG00-0XA0**
• DVI-I to VGA for onboard graphics, 250 mm long	**6ES7648-3AB00-0XA0**
SIMATIC IPC power cable For Box PC and Panel PC, 230 V AC, angled, 3 m	
• For Germany, France, Spain, the Netherlands, Belgium, Sweden, Austria, Finland	**6ES7900-1AA00-0XA0**
• For the UK	**6ES7900-1BA00-0XA0**
• For Switzerland	**6ES7900-1CA00-0XA0**
• For the USA	**6ES7900-1DA00-0XA0**
• For Italy	**6ES7900-1EA00-0XA0**
• For China	**6ES7900-1FA00-0XA0**
Fieldbus connection	
PROFIBUS FastConnect bus connector RS 485 Plug 180 With 180° cable outlet, insulation displacement	**6GK1500-0FC10**

Accessories

	Article No.
Portrait mounting kit	
• Kit 1: Interfaces to the front	**6ES7648-1AA10-1YB0**
• Kit 2: Interfaces point up/down	**6ES7648-1AA10-1YA0**

Accessories

Portrait assembly kit

As an alternative to installation with mounting brackets, the portrait mounting kit allows for space-saving installation of the SIMATIC PCS 7 BOX (standard design without Panel Front). It is available in two models:

- Kit 1: Portrait assembly with interfaces to the front
- Kit 2: Portrait assembly with interfaces on top or bottom

Together with the kit, the SIMATIC PCS 7 BOX occupies a mounting depth of 365 mm (Kit 1) or 279 mm (Kit 2) in the control cabinet. The limitations associated with portrait assembly regarding vibration and shock resistance are relatively small (see technical specifications).

Since all interfaces are accessible from the front when using Kit 1, this type of assembly is particularly suitable for commissioning and servicing.

Please observe the information on operation planning and device installation in the manual of the SIMATIC IPC627D in conjunction with the use of portrait mounting kits for SIMATIC PCS 7 BOX.

Uninterruptible DC power supply (DC UPS)

You can bypass power failures by using a SITOP DC UPS uninterruptible power supply. For information and suitable products see the chapter "Process I/O", section "Power supplies" as well as catalog KT 10.1.

© Siemens 2019

Notes


© Siemens 2019



10/2	**Introduction**
10/5	**Industrial Ethernet**
10/8	SCALANCE X switches product overview
10/11	SCALANCE X-100 unmanaged media converter
10/13	SCALANCE XB-000 switches
10/15	SCALANCE XC-100 switches
10/17	SCALANCE XB-200 switches
10/19	SCALANCE XC-200 switches
10/23	SCALANCE XC-200EEC switches
10/25	SCALANCE XP-200 switches
10/28	SCALANCE XF-200 switches
10/30	SCALANCE XF-200BA switches
10/32	– BusAdapter BA 2xRJ45VD HA
10/33	SCALANCE X-200RNA switches
10/36	RUGGEDCOM Compact Switch RNA
10/38	SCALANCE XR-300 switches
10/42	– Media modules for SCALANCE XR-300
10/47	SCALANCE XR-300 WG switches
10/49	SCALANCE XM-400 switches
10/52	– Port Extender for SCALANCE XM-400
10/54	– PoE power supplies for SCALANCE XM-400
10/55	SCALANCE XR-500 switches
10/58	– Media modules for modular SCALANCE XR-500
10/62	– Power supplies for SCALANCE XR-500
10/63	SCALANCE accessories
10/64	– C-PLUG
10/67	– Plug-in transceiver for SCALANCE
10/70	Passive network components
10/70	– FastConnect
10/74	– Fiber-optic cables
10/76	System connection PCS 7 systems
10/80	Industrial Wireless LAN
10/90	**PROFINET**
10/92	Architecture
10/93	Switches for PROFINET
10/94	SCALANCE XF-200BA DNA switches ("Y-Switch")
10/96	IE/PB LINK
10/98	PROFINET Bus Analyzer (BANY)
10/101	**PROFIBUS**
10/102	**PROFIBUS DP**
10/103	Electrical networks
10/105	Optical networks
10/107	AS connection
10/108	Y-Link
10/109	**PROFIBUS PA**
10/113	PA routers
10/117	Active field distributors for PA components
10/123	Passive PA components
10/124	**FOUNDATION Fieldbus H1**
10/126	FF routers
10/129	Active field distributors for FF components
10/135	Passive FF components
10/136	**OpenPCS 7**
10/138	**Other communication**
10/138	AS-Interface
10/140	Modbus

© Siemens 2019

Overview

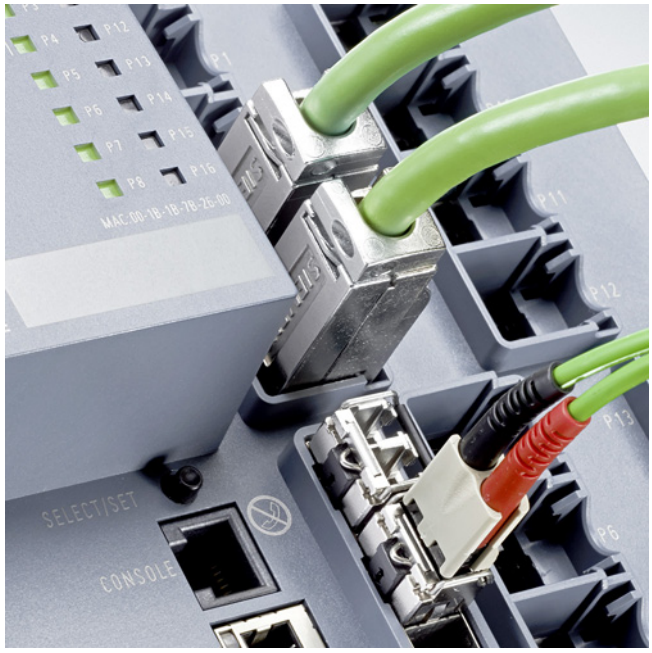

With the SIMATIC NET network components based on globally established standards, SIMATIC PCS 7 possesses a powerful and rugged range of products for implementing totally integrated communication networks for reliable data exchange between all system components and levels in a plant.

The SIMATIC NET products specially developed for industrial applications provide optimum suitability for plants in all sectors. They are matched to one another, and meet the highest industrial demands, especially in areas subject to extreme influences, such as:

- Extended temperature range
- Vibration
- High mechanical stress

The SIMATIC NET products guarantee expandability and the protection of investments as a result of compatible further developments, as well as uniformity from inbound logistics to outbound logistics and from field devices up to the Manufacturing Execution System (MES).

Design

Incorporated in Totally Integrated Automation, the unique basis offered by Siemens for uniform automation of all sectors in the production, process or hybrid industries, the SIMATIC NET portfolio ensures fast and reliable communication between the individual systems/applications of the SIMATIC PCS 7 process control system such as:

- Automation systems, distributed I/O and field components
- Engineering system, operator system and maintenance station
- SIMATIC BATCH and SIMATIC Route Control
- Web clients and web servers for operator control and monitoring via Internet/Intranet as well as IT applications

Industrial Ethernet plant bus

Industrial Ethernet is used as the plant bus as well as terminal bus for multi-user systems with client/server architecture. For small systems, the "Basic Communication Ethernet" (BCE) integrated in the SIMATIC PCS 7 Industrial Workstations permits operation of single stations and servers on the plant bus even without a CP 1623/CP 1628 communications module.


In medium and large plants with high requirements, SIMATIC PCS 7 applies modern FastEthernet and Gigabit technology that combines the high availability provided by redundant electrical and optical rings with the scalable performance provided by switching technology and high transmission rates of up to 10 Gbps.

PROFINET

PROFINET is based on the international standards IEC 61158 and IEC 61784 and combines the advantages of the open network standard, Ethernet, and the PROFIBUS fieldbus system. It stands for maximum transparency, open IT communication, network security and real-time communication down to the field level. This makes PROFINET the basis for uniform automation network in the plant, into which existing fieldbuses implemented with PROFIBUS can be easily integrated.

© Siemens 2019

Design (continued)

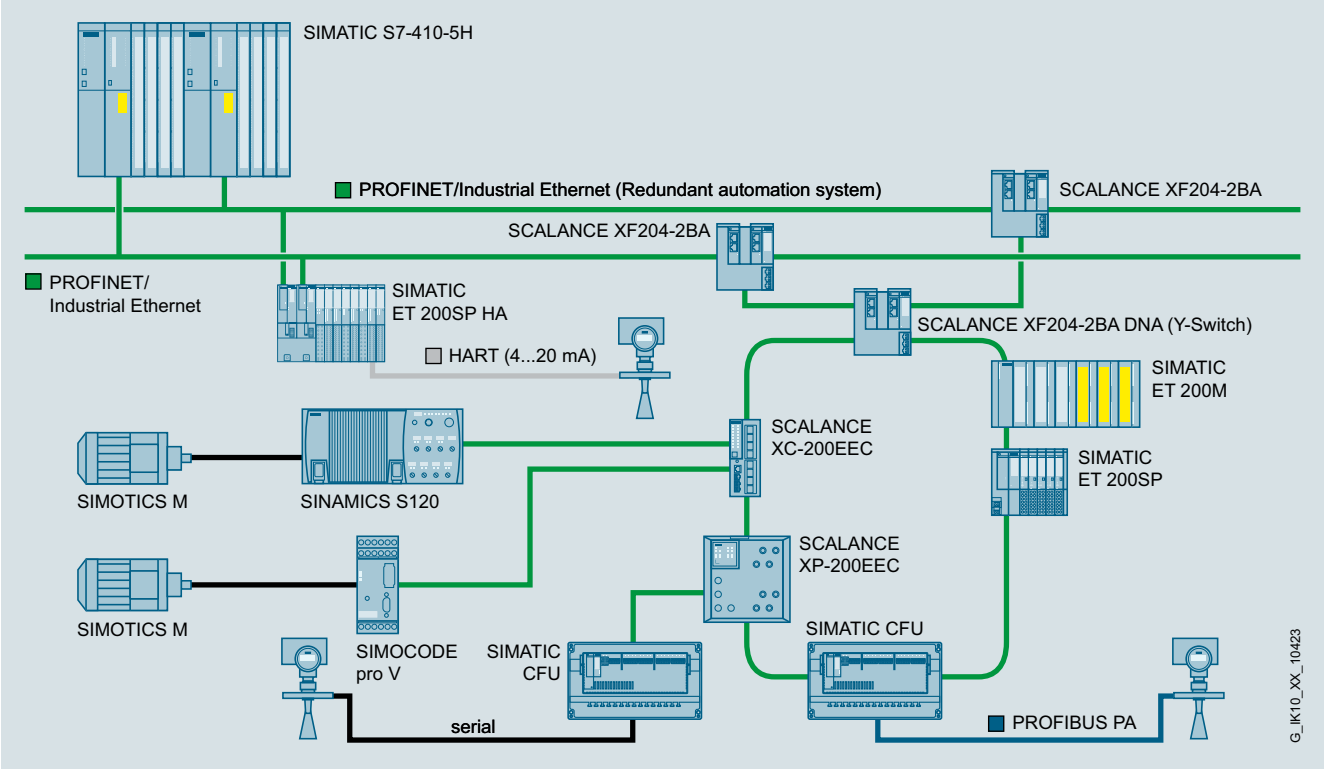


Example of PROFINET communication in the SIMATIC PCS 7 process control system

In the context of the SIMATIC PCS 7 process control system, PROFINET mainly focuses on communication between the automation systems (controllers) and the process I/O.

© Siemens 2019

Design (continued)

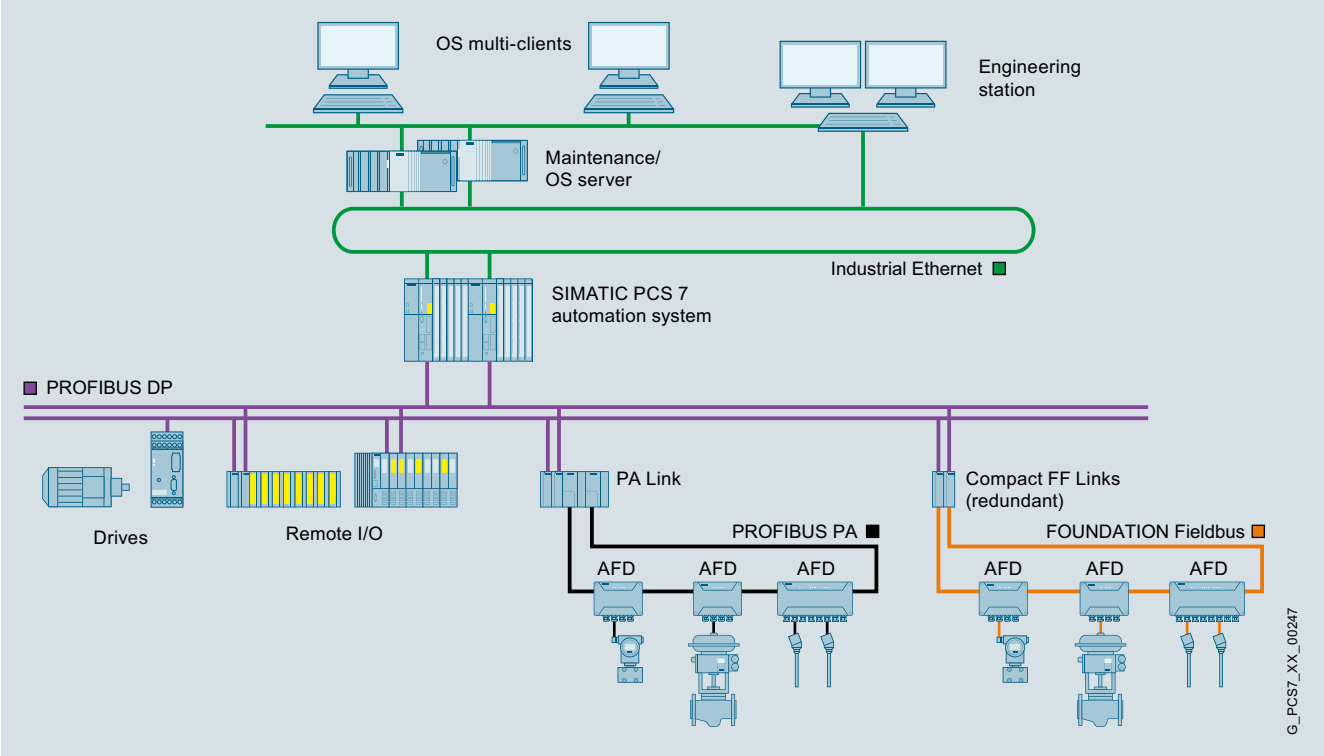

Integration of PROFIBUS PA and FOUNDATION Fieldbus H1

Fieldbus systems

PROFIBUS has become established as sturdy and reliable communications medium for connecting intelligent distributed I/O devices, transmitters and actuators to the controller level of the SIMATIC PCS 7 process control system. The universal, open fieldbus corresponds to the international standards IEC 61158 and IEC 61784.

PROFIBUS DP

PROFIBUS DP is both a system bus and an open communication system, and is designed for moderate transmission rates and short response times. It is therefore optimally suitable for the control of the following devices:

- Directly connected field devices, e.g. drives, motor starters, analyzers, process controllers, or panels
- Distributed I/O devices such as the SIMATIC ET 200M, SIMATIC ET 200iSP and SIMATIC ET 200pro remote I/O stations
- Transmitters and actuators on a seamlessly integrated PROFIBUS PA fieldbus or FOUNDATION Fieldbus H1

Since it also supports the transmission of the HART protocol, HART field devices can also be integrated in a PROFIBUS DP communication network.

PROFIBUS PA and FOUNDATION Fieldbus H1

In addition to the direct connection of transmitters and actuators including power supply via the communication medium, the high information content of the communication as well as the diagnostic options are also of importance for the automation of industrial processes that frequently take place in corrosive, harmful, and hazardous environments.


Both the PROFIBUS PA fieldbus and the FOUNDATION Fieldbus H1 meet these requirements. Both are optimally suitable for directly integrating actuators and sensors in operating environments up to Ex zone 1/21 or 0/20 into the process system.

Their physical bus characteristics are based on the MBP transmission technology (Manchester Coded; Bus Powered) and are largely identical according to IEC 61158. Both fieldbuses can be integrated seamlessly in the SIMATIC PCS 7 process control system using PROFIBUS DP as link.

PROFIBUS PA and FOUNDATION Fieldbus H1 thus profit equally from the higher-level PROFIBUS architecture.

© Siemens 2019

Overview

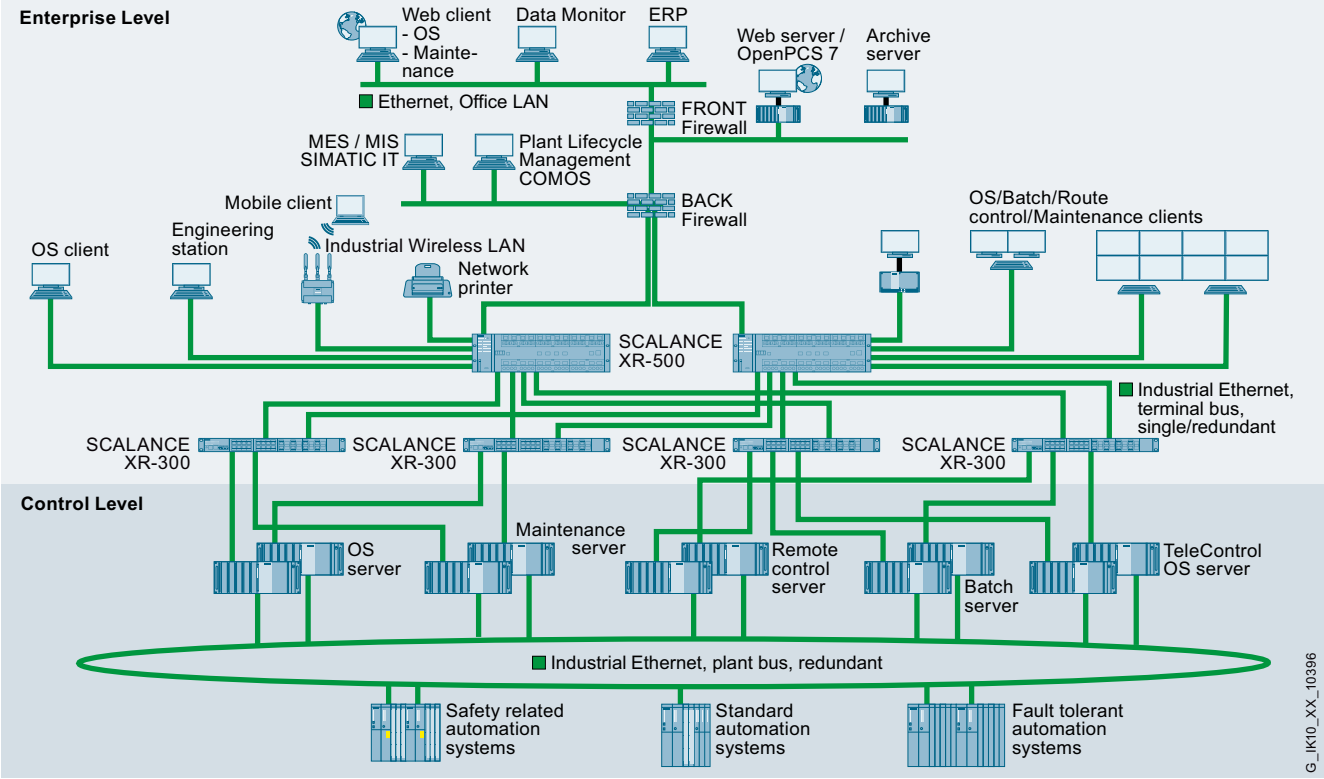

Typical configuration example for redundant plant bus

The plant bus and the terminal bus for multi-user systems with client/server architecture are implemented with Industrial Ethernet, a powerful area and cell network for industrial applications in line with the international IEEE 802.3 standard (Ethernet). Bus structures with optical rings are particularly suitable for this because of their interference immunity and high availability.

In medium-sized and large plants with high requirements, SIMATIC PCS 7 relies on modern FastEthernet and Gigabit technology. This combines the high reliability of optical rings with the scalable performance of switching technology and high transmission rates of up to 10 Gbps.

Benefits

Ethernet is now the number 1 network technology in the global LAN environment. Ethernet offers important characteristics that can give you significant advantages for your application:

- Fast commissioning through simple connections
- High flexibility since existing networks can be extended without any adverse effects
- High availability thanks to redundant network topologies
- Almost unlimited communications performance because scalable performance is available through switching technology if required
- Networking of different application areas (e.g. office and production)
- Investment security through continuous compatible further development
- Plant-wide clock system permits exact assignment of events within the entire system

Ethernet technology for industrial environments

With Industrial Ethernet, SIMATIC NET expands Ethernet technology with future-proof network components with special features and capabilities for use in industrial environments, for example:

- Rugged design, suitable for harsh industrial environments
- Fast local assembly using the FastConnect cabling system
- High fault tolerance due to redundancy and fast redundancy switchover, from bumpless redundancy through PRP and HSR to ring redundancy with MRP
- Continuous and central monitoring of network components with a simple yet effective signaling concept, and network management software

© Siemens 2019


Design

The following Ethernet communications interfaces are used in the various SIMATIC PCS 7 subsystems (ES, OS, AS etc.):

- Interfaces integrated onboard
- Simple network adapters
- Special communications modules, e.g. CP 1623 and CP 1628

They are defined when selecting the respective system components, depending on the requirements. For further information, see Section "System connection of PCS 7 systems".

The communication stations can be integrated in the terminal bus and the plant bus using Industrial Ethernet switches of the SCALANCE X product family. These switches offer scalable performance at an attractive price and support a wide variety of configuration options.

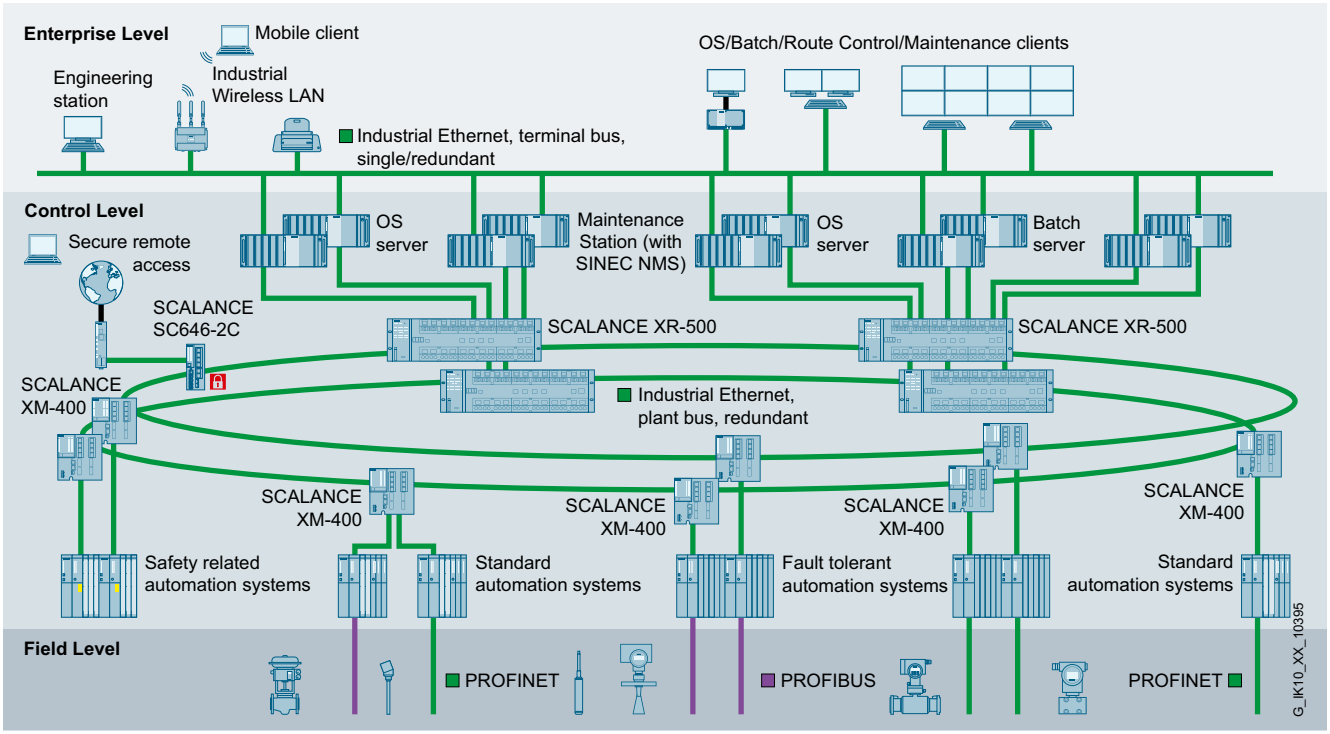

Configuration example for plant and terminal bus

Terminal bus

Client-server and server-server communication is carried out on a dedicated Ethernet LAN. The communication network identified as a terminal bus can be implemented with standard SIMATIC NET components such as Industrial Ethernet switches, onboard interfaces, network adapters, communications processors (CP), cabling, etc.

A ring design avoids communication failures should the line become damaged or disconnected at a particular point. To further increase availability, it is also possible to distribute terminal bus communication over two redundant rings. Each PCS 7 station is connected to one of two Industrial Ethernet ports on each of the two separate rings. The SIMATIC NET SOFTNET-IE RNA communications software on the PCS 7 stations organizes communication processes based on the PRP. Non-PRP-enabled terminal devices that have only one Industrial Ethernet port can be integrated in the redundant terminal bus via SCALANCE X204RNA.

According to IEC 62439-3, the **Parallel Redundancy Protocol (PRP)** is based on double transmission of message frames over two separate networks (Ring 1, Ring 2). On the sender side, the SOFTNET-IE RNA software or SCALANCE X-200RNA network access point duplicates the message frame arriving from the sender and feeds one message frame to Ring 1 and the other to Ring 2. On the receiver side, the software or network access point forwards the first incoming message frame to the recipient. The second message frame from the second LAN is discarded. Transmission of the message frame is thus always ensured without delay if an error occurs.

© Siemens 2019

Design (continued)

Industrial Ethernet plant bus

The automation systems (AS) communicate with one another and with the engineering system and operator systems (servers/ single stations) over the Industrial Ethernet plant bus. This can be configured in a similar way to the terminal bus, using SIMATIC NET standard components such as Industrial Ethernet switches, network adapters, communications modules (CP), cabling, etc. For small plants with up to 8 standard automation systems per operator system, single stations and servers can be efficiently operated on the plant bus using "Basic Communication Ethernet" (BCE) and a FastEthernet network adapter. The CP 1623/ CP 1628 communications module is always required if more than 8 automation systems or redundant automation systems are used.

As far as availability is concerned, ring topologies are always the first choice for the plant bus. With particularly high availability requirements, the plant bus can also be configured as a redundant double ring (two CPs per AS CPU and OS server). Double faults such as a switch failure on ring 1 with a simultaneous interruption in the bus cable on ring 2 can then be tolerated. The two rings in such a configuration are physically separated. The coupling partners are linked together logically when configuring with NetPro over a fault-tolerant S7 connection (4-way redundancy). One switch each takes over the function of the redundancy manager for each ring. The current switches of the SCALANCE X-500, X-400, X-300 and X-200 product lines can act as redundancy manager in a ring.

Note:

Detailed information on Industrial Ethernet and network components can be found in Catalog IK PI, in the Industry Mall, or in Catalog CA 01 under "Industrial Communication".

© Siemens 2019

Overview

Layer 2 Industrial Ethernet switches from Siemens include:

- Compact Switch Modules (CSMs)
- SCALANCE X Industrial Ethernet switches
- RUGGEDCOM Ethernet switches
- Communications processors (CP) with integral switch

SCALANCE X-000 unmanaged

Unmanaged switches with electrical and/or optical ports for designing small networks for machine or plant islands with 10/100/1000 Mbps. In addition, 24 V AC versions are available for use in building automation.

SCALANCE X-100 unmanaged

Switches with electrical and/or optical ports, redundant power supply, and signaling contact for use in machine-level applications. In addition, 24 V AC versions for use in building automation and devices in 19" rack design are available.

SCALANCE X-200 managed

For universal use, from machine-level applications to networked subsystems with data transfer rates up to 1000 Mbps. Configuration and remote diagnostics are integrated into the STEP 7/ TIA Portal engineering tool. This increases plant availability. Devices with a high degree of protection facilitate cabinet-free setup.

Corresponding switches are also available for use in subsystem networks with hard real-time requirements (Isochronous Real Time – IRT) and in H systems with maximum availability with S2 diagnostics, CiR/H-CiR and H-Sync. Versions with SFP plug-in transceivers are available to allow a choice between electrical and optical ports.

In addition, versions are offered for various applications – in the form of SIMATIC ET 200S, ET 200SP or S7-1500 and for a cabinet-free layout.

SCALANCE X-300 managed

Networking of subsystems/plant areas, as well as linking to the shopfloor. The SCALANCE X-300 managed product line combines the firmware functionality of the SCALANCE X-400 line with the compact design of the SCALANCE X-200 line. This means the SCALANCE X-300 switches have extended management functions and an extended firmware functionality compared to the SCALANCE X-200 switches. Devices in the 19" rack design are also available, both as fully or partially modular devices and as so-called work group switches.

SCALANCE XM-400 managed (Layer 3)

For flexible networking and structuring of high-performance plant networks. Thanks to the modular design, the switches can be adapted to the respective task. Using Port Extender, the switches can be upgraded to up to 24x 10/100/1000 Mbps ports, of which up to 8x ports can supply data and power to terminal devices with Power-over Ethernet capability. In addition, SFP plug-in transceivers allow the XM-400 devices to be equipped with single-mode and/or multimode SFPs at 100 Mbps and/or 1000 Mbps.

Optional routing functions on layer 3 permit communication between different IP subnetworks.

SCALANCE XR-500 managed (Layer 3)

For networking and structuring high-performance industrial networks and for connecting office networks to automation networks. As a Layer 3 switch, SCALANCE XR-500 is extremely well suited to use as a central component in backbone networks, e.g. when a high number of ports is required, at extremely high transmission rates (10 Gigabit Ethernet), or for redundant connection to an office infrastructure. The rack switches are especially designed for use in 19" control cabinets. The modular variants feature versatile plug-in 4-port media modules (electrical and optical) which can adapt to the respective requirement.

Optional routing functions on layer 3 permit communication between different IP subnetworks.

Communications processors for SIMATIC with integral switch

Managed switches for adding Industrial Ethernet/PROFINET interfaces to the SIMATIC and for integrating the controllers into existing line or ring topologies.


Thanks to integral layer 3 functionality, the Advanced-CPs can also be used as routers between IP subnets.

Communications processors for PC with integral switch

Managed switches for adding Industrial Ethernet/PROFINET interfaces to industrial PCs and for integrating PCs into existing line topologies.

© Siemens 2019

Overview (continued)

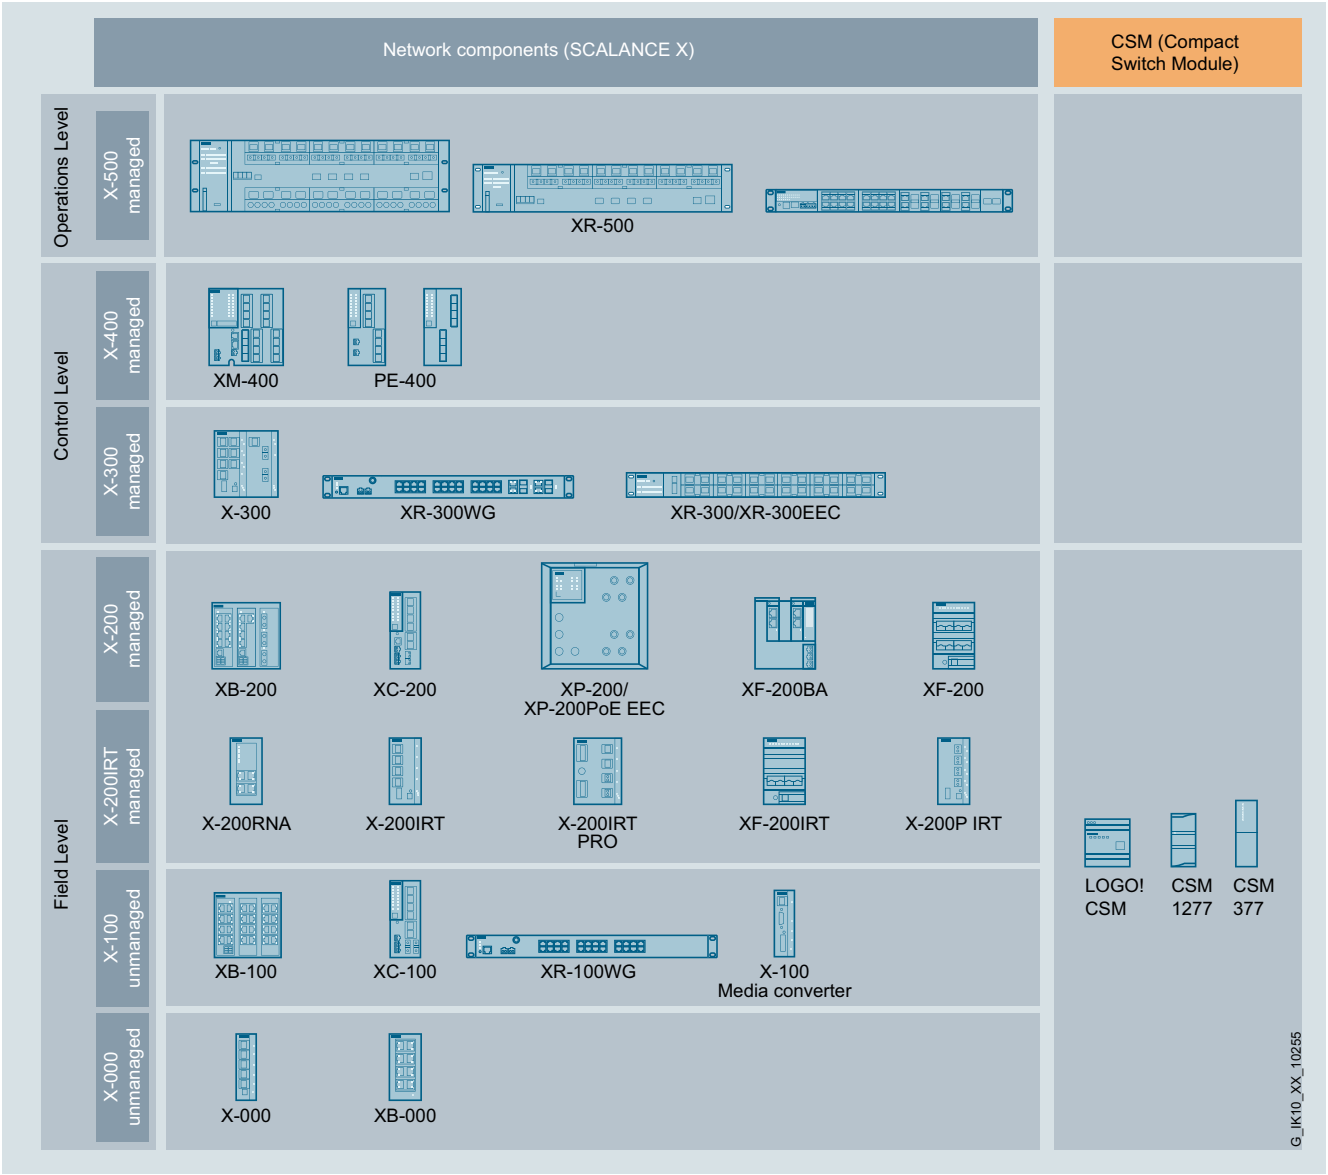

Portfolio overview of managed and unmanaged Layer 2 and Layer 3 Industrial Ethernet switches

© Siemens 2019

Overview (continued)

	Areas of application / Type of networks / Requires	Office connection	Plant networking	Industry-related applications	Process automation	Power generation and distribution	Wind farms	Machinery and plant engineering	Unit networking	Standard mechanical engineering	Machine-internal networking	Network setup through SIMATIC S7-300, S7-1200 or LOGO!
X-500	Powerful backbone network with very high requirements on functionality / port density / availability as well as interface to Office IT	•	•	•								
X-400	Powerful plant network with high demand on functionality and availability	•	•	•								
X-300	Large networks with high demand on functionality and availability		•	•		•	•					
X-200	Networks with high demand on functionality and availability		•	•	•	•	•	•	•	•		
X-100	Networks with low demand on functionality						•	•	•	•		
X-000	Networks with low demand on functionality and ruggedness									•	•	
CSM	Networks or interface extension for SIMATIC S7-300, S7-1200, LOGO!											•

G_IK10_XX_10301

• applies to selected versions

SCALANCE X Industrial Ethernet switches: Areas of application

	Layer 3 / Routing	19" design	Modular through media modules	Support of Gigabit Ethernet	PROFINET	EtherNet/IP	Office features (VLAN)	Diagnostic functions	Isochronous Real-Time (IRT)	Power-over-Ethernet	Can be used under enhanced ambient conditions	Time synchronization to IEEE 1588	Additional interface for SIMATIC S7-300/ ET 200M, S7-1200 or LOGO!
X-500	•	•	•	•	•	•	•	•		•		•	
X-400	•		•	•	•	•	•	•		•			
X-300		•	•	•	•		•	•		•	•	•	
X-200				•	•	•	•	•	•		•		
X-100										•			
X-000				•							•		
CSM													•

G_IK10_XX_10302

• applies to selected versions

SCALANCE X Industrial Ethernet switches: Overview of functions

More information

Selection Tool:

The SIMATIC NET Selection Tool and the TIA Selection Tool are available to support the selection of SCALANCE network components at:

- http://www.siemens.com/snst-standalone
- http://www.siemens.com/tia-selection-tool

© Siemens 2019

Overview



The unmanaged Industrial Ethernet media converters of the SCALANCE X-100 product line are ideally suited to converting electrical signals into optical signals in Industrial Ethernet networks at data transfer rates of 10/100 Mbps in line and star topologies.

- Electrical or optical connection to nodes or networks according to port characteristics of the devices
- Rugged metal enclosure for space-saving cubicle mounting on standard rails, SIMATIC S7-300 DIN rails, or for wall mounting
- Rugged node connections with industry-standard RJ45 plug-in connectors with retaining collar that offers additional strain and bending strain relief thanks to latching on the enclosure
- Redundant power supply
- Diagnostics on the device by means of LEDs (power, link status, data communication)
- Error signaling contact with easy adjustment using the SET button

Product variants

SCALANCE X101-1, SCALANCE X101-1LD

- For converting electrical signals into optical signals in Industrial Ethernet line, star and ring topologies
- The Industrial Ethernet media converters have an electrical 10/100 Mbps RJ45 port and:
  - SCALANCE X101-1
    1x 100 Mbps ST/BFOC port, optical (multi-mode, glass FOC)
  - SCALANCE X101-1LD
    1x 100 Mbps ST/BFOC port, optical (single-mode, glass FOC)
- Redundant power supply with 2 x 24 V DC
- Diagnostics on the device using LEDs (power, link status, data traffic) and signaling contact (message screen can be set using a button on the device)
- The electric RJ45 port is industry standard and features an additional retaining collar for optimal connection of the IE FC RJ45 plugs

Benefits

get Designed for Industry

- Ideal solution for converting electrical signals into optical signals in Industrial Ethernet line, star and ring topologies
- Space-saving installation in the cabinet thanks to compact design in SIMATIC S7-300 format
- Reliable plug-in connection with industry-standard FastConnect plugs
- Cost savings, since installation is possible without a patch field by means of IE FC RJ45 plugs and IE FC standard cables

Design

The SCALANCE Industrial Ethernet media converters with a rugged metal enclosure are optimized for mounting on a standard rail and a SIMATIC S7-300 DIN rail. Direct wall mounting in various positions is also possible. Thanks to the dimensions of the enclosure that correspond to those of the SIMATIC S7-300, the devices are ideally suited for integration in an automation solution with SIMATIC S7-300 components.

The SCALANCE X-100 media converters feature:

- A 4-pin terminal block for connecting the redundant supply voltage (2 x 24 V DC)
- A row of LEDs for displaying status information (power, link status, data communication, signaling contact)
- A 2-pin terminal block for connecting the floating signaling contact
- A SET button for local configuration of the signaling contact and of cascading mode

The following port types are available:

- 10/100BaseTX, RJ45 port:
  Automatic detection of the data rate (10 or 100 Mbps), with autosensing and autocrossover function for connecting IE FC cables via IE FC RJ45 plugs over distances up to 100 m
- 100BaseFX, BFOC port with glass fiber-optic cable:
  For direct connection to Industrial Ethernet glass fiber-optic cables up to 3000 m or 26000 m for configuring line, star or ring topologies

© Siemens 2019

Ordering data	Article No.
SCALANCE X-100 unmanaged media converter	
Unmanaged Industrial Ethernet media converters, LED diagnostics, fault signaling contact with SET key, redundant power supply, PROFINET-compatible securing collars; manual available as download	
• **SCALANCE X101-1** 1 x 10/100 Mbps RJ45 port 1 x 100 Mbps multimode FOC BFOC	**6GK5101-1BB00-2AA3**
• **SCALANCE X101-1LD** 1 x 10/100 Mbps RJ45 port 1 x 100 Mbps single-mode FOC BFOC	**6GK5101-1BC00-2AA3**
SIPLUS SCALANCE X101-1 1 x 10/100 Mbps RJ45 port 1 x 100 Mbps multimode BFOC	**6AG1101-1BB00-4AA3**
Accessories	
SITOP compact 24 V/0.6 A 1-phase power supply with wide-range input 85 – 264 V AC/110 – 300 V DC, stabilized output voltage 24 V, rated output current value 0.6 A, slim design	**6EP1331-5BA00**
IE FC Stripping Tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	**6GK1901-1GA00**
IE FC RJ45 plug 180 2 x 2 RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
IE FC TP standard cable GP 2 x 2 (Type A) 4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. length 1 000 m, minimum order quantity 20 m	**6XV1840-2AH10**

	Article No.
IE TP Cord RJ45/RJ45 TP cable 4 x 2 with 2 RJ45 plugs	
• 1 m	**6XV1870-3QH10**
• 2 m	**6XV1870-3QH20**
• 10 m	**6XV1870-3QN10**
FC FO Termination Kit Assembly case for local assembly of FC SC and FC BFOC connectors on FC FO standard cable, comprising a stripping tool, Kevlar cutters, fiber breaking tool and microscope	**6GK1900-1GL00-0AA0**
FC BFOC plug Screw connector for on-site assembly on FC fiber-optic cable; (1 pack = 20 units + cleaning cloths)	**6GK1900-1GB00-0AC0**
FC FO standard cable GP 62.5/200/230 FC FO standard cable for fixed routing indoors with PVC sheath; sold by the meter; max. length 1 000 m; minimum order 20 m	**6XV1847-2A**
Multimode FO BFOC connector set For FO standard cable (50/125/1400), FO ground cable (50/125/1400), flexible FO trailing cable, INDOOR FC cable (62.5/125/900), 20 units	**6GK1901-0DA20-0AA0**
Standard cable GP (50/125/1400/OM2++) segmentable Multimode cable, sold by the meter; max. length 1000 m; minimum order 20 m;	**6XV1873-2A**
MM FO cord SC/BFOC With one SC duplex connector and two BFOC connectors, 1 m	**6XV1843-5EH10-0CB0**
SM FO cord SC/BFOC With one SC duplex connector and two BFOC connectors, 1 m	**6XV1843-5FH10-0CB0**
Screw-type terminal block For SCALANCE X/W/S	
• 2-pin for signaling contact (24 V DC) 1 pack = 5 units	**6GK5980-0BB00-0AA5**
• 4-pin for power supply (24 V DC) 1 pack = 5 units	**6GK5980-1DB00-0AA5**

© Siemens 2019

Overview



The unmanaged Industrial Ethernet switches of the SCALANCE XB-000 line are ideal for installing Industrial Ethernet networks in line and star topologies.

- Enclosure for space-saving installation in control cabinets or boxes on a standard DIN rail

Product variants

- SCALANCE XB005 and SCALANCE XB008
  5 or 8 x 10/100 Mbps RJ45 ports, electrical
- SCALANCE XB005G and SCALANCE XB008G (Gigabit)
  5 or 8 x 10/100/1000 Mbps RJ45 ports, electrical
- SCALANCE XB004-1
  4 x 10/100 Mbps RJ45 ports, electrical
  1 x 100 Mbps SC port, optical (multimode, glass), up to 5 km
- SCALANCE XB004-2
  4 x 10/100 Mbps RJ45 ports, electrical
  2 x 100 Mbps SC ports, optical (multimode, glass), up to 5 km
- SCALANCE XB004-1LD (long distance)
  4 x 10/100 Mbps RJ45 ports, electrical
  1 x 100 Mbps SC port, optical (single-mode, glass), up to 26 km
- SCALANCE XB004-1G (Gigabit)
  4 x 10/100/1 000 Mbps RJ45 ports, electrical
  1 x 1 000 Mbps SC port, optical (multimode, glass), up to 750 m
- SCALANCE XB004-1LDG (long distance)
  4 x 10/100/1000 Mbps RJ45 ports, electrical
  1 x 1000 Mbps SC port, optical (single-mode, glass), up to 10 km

Benefits

get Designed for Industry

- Implementation of simple and very economical machine networking
- Space-saving installation thanks to small, compact design
- Can be used in industrial environments
- Fast commissioning without configuration
- Easy on-site diagnostics via LEDs
- Uncomplicated use of uncrossed connecting cables possible thanks to the integrated Autocrossover function
- Low-cost connection of especially remote nodes possible
- 24 V AC versions for use in building automation

Design

The SCALANCE XB-000 Industrial Ethernet switches are optimized for installation on a standard rail. Wall mounting is possible.

The SCALANCE XB-000 switches have:

- A 3-pole terminal block for connecting the power supply (1 x 24 V DC) and functional ground
- An LED for indicating the status information (power)
- LEDs for indicating the status information (link status and data exchange) per port

The following port types are available:

- 10/100 BaseTX electrical RJ45 ports or 10/100/1000 BaseTX electrical RJ45 ports:
  automatic data transmission rate detection (10 or 100 Mbps), with Autosensing and Autocrossing function for connecting IE TP cables up to 100 m.
- 100 BaseFX, optical SC port:
  for direct connection to Industrial Ethernet FO cables. Multimode fiber-optic cable up to 5 km
- 100 BaseFX, optical SC port:
  for direct connection to Industrial Ethernet FO cables. Single mode fiber-optic cable up to 26 km
- 1000 BaseSX, optical SC port:
  for direct connection to Industrial Ethernet FO cables. Multimode fiber-optic cable up to 750 m
- 1000 BaseLX, optical SC port:
  for direct connection to Industrial Ethernet FO cables. Single mode fiber-optic cable up to 10 km

All connections for data cables are located at the front, and the connection for the power supply is at the bottom.

© Siemens 2019

Ordering data	Article No.
SCALANCE XB-000 Industrial Ethernet Switches	
Unmanaged Industrial Ethernet switches for 10/100/1 000 Mbps, LED diagnostics, manual available as download	
• **SCALANCE XB005** 5 x 10/100 Mbps RJ45 ports electrical	**6GK5005-0BA00-1AB2**
• **SCALANCE XB008** 8 x 10/100 Mbps RJ45 ports electrical	**6GK5008-0BA10-1AB2**
• **SCALANCE XB004-1** 4 x 10/100 Mbps RJ45 ports electrical 1x 100 Mbps SC port optical (multimode, glass), up to 5 km	**6GK5004-1BD00-1AB2**
• **SCALANCE XB004-2** 4 x 10/100 Mbps RJ45 ports, electrical 2 x 100 Mbps SC ports, optical (multimode, glass), up to 5 km	**6GK5004-2BD00-1AB2**
• **SCALANCE XB004-1LD** 4 x 10/100 Mbps RJ45 ports electrical 1x 100 Mbps SC port optical (single-mode, glass), up to 26 km	**6GK5004-1BF00-1AB2**
• **SCALANCE XB005G** 5 x 10/100/1 000 Mbps electrical RJ45 ports	**6GK5005-0GA10-1AB2**
• **SCALANCE XB008G** 8 x 10/100/1 000 Mbps electrical RJ45 ports	**6GK5008-0GA10-1AB2**
• **SCALANCE XB004-1G** 4 x 10/100/1 000 Mbps RJ45 electrical ports 1x 1000 Mbps optical SC port (multimode, glass), up to 0.75 km	**6GK5004-1GL10-1AB2**
• **SCALANCE XB004-1LDG** 4 x 10/100/1 000 Mbps electrical RJ45 ports 1x 1 000 Mbps SC optical port (single-mode, glass), up to 10 km	**6GK5004-1GM10-1AB2**

	Article No.
Accessories	
SITOP compact 24 V/0.6 A Single-phase power supply with wide-range input 85 ... 264 V AC/110 ... 300 V DC, 24 V stabilized output voltage, 0.6 A rated output current value, slim design	**6EP1331-5BA00**
LOGO!Power 24 V/1.3 A Stabilized power supply Input: 100-230 V AC (110-300 V DC) Output: 24 V DC/1.3 A	**6EP1331-1SH03**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	**6GK5104-0BA00-1SA2**
IE TP cord RJ45/RJ45 Pre-assembled 8-core Cat6A patch cable 4 x 2, with two RJ45 connectors, preferred length	
• 0.3 m	**6XV1870-3QE30**
• 0.5 m	**6XV1870-3QE50**
• 1 m	**6XV1870-3QH10**
• 2 m	**6XV1870-3QH20**
• 3 m	**6XV1870-3QH30**
• 4 m	**6XV1870-3QH40**
• 6 m	**6XV1870-3QH60**
• 10 m	**6XV1870-3QN10**
• 15 m	**6XV1870-3QN15**
• 20 m	**6XV1870-3QN20**
• 25 m	**6XV1870-3QN25**
• 30 m	**6XV1870-3QN30**
• 35 m	**6XV1870-3QN35**
• 40 m	**6XV1870-3QN40**
• 45 m	**6XV1870-3QN45**
• 50 m	**6XV1870-3QN50**
FO standard cable GP 50/125/1400 Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with SC connectors in various lengths	**6XV1873-2A**

Notes:

- You can find more information on the FastConnect range in the https://w3app.siemens.com/mcms/infocenter/dokumenten-center/sc/ic/Documentsu20Brochures/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Overview



The unmanaged Industrial Ethernet switches of the SCALANCE XC-100 product line are optimized for installing Industrial Ethernet networks at transmission rates of 10/100 Mbps in line and star topologies for machine-level applications:

- Connection to stations or networks according to the port type of the devices – electrical with RJ45 port or optical with ST/BFOC or SC port
- Space-saving control cabinet installation on standard DIN rail, SIMATIC S7-300, S7-1500 DIN rail, or for wall mounting
- Rugged station connections with industry-standard RJ45 plug-in connectors that offer additional strain and bending strain relief thanks to latching on the enclosure (retaining collar)
- Redundant power supply
- Clear diagnostics display on the device by means of LEDs (power, link status, data communication)
- Error signaling contact with easy adjustment using the SET button

Product versions

SCALANCE XC106-2 / SCALANCE XC108 / SCALANCE XC116 / SCALANCE XC124 / SCALANCE X108 PoE

- Construction of optical Industrial Ethernet line or star topologies:
  - SCALANCE XC106-2
    With 6 electrical ports (RJ45 with retaining collar) and 2 optical ports (ST/BFOC)
  - SCALANCE XC106-2
    With 6 electrical ports (RJ45 with retaining collar) and 2 optical ports (SC)
  - SCALANCE XC108
    With 8 electrical ports (RJ45 with retaining collar)
  - SCALANCE XC116
    With 16 electrical ports (RJ45 with securing collar)
  - SCALANCE XC124
    With 24 electrical ports (RJ45 with securing collar)
- Diagnostics on the device using LEDs (power, link status, data traffic) and signaling contact (message screen can be set using a button on the device)
- The RJ45 ports are suitable for industrial use and have additional retaining collars, optimized for connecting the IE FC RJ45 Plug 180.

Benefits

get Designed for Industry

- Ideal solution for configuring Industrial Ethernet line and star topologies
- Space-saving installation in the control cabinet thanks to compact design in SIMATIC S7-1500 format and mounting option on the SIMATIC S7-1500 DIN rail
- Extended temperature range from -40 °C to +70 °C (X108PoE: -20 °C to +60 °C)
- Reliable device connection with industry-standard FastConnect plugs
- Installation is possible without a patch field by means of IE FC RJ45 Plug 180 and IE FC Standard Cable
- Uncrossed connecting cables can be used due to the integrated autocrossover function

Design

The SCALANCE Industrial Ethernet switches with enclosure rear sections of metal are optimized for mounting on a standard DIN rail and an S7-1500 DIN rail. Direct wall mounting in various positions is also possible. Thanks to the enclosure dimensions that correspond to those of the SIMATIC S7-1500, the devices are ideally suited for integration into automation solutions and mounting on the SIMATIC S7-1500 DIN rail. Mounting on a SIMATIC S7-300 DIN rail is also possible.

The SCALANCE XC-100 switches feature:

- A 4-pin terminal block for connecting the redundant supply voltage (2 x 24 V DC)
- A raised row of LEDs for displaying status information (power, link status, data communication, signaling contact)
- A 2-pin terminal block for connecting the floating signaling contact
- A SET button for on-site configuration of the signaling contact

The following port types are available:

- 10/100BaseTX, RJ45 port;
  automatic detection of the data rate (10 or 100 Mbps), with autosensing and autocrossover function for connecting IE FC cables via IE FC RJ45 Plug 180 over distances up to 100 m
- 100BaseFX, ST/BFOC port;
  for direct connection to the Industrial Ethernet glass FOC up to 5 km
- 100BaseFX, SC port;
  for direct connection to the Industrial Ethernet glass FOC up to 5 km

© Siemens 2019

Ordering data	Article No.
SCALANCE XC-100 Industrial Ethernet switches	
Unmanaged Industrial Ethernet switches for 10/100 Mbps, manual available as download	
• **SCALANCE XC106-2** 6 x 10/100 Mbps RJ45 ports, electrical 2 x ST/BFOC ports, optical (multimode BFOC, glass) up to 5 km	**6GK5106-2BB00-2AC2**
• **SCALANCE XC106-2** 6 x 10/100 Mbps RJ45 ports, electrical 2 x ST/BFOC ports, optical (multimode SC, glass)	**6GK5106-2BD00-2AC2**
• **SCALANCE XC108** 8 x 10/100 Mbps RJ45 ports, electrical	**6GK5108-0BA00-2AC2**
• **SCALANCE XC116** 16 x 10/100 Mbps RJ45 ports, electrical	**6GK5116-0BA00-2AC2**
• **SCALANCE XC124** 24 x 10/100 Mbps RJ45 ports, electrical	**6GK5124-0BA00-2AC2**
Accessories	
S7-1500 PM 1507 power supply SIMATIC PM 1507 24 V/3 A stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output 24 V DC/3 A	**6EP1332-4BA00**
S7-1500 PM 1507 power supply SIMATIC PM 1507 24 V/8 A stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output 24 V DC/8 A	**6EP1333-4BA00**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	**6GK5104-0BA00-1SA2**
IE FC RJ45 plug 180 2 x 2 RJ45 plug-in connector for Industrial Ethernet with a rugged metal housing and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/ CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
IE FC TP standard cable GP 2 x 2 (Type A) 4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with RJ45 connectors in various lengths	**6XV1840-2AH10**
FC ST/ BFOC plug Screw connector for on-site assembly on FC fiber-optic cable; (1 pack = 10 units + cleaning cloths)	**6GK1900-1GB00-0AC0**
FO standard cable GP 50/125/1400 Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with ST/BFOC and SC connectors in various lengths	**6XV1873-2A**

Notes:

- You can find more information on the FastConnect range in the https://w3app.siemens.com/mcms/infocenter/dokumenten-center/sc/ic/Documentsu20Brochures/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Overview



The managed SCALANCE XB-200 switches are optimized for setting up 10/100 Mbps Industrial Ethernets in line, star or ring topologies

- Electrical and optical nodes or network connections can be implemented using 8 or 16 RJ45 ports (10/100 Mbps) or 3 fiber-optic ports (100 Mbps)
- Rugged plastic enclosure
- Diagnostics on the device by means of LEDs (power, link status, data communication)
- The devices feature SNMP access, integral web server, remote diagnostics, and signaling over the network.
- Diagnostics and parameterization via web page or console port

Product variants

- Switches with electrical ports:
  - SCALANCE XB208;
    8 x 10/100 Mbps RJ45 port, electrical
  - SCALANCE XB216;
    16 x 10/100 Mbps RJ45 port, electrical
- Switches with electrical and optical ports
  - SCALANCE XB205-3
    5 x 10/100 Mbps RJ45 port, electrical
    3 x 100 Mbps ST/BFOC port, optical
  - SCALANCE XB205-3
    5 x 10/100 Mbps RJ45 port, electrical
    3 x 100 Mbps SC port, optical
  - SCALANCE XB205-3 LD
    5 x 10/100 Mbps RJ45 port, electrical
    3 x 100 Mbps SC port, optical
  - SCALANCE XB213-3
    13 x 10/100 Mbps RJ45 port, electrical
    3 x 100 Mbps ST/BFOC port, optical
  - SCALANCE XB213-3;
    13 x 10/100 Mbps RJ45 port, electrical
    3 x 100 Mbps SC port, optical
  - SCALANCE XB213-3 LD;
    13 x 10/100 Mbps RJ45 port, electrical
    3 x 100 Mbps SC port, optical

Benefits

get Designed for Industry

- Ideal solution for configuring Ethernet line, ring and star topologies
- High network availability due to design of redundant ring structures on the basis of high-speed redundancy (HRP) or media redundancy protocol (MRP), redundancy manager integrated
- Quick and easy diagnosis with LEDs on the device, using integral web server and via SNMP
- Integration of the SCALANCE XB-200 switches into existing network management systems, e.g. SINEMA Server or SINEC NMS, by means of SNMP access
- Load limiting when using multicast-based protocols (Voice over IP, Video) thanks to IGMP Snooping/Querier and additional multicast and broadcast limiting per port
- Uncrossed connecting cables can be used due to the integrated autocrossover function
- Low-maintenance operation thanks to fanless construction
- Support of VLANs permits integration into Enterprise Security Policies

Design

The SCALANCE XB-200 Industrial Ethernet switches in their rugged plastic enclosure are optimized for mounting on standard DIN rails.

The devices are designed with IP20 degree of protection.

The switches have a 6-pin terminal block for connecting the redundant supply voltage (24 V DC) and the grounding. The port LEDs provide information on the status (power, link status, data traffic).

Ethernet interfaces:

- 10/100BaseTX, RJ45 connection;
  8/6 or 16/13 x RJ45 socket, automatic data transmission rate detection, with autosensing and autocrossover function
- 100 Mbit/s, SC-FO connection;
  3 x SC-FO socket (multimode)
- 100 Mbit/s, SC-LD-FO connection;
  3 x SC-LD-FO socket (single mode)

Other interfaces:

- 6-pin terminal block for redundant voltage feed (24 V DC) and grounding
- 1 x RJ11 as a connection for the serial interface

The port LEDs provide information on the status (power, link status, data traffic).

Remote diagnosis is possible by means SNMP,web browser and CLI.

© Siemens 2019

Ordering data	Article No.
SCALANCE XB-200 Industrial Ethernet switches	
Industrial Ethernet switches with integral SNMP access, Web diagnostics, copper cable diagnostics, PROFINET and EtherNet/IP support, for configuring line, star and ring topologies; with integrated redundancy manager; includes operating instructions on DVD	
SCALANCE XB208	
8 x 10/100 Mbps RJ45 ports electrical;	
• Default PROFINET settings	**6GK5208-0BA00-2AB2**
SCALANCE XB205-3	
5 x 10/100 Mbps RJ45 ports, electrical, 3 x 100 Mbps BFOC ports, optical (multimode, glass), up to 5 km	
• Default PROFINET settings	**6GK5205-3BB00-2AB2**
SCALANCE XB205-3	
5 x 10/100 Mbps RJ45 ports, electrical; 3 x 100 Mbps SC ports, optical (multimode, glass), up to 5 km; 3 x 100 Mbps BFOC ports, optical (multimode, glass), up to 5 km	
• Default PROFINET settings	**6GK5205-3BD00-2AB2**
SCALANCE XB205-3LD	
5 x 10/100 Mbps RJ45 ports, electrical; 3 x 100 Mbps BFOC ports, optical (single-mode, glass), up to 26 km	
• Default PROFINET settings	**6GK5205-3BF00-2AB2**
SCALANCE XB216	
16 x 10/100 Mbps RJ45 ports, electrical;	
• Default PROFINET settings	**6GK5216-0BA00-2AB2**
SCALANCE XB213-3	
13 x 10/100 Mbps RJ45 ports, electrical; 3 x 100 Mbps BFOC ports, optical (multimode, glass), up to 5 km	
• Default PROFINET settings	**6GK5213-3BB00-2AB2**
SCALANCE XB213-3	
13 x 10/100 Mbps RJ45 ports, electrical; 3 x 100 Mbps SC port, optical (multi-mode, glass), up to 5 km	
• Default PROFINET settings	**6GK5213-3BD00-2AB2**
SCALANCE XB213-3LD	
13 x 10/100 Mbps RJ45 ports, electrical; 3 x 100 Mbps BFOC ports, optical (single-mode, glass), up to 26 km	
• Default PROFINET settings	**6GK5213-3BF00-2AB2**

Accessories	Article No.
SITOP compact 24 V/0.6 A	**6EP1331-5BA00**
Single-phase power supply with wide-range input 85 – 264 V AC/110 – 300 V DC, stabilized output voltage 24 V, rated output current value 0.6 A, slim design	
LOGO!Power 24 V/1.3 A	**6EP1331-1SH03**
Stabilized power supply Input: 100-230 V AC (110-300 V DC) Output: 24 V DC/1.3 A	
IE TP cord RJ45/RJ45	
Pre-assembled 8-core $Cat6_A$ patch cable 4 x 2, with two RJ45 connectors, preferred length	
• 0.3 m	**6XV1870-3QHE30**
• 0.5 m	**6XV1870-3QHE50**
• 1 m	**6XV1870-3QH10**
• 2 m	**6XV1870-3QH20**
• 3 m	**6XV1870-3QH30**
• 4 m	**6XV1870-3QH40**
• 6 m	**6XV1870-3QH60**
• 10 m	**6XV1870-3QN10**
• 15 m	**6XV1870-3QN15**
• 20 m	**6XV1870-3QN20**
• 25 m	**6XV1870-3QN25**
• 30 m	**6XV1870-3QN30**
• 35 m	**6XV1870-3QN35**
• 40 m	**6XV1870-3QN40**
• 45 m	**6XV1870-3QN45**
• 50 m	**6XV1870-3QN50**
FO standard cable GP 50/125/1400	**6XV1873-2A**
Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with ST/BFOC and SC connectors in various lengths	
SCALANCE TAP104	**6GK5104-0BA00-1SA2**
Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Overview



The managed Industrial Ethernet switches of the SCALANCE XC-200 product line are optimized for setting up Industrial Ethernet networks with data transfer rates of 10/100/1 000 Mbps in line, star or ring topologies.

- Rugged enclosure in SIMATIC S7-1500 format, for mounting on standard rails and SIMATIC S7-300 and S7-1500 DIN rails, or for direct wall mounting
- Electrical or optical connection to stations or networks according to port characteristics of the devices
- Versions with transmission rates up to 1 000 Mbps, electrical or optical
- Combo ports for the flexible use of interfaces: A combo port consists of an electric port and an SFP slot. Only one of the two ports can ever be active. If an SFP plug-in transceiver is inserted, the electric port is deactivated
- Rugged station connections with industry-standard RJ45 connectors that offer additional strain and bending strain relief thanks to latching on the enclosure
- Redundant power supply
- Console port for direct access to device
- Display of comprehensive operating mode and status information via LEDs and selection pushbuttons
- Signaling contact for connecting to an error signaling system
- Slot for optional C-PLUG removable data storage medium for easy device replacement without additional equipment such as a Field PG
- Grounding screw for external ground connection
- Extensive diagnostics options: Full integration in PROFINET, SNMP access, integrated web server and automatic email transmission function for remote diagnostics and signaling via the network
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management
- Virtual LANs (VLAN) for easy structuring of large networks into smaller, logical subnetworks. Reasons for the subdivision into logical subnetworks are, for example, separation of the Ethernet networks to reduce the broadcast load, separation of sensitive areas from the main network, and subdivision of the network into logical working groups
- By learning the multicast sources and destinations (Internet Group Management Protocol (IGMP) Snooping), SCALANCE XC-200 switches can also filter multicast data traffic and thus limit the load on the network
- Integrated security functions offer protection against unauthorized network access and configuration (e.g. authentication via IEEE 802.1X/ RADIUS)


Product versions

Switches with PROFINET delivery state:

- Switches with electrical ports
  - SCALANCE XC208
    With 8x RJ45 ports 10/100 Mbps, for mounting in control cabinet
  - SCALANCE XC208G
    With 8x RJ45 ports 10/100/1 000 Mbps, for mounting in control cabinet
  - SCALANCE XC216
    With 16x RJ45 ports 10/100 Mbps, for mounting in control cabinet
  - SCALANCE XC224
    With 24x RJ45 ports 10/100 Mbps, for mounting in control cabinet
- Switches with electrical and optical ports
  - SCALANCE XC206-2
    With 6x RJ45 ports 10/100 Mbps and 2x ST/BFOC ports 100 Mbps
  - SCALANCE XC206-2
    With 6x RJ45 ports 10/100 Mbps and 2x SC ports 100 Mbps
  - SCALANCE XC206-2SFP
    With 6x RJ45 ports 10/100 Mbps and 2x SFP plug-in transceivers with 100 or 1 000 Mbps
  - SCALANCE XC206-2SFP G
    With 6x RJ45 ports 10/100/1 000 Mbps and 2x SFP plug-in transceivers 1 000 Mbps
  - SCALANCE XC216-4C;
    With 12x RJ45 ports 10/100 Mbps and 4x Gigabit combo ports (either 10/100/1 000 Mbps RJ45 port or SFP connector 1 000 Mbps can be used
  - SCALANCE XC216-4C G;
    With 12x RJ45 ports 10/100/1 000 Mbps and 4x Gigabit combo ports (either 10/100/1 000 Mbps RJ45 port or SFP plug-in transceiver 1 000 Mbps can be used)
  - SCALANCE XC224-4C G;
    With 20x RJ45 ports 10/100/1 000 Mbps and 4x Gigabit combo ports (either 10/100/1 000 Mbps RJ45 port or SFP plug-in transceiver 1 000 Mbps can be used)

© Siemens 2019

Overview (continued)

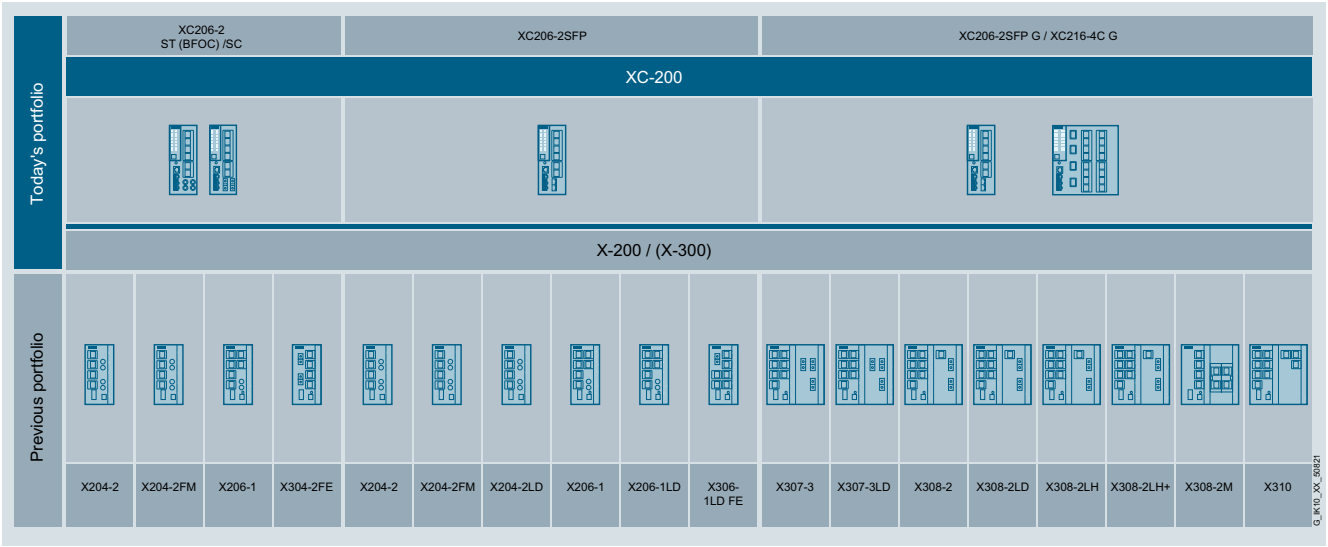

Migration from SCALANCE X-200/X-300 to the new SCALANCE XC-200 portfolio – Part 1



Migration from SCALANCE X-200/X-300 to the new SCALANCE XC-200 portfolio – Part 2

© Siemens 2019

Benefits



- Operational reliability in industrial environments, e.g. due to rugged enclosure, redundancy, temperature range from -40 °C to +70 °C
- Increased plant availability thanks to:
  - Redundant power supply
  - Redundant network structures based on fast media redundancy HRP and MRP
  - Standby redundancy between HRP rings
  - Prevention of loops by standard STP, RSTP and MSTP mechanisms, and loop detection
  - SFP plug-in transceivers can be replaced or expanded during operation
  - Easy device replacement by means of plug-in C-PLUG removable data storage medium
  - Link aggregation (IEEE 802.3ad) for parallel use of ports to increase transmission rate failure safety
- Easy monitoring and diagnostics due to separate diagnostics station with integrated LEDs, signaling contact, web browser, traps and email transmission
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management
- Reduced engineering expenditure for PLC/HMI due to integration into the SIMATIC system fault message concept
- Configuration in the TIA Portal as well as in Web Based Management (WBM)
- Easy integration in process and system diagnostics with PROFINET
- Integration of the SCALANCE XC-200 switches into existing network management systems (e.g. SINEMA Server or SINEC NMS) by means of SNMP access
- Reliable plug-in connection thanks to rugged, industry-standard device connection in conjunction with industry-standard FastConnect connectors
- Integration of switches through support of S2 system redundancy and H-Sync in SIMATIC S7-1500R/H systems

Design

SCALANCE XC-200 Industrial Ethernet switches with a rugged enclosure are optimized for mounting on standard DIN rails and SIMATIC S7-1500 mounting rails Direct wall mounting in various positions and mounting on a SIMATIC S7-300 mounting rail are also possible. Thanks to the SIMATIC S7-1500 enclosure dimensions, the devices are ideally suited for integration into an automation solution with SIMATIC S7-1500 components.

The network access points with IP20 degree of protection feature:

- A 4-pin terminal block (push-in) for connecting the redundant supply voltage (2 x 24 DC)
- The following status information is displayed by LEDs on site:
  - Port status
  - Port mode (10/100/1 000 Mbps, full/half-duplex)
  - Status of the two power supplies
  - Signaling contact status
  - Signal mask (setpoint status)
  - Redundancy manager mode (RM mode)
  - Standby mode
- A 2-pin terminal block (push-in) for connecting the floating signaling contact
- A SELECT/SET key for on-site configuration of the signaling contact

SCALANCE XC-200 switches are available with the following port types:

- 10/100BaseTX, RJ45 connection;
  automatic detection of the data rate (10, 100 or 1 000 Mbps), with autosensing and autocrossover function for connecting IE FC cables via IE FC RJ45 plugs over distances up to 100 m.
- 100BaseFX, ST/BFOC connection technology (SCALANCE XC-206-2);
  ST/BFOC for direct connection to Industrial Ethernet fiber-optic cables up to 5 km (multi-mode FOC)
- 100BaseFX, SC connection technology (SCALANCE XC-206-2);
  SC ports for direct connection to Industrial Ethernet fiber-optic cables up to 5 km (multi-mode FOC)
- 100/1 000BaseFX, SFP slots
  LC connections with different ranges can be implemented via SFP modules (multi-mode/single-mode up to 200 km)

© Siemens 2019

Ordering data	Article No.
SCALANCE XC-200 Industrial Ethernet switches	
Industrial Ethernet switches with integrated SNMP access, online diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM	
Switches with PROFINET delivery state	
• **SCALANCE XC206-2 (ST/BFOC)** With six RJ45 ports 10/100 Mbps and two ST/BFOC ports 100 Mbps	**6GK5206-2BB00-2AC2**
• **SCALANCE XC206-2 (SC)** With six RJ45 ports 10/100 Mbps and two SC ports 100 Mbps	**6GK5206-2BD00-2AC2**
• **SCALANCE XC206-2SFP** With six RJ45 ports 10/100 Mbps and two SFP slots for SFPs with 100 or 1 000 Mbps	**6GK5206-2BS00-2AC2**
• **SCALANCE XC206-2SFP G** With six RJ45 ports 10/100/1 000 Mbps and two SFP slots for SFPs with 1 000 Mbps	**6GK5206-2GS00-2AC2**
• **SCALANCE XC208** With eight RJ45 ports 10/100 Mbps	**6GK5208-0BA00-2AC2**
• **SCALANCE XC208G** With eight RJ45 ports 10/100/1 000 Mbps	**GK5208-0GA00-2AC2**
• **SCALANCE XC216** With 16 RJ45 ports 10/100 Mbps	**6GK5216-0BA00-2AC2**
• **SCALANCE XC224** With 24 RJ45 ports 10/100 Mbps	**6GK5224-0BA00-2AC2**
• **SCALANCE XC216-4C** With 12 RJ45 ports 10/100 Mbps	**6GK5216-4BS00-2AC2**
• **SCALANCE XC216-4C G** With 12 RJ45 ports 10/100/1 000 Mbps	**6GK5216-4GS00-2AC2**
• **SCALANCE XC224-4C G** With 20 RJ45 ports 10/100/1 000 Mbps	**6GK5224-4GS00-2AC2**
Accessories	
S7-1500 PM 1507 power supply SIMATIC PM 1507 24 V/8 A Stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/8 A	**6EP1333-4BA00**
C-PLUG Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used in SIMATIC NET products with C-plug slot	
• 1 pack = 1 unit	**6GK1900-0AB10**

	Article No.
IE FC RJ45 plug 180 2x2 Industrial Ethernet FastConnect RJ45 plug 180 2x2, RJ45 connector (10/100 Mbps) with rugged metal enclosure and FC connection technology, for IE FC cable 2x2 180° cable outlet 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
IE FC RJ45 plug 4x2 RJ45 plug-in data connector (10/100/1 000 Mbps), for connection to IE FC TP cables 4x2, with rugged metal enclosure and FastConnect connection technology	**6GK1901-1BB11-2AA0**
IE FC TP standard cable GP 2 x 2 (Type A) 4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with RJ45 connectors in various lengths	**6XV1840-2AH10**
IE FC TP standard cable GP 4X2 TP installation cable Cat6 for connecting to IE FC RJ45 plug 4x2, AWG 24, sold by the meter; max. length 1 000 m, minimum order 20 m, also available pre-assembled with RJ45 connectors in various lengths	**6XV1878-2A**
FO standard cable GP 50/125/1400 Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with ST/BFOC, SC and LC connectors in various lengths	**6XV1873-2A**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	**6GK5104-0BA00-1SA2**

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Overview



The managed Industrial Ethernet switches of the SCALANCE XC-200EEC product line are optimized for setting up Industrial Ethernet networks in process automation with data transfer rates of 10/100/1 000 Mbps in line, star or ring topologies. Rugged enclosure in SIMATIC S7-1500 format, for mounting on standard DIN mounting rails and SIMATIC S7-300 and SIMATIC S7-1500 mounting rails, or for direct wall mounting.

- The XC-200EEC versions are optimized for use in process automation and feature the following properties:
  - Conformal coating PCBs
  - Max. installation altitude 4 000 m
  - Extended temperature range from -40 °C to +70 °C
  - NAMUR NE 21-compliant
  - Firmware support for S2 device and CiR/H-CiR
  - Release and integration capability for SIMATIC PCS 7
- Electrical or optical connection to stations or networks according to port characteristics of the devices
- Versions with transmission rates up to 1 000 Mbps, electrical or optical

Product versions

- Switches with electrical ports:
  - SCALANCE XC208 (EEC)
    With 8x RJ45 ports 10/100 Mbps for mounting in the control cabinet
  - SCALANCE XC208G (EEC)
    With 8x RJ45 ports 10/100/1000 Mbps for mounting in the control cabinet
  - SCALANCE XC216 (EEC)
    With 16x RJ45 ports 10/100 Mbps for mounting in the control cabinet
- Switches with electrical and optical ports
  - SCALANCE XC206-2SFP (EEC)
    With 6x RJ45 ports 10/100 Mbps and 2x SFP plug-in transceivers with 100 or 1 000 Mbps
  - SCALANCE XC206-2SFP G (EEC)
    With 6x RJ45 ports 10/100/1 000 Mbps and 2x SFP plug-in transceivers 1 000 Mbps
  - SCALANCE XC216-4C G (EEC)
    With 12x RJ45 ports 10/100/1 000 Mbps and 4x Gigabit combo ports (either 10/100/1 000 Mbps RJ45 port or SFP plug-in transceiver 1 000 Mbps can be used)
  - SCALANCE XC224-4C G (EEC)
    With 20x RJ45 ports 10/100/1 000 Mbps and 4x Gigabit combo ports (either 10/100/1 000 Mbps RJ45 port or SFP plug-in transceiver 1 000 Mbps can be used)

Benefits

get Designed for Industry

- Operational reliability in industrial environments, e.g. due to rugged enclosure, redundancy, temperature range from -40 °C to +70 °C
- Increased plant availability thanks to:
  - Redundant power supply
  - Redundant network structures based on fast media redundancy HRP and MRP
  - Standby redundancy between HRP rings
  - Prevention of loops by standard STP, RSTP and MSTP mechanisms, and loop detection
  - SFP plug-in transceivers can be replaced or expanded during operation
  - Easy device replacement by means of plug-in C-PLUG removable data storage medium
  - Link aggregation (IEEE 802.3ad) for parallel use of ports to increase transmission rate failure safety
- Integration of switches in systems with S2 single system redundancy and Configuration in Run (CiR/H-CiR)
- Since Configuration in Run (CiR/H-CiR) is supported, PROFINET-defined configuration changes to the switch are performed during operation
- Configuration as a service bridge permits dedicated temporary access from the plant bus to the fieldbus for advanced commissioning and diagnostic purposes
- Easy monitoring and diagnostics due to separate diagnostics station with integrated LEDs, signaling contact, web browser, traps and e-mail transmission
- Easy integration in the process and system diagnostics with PROFINET via SIMATIC PCS 7
- Integration of Industrial Ethernet switches into existing network management systems (e.g. SINEMA Server or SINEC NMS) by means of SNMP access
- Reliable plug-in connection thanks to rugged, industry-standard device connection in conjunction with industry-standard FastConnect connectors

© Siemens 2019

Design

SCALANCE XC-200EEC Industrial Ethernet switches with a rugged enclosure are optimized for mounting on standard DIN rails and SIMATIC S7-1500 mounting rails. Direct wall mounting in various positions and mounting on a SIMATIC S7-300 mounting rail are also possible. Due to the SIMATIC S7-1500 housing dimensions, the devices are optimally suited for integration into an automation solution with SIMATIC S7-1500 components.

The switches with IP20 degree of protection feature:

- A 4-pin terminal block (push-in) for connecting the redundant supply voltage (2 x 24 DC)
- LEDs for signaling on-site status information:
  - Port status
  - Port mode (10/100/1 000 Mbps, full/half-duplex)
  - Status of the two power supplies
  - Signaling contact status
  - Signal mask (setpoint status)
  - Redundancy manager mode (RM mode)
  - Standby mode
- A 2-pin terminal block (push-in) for connecting the floating signaling contact
- A SELECT/SET key for on-site configuration of the signaling contact

SCALANCE XC-200EEC switches are available with the following port types:

- 10/100/1000BaseTX, RJ45 connection
  Automatic detection of the data rate (10 or 100 Mbps), with autosensing and autocrossover function for connecting IE FC cables via IE FC RJ45 plugs over distances up to 100 m.
- 100/1000BaseFX, SFP slots
  LC connections with different ranges can be implemented via SFP modules (multimode/single-mode up to 200 km)

10

Ordering data

Ordering data	Article No.
SCALANCE XC-200EEC Industrial Ethernet switches	
Industrial Ethernet switches with integrated SNMP access, online diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM	
• **SCALANCE XC206-2SFP (EEC)** With six RJ45 ports 10/100 Mbps and two SFP slots for SFPs with 100 or 1 000 Mbps; with coated PCBs	**6GK5206-2BS00-2FC2**
• **SCALANCE XC206-2SFP G (EEC)** With six RJ45 ports 10/100/1 000 Mbps and two SFP slots for SFPs with 1 000 Mbps; with coated PCBs	**6GK5206-2GS00-2FC2**
• **SCALANCE XC208 (EEC)** With eight RJ45 ports 10/100 Mbps; with coated PCBs	**6GK5208-0BA00-2FC2**
• **SCALANCE XC208G (EEC)** With eight RJ45 ports 10/100/1 000 Mbps; with coated PCBs	**6GK5208-0GA00-2FC2**
• **SCALANCE XC216 (EEC)** With 16x RJ45 ports 10/100 Mbps; with coated PCBs	**6GK5216-0BA00-2FC2**
• **SCALANCE XC216-4C G (EEC)** With 12x RJ45 ports 10/100/1 000 Mbps; with coated PCBs	**6GK5216-4GS00-2FC2**
• **SCALANCE XC224-4C G (EEC)** With six RJ45 ports 10/100/1 000 Mbps; with coated PCBs	**6GK5224-4GS00-2FC2**
Accessories	
S7-1500 PM 1507 power supply SIMATIC PM 1507 24 V/8 A Regulated power supply for SIMATIC S7-1500 Input: 120/230 V AC Output 24 V DC/8 A	**6EP1333-4BA00**
C-PLUG (conformal coating) C-PLUG removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or application data; can be used for SIMATIC NET products with C-PLUG slot, conformal coating	
• 1 pack = 1 unit	**6GK1900-0AQ00**
SFP plug-in transceiver See "Plug-in transceivers for SCALANCE"	
IE FC TP standard cable GP 2 x 2 (type A) 4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval Sold by the meter Max. length 1 000 m, minimum order quantity 20 m, also available as pre-assembled cable with RJ45 connectors in various lengths	**6XV1840-2AH10**
IE FC TP standard cable GP 4X2 TP installation cable Cat6 for connecting to IE FC RJ45 plug 4x2, AWG 24 Sold by the meter Max. length 1 000 m, minimum order quantity 20 m, also available pre-assembled with RJ45 connectors in various lengths	**6XV1878-2A**
FO standard cable GP 50/125/1400 Multimode cable Sold by the meter Max. delivery unit 1000 m; minimum order quantity 20 m, also available pre-assembled with ST/BFOC, SC and LC connectors in various lengths	**6XV1873-2A**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	**6GK5104-0BA00-1SA2**

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Overview



The managed Industrial Ethernet switches of the SCALANCE XP-200 product line with 8 or 16 Ethernet ports are optimally suited for setting up cabinet-free automation concepts of Industrial Ethernet networks with transmission rates of 10/100/1000 Mbps in a line, star or ring topology.

- Integral redundancy manager for configuration of high availability networks in ring topologies
- Electric device or network connection
- Rugged metal enclosure with mounting options on SIMATIC ET 200pro rack, ITEM rail mounting or direct wall mounting
- Rugged device connections with industrial-strength M12 plug connectors, M12 D-coded for FastEthernet (10/100 Mbps interfaces), M12 X-coded for Gigabit (1000 Mbps interfaces), PROFINET and EtherNet/IP-compliant M12 connection technology (M12 D-coded, M12 X-coded)
- Redundant power supply (M12, A-coded)
- Console port (M12, D-coded)
- Diagnostics on the device by means of prominent LED display with integrated SELECT/SET button (power, link status, data communication, display mode)
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management
- Error signaling contact with easy adjustment using SELECT/SET button. Configuration storage using the C-PLUG removable data storage medium
- Grounding screw for external ground connection
- Virtual Local Area Network (VLAN) port-based, protocol-based and IP-based
- IGMP snooping und query (use in EtherNet/IP networks)
- Access Control List (ACL) MAC-based and IP-based
- Link aggregation
- Standby observer for HRP
- IEEE 802.1X (e.g. RADIUS)
- Rapid Spanning Tree Protocol/Multi Spanning Tree Protocol (RSTP/MSTP)
- Remote Network Monitoring (RMON)
- Configuration in the TIA Portal as well as in Web Based Management (WBM)
- H-Sync for implementation of system redundancy together with a SIMATIC S7-1500R
- The XP-200EEC versions are also optimized for use in process automation and feature the following properties:
  - Conformal coating PCBs
  - Max. installation altitude 4000 m
  - Extended temperature range from -40 °C to +70 °C
  - NAMUR NE 21-compliant
  - Firmware support for S2 device and CiR/H-CiR
  - Release and integration capability for SIMATIC PCS 7

Product variants

- Switches with PROFINET delivery state
  - SCALANCE XP208
    With eight electrical ports (10/100 Mbps, M12 D-coded) for mounting outside the control cabinet (IP65)
  - SCALANCE XP208EEC
    With eight electrical ports (10/100 Mbps, M12 D-coded) for mounting outside the control cabinet (IP65). Equipped with conformal coating PCBs for use with increased environmental requirements, e.g. rail applications (EN 50155/45545)
  - SCALANCE XP208PoE EEC
    With four electrical ports (10/100 Mbps, M12 D-coded) and four electrical PoE ports (10/100 Mbps M12 D-coded) according to IEEE 802.3at Type 2 for mounting outside the control cabinet (IP65). Equipped with conformal coating PCBs for use where increased environmental requirements prevail, e.g. rail applications (EN 50155/45545)
  - SCALANCE XP216
    With twelve electrical ports (10/100 Mbps, M12 D-coded) and 4 electrical ports (10/100/1000 Mbps, M12 X-coded) for mounting outside the control cabinet (IP65)
  - SCALANCE XP216EEC
    With twelve electrical ports (10/100 Mbps, M12 D-coded) and 4 electrical ports (10/100/1000 Mbps, M12 X-coded) for mounting outside the control cabinet (IP65). Equipped with conformal coating PCBs for use where increased environmental requirements prevail, e.g. rail applications (EN 50155/45545)
  - SCALANCE XP216PoE EEC
    With eight electrical ports (10/100 Mbps, M12 D-coded), six electrical PoE ports (10/100 Mbps, M12 D-coded) according to IEEE 802.3at Type 2, and two electrical PoE ports (10/100/1000 Mbps, M12 X-coded) according to IEEE 802.3at Type 2. The switch can also be operated with only two PoE ports (10/100 Mbps, M12 D-coded) according to IEEE 802.3at Type 2 and two PoE ports (10/100/1000 Mbps, M12 X-coded) according to IEEE 802.3at Type 2. The switch is deigned for mounting outside the control cabinet (IP65), and is equipped with conformal coating PCBs for use where increased environmental requirements prevail, e.g. rail applications (EN 50155/45545)

© Siemens 2019

Benefits



- Ideal solution for configuring Industrial Ethernet line, star and ring topologies
- Industrial-strength plug-in connection (10/100 Mbps M12 D-coded and 10/100/1000 Mbps, X-coded)
- High network availability through configuration of redundant ring topologies (redundancy manager integrated)
- Integration of the SCALANCE XP-200 Industrial Ethernet switches into existing network management systems (e.g. SINEMA Server or SINEC NMS) by means of SNMP access
- Easy integration in the process diagnostics and system diagnostics with PROFINET
- Integrated configuration and diagnostics in STEP 7/TIA Portal bring significant advantages during the engineering, commissioning, and operating phases of a plant
- C-PLUG enables fast device replacement in the event of an error
- H-Sync for implementation of system redundancy together with a SIMATIC S7-1500R
- Integration of switches in systems with simple S2 system redundancy and Configuration in Run (CiR/HCiR)
- Since Configuration in Run (CiR/H-CiR) is supported, PROFINET-defined configuration changes to the switch are performed during operation
- Easy integration in the process and system diagnostics with PROFINET via SIMATIC PCS 7

Design

The SCALANCE XP-200 Industrial Ethernet switches with rugged metal enclosure are optimized for use outside the control cabinet. Mounting options on ET 200pro rack, ITEM rail mounting or direct wall mounting in variety of mounting positions.

The switches with IP65 degree of protection feature:

- Two 4-pin M12 connections (A-coded) for connection of redundant power supply (2 x 24 V DC)
- An LED display for display of status information using SELECT/SET button (power, link status, data traffic, power supply, signaling contact)
- One 2-pin M12 interface (B-coded) for connecting the floating signaling contact
- One 2-pin M12 interface (D-coded) as console access

The SCALANCE XP-200 switches are available with the following port types:

- 10/100 Mbps, M12 connection (D-coded);
  automatic detection of the data rate (10 or 100 Mbps), with autosensing and autocrossover function for connection of IE FC cables via IE FC M12 Plug PRO 2x2 up to 100 m.
- 10/100/10000 Mbps, M12 connection (X-coded);
  automatic detection of the data rate (10 or 100 or 1000 Mbps), with autosensing and autocrossover function for connection of IE FC cables via IE FC M12 Plug PRO 4x2 up to 100 m.

© Siemens 2019

Ordering data	Article No.
SCALANCE XP-200 Industrial Ethernet switches	
Industrial Ethernet switches with integrated SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics, for configuration of electrical line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM	
• With electrical ports and PROFINET basic setting	
- **SCALANCE XP208** With eight 10/100 Mbps M12 ports (D-coded)	**6GK5208-0HA00-2AS6**
- **SCALANCE XP208EEC** With eight 10/100 Mbps M12 ports (D-coded) with rail approval EN 50155/45545	**6GK5208-0HA00-2ES6**
- **SCALANCE XP208PoE EEC** With four 10/100 Mbps M12 ports (D-coded) and four 100/100 Mbps M12 PoE ports (D-coded) with rail approval EN 50155/45545	**6GK5208-0UA00-5ES6**
- **SCALANCE XP216** With twelve 10/100 Mbps M12 ports (D-coded) and four 10/100/1 000 Mbps M12 ports (X-coded)	**6GK5216-0HA00-2AS6**
- **SCALANCE XP216EEC** With twelve 10/100 Mbps M12 ports (D-coded) and four 10/100/1 000 Mbps M12 ports (X-coded) with rail approval EN 50155/45545	**6GK5216-0HA00-2ES6**
- **SCALANCE XP216PoE EEC** With 12 10/100 Mbps RJ45 ports and two fiber-optic cable ports	**6GK5216-0UA00-5ES6**
Accessories	
SITOP PSU100P IP67 Stabilized power supply Input: 120/230 V AC Output: 24 V DC/8 A	**6EP1334-7CA00**
C-PLUG Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used in SIMATIC NET products with C-plug slot	**6GK1900-0AB10**
C-PLUG with conformal coating Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used in SIMATIC NET products with C-plug slot	**6GK1900-0AQ00**

	Article No.
IE connecting cable M12-90/M12-90 Flexible plug-in cable (4-core), pre-assembled with 4-pin M12 connectors (D-coded), 90° cable outlet, for connection of IE devices such as SCALANCE XP-200, ET 200pro and ET 200eco PN, IP65/67 Length:	
• 0.3 m	**6XV1870-8GE30**
• 0.5 m	**6XV1870-8GE50**
• 1 m	**6XV1870-8GH10**
• 1.5 m	**6XV1870-8GH15**
• 2 m	**6XV1870-8GH20**
• 3 m	**6XV1870-8GH30**
• 5 m	**6XV1870-8GH50**
• 10 m	**6XV1870-8GN10**
• 15 m	**6XV1870-8GN15**
IE TP cord M12-90/M12-90 Pre-assembled IE flexible cable, with 2 M12 connectors (X-coded), 90° cable outlet Length:	
• 0.5 m	**6XV1878-5GE50**
• 1 m	**6XV1878-5GH10**
• 1.5 m	**6XV1878-5GH15**
• 2 m	**6XV1878-5GH20**
• 3 m	**6XV1878-5GH30**
• 5 m	**6XV1878-5GH50**
• 10 m	**6XV1878-5GN10**
• 15 m	**6XV1878-5GN15**
Power connecting cable M12-90/M12-90 Flexible power cable (4-core), pre-assembled with M12 male connector and M12 female connector (A-coded), 90° cable outlet, for supplying SCALANCE XP-200, ET 200pro and ET 200eco PN, IP65/67 Length:	
• 0.3 m	**6XV1801-5GE30**
• 0.5 m	**6XV1801-5GE50**
• 1 m	**6XV1801-5GH10**
• 1.5 m	**6XV1801-5GH15**
• 2 m	**6XV1801-5GH20**
• 3 m	**6XV1801-5GH30**
• 5 m	**6XV1801-5GH50**
• 10 m	**6XV1801-5GN10**
• 15 m	**6XV1801-5GN15**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	**6GK5104-0BA00-1SA2**

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Overview



The managed Industrial Ethernet switches of the SCALANCE XF-200 line are optimized for setting up Industrial Ethernet networks at data transfer rates of 10/100 Mbps in a line, star or ring topology.

- Integrated redundancy manager for constructing Fast Ethernet ring topologies with fast media redundancy
- Electrical or optical connection to stations or networks according to port characteristics of the devices
- Enclosure in SIMATIC ET 200S format (slim design) for use in small control boxes
- Rugged station connections with industry-standard RJ45 connectors that offer additional strain and bending strain relief thanks to latching on the enclosure
- PROFINET diagnostics, SNMP access, integrated web server and automatic email transmission function for remote diagnostics and signaling via the network
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management

Product variants

- Switches with electrical and optical ports for glass multimode FOC up to 5 km:
  - SCALANCE XF204-2
    4 x 10/100 Mbps RJ45 port, electrical
    2 x 100 Mbps ST/BFOC port, optical
  - SCALANCE XF206-1
    6 x 10/100 Mbps RJ45 port, electrical
    1 x 100 Mbps ST/BFOC port, optical
- Switches with electrical ports:
  - SCALANCE XF204;
    4 x 10/100 Mbps RJ45 port, electrical
  - SCALANCE XF208;
    8 x 10/100 Mbps RJ45 port, electrical

Benefits

get Designed for Industry

- Saves space in the control cabinet and uses smaller control boxes due to slim design in the format of the SIMATIC ET 200S distributed I/O
- Simple connection and disconnection of the RJ45 plug by means of easily accessible RJ45 sockets angled downward on the device
- High availability of the network thanks to:
  - Redundant power supply
  - Redundant network structures based on fiber-optic or twisted-pair cables (redundancy manager is integrated)
  - Easy device replacement by means of C-PLUG removable data storage medium
- Lower susceptibility to failure and higher availability of the plant networking due to latching of the RJ45 FastConnect connectors in the sleeve of the RJ45 ports
- Protection of investment through integration into existing network management systems (e.g. SINEMA Server or SINEC NMS) by means of standardized SNMP access
- Time savings during engineering, commissioning and in the operating phase of a plant by using the configuration and diagnostics integrated in STEP 7/TIA Portal
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management

Design

The SCALANCE XF-200 managed Industrial Ethernet switches are designed for installation on a standard DIN rail. With their enclosure in SIMATIC ET 200S format (slim design), the devices are optimally suited for integration in automation solutions in small control boxes together with the SIMATIC ET 200S.

The switches with IP20 degree of protection feature:

- A 4-pin terminal block for connecting the redundant supply voltage (2 x 24 V DC)
- A row of LEDs to indicate the status information (power, link status, data traffic, power supply, signaling contact)
- A 2-pin terminal block for connecting the floating signaling contact
- A SET button for on-site configuration of the signaling contact

The SCALANCE XF-200 switches are available with the following port types:

- 10/100BaseTX, RJ45 connection;
  RJ45 socket, automatic detection of the data rate (10 or 100 Mbps), with autosensing and autocrossover functions for connecting IE FC cables using the IE FC RJ45 Plug 180.
- 100BaseFX, ST/BFOC connection technology;
  ST/BFOC sockets for direct connection to Industrial Ethernet glass fiber-optic cables up to 5 km (multimode FOC) for configuring line, ring, and star topologies.

© Siemens 2019

Ordering data	Article No.
SCALANCE XF-200 Industrial Ethernet switches	
Industrial Ethernet switches with integrated SNMP access, online diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM	
• **SCALANCE XF204-2** 4 x 10/100 Mbps RJ45 ports, electrical; 2 x 100 Mbps BFOC ports, optical (multimode, glass), up to 5 km	**6GK5204-2BC00-2AF2**
• **SCALANCE XF206-1** 6 x 10/100 Mbps RJ45 ports, electrical; 1 x 100 Mbps BFOC ports, optical (multimode, glass), up to 5 km	**6GK5206-1BC00-2AF2**
• **SCALANCE XF204** 4 x 10/100 Mbps RJ45 ports, electrical	**6GK5204-0BA00-2AF2**
• **SCALANCE XF208** 8 x 10/100 Mbps RJ45 ports, electrical	**6GK5208-0BA00-2AF2**
Accessories	
SIMATIC ET 200SP PS 24 V/5 A Stabilized power supply Input: 120/230 V AC Output: 24 V DC/5 A	**6EP7133-6AB00-0BN0**
C-PLUG Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used in SIMATIC NET products with C-plug slot	**6GK1900-0AB00**
IE FC RJ45 plug 180 2 x 2 RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
IE FC TP standard cable GP 2 x 2 (Type A) 4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with RJ45 connectors in various lengths	**6XV1840-2AH10**
FO standard cable GP 50/125/1400 Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with ST/BFOC and SC connectors in various lengths	**6XV1873-2A**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	**6GK5104-0BA00-1SA2**

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

10

© Siemens 2019

Overview



The SCALANCE XF204-2BA from Siemens is a new compact switch in SIMATIC ET 200SP design for factory automation and process automation. It fulfills the recommendations of NAMUR NE 21, and is therefore suitable for use in process automation. The flexible use of various bus adapters allows support of electrical and optical line, star and ring topologies.

- XF-200BA versions are optimized for use in process automation and feature the following properties:
  - Conformal coating PCBs
  - Max. installation altitude 4000 m
  - Extended temperature range from -40 °C to +70 °C
  - NAMUR NE 21-compliant
  - Firmware support for S2 device and CiR/H-CiR
  - Release and integration capability for SIMATIC PCS 7
- Connection of up to two modular BusAdapters (2 ports each) supported
- Enclosure in SIMATIC ET 200SP design (slim design, 100 mm wide) for space-saving use in small control boxes
- Integrated redundancy manager for configuring Fast Ethernet ring topologies with fast MRP media redundancy
- End-to-end system diagnostics with PROFINET, SNMP access, integrated web server, SINEMA Server or SINEC NMS and automatic email transmission function for remote diagnostics and signaling via the network
- H-Sync for implementation of system redundancy together with a SIMATIC S7-1500R

The following BusAdapters are currently released for use with SCALANCE XF204-2BA (others available soon):

- SIMATIC ET 200SP HA, BusAdapter BA 2×RJ45, 2 RJ45 sockets
- SIMATIC ET 200SP HA, BusAdapter BA 2×FC, 2 FastConnect connections
- SIMATIC ET 200SP, BusAdapter BA 2×SCRJ, 2 SCRJ FO connections
- SIMATIC BA 2xRJ45VD HA, 2 RJ45 sockets with VD technology (variable distance)
- SIMATIC ET 200SP, BusAdapter BA 2XRJ45, 2 x RJ45 sockets
- SIMATIC ET 200SP, BusAdapter BA 2xFC, 2x FastConnect connections
- SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45, 1x SCRJ FO connection and 1x RJ45 connection
- SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC, 1x SCRJ FO connection and 1x FastConnect (FC) connection

Product variant

SCALANCE XF204-2BA

- The flexible use of various BusAdapters allows users to set up electrical and optical line, star and ring topologies with the SCALANCE XF204-2BA.

Benefits

get Designed for Industry

- Setup of networks in PCS 7 systems with extended environmental conditions (conformal coating)
- Small frame size (SIMATIC ET 200SP design and BusAdapter concept)
- Simple, flexible integration into automation solutions through large selection of different BusAdapters
- Modular design with BusAdapters allows efficient spare part storage by using the same BusAdapter in multiple devices
- Approvals for ATEX Zone 2/IECEx, cULus HazLoc, FM, thus use in Zone 2 hazardous areas possible
- Conforms to NAMUR NE 21, integration in all conventional process control systems, such as SIMATIC PCS 7
- Time savings during engineering, commissioning and in the operating phase of a plant by using the configuration and diagnostics integrated in STEP 7/TIA Portal
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management
- H-Sync for implementation of system redundancy together with a SIMATIC S7-1500R
- The SIMATIC BA 2xRJ45VD HA permits PROFINET communication up to 500 m
- Integration of switches in systems with simple S2 system redundancy and Configuration in Run (CiR/HCiR)
- Since Configuration in Run (CiR/H-CiR) is supported, PROFINET-defined configuration changes to the switch are performed during operation
- Easy integration in the process and system diagnostics with PROFINET via SIMATIC PCS 7

© Siemens 2019

Design

The SCALANCE XF204-2BA managed Industrial Ethernet switch is designed for mounting on a standard DIN rail. With its enclosure in SIMATIC ET 200SP format (slim design), the device is optimally suited for integration in automation solutions in small control boxes together with the SIMATIC ET 200SP.

The SCALANCE XF204-2BA switch with its rugged plastic enclosure and IP20 degree of protection is optimized for mounting on standard DIN rails. Thanks to the dimensions of the SIMATIC ET 200SP enclosure, the devices are ideally suited for integration into an automation solution with SIMATIC ET 200SP components.

The SCALANCE XF204-2BA switch is available with the following port types/interfaces:

- 2 BusAdapter interfaces

Ordering data

	Article No.
SCALANCE XF-204-2BA Industrial Ethernet switches	
Managed switch with 2 x BusAdapter interfaces, 24 V DC redundant power supply, PN device, extended temperature range, conformal coating, configuration software on CD-ROM	
• **SCALANCE XF204-2BA** 2 x BusAdapter interface (without pre-assembled BusAdapter)	**6GK5204-2AA00-2GF2**
Accessories	
SIMATIC ET 200SP PS 24 V/5 A Stabilized power supply Input: 120/230 V AC Output: 24 V DC/5 A	**6EP7133-6AB00-0BN0**
SIMATIC ET 200SP HA, BusAdapter BA 2×RJ45, 2 RJ45 sockets PROFINET BusAdapter with Ethernet socket for standard RJ45 connector, with conformal coating PCBs	**6DL1193-6AR00-0AA0**
SIMATIC ET 200SP HA, BusAdapter BA 2×FC, 2 FastConnect connections PROFINET BusAdapter with FastConnect Ethernet connection for direct bus cable connection, with conformal coating PCBs	**6DL1193-6AF00-0AA0**
BusAdapter BA 2xRJ45VD HA BusAdapter with coated PCBs (conformal coating) and VD technology for connecting 2, 4 and 8-wire cables via standard RJ45 connectors	**6GK5991-2VA00-8AA2**
ET 200SP, BusAdapter BA 2xSCRJ SIMATIC ET 200SP, BusAdapter BA 2xSCRJ, 2 SCRJ FO connections for PROFINET	**6ES7193-6AP00-0AA0**
ET 200SP, BusAdapter BA SCRJ/RJ45 SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45, media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection for PROFINET	**6ES7193-6AP20-0AA0**
ET 200SP, BusAdapter BA SCRJ/FC SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC, media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection for PROFINET	**6ES7193-6AP40-0AA0**

	Article No.
C-PLUG (conformal coating) C-PLUG removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or application data; can be used for SIMATIC NET products with C-PLUG slot, conformal coating	**6GK1900-0AQ00**
IE TP cord RJ45/RJ45 Pre-assembled 8-core Cat6A patch cable 4 x 2, with two RJ45 connectors, preferred length	
• 0.3 m	**6XV1870-3QHE30**
• 0.5 m	**6XV1870-3QHE50**
• 1 m	**6XV1870-3QH10**
• 2 m	**6XV1870-3QH20**
• 3 m	**6XV1870-3QH30**
• 4 m	**6XV1870-3QH40**
• 6 m	**6XV1870-3QH60**
• 10 m	**6XV1870-3QN10**
• 15 m	**6XV1870-3QN15**
• 20 m	**6XV1870-3QN20**
• 25 m	**6XV1870-3QN25**
• 30 m	**6XV1870-3QN30**
• 35 m	**6XV1870-3QN35**
• 40 m	**6XV1870-3QN40**
• 45 m	**6XV1870-3QN45**
• 50 m	**6XV1870-3QN50**
FO standard cable GP 50/125/1400 Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with LC connectors in various lengths	**6XV1873-2A**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	**6GK5104-0BA00-1SA2**

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

10

© Siemens 2019

BusAdapter BA 2xRJ45VD HA

Overview



With the SIMATIC BA 2xRJ45VD HA, Siemens provides a new BusAdapter which is designed for variable distances and optimized for the process industry. Depending on the line type, distances of up to 1000 m are achieved with transfer rates of 10 Mbps and up to 500 m with 100 Mbps. This product can be used in several basic units with a BusAdapter interface thanks to the flexible BusAdapter concept. The release of the Bus-Adapter in the firmware of the basic unit is required.

- The BusAdapter has two 10/100 Mbps RJ45 ports
- Enclosure in the SIMATIC ET 200SP BusAdapter design

Currently, the SIMATIC BA 2xRJ45VD HA can be used with the following basic unit:

- SCALANCE XF204-2BA
- SCALANCE XF204-2BA DNA

Further basic units will follow. The release of the BusAdapter in the firmware (FW) of the basic unit is required.

Benefits

get Designed for Industry

- Reuse of installed PROFIBUS cables for Ethernet transfer via 2 wires
- 10 Mbps up to 1000 m (via 2 wires)
- 100 Mbps up to 100 m (via 2 wires)
- 100 Mbps up to 300 m (via 4 wires)
- 100 Mbps up to 500 m (via 8 wires)
- SIMATIC ET 200SP BusAdapter concept
- Setup of networks in PCS 7 systems with extended ambient conditions (conformal coating)
- Simple, flexible integration into automation solutions
- Approvals for ATEX Zone 2 / IECEx, cULus HazLoc, FM, thus use in Zone 2 hazardous areas possible
- Integration in all conventional process control systems, such as SIMATIC PCS 7

Design

- Technical setup in the SIMATIC ET 200SP design
- The BusAdapter has two RJ45 ports

Ordering data

	Article No.
Industrial Ethernet/PROFINET BusAdapter BA 2xRJ45VD HA	
BusAdapter BA 2xRJ45VD HA for Ethernet communication via 2, 4 or 8-wire copper cables; 2xRJ45 sockets for Industrial Ethernet and PROFINET; Conformal Coating; -40 °C…+70 °C; installation altitude up to 4000 m; distances up to 1000 m at 10 Mbps; 4-wire up to 300 m at 100 Mbps; 8-wire up to 500 m at 100 Mbps.	
• **BusAdapter BA 2xRJ45VD HA** 2 x 10/100 Mbps RJ45 ports, electrical	**6GK5991-2VA00-8AA2**
Accessories	
IE FC RJ45 plug 180 2 x 2	
Industrial Ethernet FastConnect RJ45 plug 180 2x2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x2; 180° cable outlet	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
IE FC RJ45 plug 4x2	
Industrial Ethernet FastConnect RJ45 plug 180 4x2, RJ45 connector (10/100/1000/10000 Mbps), CAT6A, AWG24, with rugged metal enclosure and FC connection technology, for IE FC cable 4x2; 180° cable outlet	
• 1 pack = 1 unit	**6GK1901-1BB12-2AA0**
IE FC TP cable 2x2	**6XV1840-2AH10**
Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 2000 m, minimum order length 20 m	
IE FC TP Cable GP 4 x 2	**6XV1878-2A**
Industrial Ethernet FastConnect TP standard cable GP 4x2, TP installation cable CAT6A for connecting to IE FC RJ45 plug 4x2, AWG24, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m	
PB FC standard cable GP	**6XV1830-0EH10**
Standard bus cable, with special design for fast assembly for permanent installation, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m	

10

© Siemens 2019

Overview



SCALANCE X-204RNA for HSR (High-availability Seamless Redundancy Protocol in accordance with IEC 62439-3) and PRP (Parallel Redundancy Protocol in accordance with IEC 62439-3)

HSR

The SCALANCE X-200RNA (**R**edundant **N**etwork **A**ccess) managed Industrial Ethernet network access points with HSR functionality are used to connect up to two non-HSR-enabled terminal devices or network segments to a ring-shaped HSR network structure. They can also be used for simple and redundant transition from HSR to PRP (Parallel Redundancy Protocol) network structures.

- Media redundancy thanks to duplicate transmission of frames in ring-shaped networks
- High system availability since frames are sent simultaneously via two routes in the ring
- No reconfiguration times of the ring-shaped network are required in the event of an error due to duplicate transmission of frames in the ring
- Simple and redundant connection of HSR and PRP network structures

PRP

The SCALANCE X-200RNA (**R**edundant **N**etwork **A**ccess) managed Industrial Ethernet network access points with PRP functionality are used to connect up to two non-PRP-enabled terminal devices or network segments to parallel networks.

- Media redundancy thanks to duplicate transmission of frames in two parallel, separate networks
- High system availability since frames are sent simultaneously over two separate networks
- Reconfiguration times in a subnetwork do not affect the propagation time because the frames are transmitted via two separate networks (bumpless redundancy)

Product variants

- Network access point in plastic enclosure with electrical ports
  - SCALANCE X204RNA for HSR or PRP networks
    For connecting up to two non-HSR- or PRP-enabled terminal devices to ring-shaped networks with four electrical ports
- Network access point in metal enclosure with electrical and optical ports as well as a wide-range power supply unit for use in expanded environmental conditions
  - SCALANCE X204RNA EEC for HSR or PRP networks
    For connecting up to two non-HSR- or PRP-enabled terminal devices to ring-shaped networks with two electrical terminal device ports and two optical/electrical combo ports for network connection
  - SCALANCE X204RNA EEC for PRP or HSR networks
    For connecting up to two non-PRP-enabled or non-HSR-enabled terminal devices to redundant networks with two electrical terminal device ports and two optical/electrical combo ports for network connection. PRP or HSR function can be defined by the user when starting the device (for description of PRP function, see chapter on X204RNA with PRP function).
- Redundant 24 V DC voltage infeed or wide-range power supply unit, depending on device version
- SNMP access, integrated web server and automatic email transmission function for remote diagnostics and signaling via the network
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management

© Siemens 2019

Benefits



- Ideal solution for establishing Industrial Ethernet networks with high network availability
- HSR: Bumpless data transmission in ring-shaped network structures for high availability systems (e.g. process automation)
- PRP: Bumpless data transmission in parallel network structures for high availability systems
- Quick and easy diagnostics with LEDs on the device, using integral web server, via SINEMA Servers or SINEC NMS and via signaling contacts
- Integration of the SCALANCE X-200RNA network access points into existing network management systems (e.g. SINEMA Server or SINEC NMS) by means of SNMP access
- Simple commissioning without mandatory configuring
- Module replacement without the need for a programming device, using the C-PLUG removable data storage medium for backing up the configuration data

Design

The SCALANCE X204RNA and X204RNA EEC network access points with rugged plastic or metal enclosures have been optimized for installation on a standard mounting rail and for direct wall mounting in different mounting positions.

The network access points with IP20 degree of protection feature:

- A 4-pin terminal block for connecting the redundant supply voltage (2 x 24 V DC), or a 3-pin terminal block in the case of the wide-range power supply unit
- A row of LEDs to indicate the status information (power, link status, data traffic, power supply, signaling contact)
- A 2-pin or 3-pin terminal block for connecting the floating signaling contact in the corresponding voltage range
- A SET button for on-site configuration of the signaling contact

The SCALANCE X-200RNA modules are available with the following port types:

- 100BaseTX, RJ45 connection;
  RJ45 port with a data rate of 100 Mbps, with autosensing and autocrossover function for the connection of IE FC cables via IE FC RJ45 Plug 180 up to 100 m
- 100BaseTX, combo port (RJ45, SFP slot);
  100 Mbps combo ports for direct connection to Industrial Ethernet copper cables or glass fiber-optic cables (multimode/singlemode fiber-optic cable);
  if the RJ45 interface of the combo port is used, the SFP slot is deactivated, and vice versa.

© Siemens 2019

Ordering data	Article No.
SCALANCE X-200RNA managed Industrial Ethernet network access points	
Industrial Ethernet network access points with integrated SNMP access, web diagnostics and PROFINET diagnostics; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD ROM; with electrical and optical ports for glass multimode fiber optic cables up to 5 km	
HSR; for connecting non-HSR-enabled terminal devices to ring-shaped HSR networks	
• **SCALANCE X204RNA** with four 100 Mbps RJ45 ports	**6GK5204-0BA00-2MB2**
• **SCALANCE X204RNA EEC** with two 100 Mbps RJ45 ports and two RJ45/SFP combo ports	**6GK5204-0BS00-2NA3**
• **SCALANCE X204RNA EEC** with two 100 Mbps RJ45 ports and two RJ45/SFP combo ports with PRP or HSR support	**6GK5204-0BS00-3PA3**
PRP; for connection of non-PRP-enabled terminal devices to PRP networks	
• **SCALANCE X204RNA** with four 100 Mbps RJ45 ports	**6GK5204-0BA00-2KB2**
• **SCALANCE X204RNA EEC** with two 100 Mbps RJ45 ports and two RJ45/SFP combo ports	**6GK5204-0BS00-3LA3**
• **SCALANCE X204RNA EEC** with two 100 Mbps RJ45 ports and two RJ45/SFP combo ports with PRP and HSR support	**6GK5204-0BS00-3PA3**
SIMATIC NET communications processor CP 443-1 RNA	**6GK7443-1RX00-0XE0**
S7 integration into bumpless, redundant network structures on the basis of the Parallel Redundancy Protocol (PRP)	
SOFTNET-IE RNA	
Software for connecting PCs to PRP-enabled networks with integrated SNMP, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A	
SOFTNET-IE RNA V12	
for 32/64-bit Windows 7 Professional/Ultimate; for Windows 2008 Server R2; for 32/64-bit Windows 8 Professional/Enterprise; for Windows Server 2012 German/English	
• Single license for one installation	**6GK1711-1EW12-0AA0**
SOFTNET-IE RNA V8.1	
For 32-bit Windows XP; German/English	
• Single license for one installation	**6GK1711-1EW08-1AA0**
Software Update Service	**6GK1711-1EW00-3AL0**
For one year with automatic extension; requirement: current software version	

	Article No.
Accessories	
SITOP compact 24 V/0.6 A	**6EP1331-5BA00**
Single-phase power supply with wide-range input 85 – 264 V AC/110 – 300 V DC, stabilized output voltage 24 V, rated output current value 0.6 A, slim design	
C-PLUG	**6GK1900-0AB00**
Swap medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used for SIMATIC NET products with C-plug slot	
SFP plug-in transceiver	
• SFP991-1 (multi-mode, glass, up to 3 km)	**6GK5991-1AD00-8AA0**
• SFP991-1LH+ (single-mode, glass, up to 70 km, LH+)	**6GK5991-1AE00-8AA0**
• SFP991-1LD (single-mode, glass, up to 26 km)	**6GK5991-1AF00-8AA0**
• SFP991-1ELH200 (single-mode, glass up to 200 km)	**6GK5991-1AE30-8AA0**
IE TP cord RJ45/RJ45	
Pre-assembled 8-core Cat6$_A$ patch cable 4 x 2, with two RJ45 connectors, preferred length	
• 0.3 m	**6XV1870-3QHE30**
• 0.5 m	**6XV1870-3QHE50**
• 1 m	**6XV1870-3QH10**
• 2 m	**6XV1870-3QH20**
• 3 m	**6XV1870-3QH30**
• 4 m	**6XV1870-3QH40**
• 6 m	**6XV1870-3QH60**
• 10 m	**6XV1870-3QN10**
• 15 m	**6XV1870-3QN15**
• 20 m	**6XV1870-3QN20**
• 25 m	**6XV1870-3QN25**
• 30 m	**6XV1870-3QN30**
• 35 m	**6XV1870-3QN35**
• 40 m	**6XV1870-3QN40**
• 45 m	**6XV1870-3QN45**
• 50 m	**6XV1870-3QN50**
FO standard cable GP 50/125/1400	**6XV1873-2A**
Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with LC connectors in various lengths	
SCALANCE TAP104	**6GK5104-0BA00-1SA2**
Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

10

© Siemens 2019

RUGGEDCOM RSG900R managed

Overview



The RUGGEDCOM RSG907R and RSG909R are compact Gigabit IEEE 1588 compatible Ethernet switches supporting High Availability Seamless Redundancy (HSR) and Parallel Redundancy Protocol (PRP) according to IEC 62439-3. The RSG907R supports 3 RNA(Redundant Network Access) ports (SFP) and 4 SAN (Singly Attached Node) fiber optic ports (LC). The RSG909R supports 3 RNA ports (SFP) and 6 SAN copper ports (RJ45).

Functions

- Support of HSR and PRP according to IEC 62439-3
- 3 x RNA Ethernet ports according to IEC 62439-3 (1000BASE-X)
- 4 Fiber optic (100BASE-FX, LC) or 6 Copper (10/100/1000BASE-X, RJ45) SAN ports
- Industry standard connectors: SFP, LC and/or RJ45
- Fully integrated power supply with redundant power inputso
  - Universal high-voltage dual inputs: 100 VAC – 240 VAC / 100 VDC – 300 VDC
  - Universal low-voltage DC dual inputs with nominal voltages: 12 VDC, 24 VDC, 48 VDC (10 – 60 VDC)
- Supports precision timing according to IEEE 1588 (transparent clock, ordinary clock)
- Non-blocking store and forward switching
- For use at ambient temperatures from –40 °C to +85 °C without the use of fans

Product versions

RUGGEDCOM RSG907R

A 7-port compact high density switch with 3 RNA ports supporting HSR and PRP according to IEC 62439-3 and 4 SAN fiber optic ports.

RUGGEDCOM RSG909R

A 9 port compact high density switch with 3 RNA ports supporting HSR and PRP according to IEC 62439-3 and 6 SAN copper ports.

Benefits

- Avoid revenue loss by mitigating the risk of communication disruptions and downtime with a redundant fault tolerant network supporting HSR and/o PRP.
- SFP ports allow for in-field modification at any time allowing deployment flexibility for varying customer needs.
- The redundant power supply inputs allow for continuous safe and reliable operations even during single power supply failures, diminishing the risk of revenue and data loss.
- Reduce maintenance costs by combining precision timing information and data communications onto a single network due to the support of IEEE 1588.

© Siemens 2019


Ordering data	Article No.
RUGGEDCOM RSG907R	
RUGGEDCOM RSG907R is a 7 port industrially hardened, fully managed Ethernet switch featuring an integrated HSR/PRP RedBox for use in harsh industrial environments. The product has 3x 1 Gbit/s SFP slots and 4x 100 Mbit/s multimode LC ports (max 2 km). -40 °C to +85 °C operating temperature (fanless).	
• **RUGGEDCOM RSG907R**	**6GK6490-7RB..-....**
RUGGEDCOM RSG909R	
RUGGEDCOM RSG909R is a 9 port industrially hardened, fully managed Ethernet switch featuring an integrated HSR/PRP RedBox for use in harsh industrial environments. The product has 3x 1 Gbit/s SFP slots and 6x 10/100/1000 Mbit/s RJ45 Ethernet ports. -40 °C to +85 °C operating temperature (fanless).	
• **RUGGEDCOM RSG909R**	**6GK6498-0RB..-....**
RUGGEDCOM accessories	
• **USB Console cable** USB 2.0 A type to B type Cable Assembly 10 feet / 3 meters	**6GK6000-8DT01-0AA0**
• **Power cable without lugs** Power Cable with North-American plug for pluggable terminal blocks (6 ft.) for RUGGEDCOM products	**6GK6000-8BB00-0AA0**
• **Panel Mounting Kit for RUGGEDCOM RSG900C** Allows for wall and other lateral mounting for the RUGGEDCOM RSG908C and RSG910C	**6GK6000-8MR00-0AA1**
• **RJ45 Dust Covers kit** RJ45 dust covers for RUGGEDCOM products, 8 pieces	**6GK6000-8HT01-0CA0**
• **SFP Dust Covers kit** SFP dust covers for RUGGEDCOM products, 12 pieces	**6GK6000-8HT02-0CA0**
RUGGEDCOM SFPs	
Copper Ethernet SFP	
• **RUGGEDCOM SFP1112-1** Copper SFP, 10/100/1000 Mbit/s, RJ45-Interface, Copper, up to max. 100 m, 0 °C ...+70 °C	**6GK6000-8CG01-0AA0**
Fiber Optic SFPs (Fast Ethernet)	
• **RUGGEDCOM SFP1121-1FX2A** 100BASE-FX, LC-Interface, Optical: Multi Mode Fiber Optic up to max. 2 km, 1310 nm, -40 °C ...+85 °C. Only compatible with the RUGGEDCOM devices supporting active SFPs	**6GK6000-8FE50-0AA0**
• **RUGGEDCOM SFP1131-1FX10A** 100BASE-LX, LC-Interface, Optical: Single-mode Fiber Optic up to max. 10 km, 1310 nm, -40 °C ...+85 °C. Only compatible with the RUGGEDCOM devices supporting active SFPs	**6GK6000-8FE60-0AA0**
• **RUGGEDCOM SFP1131S-1LX40A** 100BASE-LX, LC-Interface, Optical: Single-mode Fiber Optic up to max. 40 km, 1310 nm, -5 °C ...+70 °C. Only compatible with the RUGGEDCOM devices supporting active SFPs	**6GK6000-8FE62-0AA0**

	Article No.
Fiber Optic SFPs (Gigabit)	
• **RUGGEDCOM SFP1122-1SX** 1000BASE-SX, LC-Interface, Optical: Multi Mode Fiber Optic up to max. 500 m, 850 nm, -40 °C...+85 °C	**6GK6000-8FG51-0AA0**
• **RUGGEDCOM SFP1122-1SX2** 1000BASE-SX, LC-Interface, Optical: Multi Mode Fiber Optic up to max. 2 km, 1310 nm, -40 °C ...+85 °C	**6GK6000-8FE58-0AA0**
• **RUGGEDCOM SFP1132-1LX10** 1000BASE-LX, LC-Interface, Optical: Single Mode Fiber Optic up to max. 10 km, 1310 nm, -40 °C ...+85 °C	**6GK6000-8FG52-0AA0**
• **RUGGEDCOM SFP1132-1LX25** 1000BASE-LX, LC-Interface, Optical: Single Mode Fiber Optic up to max. 25 km, 1310 nm, -40 °C... +85 °C	**6GK6000-8FG53-0AA0**
• **RUGGEDCOM SFP1132-1LX40** 1000BASE-LX, LC-Interface, Optical: Single Mode Fiber Optic up to max. 40 km, 1550 nm, -40 °C ...+85 °C	**6GK6000-8FG57-0AA0**
• **RUGGEDCOM SFP1132-1LX70** 1000BASE-LX, LC-Interface, Optical: Single Mode Fiber Optic up to max. 70 km, 1550 nm, -40 °C ...+85 °C	**6GK6000-8FG54-0AA0**
• **RUGGEDCOM SFP1132-1LX115** 1000BASE-LX, LC-Interface, Optical: Single Mode Fiber Optic up to max. 115 km, 1550 nm, -10 °C ...+70 °C	**6GK6000-8FE56-0AA0**
Fiber Optic Bi-Directional SFPs (Gigabit)	
• **RUGGEDCOM SFP1132-1BX10R** 1000BASE-BX-U, LC-Interface, Optical: Single Mode Fiber Optic up to max. 10 km, 1310 nm TX/1490 nm RX, -40 °C ...+85 °C	**6GK6000-8FB51-0AA0**
• **RUGGEDCOM SFP1132-1BX10T** 1000BASE-BX-D, LC-Interface, Optical: Single Mode Fiber Optic up to max. 10 km, 1490 nm TX/1310 nm RX, -40 °C ...+85 °C	**6GK6000-8FB52-0AA0**
• **RUGGEDCOM SFP1132-1BX40R** 1000BASE-BX-U, LC-Interface, Optical: Single Mode Fiber Optic up to max. 40 km, 1310 nm TX/1490 nm RX, -40 °C ...+85 °C	**6GK6000-8FB53-0AA0**
• **RUGGEDCOM SFP1132-1BX40T** 1000BASE-BX-D, 1 X 1000 Mbit/s, LC-Interface, Optical: Single Mode Fiber Optic up to max. 40 km, 1490 nm TX/1310 nm RX, -40 °C ...+85 °C	**6GK6000-8FB54-0AA0**

10

© Siemens 2019

Overview

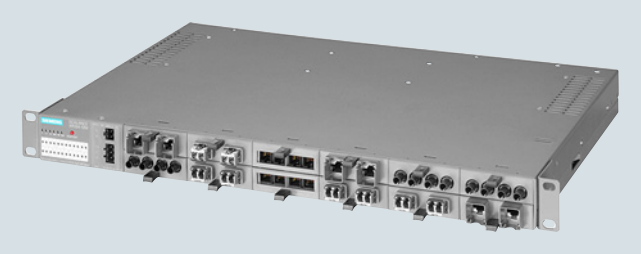

The SCALANCE XR-300 Industrial Ethernet switches are partially and fully modular, high-performance, industry-standard switches for the setup of electrical and optical line, ring and star topologies with transmission rates of 10/100/1000 Mbps, designed for installation in 19" control cabinets.

- Up to 24 electrical and/or optical interfaces (10/100/1000 Mbps);
  up to 12 electrical and/or optical 2-port media modules can be inserted at any position in the basic unit
- High-speed media redundancy through integrated redundancy manager both for Gigabit Ethernet (with SCALANCE X-200, X-300, XM-400, XR-500) and Fast Ethernet (e.g. in combination with SCALANCE XB-200 switches)
- Seamless integration of automation networks in existing corporate networks since numerous IT standard functions are supported (VLANs, IGMP Snooping/Querier, STP/RSTP, Link Aggregation, Quality of Service)
- Redundant integration into higher-level networks thanks to support for standardized redundancy procedures (Spanning Tree Protocol/Rapid Reconfiguration Spanning Tree Protocol/MRP)
- Remote diagnostics with integrated system diagnostics over PROFINET, web browser, CLI or SNMP
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management
- SCALANCE XR324-4M PoE, XR324-4M PoE TS:
  As many as 24 electrical and/or optical interfaces (10/100/1 000 Mbps), of which 16 are integrated RJ45 ports, eight of which are PoE-compatible; up to 4 electrical and/or optical 2-port media modules can additionally be inserted in the media module slots of the basic unit
- SCALANCE XR-300EEC:
  Suitable for use in extremely harsh industrial environments and in low-voltage and high-voltage switchgear thanks to:
  - Extended temperature range (-40 to +70 °C, briefly to +85 °C)
  - Support for special protocols and standards (IEEE 1613 and IEC 61850-3)
  - Wide-range power supplies (60 to 250 V AC/DC)

Benefits

get Designed for Industry

- Unlimited flexibility for network expansions (e.g. more terminal devices) or conversion (e.g. switching from copper to FOC) and reduction of storage costs due to the modular construction using port modules
- High availability of the network thanks to:
  - Redundant power supply
  - Redundant network structures based on fiber-optic or twisted-pair cables (redundancy manager, standby function and STP/RSTP are integrated)
  - Easy device replacement by means of C-PLUG removable data storage medium
  - Extremely fast network reconfiguration in the event of a fault
- Lower susceptibility to failure and higher availability of the plant networking due to latching of the RJ45 FastConnect connectors in the sleeve of the RJ45 port modules
- Protection of investment through integration into existing network management systems (e.g. SINEMA Server or SINEC NMS) by means of standardized SNMP access
- Time saving during engineering, commissioning and in the operating phase of a plant by using the integrated configuration and diagnostics in STEP 7, without additional software
- Space savings in control cabinet due to flexible cable outlet on the front or rear of the device
- SCALANCE XR324-4M PoE, XR324-4M PoE TS:
  Savings in terms of additional power supply units and cabling for terminal devices thanks to PoE power supply
- SCALANCE XR-300EEC:
  Increased availability of the network thanks to hardware and software functions specially geared to the particular requirements of energy technology plants and extreme environmental conditions

© Siemens 2019

Design

The SCALANCE XR-300 Industrial Ethernet switches with rugged metal enclosure with IP30 degree of protection are optimized for installation in the 19" control cabinet. Versions are available with either 24 V DC or 100-240 V AC connections. The connection of the power supply and the data cable outlet are located optionally either at the front or rear of the device.

The switches have:

- 4-pin joint block for redundant voltage feed for protection against voltage failure in 24 V DC version
- 3-pin joint block for voltage feed in 100-240 V AC version
- 2-pin joint block for connecting the isolated signaling contact for simple display of faults
- Row of LEDs for indicating status information (power, link status, data transfer, power supply, signaling contact)
- SELECT/SET pushbutton for easy setting of the fault signaling contact on the device
- Slot for optional C-PLUG removable data storage medium on the side of the device for easy replacement in the event of a fault
- Console port (serial interface) for on-site parameterization/ diagnostics (RJ11 cable to RS232 (9-pin) included in scope of delivery)

The SCALANCE XR-300 switches are available with the following port types:

- 12 slots for electrical or optical 2-port media modules for multi-mode or single-mode connections; the optical media modules are available in various connection technologies
- The RJ45 sockets are designed to be industry-compatible with additional securing collars for connection of the Industrial Ethernet FC RJ45 Plug 180
- All electrical Ethernet interfaces support 10/100/1000 Mbps, all optical Ethernet interfaces support 100 or 1000 Mbps
- The SCALANCE XR-300 switches support Gigabit Ethernet (1000 Mbps) at all ports. The 24 ports are divided into three groups of eight ports each (Gigabit Ethernet Blocking). Gigabit Ethernet is supported with full wire speed within each group, but not between the groups
- For the SCALANCE XR-300PoE switches, eight of 16 integrated RJ45 ports support PoE

Product versions

SCALANCE XR324-12M (12 media module slots)

Versions are available with

- LEDs, power supply connection and data cable outlet on the front
- LEDs on the front, power supply connection and data cable outlet at the rear

All versions have twelve media module slots and

- 1 x 24 V DC power supply unit
- 1 x 100-240 V AC power supply unit

SCALANCE XR324-12M TS (12 media module slots)

A version is available with

- LEDs, power supply connection and data cable outlet on the front

The SCALANCE XR324-12M TS has twelve media module slots and

- 1 x 24 V DC power supply unit

SCALANCE XR324-4M PoE (4 media module slots)

Versions are available with

- LEDs, power supply connection and data cable outlet on the front
- LEDs on the front, power supply connection and data cable outlet at the rear

All versions have twelve media module slots and

- 1 x 24 V DC power supply unit
- 1 x 100-240 V AC power supply unit

SCALANCE XR324-4M PoE TS (4 media module slots)

A version is available with

- LEDs, power supply connection and data cable outlet at the front;

The version has four media module slots and

- 1 x 24 V DC power supply unit


SCALANCE XR324-4M EEC (4 media module slots)

Versions are available with

- LEDs, data cable outlet on the front and power supply connection at the rear
- LEDs, power supply connection on the front, data cable outlet at the rear

All versions have four media module slots and

- 1 x 24 V DC power supply unit
- 2 x 24 V DC power supply units
- 1 x 230 V AC power supply unit
- 2 x 230 V AC power supply units

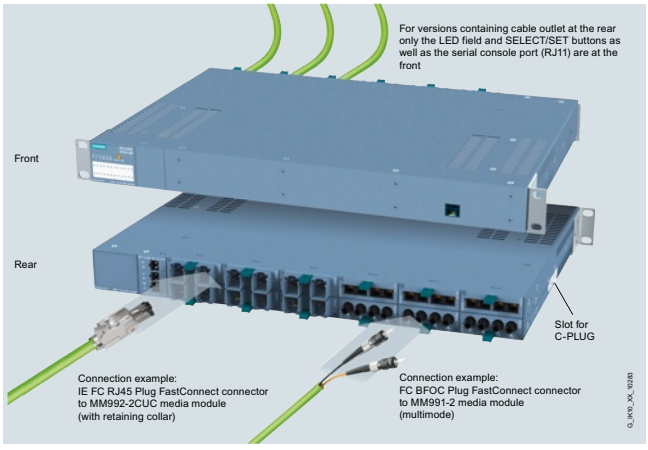

SCALANCE XR-300 with cable outlet at rear

© Siemens 2019

Ordering data	Article No.
SCALANCE XR324 Industrial Ethernet switches	
Fully modular 19" Industrial Ethernet switches for setting up electrical and/or optical Industrial Ethernet networks; all ports can optionally be equipped with optical or electrical 2-port media modules; all ports support Gigabit Ethernet (blocking), integrated redundancy manager, RSTP, RMON, IGMP-Snooping/Querier, network management via SNMP, PROFINET, and web server 12 x 10/100/1 000 Mbps slots for 2-port media modules, electrical or optical	
SCALANCE XR324-12M	
24 V DC power supply	
• Data cable outlet at front	**6GK5324-0GG10-1AR2**
• Data cable outlet at rear	**6GK5324-0GG10-1HR2**
110 … 230 V AC power supply	
• Data cable outlet at front	**6GK5324-0GG10-3AR2**
• Data cable outlet at rear	**6GK5324-0GG10-3HR2**
SCALANCE XR324-12M TS	
For railway applications (approval in accordance with EN 50155); 24 V DC power supply	
• Data cable outlet at front	**6GK5324-0GG10-1CR2**
SCALANCE XR324-4M PoE	
24 V DC power supply	
• Data cable outlet at front	**6GK5324-4QG10-1AR2**
• Data cable outlet at rear	**6GK5324-4QG10-1HR2**
100 … 240 V AC power supply	
• Data cable outlet at front	**6GK5324-4QG10-3AR2**
• Data cable outlet at rear	**6GK5324-4QG10-3HR2**
SCALANCE XR324-4M PoE TS	
For railway applications (approval in accordance with EN 50155); 24 V DC power supply	
• Data cable outlet at front	**6GK5324-4QG10-1CR2**
SCALANCE XR324-4M EEC	
1 x 24 V DC power supply	
• Data cable outlet at front Power supply at rear	**6GK5324-4GG10-1ER2**
• Data cable outlet at rear Power supply at front	**6GK5324-4GG10-1JR2**
1 x 100-240 AC/60-250 V DC power supply	
• Data cable outlet at front Power supply at rear	**6GK5324-4GG10-3ER2**
• Data cable outlet at rear Power supply at front	**6GK5324-4GG10-3JR2**
2 x 24 V DC power supply	
• Data cable outlet at front Power supply at rear	**6GK5324-4GG10-2ER2**
• Data cable outlet at rear Power supply at front	**6GK5324-4GG10-2JR2**
2 x 100-240 AC/60-250 V DC power supply	
• Data cable outlet at front Power supply at rear	**6GK5324-4GG10-4ER2**
• Data cable outlet at rear Power supply at front	**6GK5324-4GG10-4JR2**

	Article No.
Media modules	See "Media modules for modular SCALANCE X-300 managed"
Accessories	
SCALANCE PS598-1 power supply	**6GK5598-1AA00-3AA0**
SCALANCE PS598-1 power supply 300 W Input: 85-264 V AC IEC plug; Output: 24 V DC terminals or for direct connection to SCALANCE XR-300	
IE FC RJ45 plug 180 2 x 2	
RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
IE FC TP standard cable GP 2 x 2 (Type A)	**6XV1840-2AH10**
4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with RJ45 connectors in various lengths	
IE FC RJ45 plug 4 x 2	
RJ45 plug-in connector for Industrial Ethernet (10/100/1 000 Mbps) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB12-2AA0**
IE FC M12 plug PRO 4x2	
M12 plug-in connector suitable for on-site assembly (X-coded, IP65/IP67), metal enclosure, insulation displacement fast connection method, for SCALANCE W	
• 1 unit	**6GK1901-0DB30-6AA0**
IE FC TP standard cable GP 4 x 2	**6XV1878-2A**
8-core, shielded TP installation cable for connection to IE FC RJ45 modular outlet for universal application; with UL approval; sold by the meter; max. quantity 1 000 m, minimum order 20 m, also available as pre-assembled cable with RJ45 connectors and M12 connectors (X-coded) in various lengths	
IE SC RJ POF plug	**6GK1900-0MB00-0AC0**
Screw connector for local assembly on POF FOC (1 pack = 20 units)	

© Siemens 2019

Ordering data	Article No.
POF standard cable GP 980/1000 POF standard cable for fixed routing indoors with PVC sheath; sold by the meter; max. length 1 000 m, minimum order 20 m	**6XV1874-2A**
Termination kit SC RJ POF plug Assembly case for on-site installation of SC RJ POF connectors, consisting of stripping tool, Kevlar cutters, SC RJ grinding plate, grinding paper, grinding base and microscope	**6GK1900-0ML00-0AA0**
IE SC RJ PCF plug Screw connector for local assembly on PCF FOC (1 pack = 10 units)	**6GK1900-0NB00-0AC0**
PCF standard cable GP 200/230 Standard cable, segmentable, sold by the meter; max. length 2 000 m, minimum order 20 m, also available as pre-assembled cable with ST/BFOC connectors in various lengths	**6XV1861-2A**
Termination kit SC RJ PCF plug Assembly case for on-site installation of SC RJ PCF connectors, consisting of stripping tool, buffer stripping tool, Kevlar cutters, fiber breaking tool, microscope	**6GK1900-0NL00-0AA0**
FO standard cable GP 50/125/1400 Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available as pre-assembled cable with ST/BFOC, SC and LC connectors in various lengths	**6XV1873-2A**
C-PLUG Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used in SIMATIC NET products with C-plug slot	**6GK1900-0AB00**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	**6GK5104-0BA00-1SA2**


Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Media modules for SCALANCE XR-300

Overview

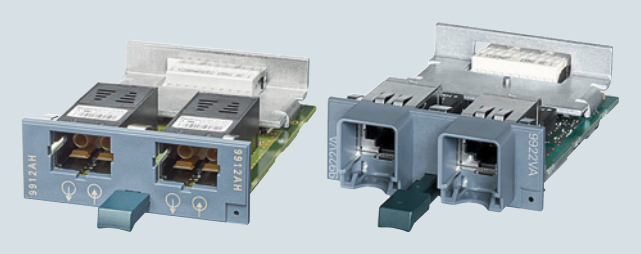

- Electrical versions with RJ45 ports are available, as are optical versions with ST/BFOC, SC and SC RJ ports for the use of POF/PCF, multimode and single-mode fiber-optic cables

Product variants — media modules

Electrical media modules with 2 x 10/100/1000 Mbps RJ45 ports

- MM992-2CU: variants with and without retaining collar, variant with retaining collar and conformal coated PCBs

Electrical media modules with 2 x 1/10/100/1000 Mbps RJ45 ports

- MM992-2VD: with retaining collar and additional two-wire transmission function (variable distance) for establishing Ethernet connections via non-Ethernet-conformant cables as well. Bridgeable distance, depending on the cable quality (e.g. 500 mm PROFINET communication with Gigabit Ethernet cable)

Electrical media modules with 2 x 10/100/1000 Mbps M12 ports

- MM992-2: variant with M12 interface (x-coded), variant with M12 interface and coated PCBs

Optical media modules with 2 x 100 Mbps BFOC ports

- MM991-2 multimode, glass, up to 5 km: variant with ST/BFOC ports, variant with SC ports
- MM991-2FM multimode, glass, up to 5 km with fiber-optic cable diagnostics (fiber monitoring)
- MM991-2LD single-mode, glass, up to 26 km, variant with ST/BFOC ports, variant with SC ports
- MM991-2LH+ single-mode, glass, up to 70 km, SC ports
- MM991-2P POF fiber-optic cable up to 50 m, PCF fiber-optic cable up to 100 m, SC RJ ports

Optical media modules with 2 x 1000 Mbps SC ports

- MM992-2: variant with multimode, glass, up to 750 m plus variant with multimode, glass, up to 750 m and conformal coated PCBs
- MM992-2LD single-mode, glass, up to 10 km
- MM992-2LH single-mode, glass, up to 40 km
- MM992-2LH+ single-mode, glass, up to 70 km
- MM992-2ELH single-mode, glass, up to 120 km

Optical media modules with 2 x 100/1000 Mbps for SFP plug-in transceiver

- MM992-2SFP for SFP plug-in transceivers: variant with 1 x 100 Mbps or 1 x 1000 Mbps multimode or single-mode, glass as well as variant with 1 x 100 Mbps or 1 x 1000 Mbps multimode or single-mode, glass and conformal coated PCBs


Benefits

get Designed for Industry

- Unlimited flexibility in the case of network expansions (e.g. more terminals) or conversion (e.g. from copper to fiber-optic cables) due to modular design with media modules
- Reduction of storage costs and maintenance overhead by focusing on a few basic device versions

© Siemens 2019

Design

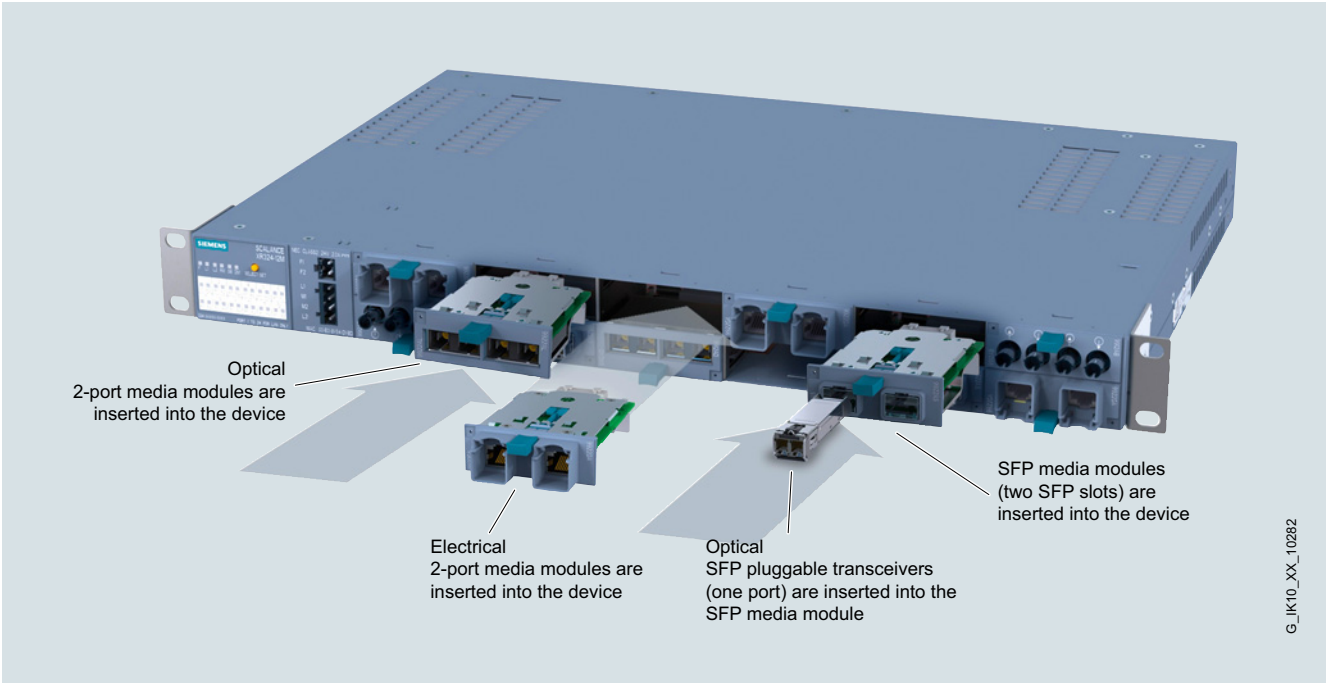

Insertion of 2-port media modules in media module slot

		10 Gigabit Ethernet		Gigabit Ethernet			Fast Ethernet		
		10 Gbit/s		10/100/1000 Mbit/s	1000 Mbit/s		100 Mbit/s		
		Optical		Electrical	Optical		Optical		Max. distance
	Module type	Multimode	Singlemode	Twisted Pair	Multimode	Singlemode	Multimode	Singlemode	
	MM992-2CUC			2x RJ45					100 m
	MM992-2CUC[2]			2x RJ45					100 m
	MM992-2CU[1]			2x RJ45					100 m
	MM992-2VD[4]			2x RJ45					[5]
	MM992-2M12[2]			2x M12 (X-coded)					100 m
	MM991-2						2x ST/BFOC		5 km
	MM991-2LD							2x ST/BFOC	26 km
	MM991-2FM						2x ST/BFOC		5 km
	MM991-2						2x SC		5 km
	MM991-2LD							2x SC	26 km
	MM991-2LH+							2x SC	70 km
	MM991-2P						2 x SC RJ		50/100 m
	MM992-2				2x SC				750 m
	MM992-2[2]				2x SC				750 m
	MM992-2LD					2x SC			10 km
	MM992-2LH					2x SC			40 km
	MM992-2LH+					2x SC			70 km
	MM992-2ELH					2x SC			120 km
	MM992-2SFP[3]				2x LC	2x LC	2x LC	2x LC	[5]
	MM992-2SFP[2]				2x LC	2x LC	2x LC	2x LC	[5]


G_IK10_XX_10277

1) Without retaining collar
2) Coated PCBs (conformal coating)
3) For max. 2x SFP modules
4) Communication via 2-, 4-, or 8-wire-cables (Variable Distance)
5) Dependent on the kind of cable and cable quality, transmission speed varies with distance

Overview of media modules for SCALANCE X-300

© Siemens 2019

Design (continued)

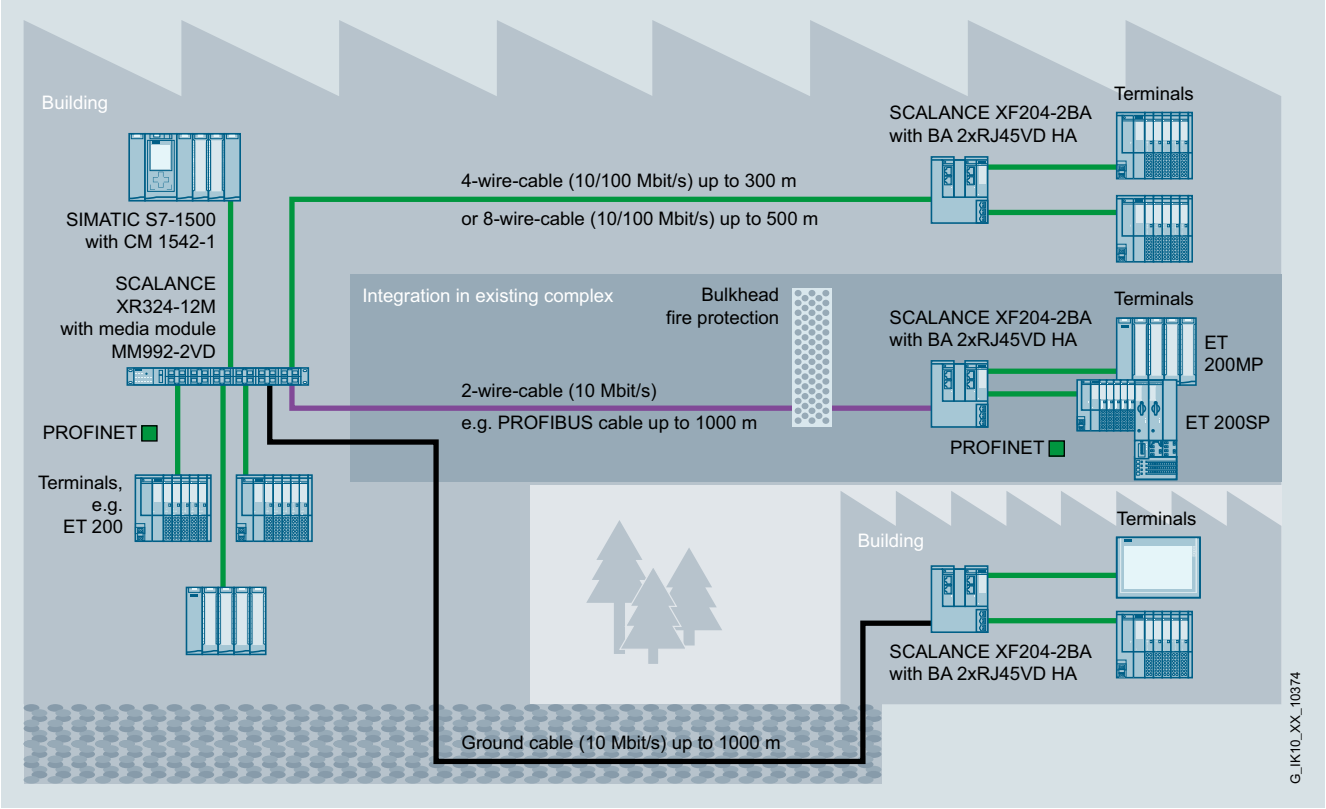

Ethernet communication with MM992-2VD media module

10

© Siemens 2019

Ordering data	Article No.
Electrical media modules	
with 2 x 10/100/1000 Mbps RJ45 ports, electrical	
• MM992-2CUC with retaining sleeve	**6GK5992-2GA00-8AA0**
• MM992-2CUC with retaining sleeve and coated PCBs (conformal coating)	**6GK5992-2GA00-8FA0**
• MM992-2CU without retaining sleeve	**6GK5992-2SA00-8AA0**
with 2 x 10/100/1000 Mbps M12 ports, electrical	
• MM992-2 M12 interface (x-coded) and coated PCBs (conformal coating)	**6GK5992-2HA00-0AA0**
with 2 x 1/10/100/1000 Mbps RJ45 ports, electrical	
• MM992-2VD	**6GK5992-2VA00-8AA0**
Optical media modules	
with 2 x 100 Mbps BFOC ports, optical	
• MM991-2 multimode, glass, up to 5 km	**6GK5991-2AB00-8AA0**
• MM991-2LD singlemode, glass, up to 26 km	**6GK5991-2AC00-8AA0**
• MM991-2FM multi-mode, glass, up to 5 km with fiber-optic cable diagnostics	**6GK5991-2AB01-8AA0**
with 2 x 100 Mbps SC ports, optical	
• MM991-2 multimode, glass, up to 5 km	**6GK5991-2AD00-8AA0**
• MM991-2LD singlemode, glass, up to 26 km	**6GK5991-2AF00-8AA0**
• MM991-2LH+ singlemode, glass, up to 70 km	**6GK5991-2AE00-8AA0**
with 2 x 100 Mbps SC RJ ports, optical	
• MM991-2P PO fiber-optic cable up to 50 m	**6GK5991-2AH00-8AA0**
with 2 x 1000 Mbps SC ports, optical	
• MM992-2 multimode, glass, up to 750 m	**6GK5992-2AL00-8AA0**
• MM992-2 multimode, glass, up to 750 m, coated PCBs (conformal coating)	**6GK5992-2AL00-8FA0**
• MM992-2LD singlemode, glass, up to 10 km	**6GK5992-2AM00-8AA0**
• MM992-2LH singlemode, glass, up to 40 km	**6GK5992-2AN00-8AA0**
• MM992-2LH+ singlemode, glass, up to 70 km	**6GK5992-2AP00-8AA0**
• MM992-2ELH singlemode, glass, up to 120 km	**6GK5992-2AQ00-8AA0**
with 2 x 100/1000 Mbps for SFP plug-in transceiver, optical	
• MM992-2SFP for SFP pluggable transceivers with 1 x 100 or 1 x 1000 Mbps multimode or singlemode, glass	**6GK5992-2AS00-8AA0**

	Article No.
Accessories	
IE FC Stripping Tool	**6GK1901-1GA00**
Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	
IE FC RJ45 Plug 180 2 x 2	
RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
IE FC TP Standard Cable GP 2 x 2 (Type A)	**6XV1840-2AH10**
4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/IE FC RJ45 Plug; PROFINET-compatible; with UL approval; sold by the meter; max. length 1000 m, minimum order quantity 20 m	
IE FC RJ45 Plug 4 x 2	
RJ45 plug-in connector for Industrial Ethernet (10/100/1000 Mbps) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB12-2AA0**
IE FC M12 Plug PRO 4x2	
M12 plug-in connector suitable for on-site assembly (X-coded, IP65/IP67), metal enclosure, insulation displacement fast connection method, for SCALANCE W	
• 1 unit	**6GK1901-0DB30-6AA0**
IE M12 Panel Feedthrough 4x2	
Control cabinet feedthrough for conversion from M12 connection method (X-coded, IP65/IP67) to RJ45 connection method (IP20)	
• 1 pack = 5 units	**6GK1901-0DM40-2AA5**
IE FC M12 Cable Connector PRO 4x2	
M12 plug-in connector suitable for on-site assembly (X-coded, IP65/IP67, female contact insert), metal enclosure, insulation displacement fast connection method	
• 1 unit	**6GK1901-0DB40-6AA0**
IE FC TP Standard Cable GP 4 x 2	**6XV1878-2A**
8-core, shielded TP installation cable for universal applications; with UL approval; sold by the meter; max. length per delivery unit 1000 m, minimum order 20 m	

© Siemens 2019

Media modules for SCALANCE XR-300

Ordering data	Article No.
IE Connecting Cable IE FC RJ45 Plug-180/IE FC RJ45 Plug-180 Preassembled IE FC TP Trailing Cable GP 2 x 2 (PROFINET type C) with two IE FC RJ45 Plug-180, IP20 degree of protection Length:	
• 1.0 m	**6XV1871-5BH10**
• 5.0 m	**6XV1871-5BH50**
• 10.0 m	**6XV1871-5BN10**
IE TP Cord RJ45/RJ45 TP cable 4 x 2 with two RJ45 connectors	
• 1 m	**6XV1870-3QH10**
• 6 m	**6XV1870-3QH60**
• 10 m	**6XV1870-3QN10**
IE SC RJ POF Plug Screw connector for local assembly on POF FOC (1 pack = 20 units)	**6GK1900-0MB00-0AC0**
POF Standard Cable GP 980/1000 POF standard cable for fixed routing indoors with PVC sheath; sold by the meter; max. length 1000 m, minimum order 20 m	**6XV1874-2A**
IE SC RJ PCF Plug Screw connector for local assembly on PCF FOC (1 pack = 10 units)	**6GK1900-0NB00-0AC0**
PCF Standard Cable GP 200/230 Standard cable, segmentable, sold by the meter; max. length 2000 m; minimum order 20 m	**6XV1861-2A**
FC FO Termination Kit Termination Kit for local assembly of FC SC and FC BFOC connectors to FC FO Standard Cable, comprising a stripping tool, Kevlar cutters, fiber breaking tool and microscope	**6GK1900-1GL00-0AA0**
FC BFOC Plug Screw connector for on-site assembly on FC fiber-optic cable; (1 pack = 20 units + cleaning cloths)	**6GK1900-1GB00-0AC0**
FC SC Plug Screw connector for on-site assembly on FC fiber-optic cable; (1 pack = 10 duplex plugs + cleaning cloths)	**6GK1900-1LB00-0AC0**
FC FO Standard Cable GP 62.5/200/230 FC FO Standard Cable for fixed routing indoors with PVC sheath; sold by the meter; max. length 1000 m; minimum order 20 m	**6XV1847-2A**
Multi-mode FO BFOC connector set For FO Standard Cable (50/125/1400), FO Ground Cable (50/125/1400), flexible FO Trailing Cable, INDOOR FC Cable (62.5/125/900), 20 units	**6GK1901-0DA20-0AA0**
Multi-mode FO SC duplex connector set For FO Standard Cable (50/125/1400), FO Ground Cable (50/125/1400), flexible FO Trailing Cable, INDOOR FC Cable (62.5/125/900), 10 units	**6GK1901-0LB10-2AA0**
FO Standard Cable GP 50/125/1400 [1) 2)] Multimode cable, sold by the meter; max. length 1000 m; minimum order 20 m	**6XV1873-2A**

1) Special fiber-optic cables, lengths and accessories available on request

2) Special tools and trained personnel are required for pre-assembling glass fiber-optic cables

10

© Siemens 2019

Overview



The SCALANCE XR-300WG product line (work group switches) are Industrial Ethernet switches for industry-related applications such as control rooms and applications in the industry-related sector. They enable the configuration of electrical and optical line, star and ring topologies with transmission rates of 10/100/1000 Mbps and are designed for installation in 19" control cabinets.

- Up to 28 × electrical interfaces (10/100/1000 Mbps) with RJ45 connections;
  of which 4 × combo ports for the connection of optical interfaces (1000 Mbps) with SFPs
- High-speed media redundancy through integrated redundancy manager both for Gigabit Ethernet (with SCALANCE X-200, X-300, XM-400, XR-500) and Fast Ethernet (e.g. in combination with SCALANCE XB-200 switches)
- Seamless integration of automation networks in existing corporate networks since a large number of IT standard functions are supported (VLANs, IGMP Snooping/Querier, STP/RSTP, Quality of Service)
- Redundant integration into higher-level networks thanks to support for standardized redundancy procedures (Spanning Tree Protocol/Rapid Reconfiguration Spanning Tree Protocol/ MRP)
- Remote diagnostics with integrated system diagnostics over PROFINET, web browser, SINEMA Server or SINEC NMS, CLI or SNMP

Benefits

get Designed for Industry

- Flexible network design through integrated combo ports that can be used both as copper (RJ45) and FO ports (SFP)
- High availability of the network thanks to:
  - Redundant voltage infeed (only with 24 V DC)
  - Redundant network structures based on fiber-optic or twisted-pair cables (redundancy manager and STP/RSTP function integrated)
  - Extremely fast network reconfiguration in the event of a fault (MRP: 200 ms)
- Protection of investment through integration into existing network management systems, such as SINEMA Server or SINEC NMS, by means of standardized SNMP access
- Time saving during engineering, commissioning and in the operating phase of a plant by using the integrated configuration and diagnostics in STEP 7, without additional software
- Space savings in the control cabinet through shallow overall depth, so that 19" control cabinets can be populated from both sides with SCALANCE XR-300WG switches

Design

The SCALANCE XR-300WG Industrial Ethernet switches with rugged metal enclosures with IP30 degree of protection are optimized for installation in the 19" control cabinet. 24 V DC and 100 ... 240 V AC versions are available in just one height, 19".

The switches have:

- 2 × 2-pin terminal block for redundant power infeed for protection against power failure in the 24 V DC version
- 3-pin IEC plug interface for non-heating apparatus for voltage infeed in the 100 ... 240 V AC version
- Status information at the port for local diagnostics (link status, data traffic)
- A RESET button for resetting the device
- A console port (serial interface) for on-site parameter assignment/diagnostics (RJ11 cable to RS 232 not included in scope of delivery)

The SCALANCE XR-300WG switches are available with the following port types:

- Electrical RJ45 interfaces that support 10/100 Mbps or 10/100/1 000 Mbps depending on the device version
- Optical SFP interfaces that can be used for multimode or single-mode SFPs for transmission of 1 000 Mbps (combo ports).

Product versions

SCALANCE XR324WG

With 24 × 10/100 Mbps ports and redundant 24 V DC power supply

SCALANCE XR324WG

With 24 x 10/100 Mbps ports and 100 ... 240 V AC power supply

SCALANCE XR328-4C WG

With 24 × 10/100 Mbps ports, 4 × combo ports and 24 V DC power supply

SCALANCE XR328-4C WG

With 24 x 10/100 Mbps ports, 4 x combo ports and 100 ... 240 V AC power supply

SCALANCE XR328-4C WG

With 24 × 10/100 Mbps ports, 4 × combo ports and 24 V DC power supply
Reduced number of approvals (no UL/FM approval)

SCALANCE XR328-4C WG

With 24 × 10/100 Mbps ports, 4 × combo ports and 100 ... 240 V AC power supply
Reduced number of approvals (no UL/FM approval)

SCALANCE XR328-4C WG

With 24 × 10/100/1 000 Mbps ports, 4 × combo ports and redundant 24 V DC power supply

SCALANCE XR328-4C WG

With 24 x 10/100/1 000 Mbps ports, 4 x combo ports and 100 ... 240 V AC power supply

© Siemens 2019

Ordering data	Article No.
SCALANCE XR-300WG Industrial Ethernet switches	
19" Industrial Ethernet switches for setting up electrical and/or optical Industrial Ethernet networks; depending on the device version, ports support 10/100 Mbps or 10/100/1 000 Mbps Ethernet (non-blocking), integrated redundancy manager, RSTP, RMON, IGMP Snooping/Querier, network management via SNMP, PROFINET, and web server	
SCALANCE XR324WG	
With 24 × 10/100 Mbps ports and redundant 24 V DC power supply	**6GK5324-0BA00-2AR3**
With 24 × 10/100 Mbps ports and 230 V AC power supply	**6GK5324-0BA00-3AR3**
SCALANCE XR328-4C WG	
With 24 × 10/100 Mbps ports, 4 × combo ports and redundant 24 V DC power supply	**6GK5328-4FS00-2AR3**
With 24 × 10/100 Mbps ports, 4 × combo ports and 230 V AC power supply	**6GK5328-4FS00-3AR3**
SCALANCE XR328-4C WG	
With 24 × 10/100 Mbps ports, 4 × combo ports and redundant 24 V DC power supply Reduced number of approvals (no UL/FM approval)	**6GK5328-4FS00-2RR3**
With 24 × 10/100 Mbps ports, 4 × combo ports and 230 V AC power supply Reduced number of approvals (no UL/FM approval)	**6GK5328-4FS00-3RR3**
SCALANCE XR328-4C WG	
With 24 × 10/100/1 000 Mbps ports, 4 × combo ports and redundant 24 V DC power supply	**6GK5328-4SS00-2AR3**
With 24 × 10/100/1 000 Mbps ports, 4 × combo ports and 230 V AC power supply	**6GK5328-4SS00-3AR3**
Accessories	
Plug-in transceivers – SFPs	See "Plug-in transceivers for SCALANCE"
Power supply unit	
SCALANCE PS598 power supply	**6GK5598-1AA00-3AA0**
Power supply 300 W Input: 85–264 V AC IEC plug Output: 24 V DC terminals or for direct connection to SCALANCE XR-300WG	
IE FC RJ45 plug 180 2x2	**6GK1901-1BB10-2AA0**
Industrial Ethernet FastConnect RJ45 plug 180 2x2, RJ45 connector (10/100 Mbps) with rugged metal enclosure and FC connection technology, for IE FC cable 2x2 180° cable outlet 1 pack = 1 unit	

	Article No.
IE FC RJ45 plug 4x2	**6GK1901-1BB11-2AA0**
RJ45 plug-in data connector (10/100/1 000 Mbps), for connection to IE FC TP cables 4x2, with rugged metal enclosure and FastConnect connection technology	
IE FC TP standard cable GP 2 x 2 (Type A)	**6XV1840-2AH10**
4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval Sold by the meter Max. length 1 000 m, minimum order 20 m, also available pre-assembled with RJ45 connectors in various lengths	
IE FC TP standard cable GP 4X2	**6XV1878-2A**
TP installation cable Cat6 for connecting to IE FC RJ45 plug 4x2, AWG 24 Sold by the meter Max. delivery unit 1 000 m; minimum order 20 m, also available pre-assembled with RJ45 connectors in various lengths	
FO standard cable GP 50/125/1400	**6XV1873-2A**
Multimode cable Sold by the meter Max. delivery unit 1 000 m; minimum order 20 m, also available pre-assembled with ST/BFOC, SC and LC connectors in various lengths	
SCALANCE TAP104	**6GK5104-0BA00-1SA2**
Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic (including incomplete diagrams) for further diagnostics	

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Overview



The SCALANCE XM-400 product range comprises modular Industrial Ethernet switches which can be expanded with a variety of port extenders and plug-in transceivers for a maximum configuration with up to 24 ports. It supports 10/100/1000 Mbps technology for various transmission media (twisted-pair, fiber-optic) and increased port requirements. The main applications are high-performance plant networks (control level).

- Combo ports for the flexible use of interfaces: A combo port consists of an electric port and an SFP slot. Only one of the two ports can ever be active. If an SFP plug-in transceiver is inserted, the electric port is deactivated
- Fast mobile diagnosis with smartphone/tablet thanks to WLAN and NFC: Fast access to the web-based management of the SCALANCE XM-400 via mobile websites. The function can be started using existing WLAN and NFC (Near Field Communication)
- High-speed media redundancy through integral redundancy manager even for large networks, for both Gigabit Ethernet and Fast Ethernet
- Remote diagnostics with integrated system diagnostics over PROFINET, CLI, SINEMA Server or SINEC NMS, web browser or SNMP
- Integration into STEP 7/TIA Portal including up/downloading of the configuration
- Seamless integration of automation networks into existing corporate networks since numerous IT standards are supported: Setup of virtual networks (VLAN)
- Integration into higher-level enterprise networks thanks to support for standardized redundancy procedures (Rapid Spanning Tree Protocol, Link Aggregation)
- By learning the multicast sources and destinations (Internet Group Management Protocol (IGMP) Snooping), SCALANCE XM-400 switches can also filter multicast data traffic, thus limiting the load on the network.
- Optional activation of the Layer 3 functions for IPv4 and IPv6 in connection with the KEY-PLUG XM-400. For a detailed description, see "Accessories for Layer 3 switches/routers"
- Creation of IP subnetworks and IP router communication by means of Layer 3 switching (IP routing)
  - Static routing
  - Dynamic routing OSPF (Open Shortest Path First) and RIPv2 (Routing Information Protocol)
  - Redundant routing VRRP (Virtual Router Redundancy Protocol)

Product variants — basic devices

Basic devices with eight to 16 integrated Gigabit Ethernet twisted-pair interfaces (10/100/1000 Mbps), in each case as Layer 2 versions for subsequent optional activation of Layer 3 functions (routing) via KEY-PLUG and as Layer 3 versions with integrated routing functionality.

XM416-4C

- 16 ports available in total, of which
  - Up to 16 x 10/100/1000 Mbps are RJ45 ports with retaining collars
  - Up to 4 x SFP slots (combo ports), 100 or 1000 Mbps
- A port extender with 8 ports can be connected to implement a maximum of 24 ports in one switch

XM408-8C

- 8 ports available in total, of which
  - Up to 8 x 10/100/1000 Mbps are RJ45 ports with retaining collars
  - Up to 8 x SFP slots (combo ports), 100 or 1000 Mbps
- Two port extenders with 8 ports each can be connected to implement a maximum of 24 ports in one switch

XM408-4C

- 8 ports available in total, of which
  - Up to 8 x 10/100/1000 Mbps are RJ45 ports with retaining collars
  - Up to 4 x slots (combo ports) for plug-in transceivers ("pluggables") with SC connection method (1000 Mbps) or ST/BFOC connection method (100 Mbps)
- Two port extenders with 8 ports each can be connected to implement a maximum of 24 ports in one switch

© Siemens 2019

Benefits



- Modular system permits cost savings. The modular system facilitates easy setup of electrical and optical Industrial Ethernet networks as well as modification of the network topology and port type to suit the plant structure, with expansion possible at any time
- Integrated industrial network for data, speech, and video
- High performance due to up to 24 Gigabit ports
- Operational reliability in industrial environments, e.g. due to robust enclosure, redundancy, temperature range from -40 °C to +70 °C
- Increased plant availability thanks to:
  - Redundant power supply
  - Redundant network structures based on fast media redundancy
  - Standby redundancy between ring topologies
  - Redundant switching through standard mechanisms STP, RSTP, MSTP
  - Redundant router operation through VRRP
  - Media modules can be replaced or expanded during operation
  - Easy device replacement due to plug-in KEY-PLUG/C-plug removable data storage medium
- Virtual networks (VLAN) allow simple division of large networks into smaller subnetworks with their own address space. Reasons for subdivision into subnetworks include separation of the Ethernet networks to reduce the broadcast load, separation of sensitive areas from the main network, and subdivision of the network into logical working groups. Communication between the VLANs can, however, be achieved with Layer-3-Switching (IP routing)
- Integrated and optional security functions offer protection against unauthorized network access and configuration
- Simple monitoring and diagnostics by means of signaling contact, SNMP traps, integrated system diagnostics with PROFINET and email function
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management
- Reduced engineering expenditure for PLC/HMI due to integration into the SIMATIC system fault message concept
- Integrated configuration and diagnostics in the TIA Portal
- Fast mobile diagnostics with smartphone/tablet thanks to WLAN and NFC (Near Field Communication): Fast access to the web-based management of the SCALANCE XM-400 via mobile websites. The function can be started using existing WLAN and NFC.

Design

SCALANCE XM-400

SCALANCE XM-400 with up to 24 Gigabit ports is an Industrial Ethernet switch with robust, industry-standard enclosure, for mounting onto standard rails, and designed IP20 protection.

SCALANCE XM-400 basic devices offer the following additional interfaces

- Console port (serial interface RJ11) and management port (100 Mbit/s, RJ45) for on-site parameterization/diagnostics and firmware update
- Slot for optional C-PLUG swap medium for simple device replacement (included in scope of delivery) or KEY-PLUG for optional software expansion to Layer-3 Switching
- Floating signaling contact can be freely configured to indicate fault events, for example
- Extensive operating mode and status information is displayed via LEDs and selection pushbuttons
- Grounding bolts for defined ground connection
- Two infeeds are available for protection against voltage failure
- Connection for a port extender on the right (tool-free installation)

© Siemens 2019

Ordering data	Article No.
SCALANCE XM-400 Industrial Ethernet switches	
With eight to 16 integrated Gigabit Ethernet twisted-pair interfaces (10/100/1 000 Mbps) 24 x 1 000 Mbps maximum overall configuration by means of port extenders Integrated redundancy manager IT functions (RSTP, VLAN, etc.) PROFINET IO device, network management via SNMP and web server; incl. operating instructions, Industrial Ethernet network manual and configuration software on DVD-ROM C-PLUG included in scope of supply	
SCALANCE XM416-4C; 16 x 10/100/1 000 Mbps, of which 4 x RJ45/SFP combo ports; 16 x 1 000 Mbps maximum basic device configuration	
• IP routing in combination with KEY-PLUG XM-400	**6GK5416-4GS00-2AM2**
• IP routing integrated	**6GK5416-4GR00-2AM2**
SCALANCE XM408-8C; 8 x 10/100/1 000 Mbps, of which 8 x RJ45/SFP combo ports; 8 x 1 000 Mbps maximum basic device configuration	
• IP routing in combination with KEY-PLUG XM-400	**6GK5408-8GS00-2AM2**
• IP routing integrated	**6GK5408-8GR00-2AM2**
SCALANCE XM408-4C 8 x 10/100/1 000 Mbps, of which 4x RJ45/ST or SC plug-in transceiver combo ports; 8x 1 000 Mbps maximum basic device configuration	
• IP routing in combination with KEY-PLUG XM-400	**6GK5408-4GP00-2AM2**
• IP routing integrated	**6GK5408-4GQ00-2AM2**
Accessories	
Power supplies	
SIMATIC PM 1507 24 V stabilized power supply for SIMATIC S7-1500	
• Power supply S7-1500 PM1507 SIMATIC PM 1507 24 V/3 A stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/3 A	**6EP1332-4BA00**
• Power supply S7-1500 PM1507 SIMATIC PM 1507 24 V/8 A stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/8 A	**6EP1333-4BA00**
• PoE power supplies for SCALANCE XM-400 SCALANCE PS9230 PoE power supply for Power-over-Ethernet Input: 120/230 V AC Output: 54 V DC/1.6 A NEC Class 2	**6GK5923-0PS00-3AA2**
• PoE power supplies for SCALANCE XM-400 SCALANCE PS924 PoE power supply for Power-over-Ethernet Input: 24 V DC Output: 54 V DC/1.6 A NEC Class 2	**6GK5924-0PS00-1AA2**
Port extender for SCALANCE XM-400	see "Port extender for SCALANCE XM-400 managed"

	Article No.
Plug-in transceivers – SFPs	See "Plug-in transceivers for SCALANCE"
IE FC RJ45 plug 4 x 2 IE FC RJ45 plug 180 4 x 2; RJ45 connector; Cat6A; (10/100/1000/10000 Mbps) with rugged metal enclosure; FC connection method; for IE FC cable 4 x 2 (AWG 24); 180° cable outlet	
• 1 pack = 1 unit	**6GK1901-1BB12-2AA0**
IE FC TP standard cable GP 4 x 2 TP installation cable Cat6 for connecting to IE FC RJ45 plug 4x2, AWG 24, 8-core, shielded TP installation cable for universal applications; with UL approval Sold by the meter Max. delivery unit 1 000 m; minimum order 20 m, also available pre-assembled with RJ45 connectors in various lengths	**6XV1878-2A**
FO standard cable GP 50/125/1400 [1) 2)] Multimode cable Sold by the meter Max. delivery unit 1 000 m; minimum order 20 m, also available pre-assembled with ST/BFOC, SC and LC connectors in various lengths	**6XV1873-2A**
C-PLUG Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or application data; can be used for SIMATIC NET products with C-PLUG slot	**6GK1900-0AB10**
SCALANCE TAP104 Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic (including incomplete diagrams) for further diagnostics	**6GK5104-0BA00-1SA2**

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

10

© Siemens 2019

Port Extender for SCALANCE XM-400

Overview



- Port extender for flexible expansion to up to 24 ports, can be connected to the SCALANCE XM-400 Industrial Ethernet switches
- Each port extender has eight ports
- There are three different versions, with different connections

Product versions

PE400-8SFP

- 8 x SFP slots, 100 or 1000 Mbps
- Extended operating temperature range from -40 °C to +60 °C

PE408

- 8 x 10/100/1000 Mbps RJ45 ports with retaining collar
- Extended operating temperature range from -40 °C to +70 °C

PE 408PoE

- 8 x 10/100/1000 Mbps RJ45 ports with retaining collar with PoE according to IEEE802.3 Type 1 and Type 2
- Extended operating temperature range from -40 °C to +60 °C
- A separate power supply is required for PoE power (SCALANCE PS924 PoE or SCALANCE PS9230 PoE are available)

Benefits

get Designed for Industry

- Modular system permits cost savings. The modular system facilitates easy setup of electrical and optical Industrial Ethernet networks as well as modification of the network topology and port type to suit the plant structure, with expansion possible at any time
- Integrated industrial network for data, speech, and video
- Mounting of a port extender on the basic device or another port extender without tools
- High performance due to Gigabit ports

Design

- Extender connection on the left for connection to a SCALANCE XM-400 basic device or a port extender
- Extender connection on the right for connecting another port extender
- 8 ports for Ethernet connection, different design depending on the version
- LEDs to display the port and device status
- 2 terminal blocks for Power-over-Ethernet supply with 54 V DC input (only PE408PoE)
- Operating temperature range from -40 °C to +70 °C
- IP20 degree of protection

Ordering data

	Article No.
Port extender for SCALANCE XM-400	
• PE400-8SFP; with 8 slots for 100/1000 Mbps SFP plug-in transceivers	**6GK5400-8AS00-8AP2**
• PE408; with 8 x 10/100/1000 Mbps TP ports	**6GK5408-0GA00-8AP2**
• PE408PoE; with 8 x 10/100/1000 Mbps TP ports Power over Ethernet according to 802.3at Type 1/2	**6GK5408-0PA00-8AP2**

	Article No.
Accessories	
IE FC Stripping Tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	**6GK1901-1GA00**
IE FC RJ45 Plug 180 2 x 2 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**

© Siemens 2019

Ordering data	Article No.
IE FC TP Standard Cable GP 2 x 2 (Type A) 4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/IE FC RJ45 Plug; PROFINET-compliant; with UL approval; sold by the meter; max. length 1000 m, minimum order quantity 20 m	**6XV1840-2AH10**
IE FC RJ45 Plug 4 x 2 RJ45 plug-in connector for Industrial Ethernet (10/100/1000 Mbps) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB11-2AA0**
IE FC TP Standard Cable GP 4 x 2 8-core, shielded TP installation cable for universal applications; with UL approval; sold by the meter; max. length per delivery unit 1000 m, minimum order 20 m	
• AWG24, for connecting to IE FC RJ45 Plug 4 x 2, IE FC M12 Plug PRO 4 x 2	**6XV1878-2A**
IE Connecting Cable IE FC RJ45 Plug-180/IE FC RJ45 Plug-180 Preassembled IE FC TP Trailing Cable GP 2 x 2 (PROFINET type C) with two IE FC RJ45 Plug-180, IP20 degree of protection	
Length:	
• 1.0 m	**6XV1871-5BH10**
• 5.0 m	**6XV1871-5BH50**
• 10.0 m	**6XV1871-5BN10**
FC FO Termination Kit Termination Kit for local assembly of FC SC and FC BFOC connectors to FC FO Standard Cable, comprising a stripping tool, Kevlar cutters, fiber breaking tool and microscope	**6GK1900-1GL00-0AA0**
FC BFOC Plug Screw connector for on-site assembly on FC fiber-optic cable; (1 pack = 20 units + cleaning cloths)	**6GK1900-1GB00-0AC0**
FC SC Plug Screw connector for on-site assembly on FC fiber-optic cable; (1 pack = 10 duplex plugs + cleaning cloths)	**6GK1900-1LB00-0AC0**
FC FO Standard Cable GP 62.5/200/230 FC FO Standard Cable for fixed routing indoors with PVC sheath; sold by the meter; max. length 1000 m; minimum order 20 m	**6XV1847-2A**
Multi-mode FO BFOC connector set For FO Standard Cable (50/125/1400), FO Ground Cable (50/125/1400), flexible FO Trailing Cable, INDOOR FC Cable (62.5/125/900), 20 units	**6GK1901-0DA20-0AA0**
Multi-mode FO SC duplex connector set For FO Standard Cable (50/125/1400), FO Ground Cable (50/125/1400), flexible FO Trailing Cable, INDOOR FC Cable (62.5/125/900), 10 units	**6GK1901-0LB10-2AA0**
LC Plug MM[2]	**6GK1901-0RB10-2AB0**
FO Standard Cable GP 50/125/1400[1) 2)] Multimode cable, sold by the meter; max. length 1000 m; minimum order 20 m	**6XV1873-2A**
Pre-assembled FO patch cables	
Multimode	
MM FO Cord SC/LC With one SC duplex connector and one LC duplex connector, 1 m	**6XV1843-5EH10-0CA0**
MM FO Cord SC/BFOC With one SC duplex connector and two BFOC connectors, 1 m	**6XV1843-5EH10-0CB0**
MM FO Cord SC/SC With two SC duplex connectors, 1 m	**6XV1843-5EH10-0CC0**
Single-mode	
SM FO Cord SC/LC With one SC duplex connector and one LC duplex connector, 1 m	**6XV1843-5FH10-0CA0**
SM FO Cord SC/BFOC With one SC duplex connector and two BFOC connectors, 1 m	**6XV1843-5FH10-0CB0**
SM FO Cord SC/SC With two SC duplex connectors, 1 m	**6XV1843-5FH10-0CC0**
Other accessories	
Spring-loaded terminal block Spring-type terminal block for SCALANCE X/W/S/M; 1 pack = 5 units	
• 2-pole for signaling contact (24 V DC)	**6GK5980-0BB10-0AA5**
Screw for fixing to S7-1500 and S7-300 rails Mounting screw for SCALANCE X/W/S/M; 1 pack = 5 items	**6GK5980-4AA00-0AA5**

1) Special fiber-optic cables, lengths and accessories available on request

2) Special tools and trained personnel are required for pre-assembling glass fiber-optic cables

10

© Siemens 2019

PoE power supplies for SCALANCE XM-400

Overview



The SCALANCE PS924 PoE and SCALANCE PS9230 PoE power supplies have an output voltage of 54 V DC, a special requirement for PoE (Power-over-Ethernet) according to IEEE 802.3at. With PoE, both data and supply voltage is transmitted from the switch to the connected node via a single cable. Examples of typical nodes, so-called powered devices (PD), are WLAN access points, RFID readers, SIMATIC RTLS gateways, OID and IP cameras, IP telephones, etc.

- Both SCALANCE PS924 PoE and SCALANCE PS9230 PoE power supplies can be installed on standard mounting rails and are designed with IP20 degree of protection for use in control cabinets.
- They are especially suited for use in demanding environments for an operating temperature range from -40 °C to +70 °C.
- The SCALANCE PS924 PoE and SCALANCE PS9230 PoE power supplies are ideal for use in products from the SCALANCE X switch series.
- Versions with 24 V DC or 100 – 240 V AC (50/60 Hz) input voltage are available

Product variants

SCALANCE PS924 PoE Power Supply

- Input voltage range from 19 to 29 V DC
- Output voltage 54 V DC
- 86 W output power
- Operating temperature from -40 °C to +70 °C
- IP20 degree of protection

SCALANCE PS9230 PoE Power Supply

- Input voltage range from 85 to 264 V AC (50/60 Hz)
- Output voltage 54 V DC
- 86 W output power
- Operating temperature from -40 °C to +70 °C
- IP20 degree of protection

Benefits

get Designed for Industry

- Reduced wiring effort since data line used transmit supply voltage as well (Power-over-Ethernet)
- High performance provided for connected PDs (up to 30 W)
- Flexible input voltage due to two available versions (24 V DC or 100–240 V AC) (50/60 Hz)
- High availability, suitable for use in harsh environments (-40 °C to 70 °C)
- Space-saving due to compact construction and installation on the standard mounting rail
- Simple installation thanks to classification as current source with limit power (LPS / NEC Class 2)

Design

- Operating temperatures from -40 °C to +70 °C
- Compact design
- IP20 degree of protection
- For installation on 35 mm DIN mounting rails in control cabinet
- LED and signaling contact for status display (DC O.K.)

Ordering data

Ordering data	Article No.
SCALANCE Power Supplies for Power-over-Ethernet Power supplies with an output voltage of 54 V DC, which is especially required for PoE (Power-over-Ethernet) according to IEEE 802.3at, for installation on a standard mounting rail, IP20 degree of protection; NEC Class 2	
SCALANCE PS924 PoE Input: 24 V DC Output: 54 V DC/1.6 A;	**6GK5924-0PS00-1AA2**
SCALANCE PS9230 PoE Input: 120/230 V AC Output: 54 V DC/1.6 A;	**6GK5923-0PS00-3AA2**

10

© Siemens 2019

Overview



The Layer 3-enabled SCALANCE XR-500 Industrial Ethernet switches are modular, high-performance, industry-standard switches for the construction of electrical and optical line, ring and star topologies with data transfer rates of up to 10 Gbps, designed for installation in 19" control cabinets.

- Up to four electrical and/or optical interfaces with 10 Gbps and up to 48 electrical and/or optical interfaces (10/100/1000 Mbps), of which up to 12 electrical PoE interfaces
- Fast media redundancy due to the integrated redundancy manager:
  Redundant connection of rings by means of high-speed media redundancy is also possible with SCALANCE XR-500
- Seamless integration of automation networks into existing corporate networks thanks to support for a host of IT standard functions (VLANs, IGMP Snooping/Query, STP/RSTP/MSTP, Link Aggregation, Quality of Service, IEEE 802.1X and optional static routing, RIP, OSPF, VRRP)
- Integrated system diagnostics over PROFINET, web browser, CLI, SINEMA Server or SINEC NMS and SNMP
- KEY-PLUG as the removable data storage medium for enabling Layer 3 routing functions.
  - For the automatic backup of configuration data. If a fault occurs, it allows fast and simple device replacement of SCALANCE XR-500 components without a Field PG (contains the function of the C-PLUG)
  - Can be used in all Layer 2 versions of SCALANCE XR-500
  - For a detailed description, see "SCALANCE Accessories for Layer 3 Switches/Routers"

Product variants

SCALANCE XR552-12M

- LEDs and ports on the front
- Alternatively: LEDs on the front and ports at the rear
- Connection of power supply unit at rear or above/below the switch
- Four SFP+ slots for equipping with 10 Gigabit Ethernet SFP+ plug-in transceivers, IE connecting cable SFP+/SFP+ or Gigabit SFP plug-in transceivers
- 12x 4-port media module slots
- Available with integrated IP routing functions or for optional extension of IP routing functions by means of KEY-PLUG

SCALANCE XR528-6M

- LEDs and ports on the front
- Alternatively: LEDs on the front and ports at the rear
- Connection of power supply unit at rear or above/below the switch
- Four SFP+ slots for equipping with 10 Gigabit Ethernet SFP+ plug-in transceivers, IE connecting cable SFP+/SFP+ or Gigabit SFP plug-in transceivers
- 6x 4-port media module slots
- Available with integrated IP routing functions or for optional extension of IP routing functions by means of KEY-PLUG

SCALANCE XR526-8C

- Two SFP+ slots for equipping with 10 Gigabit Ethernet SFP+ plug-in transceivers, IE connecting cable SFP+/SFP+ or Gigabit SFP plug-in transceivers
- Eight combo-ports for optional use of optical or electrical interfaces with 10/100/1000 Mbps optically or electrically via SFP plug-in transceiver
- 16 electrical ports operating at 10/100/1000 Mbps
- In total, 26 ports can be used
- Power supply versions 24 V DC and 110 - 240 V AC (integrated)
- Available with integrated IP routing functions or for optional extension of IP routing functions by means of KEY-PLUG

SCALANCE XR524-8C

- Eight combo-ports for optional use of optical or electrical interfaces with 10/100/1000 Mbps optically or electrically via SFP plug-in transceiver
- 16 electrical ports operating at 10/100/1000 Mbps
- In total, 24 ports can be used
- Power supply versions 24 V DC and 110 - 240 V AC (integrated)
- Available with integrated IP routing functions or for optional extension of IP routing functions by means of KEY-PLUG

© Siemens 2019

Benefits

get Designed for Industry

- Unlimited flexibility during network expansions (e.g. more terminals, higher data transfer rates, PoE ports) or conversion (e.g. switching from copper to fiber-optic cable) and reduction of the storage costs due to the fully modular construction using SFPplus/SFP and media modules
- Retrofitting the Layer 3 switching functions (IP routing) by means of a license on KEY-PLUG without replacing the existing hardware
- Changing the media modules during operation
- High availability of the network thanks to:
  - Redundant power supply
  - Redundant network structures based on fiber-optic or twisted pair cables (redundancy manager, standby function and STP/RSTP/MSTP integrated)
  - Easy device replacement by means of C-plug/KEY-PLUG removable data storage medium
  - Extremely fast network reconfiguration in the event of a fault
- High flexibility thanks to variable mounting options of the power supply unit and device variants with ports on either the front or rear of the device.
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management

Design


The SCALANCE XR-500 Industrial Ethernet switches with a rugged metal enclosure in IP20 degree of protection are optimized for installation in the 19" control cabinet. The power supply unit (85 to 264 V AC) for power supply to the SCALANCE XR-500, which is also optimized for the 19" cabinet, can either be installed directly at the rear of the SCALANCE XR-500 or connected using connecting cables (installation of the power supply unit in a 19" rack). The data ports of the SCALANCE XR-500 are located optionally either at the front or rear of the device (depending on the device variant).

The switches have:

- 4-pin terminal block on the front for connecting the optionally available power supply unit (85 V to 264 V AC)
- 6-pin connector for assembly of the optionally available power supply unit (85 V to 264 V AC) on the rear
- 2-pin terminal block for connecting the isolated signaling contact for simple display of faults
- Row of LEDs for indicating status information (power, link status, data traffic, power supply, signaling contact)
- SELECT/SET pushbutton for easy setting of the fault signaling contact on the device
- Slot on the side of the device for the C-PLUG removable data storage medium for easy device replacement in the event of a fault, or for the KEY-PLUG for adding IP routing to the device functionality
- Console port (RS 232 serial interface, RJ11 cable to D-sub (9-pin) included in scope of delivery) and management port (Ethernet interface) for on-site parameter assignment/ diagnostics

The SCALANCE XR-500 switches are available with the following types of port depending on the device variant:

- Four SFP+ slots for optical SFP+ or SFP plug-in transceivers (multimode and singlemode connections)
  - The SFP+ plug-in transceivers support 10 Gbps
  - The SFP plug-in transceivers support 1000 Mbps
- Up to 12 slots for electrical 4-port media modules and electrical PoE 4-port media modules or optical 4-port media modules for multimode or singlemode connections; the optical media modules are available in various connection technologies
  - The RJ45 sockets are also available in industry-standard design with additional retaining collars for connection of the Industrial Ethernet FC RJ45 Plug 180
  - All electrical Ethernet interfaces support 10/100/1000 Mbps, all optical Ethernet interfaces support 100 or 1000 Mbps

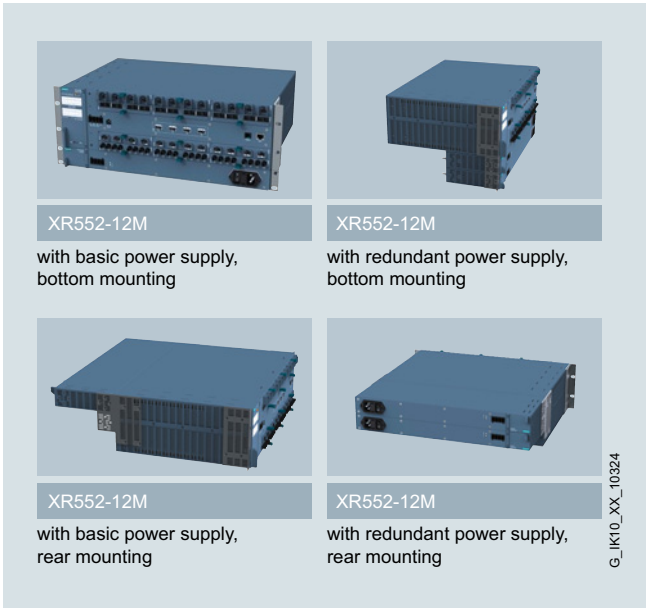

Options for mounting a single/redundant power supply unit to SCALANCE XR552-12M

Ordering data

	Article No.
SCALANCE XR-500 Industrial Ethernet switches	
Layer 3-enabled Industrial Ethernet switches for establishing electrical and/or optical Industrial Ethernet networks; with data transfer rates up to 10 Gbps, designed for installation in 19" control cabinets	
SCALANCE XR552-12M	
4 x integral 1/10 Gbps SFP+ slots for SFP or SFP+ plug-in transceivers 12 x 10/100/1 000 Mbps slots for 4-port media modules, electrical or optical	
Layer 2, upgrade to Layer 3 possible	
• Ports at front	**6GK5552-0AA00-2AR2**
• Ports at rear	**6GK5552-0AA00-2HR2**
Layer 3	
• Ports at front	**6GK5552-0AR00-2AR2**
• Ports at rear	**6GK5552-0AR00-2HR2**

© Siemens 2019

Ordering data	Article No.
SCALANCE XR528-6M	
4 x integral 1/10 Gbps SFP+ slots for SFP or SFP+ plug-in transceivers 6 x 10/100/1 000 Mbps slots for 4-port media modules, electrical or optical	
Layer 2, upgrade to Layer 3 possible	
• Ports at front	**6GK5528-0AA00-2AR2**
• Ports at rear	**6GK5528-0AA00-2HR2**
Layer 3	
• Ports at front	**6GK5528-0AR00-2AR2**
• Ports at rear	**6GK5528-0AR00-2HR2**
SCALANCE XR526-8C	
2 x 10 Gbps 24 x 10/100/1 000 Mbps, of which 8 x RJ45/SFP combo ports 24 x 1 000 Mbps maximum use	
Layer 2, upgrade to Layer 3 possible	
• Redundant 24 V DC power supply	**6GK5526-8GS00-2AR2**
• Power supply 230 V AC	**6GK5526-8GS00-3AR2**
• Redundant 230 V AC power supply	**6GK5526-8GS00-4AR2**
Layer 3	
• Redundant 24 V DC power supply	**6GK5526-8GR00-2AR2**
• Power supply 230 V AC	**6GK5526-8GR00-3AR2**
• Redundant 230 V AC power supply	**6GK5526-8GR00-4AR2**
SCALANCE XR524-8C	
24 x 10/100/1 000 Mbps, of which 8 x RJ45/SFP combo ports; 24 x 1 000 Mbps maximum usable	
Layer 2, upgrade to Layer 3 possible	
• Redundant 24 V DC power supply	**6GK5524-8GS00-2AR2**
• Power supply 230 V AC	**6GK5524-8GS00-3AR2**
• Redundant 230 V AC power supply	**6GK5524-8GS00-4AR2**
Layer 3	
• Redundant 24 V DC power supply	**6GK5524-8GR00-2AR2**
• Power supply 230 V AC	**6GK5524-8GR00-3AR2**
• Redundant 230 V AC power supply	**6GK5524-8GR00-4AR2**
Accessories	
SCALANCE PS598-1 power supply	**6GK5598-1AA00-3AA0**
Power supply 300 W Input: 85–264 V AC IEC plug Output: 24 V DC terminals or for direct connection to SCALANCE X-500	
FAN597-1	**6GK5597-1AA00-8AA0**
Replacement fan slide-in unit for SCALANCE XR552-12M	
FAN597-2	**6GK5597-2AA00-8AA0**
Replacement fan slide-in unit for SCALANCE XR528-6M	

	Article No.
C-PLUG	**6GK1900-0AB10**
Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used for SIMATIC NET products with C-plug slot	
KEY-PLUG X-500	**6GK5905-0PA00**
Removable data storage medium for expansion of the device functions with IP routing (Layer 3), for integration of configuration data and for easy replacement of SCALANCE X-500 in the event of a fault	
SCALANCE TAP104	**6GK5104-0BA00-1SA2**
Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts entire data traffic (including incomplete diagrams) for further diagnostics.	
Media modules	See "Media modules for modular SCALANCE X-500 managed"
Plug-in transceivers - SFPs	See "Power supply for modular SCALANCE X-500 managed"
IE FC RJ45 plug 4x2	**6GK1901-1BB11-2AA0**
RJ45 plug-in data connector (10/100/1 000 Mbps), for connection to IE FC TP cables 4x2, with rugged metal enclosure and FastConnect connection technology	
IE FC TP standard cable GP 4X2	**6XV1878-2A**
TP installation cable Cat6 for connecting to IE FC RJ45 plug 4x2, AWG 24 Sold by the meter Max. delivery unit 1 000 m; minimum order 20 m, also available pre-assembled with RJ45 connectors in various lengths	
FO standard cable GP 50/125/1400	**6XV1873-2A**
Multimode cable Sold by the meter Max. delivery unit 1 000 m; minimum order 20 m, also available pre-assembled with ST/BFOC, SC and LC connectors in various lengths	


Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

© Siemens 2019

Media modules for modular SCALANCE XR-500

Overview

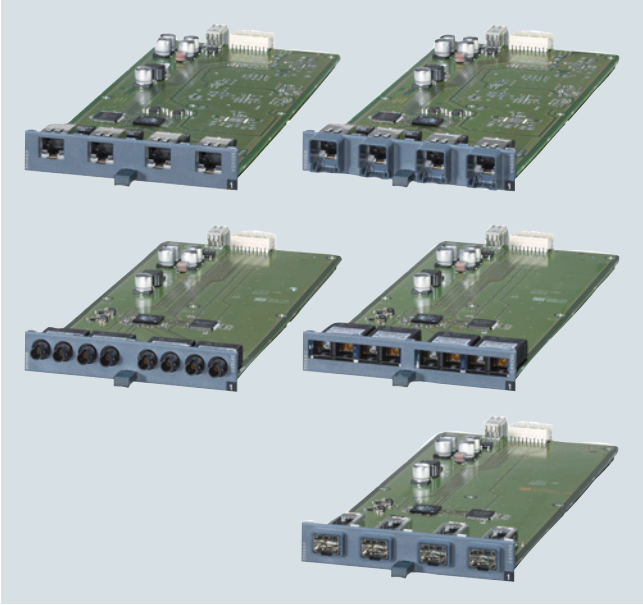

- 4-port media modules for flexible, 4-port-granular equipping of SCALANCE XR-500 Industrial Ethernet switches
- Electrical versions with RJ45 ports are available as are optical versions with ST/BFOC, SC and LC (via SFPs) for the use of multimode and single-mode fiber-optic cables
- Using a 4-port SFP media module, the optional use of fiber-optic SFP plug-in transceivers (small form-factor pluggable) with LC connection technology is possible

Product variants — media modules

Electrical media modules with 4 x 10/100/1 000 Mbps RJ45 ports

- MM992-4CUC with retaining collar
- MM992-4CU without retaining collar

Electrical media modules with 4 x 10/100/1 000 Mbps RJ45 ports and PoE

- MM992-4PoEC with retaining collar
- MM992-4PoE without retaining collar

Optical media modules with 4 x 100 Mbps ST/BFOC ports

- MM991-4
  multimode, glass, up to 5 km
- MM991-4LD
  single-mode, glass, up to max. 26 km

Optical media modules with 4 x 1 000 Mbps SC ports

- MM992-4
  multimode, glass, up to 750 m
- MM992-4LD
  single-mode, glass, up to max. 10 km

Optical media modules with 4 x 100/1 000 Mbps for SFP plug-in transceiver

- MM992-4SFP
  For SFP plug-in transceivers with 1 x 100 Mbps or 1 x 1 000 Mbps multimode or single-mode, glass


Benefits

get Designed for Industry

- Unlimited flexibility during network expansions (e.g. more terminal devices), conversion (e.g. switching from copper to fiber-optic cables), or performance enhancement (e.g. from Gigabit to 10 Gigabit) through modular construction using media modules and SFP+ or SFP plug-in transceivers
- Reduction of storage costs and maintenance overhead by focusing on a few basic device versions

© Siemens 2019

Design

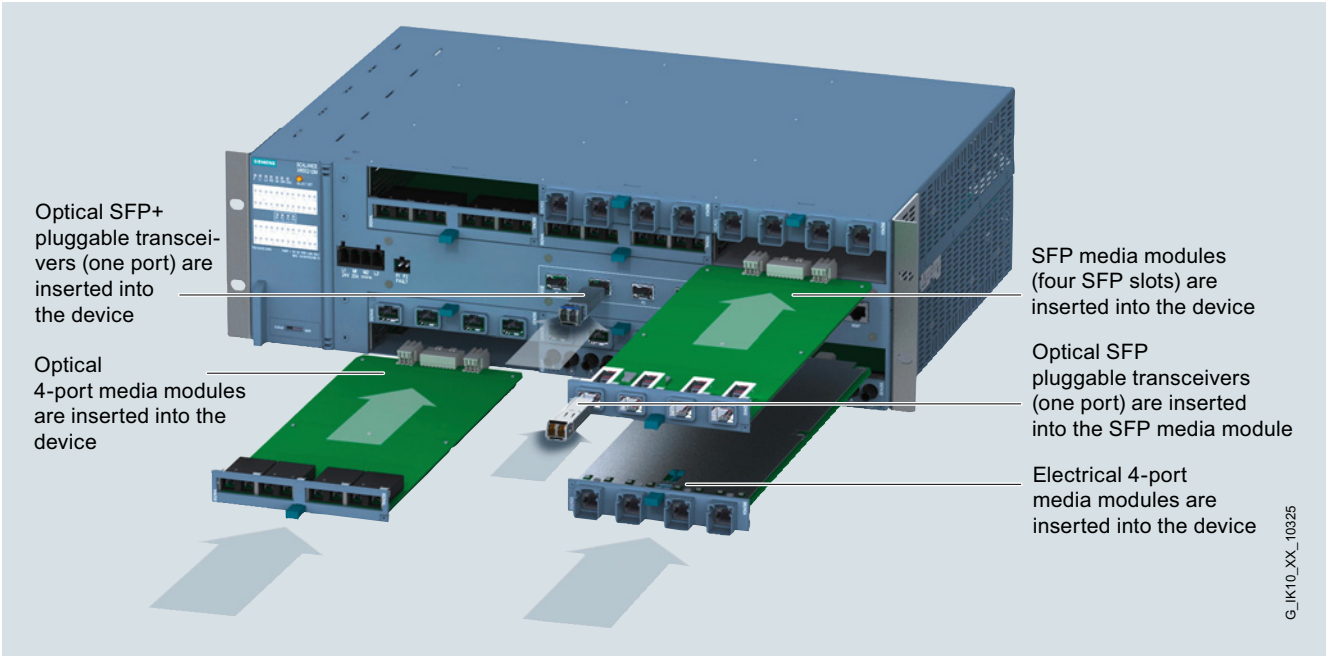

4-port media modules plugged into media module slot and SFP/SFP+ plug-in transceivers in SFP+ slots

		10 Gigabit Ethernet		Gigabit Ethernet			Fast Ethernet			
		10 Gbit/s		10/100/1000 Mbit/s	1000 Mbit/s		100 Mbit/s			
		Optical		Electrical	Optical		Optical		Max. distance	
	Module type	Multimode	Singlemode	Twisted Pair	Multimode	Singlemode	Multimode	Singlemode		
	MM992-4CUC			4x RJ45					100 m	G_IK10_XX_10293
	MM992-4CU[1]			4x RJ45					100 m	
	MM992-4PoE C			4x RJ45					100 m	
	MM992-4PoE[1]			4x RJ45					100 m	
	MM991-4						4x ST/BFOC		5 km	
	MM991-4LD							4x ST/BFOC	26 km	
	MM992-4				4x SC				750 m	
	MM992-4LD					4x SC			10 km	
	MM992-4SFP[3]				4x LC	4x LC	4x LC	4x LC	[2]	

1) Without retaining collar
2) Dependent on the kind of cable and cable quality, transmission speed varies with distance
3) For max. 4x SFP modules

Overview of media modules for SCALANCE X-500

© Siemens 2019

Media modules for modular SCALANCE XR-500

Ordering data	Article No.
Electrical media modules	
with 4 x 10/100/1000 Mbps RJ45 ports, electrical	
• MM992-4CuC	**6GK5992-4GA00-8AA0**
• MM992-4CU	**6GK5992-4SA00-8AA0**
with power over Ethernet	
• MM992-4PoEC	**6GK5992-4RA00-8AA0**
• MM992-4PoE	**6GK5992-4QA00-8AA0**
Optical media modules	
with 4 x 100 Mbps BFOC ports, optical	
• MM991-4 multi-mode, glass, up to 5 km	**6GK5991-4AB00-8AA0**
• MM991-4LD single-mode, glass, up to max. 26 km	**6GK5991-4AC00-8AA0**
with 4 x 1000 Mbps SC ports, optical	
• MM992-4 multimode, glass, up to 750 m	**6GK5992-4AL00-8AA0**
• MM992-4LD single-mode, glass, up to max. 10 km	**6GK5992-4AM00-8AA0**
with 4 x 100/1000 Mbps for SFP pluggable transceiver, optical	
• MM992-4SFP for SFP plug-in transceivers with 1 x 100 or 1 x 1000 Mbps multi-mode or single-mode, glass	**6GK5992-4AS00-8AA0**
Accessories	
IE FC Stripping Tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	**6GK1901-1GA00**
IE FC RJ45 Plug 180 RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation/displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
IE FC TP Standard Cable GP 2 x 2 (Type A) 4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/IE FC RJ45 Plug; PROFINET-compatible; with UL approval; sold by the meter; max. length 1000 m, minimum order quantity 20 m	**6XV1840-2AH10**
IE FC RJ45 Plug 4 x 2 IE FC RJ45 plug 180 4 x 2; RJ45 connector; Cat6A; (10/100/1000/10000 Mbps) with rugged metal enclosure; FC connection method; for IE FC cable 4 x 2 (AWG24); 180° cable outlet	
• 1 pack = 1 unit	**6GK1901-1BB12-2AA0**
IE FC TP Standard Cable GP 4 x 2 8-core, shielded TP installation cable for connection to IE FC RJ45 Modular Outlet for universal application; with UL approval; sold by the meter; max quantity 1000 m, minimum order 20 m	**6XV1870-2E**
IE Connecting Cable IE FC RJ45 Plug-180/IE FC RJ45 Plug-180 Preassembled IE FC TP Trailing Cable GP 2 x 2 (PROFINET type C) with two IE FC RJ45 Plug-180, IP20 degree of protection	
Length:	
• 1.0 m	**6XV1871-5BH10**
• 5.0 m	**6XV1871-5BH50**
• 10.0 m	**6XV1871-5BN10**
IE TP Cord RJ45/RJ45 TP cable 4 x 2 with two RJ45 connectors	
• 1 m	**6XV1870-3QH10**
• 6 m	**6XV1870-3QH60**
• 10 m	**6XV1870-3QN10**
FC FO Termination Kit Termination Kit for local assembly of FC SC and FC BFOC connectors to FC FO Standard Cable, comprising a stripping tool, Kevlar cutters, fiber breaking tool and microscope	**6GK1900-1GL00-0AA0**
FC BFOC Plug Screw connector for on-site assembly on FC fiber-optic cable; (1 pack = 20 units + cleaning cloths)	**6GK1900-1GB00-0AC0**
FC SC Plug Screw connector for on-site assembly on FC fiber-optic cable; (1 pack = 10 duplex plugs + cleaning cloths)	**6GK1900-1LB00-0AC0**
FC FO Standard Cable GP 62.5/200/230 FC FO Standard Cable for fixed routing indoors with PVC sheath; sold by the meter; max. length 1000 m; minimum order 20 m	**6XV1847-2A**
Multi-mode FO BFOC connector set For FO Standard Cable (50/125/1400), FO Ground Cable (50/125/1400), flexible FO Trailing Cable, INDOOR FC Cable (62.5/125/900), 20 units	**6GK1901-0DA20-0AA0**
Multi-mode FO SC duplex connector set For FO Standard Cable (50/125/1400), FO Ground Cable (50/125/1400), flexible FO Trailing Cable, INDOOR FC Cable (62.5/125/900), 10 units	**6GK1901-0LB10-2AA0**

© Siemens 2019

Ordering data	Article No.
LC Plug MM[2]	**6GK1901-0RB10-2AB0**
FO Standard Cable GP 50/125/ 1400 [1] [2] Multimode cable, sold by the meter; max. length 1000 m; minimum order 20 m	**6XV1873-2A**
Pre-assembled FO patch cables Multimode	
MM FO Cord SC/LC With one SC duplex connector and one LC duplex connector, 1 m	**6XV1843-5EH10-0CA0**
MM FO Cord SC/BFOC With one SC duplex connector and two BFOC connectors, 1 m	**6XV1843-5EH10-0CB0**
MM FO Cord SC/SC With two SC duplex connectors, 1 m Single-mode	**6XV1843-5EH10-0CC0**
SM FO Cord SC/LC With one SC duplex connector and one LC duplex connector, 1 m	**6XV1843-5FH10-0CA0**
SM FO Cord SC/BFOC With one SC duplex connector and two BFOC connectors, 1 m	**6XV1843-5FH10-0CB0**
SM FO Cord SC/SC With two SC duplex connectors, 1 m	**6XV1843-5FH10-0CC0**

1) Special fiber-optic cables; lengths and accessories available on request


2) Special tools and trained personnel are required for pre-assembling glass fiber-optic cables

10

© Siemens 2019

Power supplies for SCALANCE XR-500

Overview

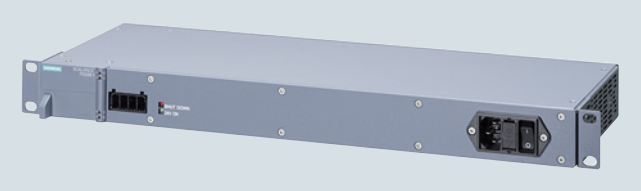

- The 24 V DC power supply SCALANCE PS598 is designed for installation in 19" control cabinets or for direct mounting on SCALANCE XR-500 Industrial Ethernet switches. It features degree of protection IP20.
- 300 W output power at an input voltage range of 85 V AC to 264 V (50/60 Hz) and an operating temperature of 0 °C to +60 °C

Benefits

get Designed for Industry

- Global application due to wide-range input (85 to 264 V AC)
- High reliability since short-circuit proof, secure against no-load operation, and able to bridge short breaks in the mains power

Design

- Non-heating apparatus socket for connecting to the AC network of 85 to 264 V AC (non-heating apparatus cable not included in the scope of delivery; can be ordered optionally on country-specific basis)
- Terminal block for universal supply of products with 24 V DC input
- Plug-in contact for direct connection on the rear of the SCALANCE XR-500 Industrial Ethernet switches (mounting kit included in scope of delivery of SCALANCE XR-500)
- Operating temperatures from 0°C to +60°C
- IP20 degree of protection
- Optimized for installation in 19" control cabinet or for direct mounting on SCALANCE XR-500 (SCALANCE XR-500 and power supply unit are mounted in the 19" control cabinet as a single unit)
- LEDs for indicating the status information (power, operating state)

Ordering data

	Article No.
Power supplies for SCALANCE X-500	
24 V power supplies are designed for installation in 19" control cabinets or for direct mounting on SCALANCE X-500 Industrial Ethernet switches; degree of protection IP20	
SCALANCE PS598-1	**6GK5598-1AA00-3AA0**
300 W output power, input voltage range of 85 V to 264 V AC, operating temperature of 0 °C to +60 °C	
Accessories	
Appliance cable	
• Grounded Continental European plug, region: D/F/NL/ESP/B/A/S/FIN	**6ES7900-0AA00-0XA0**
• Grounded British plug; region: UK	**6ES7900-0BA00-0XA0**
• Grounded Swiss plug; region: CH	**6ES7900-0CA00-0XA0**
• Grounded North American and Japanese plug; region: USA	**6ES7900-0DA00-0XA0**
• Grounded Italian plug; region: Italy	**6ES7900-0EA00-0XA0**
• Grounded Chinese plug; region: China	**6ES7900-0FA00-0XA0**

© Siemens 2019

Overview


Accessories for Industrial Ethernet

- C-PLUG;
  removable data storage medium that supports the fast and easy replacement of SIMATIC NET components without a programming device in the event of a fault.
- CLP;
  removable data storage medium that supports the fast and easy replacement of components with a CLP slot (e.g. SCALANCE W1788) without a programming device in the event of a fault.
- PS791-1PRO power supply;
  AC/DC power supply unit with IP65 degree of protection for the SCALANCE X208PRO and SCALANCE X204IRT PRO Industrial Ethernet switches.
- RUGGEDCOM RP100;
  PoE (Power over Ethernet) power supply units for supplying power to remote PoE devices via a Cat 5 standard cable.

© Siemens 2019

C-PLUG

Overview

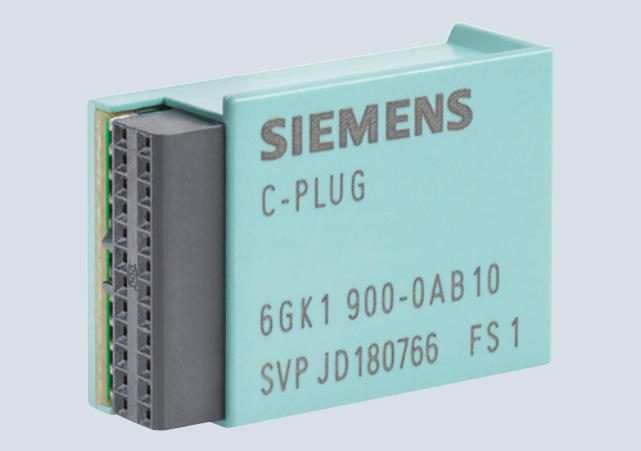

- Removable data storage medium that enables fast and simple device replacement of SIMATIC NET components without a programming device in the event of a fault
- Can be used in all SIMATIC NET products with a C-plug slot
- For automatic backup of configuration and project engineering data for SIMATIC NET components
- The C-plug can also be used to store application data such as documentation or web pages

Benefits

get Designed for Industry

- Fast and easy replacement of SIMATIC NET components without reconfiguration of the spare part
- Device replacement without the need for specially trained personnel, programming devices or PCs
- Downtimes of network segments and connected Industrial Ethernet nodes is minimized if a fault occurs.

Application

The C-plug is used if the replacement of network components or communication modules needs to be quick and simple when a fault occurs, without having to configure the replacement and without the need for specialist personnel.

Design

The C-plug is offered in two designs:


- C-plug with IP20 degree of protection
- C-plug with IP20 degree of protection and with conformal coating for use in harsh environments.

The degree of protection of IP65/IP67 components is ensured by the design of the target device. The power supply is also provided by the terminal device.

The C-plug is inserted in the associated slot of the SIMATIC NET component. The configuration data are automatically saved to the C-PLUG during device start-up and reconfiguring.

If a device needs to be replaced, the C-plug is simply removed from the failed component and plugged into the replacement device. The replacement device installed in the network or automation system now starts up automatically with the same device configuration as the failed device.

To prevent unintentional removal or falling out, the C-plug slot is usually located on the rear of the terminal devices.

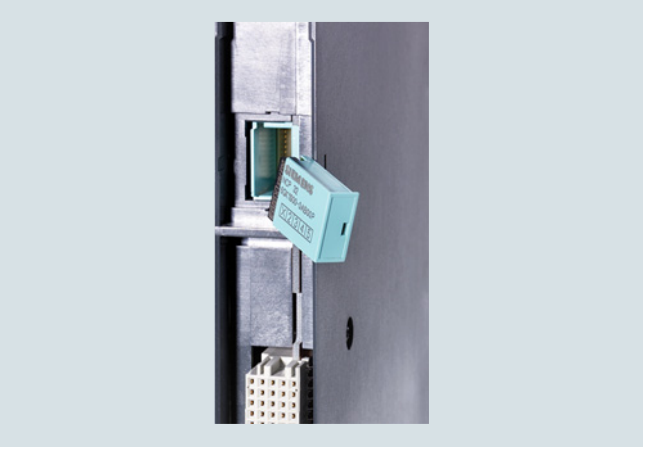

Plugging the C-plug into the rear of the CP 443-1 Advanced



Plugging the C-plug into the SCALANCE XM408-8C switch

© Siemens 2019

Function

During start-up, the device automatically backs up the configuration data on an unwritten C-PLUG (delivery condition) that has been plugged into a SIMATIC NET component. Changes to the configuration during normal operation are also backed up on the C-PLUG without any additional operator intervention.

During start-up an unconfigured device automatically loads the configuration data from an inserted, written C-PLUG provided the data were written by a compatible device type.

Diagnostics

Incorrect C-PLUG handling, such as inserting a C-PLUG that contains the configuration of another device group or general malfunctions of the C-PLUG are signaled over the diagnostic mechanisms for the respective terminal device (LEDs, PROFINET, SNMP, Web-based Management, etc.).

The following devices of the named product lines have a C-PLUG slot:

Product line	C-PLUG 6GK1900-0AB00	C-PLUG 6GK1900-0AB10
SCALANCE X Industrial Ethernet switches	SCALANCE X-200	SCALANCE XC-200, SCALANCE XP-200
	-	SCALANCE XF-200 BA
	-	SCALANCE XF-200BA DNA
	SCALANCE X-300 (included in scope of delivery)	-
	SCALANCE X-400 (included in scope of delivery)	SCALANCE XM-400 (included in scope of delivery)
	-	SCALANCE XR-500 (included in scope of delivery)
SCALANCE S security modules	SCALANCE S-600	SCALANCE S-615
	-	SCALANCE SC600
Industrial Wireless LAN SCALANCE W	-	W78x, W77x IWLAN access points
	-	W74x, W73x IWLAN Client Modules
SCALANCE M industrial modems and routers	-	SCALANCE M81x
	-	SCALANCE M826
	-	SCALANCE M87x
System connections for SIMATIC S7	CP 443-1 Advanced (included in scope of delivery)	-
	CP 343-1 Advanced (included in scope of delivery)	-
	CP 343-1 ERPC (included in scope of delivery)	-
Gateways	IE/PB Link PN IO	-
	IE/AS-i LINK PN IO	-
	DP/AS-i LINK Advanced	-

Note:

The C-PLUG Conformal Coating (6GK1900-0AQ00) is also suited for all SIMATIC NET components that are designed for extended environmental conditions (e.g. SCALANCE XP-200EEC).

Technical specifications

Article number	6GK1900-0AB00	6GK1900-0AB10
Supply voltage	via terminal device	via terminal device
Power loss	0.015 mW	0.015 mW
Installation	Can be plugged into C-plug slot	Can be plugged into C-plug slot
Constructional design		
• Dimensions (W x H x D) in mm	24.3 x 17 x 8.1	24.3 x 17 x 8.1
• Weight	approx. 5 g	approx. 5 g
Memory capacity	32 MB	256 MB
Degree of protection	IP20	IP20

© Siemens 2019

C-PLUG

Ordering data

	Article No.
C-PLUG Removable data storage medium for easy replacement of devices in case of error; for storing configuration and application data; can be used in the following SIMATIC NET products with PLUG slot: SCALANCE X-200, X-300, X-400, S-600, CP443-1 Advanced, CP343-1Advanced, CP343-1 ERPC, IE/PB Link PN IO, IE/AS-I Link PN IO, DP/AS-I Link Advanced	**6GK1900-0AB00**
C-PLUG Removable data storage medium for easy replacement of devices in case of error; for storing configuration and application data; can be used in the following SIMATIC NET products with PLUG slot: SCALANCE XC-200, XP-200, XM-400, XR-500, M-800, S615 and W-700	**6GK1900-0AB10**

More information


Selection Tool:

The SIMATIC NET Selection Tool and the TIA Selection Tool are available to support the selection of SCALANCE network components at:

- http://www.siemens.com/snst-standalone
- https://www.siemens.com/tia-selection-tool

© Siemens 2019

Overview

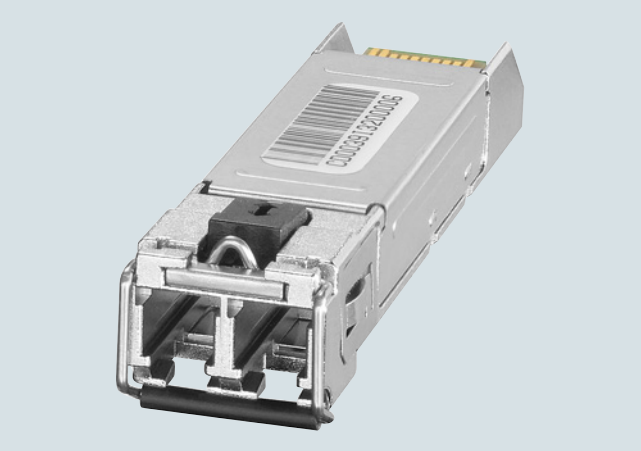

- Plug-in transceivers allow you to flexibly equip network components of the SCALANCE family with a corresponding SFP slot for optical connections
  SFP slots are available for the following devices:
  - SCALANCE XC-200
  - SCALANCE X-200RNA
  - SCALANCE X-300M, SCALANCE XR-300, SCALANCE XR-300WG
  - SCALANCE XM-400
  - SCALANCE XR-500
  - SCALANCE SC-600
  - SCALANCE W786-2SFP
- With an operating temperature range from -40 °C to +70 °C, the plug-in transceivers are especially suited for use in demanding environments
- All specified plug-in transceivers are tested for use with SCALANCE devices
- There are different versions that differ depending on suitable fiber types, range, and bandwidth

Product variants

SFP (small form-factor pluggable) transceivers can be directly plugged in (e.g. on the SCALANCE SC646-2C) or connectable via media modules (e.g. MM992-2SFP for modular X-300 Industrial Ethernet switches).

Optical SFP plug-in transceivers with 1 x 100 Mbps LC port

- SFP991-1 multi-mode, glass, up to 5 km: variants with and without coated printed circuit boards (conformal coating)
- SFP991-1LD, single-mode, glass, up to 26 km: variants with and without coated printed circuit boards (conformal coating)
- SFP991-1LH+, single-mode, glass, up to 70 km
- SFP991-1ELH200 single-mode, glass, up to 200 km

Optical SFP plug-in transceivers with 1 × 1 000 Mbps LC port

- SFP992-1 multi-mode, glass, up to 750 m
- SFP992-1+ multi-mode, glass, up to 2 km
- SFP992-1BXMT multi-mode, glass, up to 500 m, bidirectional
- SFP992-1BXMR multi-mode, glass, up to 500 m, bidirectional
- SFP992-1LD, single-mode, glass, up to 10 km: variants with and without coated printed circuit boards (conformal coating)
- SFP992-1LH, single-mode, glass, up to 40 km
- SFP992-1LH+, single-mode, glass, up to 70 km
- SFP992-1ELH single-mode, glass, up to 120 km

Optical SFP plug-in transceivers with 1 × 10 000 Mbps LC port

- SFP993-1 multi-mode, glass, up to 300 m
- SFP993-1LD, single-mode, glass, up to 10 km
- SFP993-1LD, single-mode, glass, up to 40 km

Benefits

get Designed for Industry

- Modular system permits cost savings. The modular system facilitates easy setup of electrical and optical Industrial Ethernet networks as well as modification of the network topology and port type to suit the plant structure, with expansion possible at any time
- Integrated industrial network for data, speech, and video; high performance due to Gigabit ports
- Bandwidths from 100 Mbps to 10 Gbps

Design

- Operating temperature range of the SFP plug-in transceivers from -40 °C to +70 °C
- SFP plug-in transceivers have an LC connection
- Degree of protection IP20

Electrically preassembled SFP+/SFP+ connecting cable with 10 Gbit/s

The IE Connecting Cable SFP+/SFP+ is preassembled at both ends and suitable for the transmission of 10 Gbit/s Ethernet. The cables have SFP+ connectors for use in the SFP+ slots of the SCALANCE X-500 series and therefore offer the possibility of connecting SCALANCE X-500 switches cost-effectively over short distances with a bandwidth of 10 Gbit/s. The SFP+/SFP+ connecting cables can only be used in the integrated SFP+ slots of the SCALANCE X-500.

- IE connecting cable SFP+/SFP+ 1 m;
  Twinax copper cable with a length of 1 m
- IE connecting cable SFP+/SFP+ 2 m;
  Twinax copper cable with a length of 2 m
- IE connecting cable SFP+/SFP+ 7 m;
  Twinax copper cable with a length of 7 m

© Siemens 2019

Plug-in transceiver for SCALANCE

Design (continued)

		10 Gigabit Ethernet		Gigabit Ethernet			Fast Ethernet		
		10 Gbit/s		10/100/1000 Mbit/s	1000 Mbit/s		100 Mbit/s		
		Optical		Electrical	Optical		Optical		Max. distance
	Module type	Multimode	Singlemode	Twisted Pair	Multimode	Singlemode	Multimode	Singlemode	
	SFP991-1[2]						1x LC		5 km
	SFP991-1[1) 2)]						1x LC		5 km
	SFP991-1LD[2]							1x LC	26 km
	SFP991-1LD[1) 2)]							1x LC	26 km
	SFP991-1LH+[2]							1x LC	70 km
	SFP991-1ELH200[2]							1x LC	200 km
	SFP992-1[3]				1x LC				750 m
	SFP992-1+[3]				1x LC				2 km
	SFP992-1LD[3]					1x LC			10 km
	SFP992-1LD[1) 3)]					1x LC			10 km
	SFP992-1BXMT[5]				1x LC				500 m
	SFP992-1BXMR[5]				1x LC				500 m
	SFP992-1LH[3]					1x LC			40 km
	SFP992-1LH+[3]					1x LC			70 km
	SFP992-1ELH[3]					1x LC			120 km
	SFP+-Module[4]								
	SFP993-1	1x LC							300 m
	SFP993-1LD		1x LC						10 km
	SFP993-1LH		1x LC						40 km

G_IK10_XX_10442

1) Coated PCBs (conformal coating)
2) Can only be inserted in SFP slot
3) Can only be inserted in SFP/SFP+ slot
4) Can only be inserted in SFP+ slot
5) Bidirectional

SFP plug-in transceiver for SCALANCE XC-200, X-300, XM-400, XR-500, SC-600 and W786-2SFP

10

		SCALANCE								
	SFP type	XC-200	X-200RNA	SFP media module X-300	XR-300WG	XM-400 / PE-400	XR-500 / SFP media module XR-500	10GB-Slots XR-500	SC-600	W786-2SFP
	SFP991-1[2]	•[6]	•	•		•	•		•	
	SFP991-1[1) 2)]	•[6]	•	•		•	•		•	
	SFP991-1LD[2]	•[6]	•	•		•	•		•	
	SFP991-1LD[1) 2)]	•[6]	•	•		•	•		•	
	SFP991-1LH+[2]	•[6]	•	•		•	•		•	
	SFP991-1ELH200[2]	•[6]	•	•		•	•		•	
	SFP992-1[3]	•		•	•	•	•	•	•	•
	SFP992-1+[3]	•		•	•	•	•	•	•	
	SFP992-1LD[3]	•		•	•	•	•	•	•	•
	SFP992-1LD[1) 3)]	•		•	•	•	•	•	•	
	SFP992-1BXMT[5]	•		•	•	•	•	•		
	SFP992-1BXMR[5]	•		•	•	•	•	•		
	SFP992-1LH[3]	•		•	•	•	•	•	•	•
	SFP992-1LH+[3]	•		•	•	•	•	•	•	•
	SFP992-1ELH[3]	•		•	•	•	•	•	•	•
	SFP+-Module[4]									
	SFP993-1							•		
	SFP993-1LD							•		
	SFP993-1LH							•		

G_IK10_XX_10444

• applies

1) Coated PCBs (conformal coating)
2) Can only be inserted in SFP slot
3) Can only be inserted in SFP/SFP+ slot
4) Can only be inserted in SFP+ slot
5) Bidirectional
6) XC206-2SFP only

Overview of supported SFP plug-in transceivers for SCALANCE network components

© Siemens 2019

Ordering data

	Article No.
SFP plug-in transceivers together with the MM992-2SFP media module in the modular SCALANCE X-300 Industrial Ethernet switches	
with 1 × 100 Mbps LC port, optical	
• SFP991-1 multi-mode, glass, up to 5 km	**6GK5991-1AD00-8AA0**
• SFP991-1 multi-mode, glass, up to max. 5 km, conformal coating	**6GK5991-1AD00-8FA0**
• SFP991-1LD single-mode, glass, up to 26 km	**6GK5991-1AF00-8AA0**
• SFP991-1LD single-mode, glass, up to max. 26 km, conformal coating	**6GK5991-1AF00-8FA0**
• SFP991-1LH+ single-mode, glass, up to 70 km	**6GK5991-1AE00-8AA0**
• SFP991-1ELH200 single-mode, glass, up to max. 200 km	**6GK5991-1AE30-8AA0**
with 1 × 1 000 Mbps LC port, optical	
• SFP992-1 multi-mode, glass, up to max. 750 m	**6GK5992-1AL00-8AA0**
• SFP992-1+ multi-mode, glass, up to max. 2 km	**6GK5992-1AG00-8AA0**
• SFP992-1LD single-mode, glass, up to 10 km	**6GK5992-1AM00-8AA0**
• SFP992-1LD single-mode, glass, up to 10 km, conformal coating	**6GK5992-1AM00-8FA0**
• SFP992-1BXMT single-mode, glass, up to max. 500 m, bidirectional	**6GK5992-1AL00-8TA0**
• SFP992-1BXMR single-mode, glass, up to max. 500 m, bidirectional	**6GK5992-1AL00-8RA0**
• SFP992-1LH single-mode, glass, up to 40 km	**6GK5992-1AN00-8AA0**
• SFP992-1LH+ single-mode, glass, up to 70 km	**6GK5992-1AP00-8AA0**
• SFP992-1ELH single-mode, glass, up to max. 120 km	**6GK5992-1AQ00-8AA0**
with 1 × 10 000 Mbps LC port, optical	
• SFP993-1 multi-mode, glass, up to max. 300 m	**6GK5993-1AT00-8AA0**
• SFP993-1LD single-mode, glass, up to 10 km	**6GK5993-1AU00-8AA0**
• SFP993-1LH single-mode, glass, up to 40 km	**6GK5993-1AV00-8AA0**
IE connecting cable SFP+/SFP+, electrical, 10 Gbps	
Twinax copper cables, length	
• 1 m	**6GK5980-3CB00-0AA1**
• 2 m	**6GK5980-3CB00-0AA2**
• 7 m	**6GK5980-3CB00-0AA7**

	Article No.
Accessories	
LC plug MM [2]	**6GK1901-0RB10-2AB0**
FO standard cable GP 50/125/1 400 [1] [2]	**6XV1873-2A**
Multi-mode cable, sold by the meter; max. length 1 000 m; minimum order 20 m	
Pre-assembled FO patch cables	
Multi-mode	
MM FO cord SC/LC	**6XV1843-5EH10-0CA0**
With one SC duplex connector and one LC duplex connector, 1 m	
SM FO cord SC/LC	**6XV1843-5FH10-0CA0**
With one SC duplex connector and one LC duplex connector, 1 m	

[1] Special fiber-optic cables, lengths and accessories available on request

[2] Special tools and trained personnel are required for pre-assembling glass fiber-optic cables

10

© Siemens 2019

Overview

Industrial Ethernet FastConnect (IE FC) is a rapid assembly system with insulation displacement for easy assembly and wiring of 4-wire and 8-wire IE FC cables. Using the FC stripping tool, it is possible to remove the outer casing and woven shield of the IE FC cable accurately in a single step. The cable prepared in this manner is subsequently assembled on the cut/crimp contacts of the connection element.

Application


Linking elements

The linking elements which can be used depend on whether the transmission rate is 10/100 Mbps or 1 000 Mbps:

- IE FC RJ45 plug 2×2 90/180 (10/100 Mbps) in association with 4-wire (2×2) IE FC cables
- IE FC RJ45 plug 4×2 180 (10/100/1 000 Mbps) in association with 8-wire (4×2) IE FC cables
- IE FC outlet RJ45 (10/100 Mbps) in association with 4-wire (2x2) IE FC cables
- IE FC RJ45 modular outlet (10/100/1 000 Mbps) with 8-wire (4x2) IE FC cables

The following table provides an overview of the electric port types of the switches, the transmission rates they support, and the IE FC TP standard cables and IE FC connecting elements which can be used. In addition to the IE FC TP standard cables, Catalog IK PI offers further IE FC TP cables with special properties.

Transmission rate	10/100 Mbps		1 000 Mbps	
Port type	10/100BaseTX		1000BaseTX	
Max. cable length	100 m	90 m (+ total of 10 m for TP cord patch cables)	90 m	90 m (+ total of 10 m for TP cord patch cables)
Cable type	IE FC TP standard cable 2×2	IE FC TP standard cable 4×2	IE FC TP standard cable 4×2 (AWG 24)	IE FC TP standard cable 4×2 (AWG 22)
Connecting elements	IE FC RJ45 plug 2×2 90/180, alternatively: IE FC outlet RJ45 + TP cord patch cable	IE FC RJ45 modular outlet with insert 2FE + TP cord patch cable	IE FC RJ45 plug 4×2 180	IE FC RJ45 modular outlet with insert 1GE + TP cord patch cable

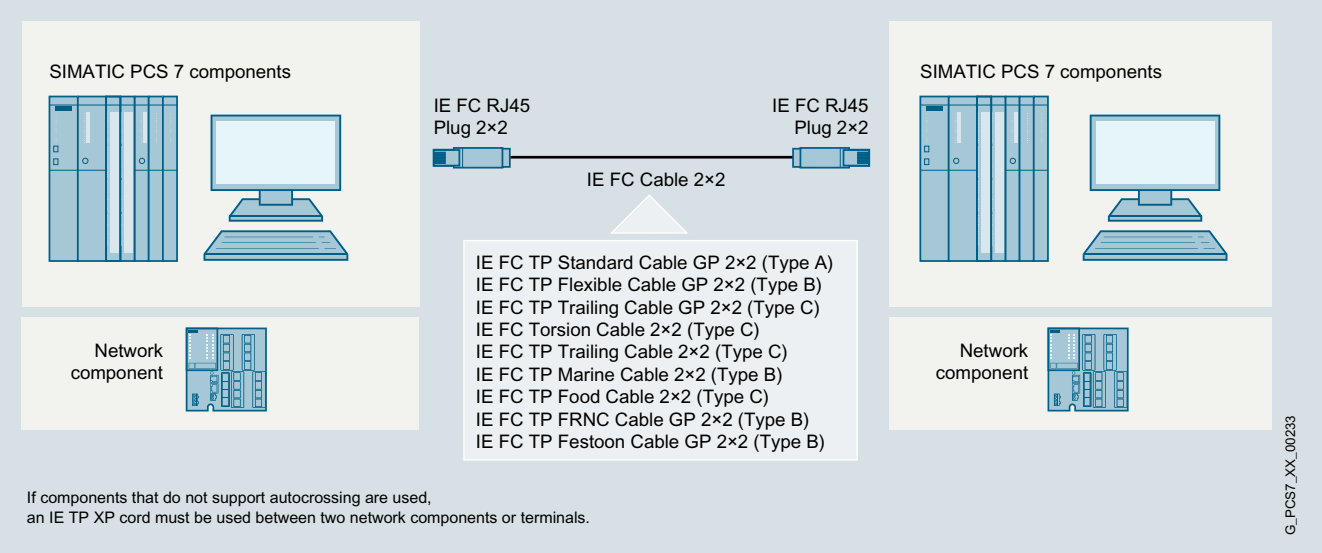

Use of FastConnect cables 2×2 with IE FC RJ45 plug 2×2


IE FC RJ45 plug 2×2

The IE FC RJ45 plugs 2×2 suitable for simple and fast on-site assembly of 4-wire (2×2) twisted pair (TP) FastConnect installation cables are the ideal solution for Industrial Ethernet communication connections for transmission rates up to 100 Mbps. They can be used to implement point-to-point connections without patch technology between two terminal devices/network components over distances of up to 100 m.

Since the IE FC RJ45 plugs 2×2 have no parts which can be lost, assembly is also possible under difficult conditions. For alternatives to the IE FC TP standard cable according to the configuration graphics, see Catalog IK PI, section "Industrial Ethernet", subsection "Cabling systems".

© Siemens 2019

Application (continued)

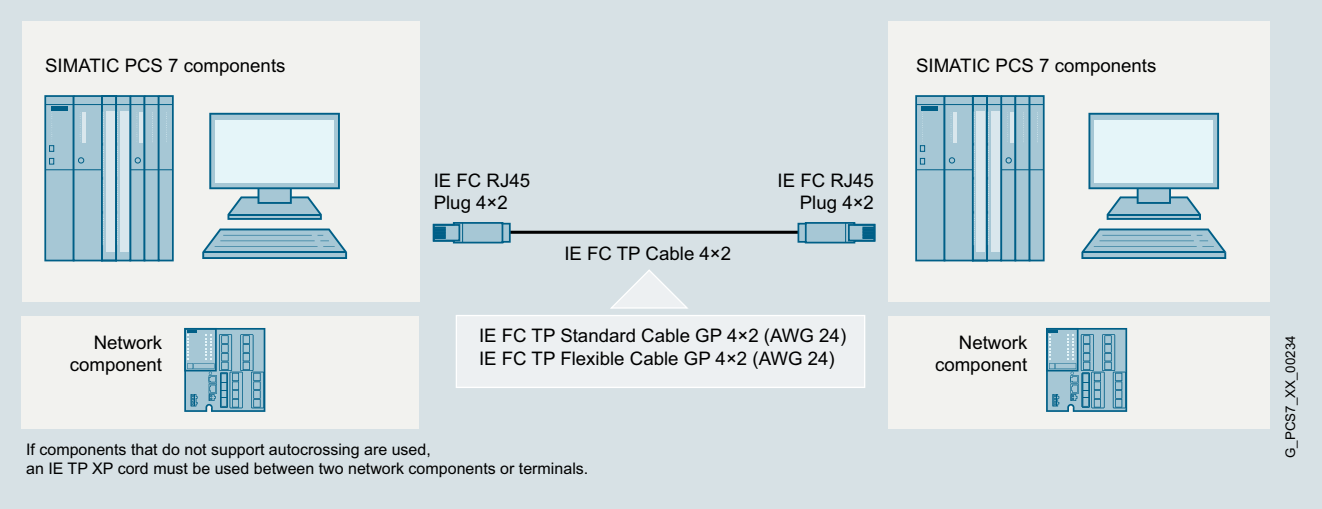

Use of FastConnect cables 4×2 with IE FC RJ45 plug 4×2


IE FC RJ45 plug 4×2

The compact, rugged design of the Cat6A plug connector enables the FC RJ45 plug to be used in both industrial and office environments.

The Industrial Ethernet FastConnect RJ45 plug 4×2 permits quick and easy installation of the Industrial Ethernet FastConnect installation cables 4×2 (8-wire twisted pair AWG24 cables) in the field.

The Industrial Ethernet FastConnect stripping tool for preparing the end of a cable (stripping the jacket and shield in one step) allows simple handling and swift, secure fitting of the connector to the cable. Since all connector parts are captive, it can also be fitted in difficult conditions.

The new plug connector allows the implementation of point-to-point connections (10/100/1 000 Mbps) for Industrial Ethernet between two terminal devices/network components up to 100 m apart without the need for patches (for details, see IK PI capital, "Industrial Ethernet", "Cabling systems").

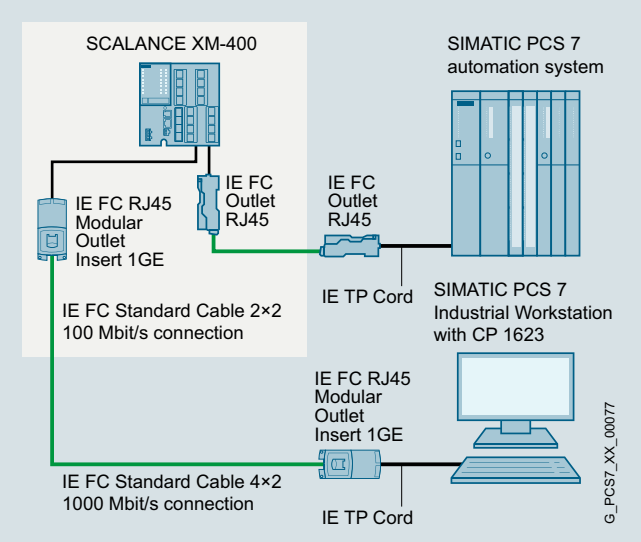

Configuration example with IE FC RJ45 modular outlet and IE FC outlet RJ45

IE FC outlet RJ45 and IE FC RJ45 modular outlet

Alternatives for conversion from RJ45 to the insulation displacement system:

- IE FC outlet RJ45 for 4-wire TP (2×2) IE FC cables and transmission rates up to 100 Mbps
- IE FC RJ45 modular outlet for 8-core TP (4×2) IE FC cables and transmission rates up to 1 000 Mbps.

The latter has the advantage that the existing wiring can still be used if communication is converted from 100 Mbps to 1 000 Mbps. It is only necessary to replace the 2FE insert by one of type 1GE. In contrast to the plugs, an RJ45 patch cable (TP cord) is also required for each outlet so that it can be connected to the network component or terminal device.


Detailed information on the FastConnect outlets and the available TP cords can be found in Catalog IK PI, in the Industry Mall or in CA 01 under "Industrial Communication".

Additional information on network structures is provided in the manual for TP and fiber-optic networks.


© Siemens 2019

Design

IE FC RJ45 plugs 4×2 and 2×2

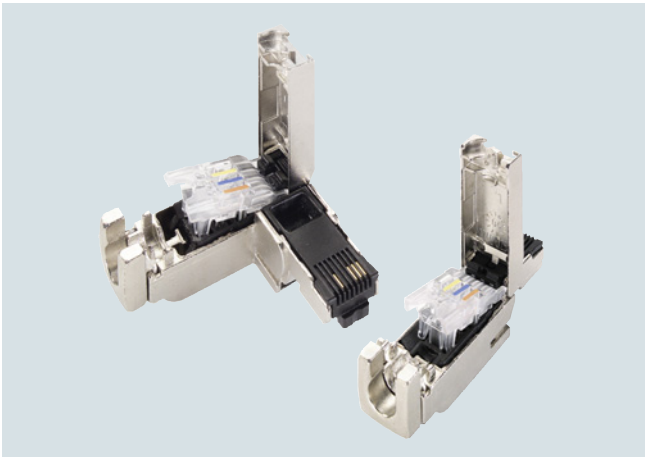

IE FC RJ45 plug 2×2 with 90° outgoing cable (left) and with 180° outgoing cable (right)

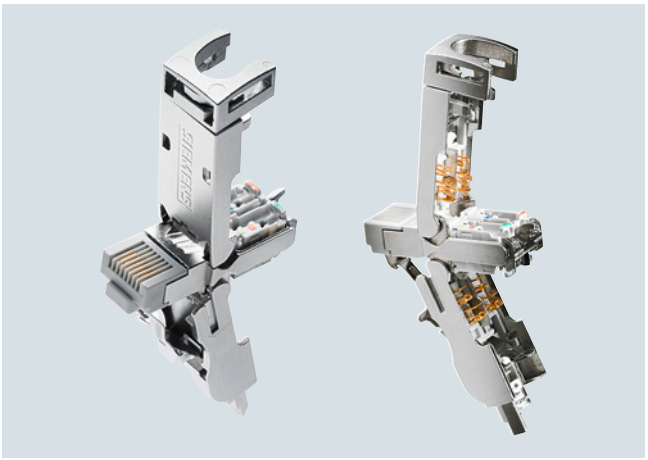

IE FC RJ45 plug 4×2 with 180° outgoing cable

In contrast to the IE FC RJ45 plug 4×2 which is only offered with a 180° (straight) outgoing cable, the IE FC RJ45 plug 2×2 is also available with a 90° (angled) outgoing cable.

All IE FC RJ45 plugs have a rugged, industry-compatible metal enclosure with integral strain relief that provides optimum protection for data communication against EMC interference. The integral insulation displacement contacts permit simple, fault-free contacting of the various types of FC cable. Following introduction of the stripped ends of the cables into the tipped-up barrel contacts, the latter are pressed down for secure contacting of the conductors.

With the housing open, colored marks on the contact cover identify correct connection of the cable cores. The transparent plastic material of the contact element allows visual inspection of the contacts.

Owing to their compact size, IE FC RJ45 plugs can be used both on devices with individual jacks and on devices with multiple jacks (blocks).

Matching retaining collars on terminal equipment, e.g. on devices from the SCALANCE X and SCALANCE S families, permits additional protection of the plug connection against tension and bending stresses.



IE FC RJ modular outlet with insert 1GE

IE FC RJ45 modular outlet

The IE FC RJ45 Modular Outlet (Base Module) designed for transmission rates up to 1 000 Mbps consists of a rugged metal housing with IP40 degree of protection which is suitable for both DIN mounting rail and wall mounting. It has 8 barrel contacts for connecting 8-core Industrial Ethernet FC installation cables (AWG 22) and an interface for the replaceable insert, for example:

- IE FC RJ45 modular outlet insert 2FE with 2 × RJ45 sockets for 100 Mbps
- IE FC RJ45 modular outlet insert 1GE with 1 × RJ45 socket for 1 000 Mbps
- IE FC RJ45 modular outlet power insert with 1 × RJ45 socket for 100 Mbps and 1 × 24 V DC connection (for details on use and ordering, see Section "Industrial Wireless LAN")


© Siemens 2019

Ordering data	Article No.
Industrial Ethernet FC Standard Cable GP 2×2 For universal use, for connection to IE FC Outlet RJ45 or IE FC RJ45, 4-core (2×2), shielded	
• Sold by the meter; max. length 1 000 m; minimum order quantity 20 m	**6XV1840-2AH10**
• Preferred length 1 000 m	**6XV1840-2AU10**
Industrial Ethernet FC Standard Cable GP 4×2 8-core, shielded TP installation cable for universal applications; with UL approval Sold by the meter; max. length 1 000 m, minimum order quantity 20 m	
• AWG 22 For connection to IE FC RJ45 modular outlet	**6XV1870-2E**
• AWG 24 For connection to IE FC RJ45 plug 4×2	**6XV1878-2A**
Industrial Ethernet FC TP Robust Standard Cable GP 2×2 (PROFINET Type A) TPE outer sheath, fixed installation, for connection to IE FC RJ45 or IE FC outlet RJ45, for universal use, 4-core, shielded, Cat. 5e Sold by the meter, max. length 2 000 m; minimum order quantity 20 m	**6XV1841-2A**
Industrial Ethernet FC TP Robust Standard Cable GP 2×2 (PROFINET Type B) TPE outer sheath, fixed installation, for connection to IE FC RJ45 or IE FC Outlet RJ45, for universal use, 4-core, shielded, Cat. 5e Sold by the meter, max. length 2 000 m; minimum order quantity 20 m	**6XV1841-2B**
Industrial Ethernet FC Stripping Tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	**6GK1901-1GA00**
Industrial Ethernet FC Blade Cassettes Replacement blade cassette for the Industrial Ethernet stripping tool, 5 units; for use with IE FC RJ45 Plugs and Modular Outlet	**6GK1901-1GB00**

	Article No.
IE FC RJ45 plug 2×2 180 RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/ CPUs with Industrial Ethernet port	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
• 1 pack = 10 units	**6GK1901-1BB10-2AB0**
• 1 pack = 50 units	**6GK1901-1BB10-2AE0**
Industrial Ethernet FC RJ45 Plug 2×2 90 RJ45 plug connector for Industrial Ethernet with a rugged metal housing and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 90° cable outlet	
• 1 pack = 1 unit	**6GK1901-1BB20-2AA0**
• 1 pack = 10 units	**6GK1901-1BB20-2AB0**
• 1 pack = 50 units	**6GK1901-1BB20-2AE0**
Industrial Ethernet FC RJ45 Plug 4×2 180 Industrial Ethernet FastConnect RJ45 plug 180 4×2, RJ45 connector; CAT6A; (10/100/1 000/10 000 Mbps) with rugged metal enclosure and FC connection technology, for IE FC cable 4×2 (AWG24); 180° cable outlet	
• 1 pack = 1 unit	**6GK1901-1BB12-2AA0**
• 1 pack = 10 units	**6GK1901-1BB12-2AB0**
• 1 pack = 50 units	**6GK1901-1BB12-2AE0**
Industrial Ethernet FC Outlet RJ45	**6GK1901-1FC00-0AA0**
IE FC RJ45 modular outlet with insert 1GE FastConnect RJ45 Outlet for Industrial Ethernet with a replaceable insert for 1 × 1 000 Mbps interface	**6GK1901-1BE00-0AA2**
IE FC RJ45 modular outlet with insert 2FE FastConnect RJ45 Outlet for Industrial Ethernet with a replaceable insert for 2 × 100 Mbps interface For further IE FC RJ45 Modular Outlet versions and replaceable inserts, see Catalog IK PI	**6GK1901-1BE00-0AA1**

© Siemens 2019

Overview

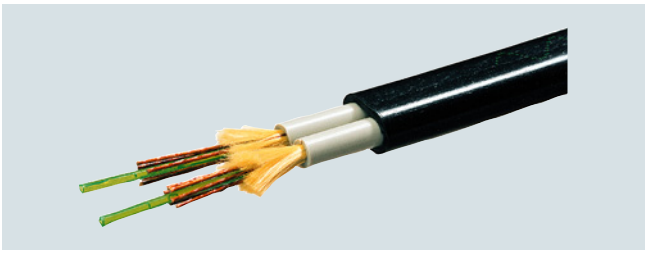

Optical transmission media

Glass fiber-optic cables are the preferred optical transmission medium. The two types of cable offered are suitable for above-ground routing indoors or outdoors. They are available in fixed lengths, pre-assembled with 2x2 BFOC connectors, 2x2 SC connectors or 2×2 LC connectors

The FO standard cable with 2 x 2 SC connectors is required for optical networking in the Gigabit range.

Note:

You can order supplementary components for the SIMATIC NET cabling range from your local contact. For technical advice contact:
Siemens AG
SPG Industrial Network and Components, Fürth, Germany
J. Hertlein
Tel.: +49 911 750-4465
E-mail: juergen.hertlein@siemens.com

Specifications, other cable lengths and other fiber-optic cables can be found in catalog IK PI.

More information on assembly is provided in the manual for TP and fiber-optic networks.

Selection tools

To assist in selecting the right Industrial Ethernet switches and with the configuration of modular variants, the SIMATIC NET Selection Tool and the TIA Selection Tool Cloud are available at:

http://www.siemens.com/snst-standalone

http://www.siemens.com/tstcloud

Ordering data

	Article No.
FO standard cable 50/125[1] Preferred lengths, pre-assembled with 2x2 SC connectors:	
• 1 m	**6XV1873-6AH10**
• 3 m	**6XV1873-6AH30**
• 5 m	**6XV1873-6AH50**
• 10 m	**6XV1873-6AN10**
• 20 m	**6XV1873-6AN20**
• 50 m	**6XV1873-6AN50**
• 100 m	**6XV1873-6AT10**
• 200 m	**6XV1873-6AT20**
• 300 m	**6XV1873-6AT30**
FO standard cable 50/125[1] Preferred lengths, pre-assembled with 2 LC duplex connectors:	
• 1 m	**6XV1873-5AH10**
• 2 m	**6XV1873-5AH20**
• 3 m	**6XV1873-5AH30**
• 5 m	**6XV1873-5AH50**
• 10 m	**6XV1873-5AN10**
• 15 m	**6XV1873-5AN15**
• 20 m	**6XV1873-5AN20**
• 30 m	**6XV1873-5AN30**
• 40 m	**6XV1873-5AN40**
• 50 m	**6XV1873-5AN50**
• 80 m	**6XV1873-5AN80**
• 100 m	**6XV1873-5AT10**
• 150 m	**6XV1873-5AT15**
• 200 m	**6XV1873-5AT20**
• 300 m	**6XV1873-5AT30**
FIBER OPTIC CABLE standard cable 62.5/125, may be split[1] Preferred lengths, pre-assembled with 2x2 BFOC (ST) connectors:	
• 1 m	**6XV1820-5BH10**
• 3 m	**6XV1820-5BH30**
• 5 m	**6XV1820-5BH50**
• 10 m	**6XV1820-5BN10**
• 20 m	**6XV1820-5BN20**
• 50 m	**6XV1820-5BN50**
• 100 m	**6XV1820-5BT10**
• 200 m	**6XV1820-5BT20**
• 300 m	**6XV1820-5BT30**
BFOC (ST) connector set For FIBER OPTIC CABLE standard cable, 20 units	**6GK1901-0DA20-0AA0**

[1] Special tools and specially trained personnel are required for pre-assembling glass fiber-optic cables.

© Siemens 2019

More information

Various versions of the optical connections for fiber-optic cables are available with the network components or terminal equipment:

Design of optical connection	Description	
ST/BFOC connection = ST (stick and twist)	ST/BFOC connectors have a bayonet lock for glass fiber-optic cables. They are suitable for monomode and multimode fibers.	
SC connection	SC connectors are standard connectors for glass fiber-optic cables. The SC connector is usually in the duplex version. However, it can also be used as a simplex connector by separating it from the isolating piece.	
LC connection	FC FO LC PLUG for on site assembly on FC fiber-optic cables (62.5/200/230) (Duplex plugs + cleaning cloths)	
SC-RJ connection	SCRJ is the smallest SC duplex plug connection.	

For more information and an overview of the connectors for connection of fiber-optic cables to the optical interface of network components and terminal equipment see the Industry Online Support:

https://support.industry.siemens.com/cs/ww/en/view/35146578

under

https://www.siemens.com/fastconnect


© Siemens 2019

Design

Connection of single stations, servers and clients

SIMATIC PCS 7 subsystems for engineering, operation and monitoring (also via Internet/Intranet), Batch Control, Route Control, Asset Management or IT applications are distributed between various SIMATIC PCS 7 Industrial Workstations of single station, server or client design depending on the configuration. Depending on their task and the associated integration into the overall plant, these SIMATIC PCS 7 Industrial Workstations are connected either on the plant bus only, the terminal bus only or on both buses of the Industrial Ethernet network. The connection can be redundant or non-redundant, and is made using:

- Interfaces integrated onboard
- Simple network adapters
- Special communications modules, e.g. CP 1623 and CP 1628

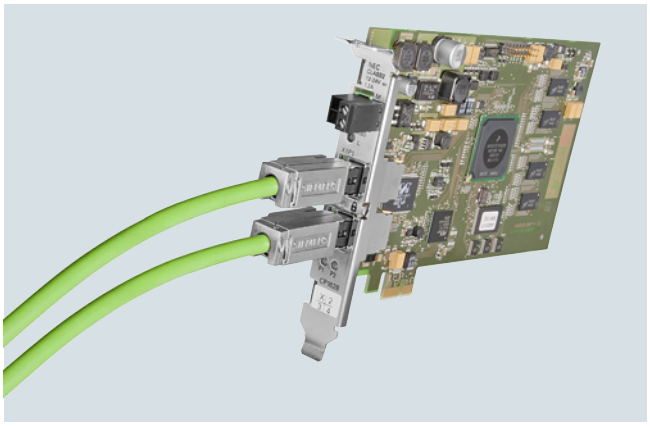

CP 1628 communications module

Connection to plant bus

A SIMATIC PCS 7 workstation, designed as single station or server, can be operated on the Industrial Ethernet plant bus with a Ethernet network adapter (10/100/1000 Mbps) and BCE license or with a CP 1623/CP 1628 communications module and SIMATIC NET HARDNET-IE S7 or SIMATIC NET HARDNET-IE S7-REDCONNECT communications software.

The IE versions of the SIMATIC PCS 7 Industrial Workstation for single stations and servers are factory equipped with a CP 1623 communications module and SIMATIC NET HARDNET-IE S7 communications software, licensed for up to four CP 1623/ CP 1628 (4x license).

CP 1623 and CP 1628 both have a PCI Express port x1 as well as a 2-port switch (RJ45) for connecting to Industrial Ethernet (10/100/1000 Mbps). CP 1628 also features security functions such as Firewall, VPN.

An Ethernet card (10/100/1 000 Mbps) with a BCE license is integrated in the BCE versions of the SIMATIC PCS 7 Industrial Workstation. A separately available desktop adapter network adapter can also be used with this BCE license in a SIMATIC PCS 7 Industrial Workstation.

If you use alternative hardware instead of the SIMATIC PCS 7 Industrial Workstation, you require an additional BCE license for each station which communicates over the plant bus via BCE (Basic Communication Ethernet).

With BCE, AS communication is possible with up to 8 automation systems, with SIMATIC NET HARDNET-IE S7 communication via CP 1623/CP 1628 with up to 64 automation systems (only AS single stations in each case, no AS redundancy stations).

Only the SIMATIC PCS 7 workstation with CP 1623/CP 1628 can communicate with redundant automation systems (redundancy stations). You require for this purpose SIMATIC NET HARDNET-IE S7-REDCONNECT (4x license) communications software instead of the SIMATIC NET HARDNET-IE S7 communications software. SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack (4x license) can be used to upgrade the communications software.

Single stations and servers with BCE can be retro-upgraded to CP 1623/1628 communication. Depending on the criteria mentioned above, this requires SIMATIC NET HARDNET-IE S7 or SIMATIC NET HARDNET-IE S7-REDCONNECT in addition to the CP 1623 or CP 1628 communications module.

The communications software for CP 1623 or CP 1628 is always supplied with the SIMATIC PCS 7 software and is installed in line with the operating system.

In order to activate this communications software, you may need additional licenses for the SIMATIC NET HARDNET-IE S7, SIMATIC NET HARDNET-IE S7-REDCONNECT, or SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack communication products.

Connection to terminal bus

SIMATIC PCS 7 Industrial Workstations in client, server or single station configurations are usually connected to the terminal bus via the onboard Industrial Ethernet interfaces. In the case of servers or single stations without a connection to the plant bus, the network adapter envisaged for BCE can be used as an alternative.

The terminal bus can also be configured redundantly. A configuration with two separate rings is recommended for the redundant, fault-tolerant terminal bus. The communication is performed in this case using the Parallel Redundancy Protocol (PRP) in accordance with IEC 62439-3. Each PCS 7 station should be connected to one of two Industrial Ethernet interfaces on each of the two separate rings. Industrial Ethernet interfaces are standard in all current SIMATIC PCS 7 Industrial Workstations.

The SIMATIC NET SOFTNET-IE RNA communications software on the redundant connection PCS 7 stations organizes communication processes based on the PRP. Therefore, SIMATIC NET SOFTNET-IE RNA communications software is required on each of the redundantly connected PCS 7 stations.

© Siemens 2019

Design (continued)

Connecting non-PRP-enabled devices

Up to 2 non-PRP-enabled devices that have only one Industrial Ethernet port, WLAN access point or infrastructure computer, such as DNS, WINS, DHCP or file server, can be integrated into a redundant, high-availability terminal bus with PRP via a SCALANCE X204RNA.

SCALANCE X204RNA is available in two product versions:

- SCALANCE X204RNA
  Network access point in plastic enclosure with 4 electrical ports for connecting up to 2 non-PRP-enabled devices to redundant networks
- SCALANCE X204RNA EEC
  Network access point in metal enclosure with 2 electric terminal device ports and 2 optical/electrical combo ports for network connection of up to 2 non-PRP-enabled terminal devices to redundant networks

The following constraints must be observed:

- Length of the TP cable between the network and SCALANCE X-200RNA:
  - Max. 100 m with IE FC cable and IE FC RJ45 Plug 180
  - Max. 10 m using patches with TP cord
- Length of the optical cables between the network and SCALANCE X-200RNA:
  - Max. 5 000 m with Industrial Ethernet glass fiber-optic cables (multimode)
  - Max. 26 000 m with Industrial Ethernet glass fiber-optic cables (single-mode)

SCALANCE X-200RNA is typically installed with the stations to be connected in a control cabinet.

For more information and technical specifications for the SCALANCE X204RNA, see Catalog IK PI.

Connection of automation systems

The SIMATIC PCS 7 automation systems communicate with other subsystems of the process control system (e.g. operator system or engineering system) via the Industrial Ethernet plant bus. The automation systems are connected to the plant bus using the CP 443-1 communications processor, also redundant in the case of fault-tolerant systems. Instead of the CP 4431, CP 4431 Advanced with integrated security function (firewall and VPN) can also be used.

With the AS 410 modular automation systems, an additional layer is applied to the PCB of CPU 410-5H Process Automation (conformal coating). To match the AS 410, a CP 443-1 in the conformal coating version is therefore preferred (component of the AS bundle configuration).

Ordering data

	Article No.
System connection of single stations, servers and clients	
Desktop adapter network adapter For BCE and as spare part for redundant terminal bus Intel network adapter for connection to Industrial Ethernet (10/100/1 000 Mbps), with RJ45 connection and PCI express interface	**A5E02639550**
CP 1623 PCI Express x1 card for connection to Industrial Ethernet (10/100/1 000 Mbps), with 2-port switch (RJ45)	**6GK1162-3AA00**
CP 1628 PCI Express x1 card for connecting to Industrial Ethernet (10/100/1 000 Mbps), with 2-port switch (RJ45) and integrated security functions (firewall, VPN)	**6GK1162-8AA00**

	Article No.
Licenses required in some cases for activating the functionality of the CP 1623 or CP 1628 (communications software is part of the SIMATIC PCS 7 software) Activation license if no redundant AS are used	
SIMATIC NET HARDNET-IE S7 V14 Software for S7, open communication, OPC, PG/OP communication Configuration software; up to 120 connections; floating license Runtime software, software and electronic manual on DVD; license key, 2 languages (English, German) for 32/64-bit: Windows 7 SP1 Professional/Ultimate 64-bit: Windows 8.1 Professional, Windows 10, Server 2008 R2 SP1, Server 2012 R2 For max. 4 CP 1623, CP 1628	
• Goods delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-1CB14-0AA0**
• Delivery form online Software and license key download Note: E-mail address required!	**6GK1716-1CB14-0AK0**

© Siemens 2019

Ordering data	Article No.
Activation licenses when using redundant AS	
• Alternative license for SIMATIC NET HARDNET-IE S7:	
SIMATIC NET HARDNET-IE S7-REDCONNECT V14 S7 communications software for fail-safe S7 communication over redundant networks with license for up to 4 Industrial Ethernet CPs Runtime software, 2 languages (English, German); for 32/64-bit: Windows 7 SP1 Professional/Ultimate 64-bit: Windows 8.1 Professional; Windows 10, Server 2008 R2 SP1, Server 2012 R2 For max. 4 CP 1623, CP 1628	
• Goods delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-0HB14-0AA0**
• Delivery form online Software and license key download Note: E-mail address required!	**6GK1716-0HB14-0AK0**
• Additive license for SIMATIC NET HARDNET-IE S7	
SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack V14 For expansion of HARDNET-IE S7 communications software to HARDNET-IE S7-REDCONNECT, with license for up to 4 Industrial Ethernet CPs 2 languages (English, German) for 32/64-bit: Windows 7 SP1 Professional/Ultimate 64-bit: Windows 8.1 Professional, Windows 10, Server 2008 R2 SP1, Server 2012 R2 For max. 4 CP 1623, CP 1628	
• Goods delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-0HB14-0AC0**
• Delivery form online Software and license key download Note: E-mail address required!	**6GK1716-0HB14-0AK1**

	Article No.
System connection for plant bus communication via standard network adapter and Basic Communication Ethernet for single stations and servers which are not based on a SIMATIC PCS 7 Industrial Workstation	
SIMATIC PCS 7 BCE V9.0 Runtime license for plant bus communication via standard network adapter and Basic Communication Ethernet; already integrated with SIMATIC PCS 7 Industrial Workstations 3 languages (English, German, French), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard 64-bit, floating license for 1 user	
• Goods delivery License key on USB flash drive, Certificate of License	**6ES7650-1CD58-2YB5**
• Delivery form online License key download, online Certificate of License Note: E-mail address required!	**6ES7650-1CD58-2YH5**
Components for connecting SIMATIC PCS 7 stations to a redundant terminal bus with PRP	
SIMATIC NET SOFTNET-IE RNA V14 Software for connecting PCS 7 stations to PRP-enabled networks with integrated SNMP Runtime software, 2 languages (English, German), software class A, for 32/64-bit: Windows 7 SP1 Professional/Ultimate 64-bit: Windows 8.1 Professional; Windows 10, Server 2008 R2 SP1, Server 2012 R2 Single license for 1 installation Goods delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1711-1EW14-0AA0**
Industrial Ethernet SCALANCE X204RNA router With integrated SNMP access, web diagnostics and PROFINET diagnostics, for connecting non-PRP-enabled terminal devices to PRP networks; with operating instructions, Industrial Ethernet network manual and configuration software on CD	
• SCALANCE X204RNA With four 100 Mbps RJ45 ports	**6GK5204-0BA00-2KB2**
• SCALANCE X204RNA EEC With two 100 Mbps RJ45 ports and two RJ45/SFP combo ports	**6GK5204-0BS00-3LA3**

© Siemens 2019

Ordering data	Article No.
Accessories for Industrial Ethernet SCALANCE X-204RNA network access	
IE FC TP standard cable GP 2×2 (type A) 4-wire, shielded TP installation cable for connecting to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. quantity 1 000 m, minimum order quantity 20 m	**6XV1840-2AH10**
IE FC RJ45 plug 180 2×2 RJ45 plug connector for Industrial Ethernet with rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet port	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
• 1 pack = 10 units	**6GK1901-1BB10-2AB0**
• 1 pack = 50 units	**6GK1901-1BB10-2AE0**
SFP plug-in transceiver	
• SFP991-1 (multimode, glass, up to 3 km)	**6GK5991-1AD00-8AA0**
• SFP991-1LH+ (single-mode, glass, up to 70 km, LH+)	**6GK5991-1AE00-8AA0**
• SFP991-1LD (single-mode, glass, up to 26 km)	**6GK5991-1AF00-8AA0**
LC plug MM[2]	**6GK1901-0RB10-2AB0**
LC plug SM[2]	**6GK1901-0SB10-2AB0**
FO Robust Cable GP 50/125/900[1]	**6XV1873-2R**
FO Robust Cable GP 4x9/125/900[1]	**6XV1843-2R**
SITOP compact 24 V/0.6 A Single-phase power supply with wide-range input 85 … 264 V AC/110 … 300 V DC, stabilized output voltage 24 V, rated output current value 0.6 A, slim-line design	**6EP1331-5BA00**
C-PLUG Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used for SIMATIC NET products with C-PLUG slot	**6GK1900-0AB00**


	Article No.
System connection of automation systems	
SIMATIC NET CP 443-1 Communications module for connecting SIMATIC S7-400 to Industrial Ethernet through TCP/IP, ISO and UDP; PROFINET IO Controller, MRP; integrated real-time switch ERTEC with 2 ports; 2 × RJ45 interface; S7 communication, open communication (SEND/RECEIVE) with FETCH/WRITE, with or without RFC 1006, DHCP, SNMP V2, diagnostics, multicast, access protection over IP access list, initialization over LAN 10/100 Mbps with electronic manual on DVD	**6GK7443-1EX30-0XE0**
SIMATIC NET CP 443-1 Advanced With security functionality (firewall and VPN) Communications module for connection of SIMATIC S7-400 to Industrial Ethernet: 1 × 10/100/1 000 Mbps; 4 × 10/100 Mbps (IE SWITCH); RJ45 ports; ISO; TCP; UDP; PROFINET IO controller, S7 communication; open communication (SEND/RECEIVE); S7 routing; IP configuration via DHCP/block; IP Access Control List; time synchronization; expanded web diagnostics; fast startup; PROFIenergy support; IP routing; FTP; web server; e-mail; PROFINET CBA	**6GK7443-1GX30-0XE0**

1) Special fiber-optic cables, lengths and accessories available on request

2) Special tools and specially trained personnel are required for pre-assembling glass fiber-optic cables

© Siemens 2019

Overview

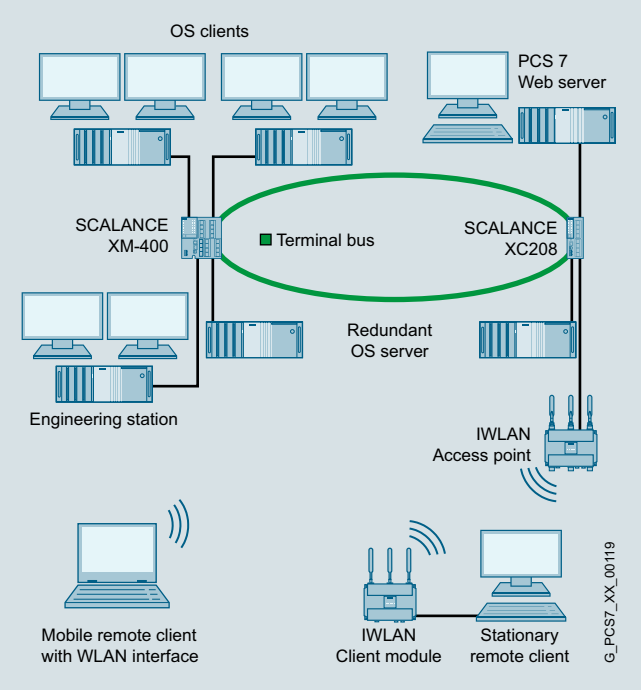

SIMATIC PCS 7 provides the option for integrating mobile or stationary remote clients via an Industrial Wireless LAN (IWLAN) access point of the SCALANCE W760, W770 or W780 product lines into the terminal bus.

The following applications, for example, can be implemented in this manner:

- Configuration of additional remote OS clients (up to 2 clients on IWLAN)
- Linking of web clients to a SIMATIC PCS 7 web server (up to 2 web clients on IWLAN)
- Remote access to an engineering station using the "RealVNC" software (Enterprise Edition), e.g., during commissioning

Mobile remote clients (e.g. notebooks) equipped with a WLAN interface can use it to communicate with the IWLAN access point. Stationary remote clients in a desktop/tower housing (SIMATIC PCS 7 Industrial Workstations) require an IWLAN client module of the SCALANCE W720, W730 or W740 production lines for communication with the IWLAN access point.

The IWLAN client modules and the IWLAN access points of the SCALANCE W700 product family are extremely rugged, use state-of-the-art authentication and encryption procedures, and ensure high wireless channel reliability. By means of link aggregation and parallel use of several antennas (MIMO technology) in accordance with the international standard IEEE 802.11n you can achieve gross data transfer rates of up to 450 Mbps.

Various designs are offered for the following operational environments:

- IWLAN client modules and access points for control cabinets
- IWLAN client modules and access points for indoor use
- IWLAN access points for outdoor use

All IWLAN access points can also be configured as IWLAN client modules.

The C-PLUG removable data storage medium for saving configuring data supports rapid exchange of equipment without specially trained personnel.

Furthermore, the KEY-PLUG removable data storage medium can also enable additional functions for products of the SCALANCE W700 family. A total of three KEY-PLUGs are available:


- KEY-PLUG W780 iFeatures
- KEY-PLUG W740 iFeatures
- KEY-PLUG W700 Security

Note:

Note that Industrial Wireless LAN is not approved as a terminal bus or plant bus of SIMATIC PCS 7.

© Siemens 2019

Overview (continued)

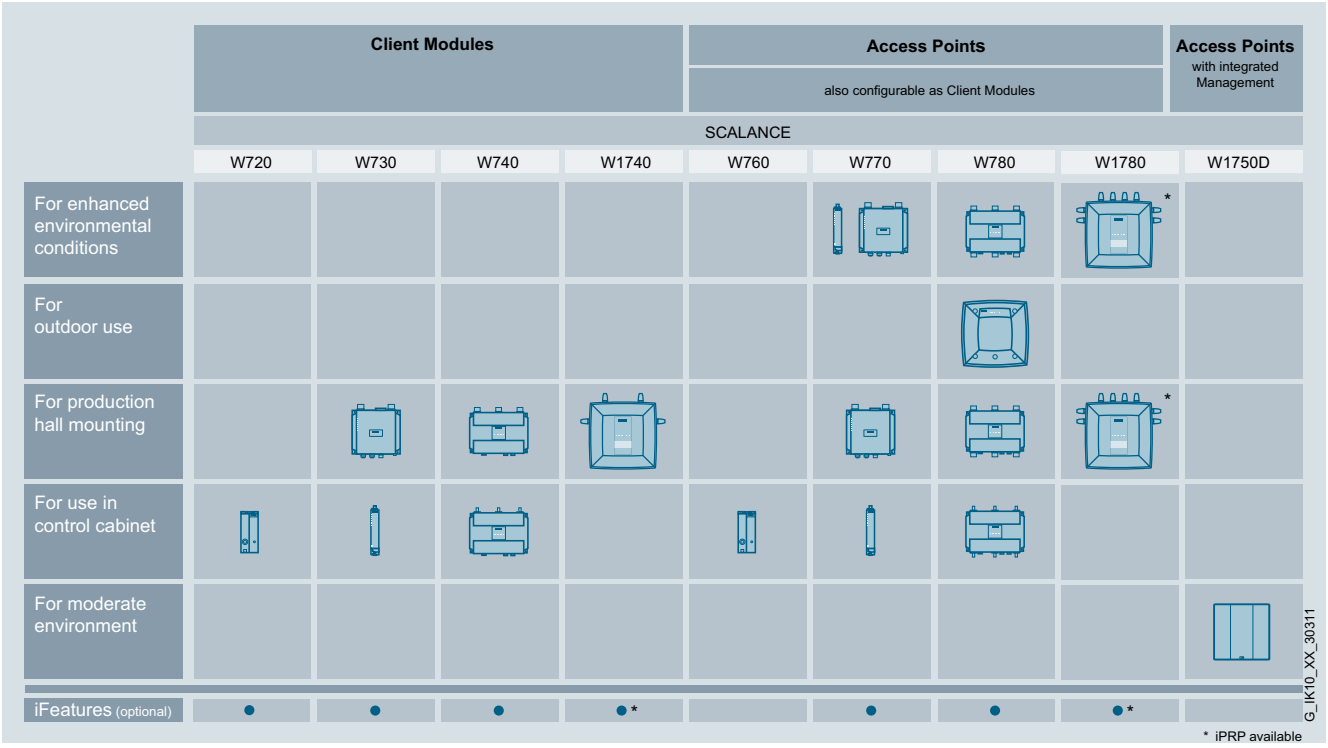

Portfolio SCALANCE W Access Points and clients W700 according to IEEE 802.11n and W1700 according to IEEE 802.11ac

Design

Product categorization according to environment of use

IWLAN products for control cabinets

The IWLAN client modules and IWLAN access points intended for installation in control cabinets are a low-cost alternative for indoor areas with less harsh environmental conditions. They are particularly suited for setting up infrastructures in which great temperature differences and protection against dust and water are less important.

IWLAN products for indoor use

IWLAN client modules and IWLAN access points of this category can be installed at the location that is most favorable for the wireless link in indoor areas. The devices with IP65 degree of protection offer exceptional protection against dust and water and tolerate large differences in temperature. The enclosure and the connectors are resistant to high levels of shock and vibration.

IWLAN products for outdoor use

The IWLAN access points designed for installation outdoors and in publicly accessible areas are extremely rugged devices for high climatic demands and can be installed at a location that is most favorable for the wireless link. They are resistant to condensation, UV radiation, and salt spray.

© Siemens 2019

Design (continued)

IWLAN Client Modules

SCALANCE W721-1 RJ45/ SCALANCE W722-1 RJ45 for the control cabinet



The W721 RJ45 and W722 RJ45 client modules with IP20 degree of protection are WLAN-capable devices according to the IEEE 802.11n WLAN standard with an RJ45 connection for 10/100 Mbps for integrated solutions from the control level down to the field. They offer reliable wireless real-time communication and stability for very high bandwidth requirements. The space-saving SCALANCE W720 client modules are suitable for applications in which the device is to be mounted in the control cabinet enabling the establishment of simple, cost-efficient wireless machine networks. Thanks to their SIMATIC design, automation components, such as the SIMATIC ET 200SP can be seamlessly integrated into an industrial WLAN to save space in the control cabinet. The device offers data rates up to 150 Mbps according to WLAN standard IEEE 802.11n.

SCALANCE W734-1 RJ45 for the control cabinet



The W734-1 RJ45 client module with IP30 degree of protection is a WLAN-capable device with two RJ45 connections for 10/100 Mbps, one of which has Power-over-Ethernet according to IEEE 802.3at, for integrated solutions from the control level down to the field. It offers reliable wireless real-time communication and stability for very high bandwidth requirements. Its compact design makes it deal to use; it also offers particularly reliable transmission of wireless signals through 2 antennas (2x2:2 MIMO). The client modules in SIMATIC S7-1500 design are suitable for applications where the device is to be mounted in the control cabinet.

In perfect interaction with SIMATIC S7-1500, the device enables wireless data transmission and communication between the controller and an ET 200MP. This allows networks ranging from simple machine networks to large wireless areas to be implemented using MIMO technology with data transmission rates of up to 300 Mbps. Due to optional iFeatures provided by the KEY-PLUG W740 iFeature, it is also possible to perform wireless data transmission in real-time via PROFINET IO. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

Due to the compact design, the devices offer versatile mounting options using DIN mounting rail mounting adapters, angle adapters or direct screw connection to the wall. The portfolio for the client module also includes an extensive selection of antennas.

SCALANCE W738-1 M12 for indoor use



The robust SCALANCE W738 M12 client module with IP65 degree of protection is a WLAN-capable device with two M12 connections for 10/100 Mbps, one of which has Power-over-Ethernet according to IEEE 802.3at, and is designed for integrated solutions from the control level to the field. It is suitable for industrial applications outside the control cabinet at locations optimal for wireless operation.

In perfect interaction with SIMATIC S7-1500, the device enables wireless data transmission and communication between the controller and an ET 200MP. This allows networks ranging from simple machine networks to large wireless areas to be implemented using MIMO technology with data transmission rates of up to 300 Mbps. Due to optional iFeatures provided by the KEY-PLUG W740 iFeature, it is also possible to perform wireless data transmission in real-time via PROFINET IO. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

Due to the compact design, the devices offer versatile mounting options using DIN mounting rail mounting adapters, angle adapters or direct screw connection to the wall. The portfolio for the client module also includes an extensive selection of antennas.

IWLAN Client Modules

SCALANCE W748-1 M12 for indoor use



The robust SCALANCE W748 M12 client module with IP65 degree of protection is a WLAN-capable device with a 1 x M12 connection for 10/100/1 000 Mbps with Power-over-Ethernet according to IEEE 802.3at for integrated solutions from the control level to the field. It is suitable for industrial applications outside the control cabinet.

With data rates of up to 450 Mbps and the extension of the IEEE 802.11n standard by corresponding iFeatures, the SCALANCE Client Module W740 ensures reliable wireless communication in real time and stability with very high bandwidth requirements. The iFeatures with MIMO technology mentioned above, for example, enable clients to move freely over multiple wireless cells. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

This opens up new areas of application both indoors and outdoors, as well as under extreme operating conditions. The SCALANCE W748 M12 can also be used to set up applications along railway lines, in holiday parks or even applications with an EMERGENCY OFF function via a mobile panel. The portfolio for the client module also includes an extensive selection of antennas.

SCALANCE W748-1 RJ45 for the control cabinet



The SCALANCE W748 RJ45 client module with IP30 degree of protection is a WLAN-compatible device with an RJ45 connection for 10/100/1 000 Mbps with Power-over-Ethernet according to IEEE 802.3at for integrated solutions from the control level down to the field with easy installation in the control cabinet. It is suitable for applications in which the client module is to be mounted in the control cabinet.

With data rates of up to 450 Mbps and the extension of the IEEE 802.11n standard by corresponding iFeatures, the SCALANCE Client Module W740 ensures reliable wireless communication in real time and stability with very high bandwidth requirements. The iFeatures with MIMO technology mentioned above, for example, enable clients to move freely over multiple wireless cells. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

This opens up new areas of application both indoors and outdoors, as well as under extreme operating conditions. The SCALANCE W748 RJ45 can also be used to set up applications along railway lines, in holiday parks or even applications with an EMERGENCY OFF function via a mobile panel. The portfolio for the client module also includes an extensive selection of antennas.

© Siemens 2019

Design (continued)

IWLAN Access Points

SCALANCE W761-1 RJ45 for the control cabinet



The SCALANCE W761 RJ45 access point with IP20 degree of protection and 1x RJ45 connection for 10/100 Mbps is ideally suited for setting up Industrial Wireless LAN (IWLAN) networks and for integrated solutions from the control level down to the field. The space-saving device supports 2.4 GHz and 5 GHz frequency bands and is suitable for applications where the device is to be mounted in the control cabinet.

With the SCALANCE W761 RJ45 Access Point, you have the option of implementing wireless machine networking simply and cost-effectively. The portfolio for the access point also includes a comprehensive selection of antennas. It forms the counterpart to the W721 clients for cost-effective, point-to-point connections and enables wireless commissioning on the system.

Thanks to their SIMATIC design, automation components such as an ET 200SP can be seamlessly integrated into an industrial WLAN to save space in the control cabinet. This is implemented according to the IEEE 802.11n standard and with data rates of up to 150 Mbps and can be expanded with video data thanks to the increased bandwidth.

SCALANCE W774-1 RJ45 for the control cabinet



The easy-to-install SCALANCE W774 RJ45 access point with IP30 degree of protection is a WLAN-capable device with two RJ45 connections for 10/100 Mbps, one of which has Power-over-Ethernet according to IEEE 802.3at, for integrated solutions from the control level to the field. The W774-1 RJ45 enables local wireless access to the system and coexistence with other wireless systems by supporting 2.4 GHz and 5 GHz frequency bands. The access points in the SIMATIC S7-1500 design are particularly suitable for applications in which the device is to be mounted in the control cabinet.

In perfect interaction with SIMATIC S7-1500, the device enables wireless data transmission and communication between the controller and an ET 200MP. This allows networks ranging from simple machine networks to large wireless areas to be implemented using MIMO technology with data transmission rates of up to 300 Mbps. Due to optional iFeatures provided by the KEY-PLUG W780 iFeature, it is also possible to perform wireless data transmission in real-time via PROFINET IO. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

SCALANCE W774 M12 EEC For an extended range of ambient conditions



The SCALANCE W774 M12 EEC compact access point with IP30 degree of protection is a WLAN-capable device with two M12 connections for 10/100 Mbps, of which one has Power-over-Ethernet according to IEEE 802.3at, which has railway approval and is suitable for mounting between walls.

In perfect interaction with SIMATIC S7-1500, the device enables wireless data transmission and communication between the controller and an ET 200MP. This allows networks ranging from simple machine networks to large wireless areas to be implemented using MIMO technology with data transmission rates of up to 300 Mbps. Due to optional iFeatures provided by the KEY-PLUG W780 iFeature, it is also possible to perform wireless data transmission in real-time via PROFINET IO. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

The SCALANCE W774-1 M12 EEC access points meet requirements for rolling stock for railway applications (EN 50155, E1) thanks to their conformal coating.

IWLAN Access Points

SCALANCE W778-1 M12 for indoor use



The rugged access point SCALANCE W778-1 M12 with IP65 degree of protection and two M12 connections for 10/100 Mbps, one of which has Power-over-Ethernet according to IEEE 802.3at, is ideal for setting up Industrial Wireless LAN (IWLAN) networks and for applications outside the control cabinet. Low-wear communication to mobile devices can be established through PROFINET or an EtherNet/IP connection via WLAN. The access point is suitable for simple, s pace-saving, cabinet-free, on-site installation in industrial and automation applications.

In perfect interaction with SIMATIC S7-1500, the device enables wireless data transmission and communication between the controller and an ET 200MP. This allows networks ranging from simple machine networks to large wireless areas to be implemented using MIMO technology with data transmission rates of up to 300 Mbps. Due to optional iFeatures provided by the KEY-PLUG W780 iFeature, it is also possible to perform wireless data transmission in real-time via PROFINET IO. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

Due to the IP65 compatibility and the compact design of the devices, they can be used in harsh ambient conditions and offer versatile mounting options using DIN mounting rail mounting adapters, angle adapters or direct screw connection to the wall. The portfolio for the access point also includes a comprehensive selection of antennas.

SCALANCE W778-1 M12 EEC For an extended range of ambient conditions



The SCALANCE W778-1 M12 EEC robust access point with IP65 degree of protection and two M12 EEC connections for 10/100 Mbps, of which one connection has Power-over-Ethernet according to IEEE 802.3at, is ideal for setting up Industrial Wireless LAN (IWLAN) wireless networks and for applications outside the control cabinet. In addition, in combination with KEY-PLUG W700 Security, the device enables increased network security when "Inter AP Blocking" is activated. The access point is suitable for use in industry and automation in general, but especially for an extended range of ambient conditions such as in the railway environment.

In perfect interaction with SIMATIC S7-1500, the device enables wireless data transmission and communication between the controller and an ET 200MP. This allows networks ranging from simple machine networks to large wireless areas to be implemented using MIMO technology with data transmission rates of up to 300 Mbps. Due to optional iFeatures provided by the KEY-PLUG W780 iFeature, it is also possible to perform wireless data transmission in real-time via PROFINET IO. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

Due to the IP65 compatibility and the compact design of the devices, they can be used in harsh ambient conditions and offer versatile mounting options using DIN mounting rail mounting adapters, angle adapters or direct screw connection to the wall. The portfolio for the access point also includes a comprehensive selection of antennas.

Thanks to their conformal coating, the access points SCALANCE W774-1 M12 EEC and SCALANCE W778-1 M12 EEC meet the requirements for rolling stock for railway applications (EN 50155, E1).

© Siemens 2019

Design (continued)

IWLAN Access Points

SCALANCE W786-2 SFP for outdoor use



The SCALANCE W786 SFP robust access point with IP65 degree of protection and 6 x R-SMA sockets for connecting remote antennas as well as two slots for SFP plug-in transceivers (optical 2-port switch) for integrated solutions from the control level to the field level with simple installation in the control cabinet. These access points are particularly well-suited to outdoor applications with demanding climatic requirements and in areas accessible to the public.

With data rates of up to 450 Mbps according to the IEEE 802.11n standard, the access points enable reliable, wireless data transmission in real time. The portfolio for the access point also includes a comprehensive selection of antennas and numerous mounting options for a wide range of applications.

iFeatures such as iPCF (industrial Point Coordination Function), which are connected via the KEY-PLUG W780 iFeatures, open up new areas of application: Data transmissions along rail tracks or in holiday parks, or even applications with EMERGENCY OFF function with PROFIsafe via wireless are possible. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

SCALANCE W786 RJ45 for outdoor use



The SCALANCE W786 RJ45 robust access point with IP65 degree of protection and an RJ45 connection for 10/100/1 000 Mbps and Power-over-Ethernet according to IEEE 802.3at for integrated solutions from the control level down to the field level with simple installation in the control cabinet. These access points are particularly well-suited to outdoor applications with demanding climatic requirements and in areas accessible to the public.

With data rates of up to 450 Mbps according to the IEEE 802.11n standard, the access points enable reliable, wireless data transmission in real time. The portfolio for the access point also includes a comprehensive selection of antennas and numerous mounting options for a wide range of applications.

iFeatures such as iPCF (industrial Point Coordination Function), which are connected via the KEY-PLUG W780 iFeatures, open up new areas of application: Data transmissions along rail tracks or in holiday parks, or even applications with EMERGENCY OFF function with PROFIsafe via wireless are possible. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

Product versions:

- **SCALANCE W786-1 RJ45**
  A radio card is permanently installed in the device; functional scope can be expanded using a KEY-PLUG W780 iFeature
- **SCALANCE W786-2 RJ45**
  Two wireless cards permanently installed in the device; functional scope can be expanded using a KEY-PLUG W780 iFeature
- **SCALANCE W786-2IA RJ45**
  Two wireless cards permanently installed in the device; six internal antennas; functional scope can be expanded using a KEY-PLUG W780 iFeature

IWLAN Access Points

SCALANCE W788 RJ45 for the control cabinet



The robust SCALANCE W788 RJ45 access points with IP30 degree of protection and an RJ45 connection for 10/100/1 000 Mbps with Power-over-Ethernet according to IEEE 802.3at are ideal for setting up Industrial Wireless LAN (IWLAN) wireless networks in which the access point is to be mounted in the control cabinet.

With data rates of up to 450 Mbps according to the IEEE 802.11n standard, the access points enable reliable, wireless data transmission in real time. The portfolio for the access point also includes a comprehensive selection of antennas and numerous mounting options for a wide range of applications.

iFeatures such as iPCF (industrial Point Coordination Function), which are connected via the KEY-PLUG W780 iFeatures, open up new areas of application: Data transmissions along rail tracks or in holiday parks, or even applications with EMERGENCY OFF function with PROFIsafe via wireless are possible. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

Product versions:

- **SCALANCE W788-1 RJ45**
  A radio card is permanently installed in the device; functional scope can be expanded using a KEY-PLUG W780 iFeature
- **SCALANCE W788-2 RJ45**
  Two wireless cards permanently installed in the device; functional scope can be expanded using KEY-PLUG W780 iFeature

SCALANCE W788 M12 for indoor use



The robust SCALANCE W788 RJ45 access points with IP65 degree of protection and an M12 connection for 10/100/1 000 Mbps with Power-over-Ethernet according to IEEE 802.3at are ideal for setting up Industrial Wireless LAN (IWLAN) wireless networks and for applications outside the control cabinet.

With data rates of up to 450 Mbps according to the IEEE 802.11n standard, the access points enable reliable, wireless data transmission in real time. The portfolio for the access point also includes a comprehensive selection of antennas and numerous mounting options for a wide range of applications.

iFeatures such as iPCF (industrial Point Coordination Function), which are connected via the KEY-PLUG W780 iFeatures, open up new areas of application: Data transmissions along rail tracks or in holiday parks, or even applications with EMERGENCY OFF function with PROFIsafe via wireless are possible. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

Product versions:

- **SCALANCE W788-1 M12**
  A radio card is permanently installed in the device; functional scope can be expanded by using a KEY-PLUG W780 iFeature
- **SCALANCE W788-2 M12**
  Two wireless cards permanently installed in the device; functional scope can be expanded using a KEY-PLUG W780 iFeature

© Siemens 2019

Design (continued)

IWLAN Access Points

SCALANCE W788 M12 EEC
For an extended range of ambient conditions



The SCALANCE W788 RJ45 robust access point with IP65 degree of protection and an M12 connection for 10/100/1 000 Mbps with Power-over-Ethernet according to IEEE 802.3at Type 2 is ideally suited for setting up Industrial Wireless LAN (IWLAN) wireless networks and for applications outside the control cabinet. It also has an extended temperature range, special approvals and conformal coating. This enables wireless on-site networking of plant components in particularly harsh industrial environments and makes it suitable for use in industrial and automation applications, especially in railway environments.

With data rates of up to 450 Mbps according to the IEEE 802.11n standard, the access points enable reliable, wireless data transmission in real time. The portfolio for the access point also includes a comprehensive selection of antennas and numerous mounting options for a wide range of applications.

iFeatures such as iPCF (industrial Point Coordination Function), which are connected via the KEY-PLUG W780 iFeatures, open up new areas of application: Data transmissions along rail tracks or in holiday parks, or even applications with EMERGENCY OFF function with PROFIsafe via wireless are possible. (For details, see iFeatures brochure: https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf)

Ordering data

	Article No.
IWLAN Client Modules	
SCALANCE W721-1 RJ45 for the control cabinet IWLAN Ethernet client module with integrated wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; IP20 degree of protection (0 to +55 °C) Product package: Mounting hardware, 3-pin screw terminal for 24 V DC; manual on CD; English/German For administration of the wireless connection of one device with Industrial Ethernet connection	
• National approvals for operation outside the U.S.	**6GK5721-1FC00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5721-1FC00-0AB0**
SCALANCE W722-1 RJ45 for the control cabinet IWLAN Ethernet client module with iFeatures support and integrated wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; IP20 degree of protection (0 to +55 °C) Product package: Mounting hardware, 3-pin screw terminal for 24 V DC; manual on CD; English/German For administration of the wireless connection of one device with Industrial Ethernet connection; with iFeatures	
• National approvals for operation outside the U.S.	**6GK5722-1FC00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5722-1FC00-0AB0**
• Country approvals for operation in Israel[2]	**6GK5722-1FC00-0AC0**

	Article No.
SCALANCE W734-1 RJ45 for the control cabinet IWLAN Ethernet client module with integrated wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 300 Mbps; WPA2/AES; integrated 2-port switch; Power over Ethernet (PoE), IP30 degree of protection (-20 to +60 °C) Product package: Mounting hardware, 4-pin screw terminal for 24 V DC; manual on CD; English/German For managing the wireless connection of up to eight linked devices with Industrial Ethernet connection	
• National approvals for operation outside the U.S.	**6GK5734-1FX00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5734-1FX00-0AB0**
SCALANCE W738-1 M12 for indoor use IWLAN Ethernet client module with integrated wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 300 Mbps; WPA2/AES; Power over Ethernet (PoE), IP65 degree of protection (-30 to +65 °C) Product package: Mounting hardware; manual on CD, English/German IWLAN Access Point with one integrated wireless interface	
• National approvals for operation outside the U.S.	**6GK5738-1GY00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5738-1GY00-0AB0**

10

© Siemens 2019

Ordering data	Article No.
SCALANCE W748-1 M12 for indoor use	
IWLAN Ethernet client module with integrated wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/AES; Power over Ethernet (PoE), IP65 degree of protection (-20 to +60 °C)	
Product package: Mounting hardware; manual on CD, English/German	
For managing the wireless connection of up to eight linked devices with Industrial Ethernet connection	
• National approvals for operation outside the U.S.	**6GK5748-1GD00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5748-1GD00-0AB0**
SCALANCE W748-1 RJ45 for the control cabinet	
IWLAN Ethernet client module with integrated wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/AES; Power over Ethernet (PoE), IP30 degree of protection (-20 to +60 °C)	
Product package: Mounting hardware; 4-pin screw terminal for 24 V DC, 4-pin screw terminal for digital input and output; manual on CD, German/English	
For administration of the wireless connection of up to eight devices with Industrial Ethernet connection; IP30 degree of protection	
• National approvals for operation outside the U.S.	**6GK5748-1FC00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5748-1FC00-0AB0**
IWLAN Access Points	
SCALANCE W761-1 RJ45 for the control cabinet	
IWLAN access point with integrated wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; IP20 degree of protection (0 to +55 °C)	
Product package: Mounting hardware, 3-pin screw terminal for 24 V DC; manual on CD; English/German	
IWLAN Access Point with one integrated wireless interface	
• National approvals for operation outside the U.S.	**6GK5761-1FC00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5761-1FC00-0AB0**

Ordering data	Article No.
SCALANCE W774-1 RJ45 for the control cabinet	
IWLAN access point with an integrated wireless interface for establishing wireless connections with iFeatures; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 300 Mbps; WPA2/AES; integrated 2-port switch; Power over Ethernet (PoE), IP30 degree of protection (-20 to +60 °C)	
Product package: Mounting hardware, 4-pin screw terminal for 24 V DC; manual on CD; English/German	
IWLAN access point with one built-in wireless interface	
• National approvals for operation outside the U.S.	**6GK5774-1FX00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5774-1FX00-0AB0**
• Country approvals for operation in Israel[1]	**6GK5774-1FX00-0AC0**
SCALANCE W774-1 M12 EEC for an extended range of ambient conditions	
IWLAN access points with built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 300 Mbps; railway approval in accordance with EN 50155; conformal coating; WPA2/AES; Power over Ethernet (PoE), IP20 degree of protection	
Product package: Mounting hardware; manual on CD-ROM, English/German	
IWLAN Access Point with one integrated wireless interface	
• National approvals for operation outside the U.S.	**6GK5774-1FY00-0TA0**
• National approvals for operation within the U.S.[1]	**6GK5774-1FY00-0TB0**
SCALANCE W778-1 M12 for indoor use	
IWLAN access point with built-in wireless interface (radio); IEEE 802.11a/b/g/h/n wireless network with 2.4/5 GHz up to 300 Mbps; 2x M12 max. 100 Mbps; M12 A-coded; plug slot WPA2/ 802.11i/e; integrated Power over Ethernet (PoE) 2-port switch; 2 N-CON antenna port, iFeatures support via KEY-PLUG; IP65 degree of protection; redundant 24 V DC; -20 to 60 °C Product package: Manuals on CD-ROM, English/German; M12 caps	
IWLAN Access Point with one integrated wireless interface	
• National approvals for operation outside the U.S.	**6GK5778-1GY00-0AA0**
• National approvals for operation within the U.S.[1]	**6GK5778-1GY00-0AB0**

© Siemens 2019

Ordering data	Article No.
SCALANCE W778-1 M12 EEC for an extended range of ambient conditions IWLAN access point with built-in wireless interface (radio); IEEE 802.11a/b/g/h/n wireless network with 2.4/5 GHz up to 300 Mbps; 2x M12 max. 100 Mbps; M12 A-coded; plug slot WPA2/ 802.11i/e; integrated Power over Ethernet (PoE) 2-port switch; 2 N-CON antenna port, iFeatures support via KEY-PLUG; IP65 degree of protection; redundant 24 V DC; -30 to 75 °C; conformal coating; EN 50155; EN45545 Product package: Manuals on CD-ROM, English/German; M12 caps	
• National approvals for operation outside the U.S.	**6GK5778-1GY00-0TA0**
• National approvals for operation within the U.S.[1)]	**6GK5778-1GY00-0TB0**
SCALANCE W786-2 SFP for outdoor use IWLAN access points with built-in wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/ AES; Power over Ethernet (PoE), IP65 degree of protection (-40°C to +60°C) Product package: Mounting hardware, 2-pin screw terminal for 24 V DC; manual on CD-ROM; English/German IWLAN access points with two integrated wireless interfaces and RJ45 connector, six external antennas	
• National approvals for operation outside the U.S.	**6GK5786-2FE00-0AA0**
• National approvals for operation within the U.S.[1)]	**6GK5786-2FE00-0AB0**
SCALANCE W786 RJ45 for outdoor use IWLAN access points with built-in wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/ AES; Power over Ethernet (PoE), IP65 degree of protection (-40°C to +60°C) Product package: Mounting hardware, 2-pin screw terminal for 24 V DC; manual on CD-ROM; English/German	
• **SCALANCE W786-1 RJ45** IWLAN access points with one integrated wireless interface and RJ45 connector Connection for three external antennas	
- National approvals for operation outside the U.S.	**6GK5786-1FC00-0AA0**
- National approvals for operation within the U.S.[1)]	**6GK5786-1FC00-0AB0**
• **SCALANCE W786-2 RJ45** IWLAN access points with two integrated wireless interfaces and RJ45 connector, six connections for external antennas	
- National approvals for operation outside the U.S.	**6GK5786-2FC00-0AA0**
- National approvals for operation within the U.S.[1)]	**6GK5786-2FC00-0AB0**
- Country approvals for operation in Israel[1)]	**6GK5786-2FC00-0AC0**
• **SCALANCE W786-2IA RJ45** IWLAN access point with two integrated wireless interfaces and RJ45 connection Six internal antennas	
- National approvals for operation outside the U.S.	**6GK5786-2HC00-0AA0**
- National approvals for operation within the U.S.[1)]	**6GK5786-2HC00-0AB0**
SCALANCE W788 RJ45 for the control cabinet IWLAN access points with integrated wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/AES; Power over Ethernet (PoE), IP30 degree of protection (-20 to +60 °C) Product package: Mounting hardware; 4-pin screw terminal for 24 V DC, 4-pin screw terminal for digital input and output; manual on CD, German/English	
• **SCALANCE W788-1 RJ45** IWLAN access point with one integrated wireless interface	
- National approvals for operation outside the U.S.	**6GK5788-1FC00-0AA0**
- National approvals for operation within the U.S.[1)]	**6GK5788-1FC00-0AB0**
• **SCALANCE W788-2 RJ45** IWLAN access point with two integrated wireless interfaces	
- National approvals for operation outside the U.S.	**6GK5788-2FC00-0AA0**
- National approvals for operation within the U.S.[1)]	**6GK5788-2FC00-0AB0**
- Country approvals for operation in Israel[1)]	**6GK5788-2FC00-0AC0**
SCALANCE W788 M12 for indoor use IWLAN access point with integrated wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/ AES; Power over Ethernet (PoE), IP65 degree of protection (-20 to +60 °C) Product package: Mounting hardware; manual on CD, English/German	
• **SCALANCE W788-1 M12** IWLAN access point with one integrated wireless interface	
- National approvals for operation outside the U.S.	**6GK5788-1GD00-0AA0**
- National approvals for operation within the U.S.[1)]	**6GK5788-1GD00-0AB0**
• **SCALANCE W788-2 M12** IWLAN access point with two integrated wireless interfaces	
- National approvals for operation outside the U.S.	**6GK5788-2GD00-0AA0**
- National approvals for operation within the U.S.[1)]	**6GK5788-2GD00-0AB0**

© Siemens 2019

Ordering data	Article No.
SCALANCE W788 M12 EEC for an extended range of ambient conditions IWLAN access points with built-in wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; railway approval in accordance with EN 50155 / NEMA TS2; conformal coating; WPA2/AES; Power over Ethernet (PoE), IP65 degree of protection Product package: Mounting hardware; manual on CD-ROM, English/German IWLAN dual access point with two integrated wireless interfaces	
• National approvals for operation outside the U.S.	**6GK5788-2GD00-0TA0**
• National approvals for operation within the U.S.[1)]	**6GK5788-2GD00-0TB0**
Accessories	
KEY-PLUG W740 iFeatures Swap medium for enabling additional iFeatures, for simple device replacement if a fault occurs and for storage of configuration data; can be used in SCALANCE W client modules with PLUG compartment	**6GK5907-4PA00**
KEY-PLUG W780 iFeatures Swap medium for enabling additional iFeatures, for simple device replacement if a fault occurs and for storage of configuration data; can be used in SCALANCE W access points with PLUG compartment	**6GK5907-8PA00**
KEY-PLUG W700 Security Removable data storage medium for enabling security features for SCALANCE W700 access points, for simple device replacement if a fault occurs, and for storing configuration data	**6GK5907-0PA00**
C-PLUG Swap medium for simple replacement of devices in the event of a fault; for storing configuration data; can be used in SIMATIC NET products with PLUG compartment	**6GK1900-0AB00**
Standard DIN mounting rail mounting adapter Standard DIN mounting rail mounting adapter for SCALANCE W788 M12 and SCALANCE W788 RJ45; screw fixing for mounting on a 35 mm DIN mounting rail in accordance with EN 50022 Product package: 3 units per pack	**6GK5798-8ML00-0AB3**
Standard mounting rail angled adapter 90° angled adapter for mounting DIN mounting rails, only for use with SCALANCE W778/W778EEC/W738; and DIN mounting rail mounting adapter for 35 mm DIN mounting rail Product package: Fixing screws	**6GK5798-8MA00-0AA1**
Standard DIN mounting rail mounting adapter Standard DIN mounting rail mounting adapter, only for use in combination with SCALANCE W778/W778EEC/W738 Product package: Fixing screws	**6GK5798-8MF00-0AA1**
MS1 mounting set Mounting set for fixing the SCALANCE W786 products onto an S7-300 mounting rail or a 35 mm DIN mounting rail	**6GK5798-8MG00-0AA0**
Power supply	
PS791-2DC power supply 24 V DC power supply for installation in SCALANCE W786 products; operating instructions in English/German	**6GK5791-2DC00-0AA0**
PS791-2AC power supply 110 to 230 V AC power supply for installation in SCALANCE W786 products; operating instructions in English/German	**6GK5791-2AC00-0AA0**
Connection components	
SFP plug-in transceiver for SCALANCE W786-2 SFP	
• SFP992-1 Gigabit, multimode, 750 m	**6GK5992-1AL00-8AA0**
• SFP992-1LD Gigabit, single-mode, 10 km	**6GK5992-1AM00-8AA0**
• SFP992-1LH Gigabit, single-mode, 40 km	**6GK5992-1AN00-8AA0**
• SFP992-1LH+ Gigabit, single-mode, 70 km	**6GK5992-1AP00-8AA0**
Fiber-optic cables	See Catalog IK PI, Industrial Ethernet, cabling systems, glass fiber-optic cables
IE FC RJ45 plug 180 2×2 RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation-displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
• 1 pack = 10 units	**6GK1901-1BB10-2AB0**
• 1 pack = 50 units	**6GK1901-1BB10-2AE0**
IE FC standard cable GP 2×2 4-core, shielded TP installation cable for connection to IE FC outlet RJ45 plug/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. quantity 1 000 m, minimum order quantity 20 m	**6XV1840-2AH10**
IE FC RJ45 plug 4×2 Industrial Ethernet FastConnect RJ45 plug 180 4×2, RJ45 connector; CAT6A; (10/100/1000/10000 Mbps) with rugged metal enclosure and FC connection technology, for IE FC cable 4×2 (AWG24); 180° cable outlet	
• 1 pack = 1 unit	**6GK1901-1BB12-2AA0**
• 1 pack = 10 units	**6GK1901-1BB12-2AB0**
• 1 pack = 50 units	**6GK1901-1BB12-2AE0**
IE FC M12 plug PRO 4×2 M12 plug connector suitable for on-site assembly (X-coded, IP65/IP67), metal enclosure, insulation/displacement fast connection method, for SCALANCE W	
• 1 unit	**6GK1901-0DB30-6AA0**
• 8 units	**6GK1901-0DB30-6AA8**

© Siemens 2019

Ordering data

Ordering data	Article No.
IE FC standard cable GP 4×2 8-core (4×2), shielded TP installation cable for connection to IE FC RJ45 plug 4×2 and IE M12 plug PRO 4×2; PROFINET-compliant; with UL approval; sold by the meter; max. length 1 000 m, minimum order quantity 20 m	**6XV1878-2A**
Power M12 Cable Connector PRO Socket for connection of SCALANCE W-700 for 24 V DC supply; 4-pin, A-coded, with mounting instructions, 3 units	**6GK1907-0DC10-6AA3**
Power cable 2×0.75 Connecting cable for Power M12 Cable Connector PRO, sold by the meter	**6XV1812-8A**
IE FC stripping tool Pre-adjusted stripping tool for fast stripping of the Industrial Ethernet FC cables	**6GK1901-1GA00**
Antennas and miscellaneous IWLAN accessories For IWLAN access points and IWLAN client modules	See Catalog IK PI, Industrial Wireless LAN, accessories

[1] Please note country approvals under:
http://www.siemens.com/wireless-approvals

More information

For further information and detailed technical specifications on the IWLAN products for SIMATIC PCS 7, refer to Catalog IK PI, the Industry Mall or Catalog CA 01 under "Industrial Communication > Industrial Wireless Communication > Industrial Wireless LAN".

Selection tools

The SIMATIC NET Selection Tool and the TIA Selection Tool are available to assist in selecting the right IWLAN components:

- http://www.siemens.com/snst-standalone
- http://www.siemens.com/tia-selection-tool-standalone
- http://www.siemens.com/tstcloud


Radio approvals

Current approvals can be found on the Internet:

- German: http://www.siemens.de/funkzulassungen
- English: http://www.siemens.com/wireless-approvals

© Siemens 2019

Overview

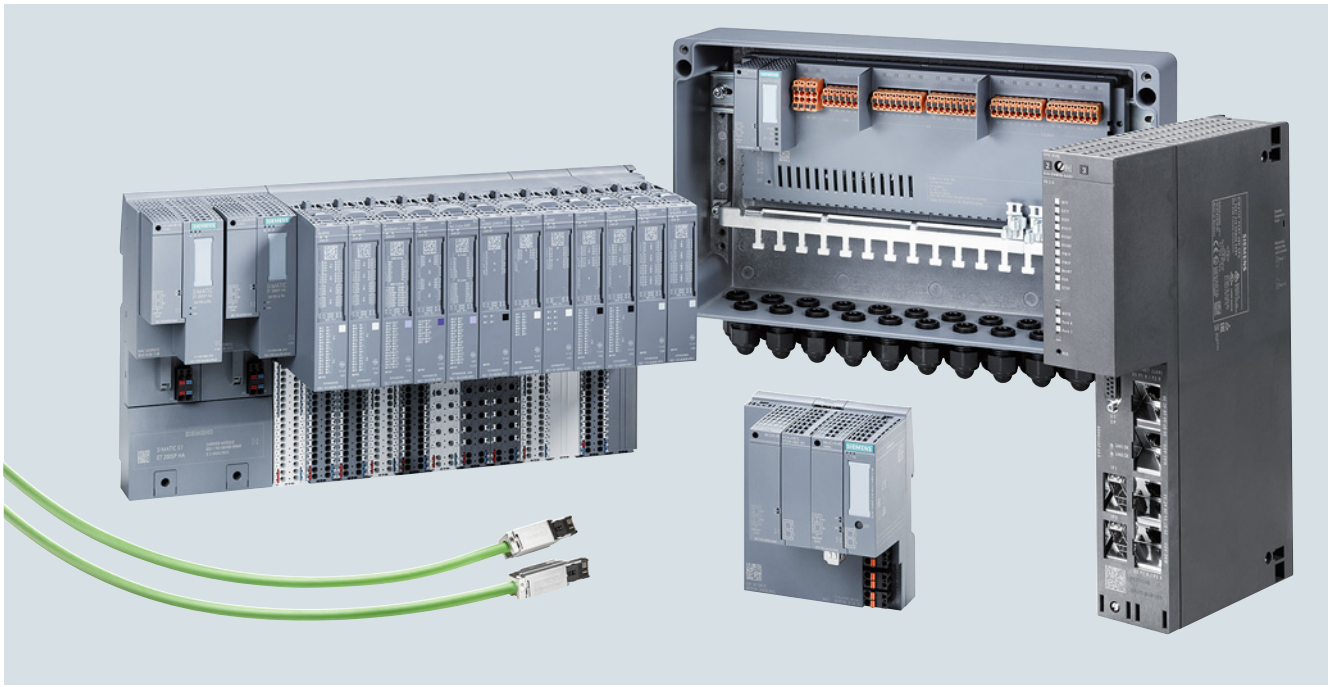

PROFINET in the process industry

PROFINET combines the advantages of PROFIBUS, the most popular fieldbus system worldwide, with modern Ethernet technology. PROFINET supports easy setup of flexible communication networks and ensures integrated, reliable and secure communication throughout the plant – in real time!

Greater flexibility, efficiency and performance in industrial communication – PROFINET has proven itself for many years in the manufacturing and machine environment and is the preeminent global standard in automation.

PROFINET more than meets the special requirements of the process industry regarding availability, flexibility, real-time capability and ruggedness. At the same time, the Ethernet-based technology provides easy handling.

With version 9.0 of SIMATIC PCS 7, the process industry can now also benefit from the latest communication technology since the conditions for this are now in place:

- Scalable system redundancy
- Changes possible in runtime ("Configuration in Run")
- High-precision time-of-day synchronization for sequence of events ("SoE")

The hardware portfolio has undergone fundamental further development in order to make full use of the new PROFINET options:

- CPU 410-5H V8.2
- SIMATIC ET 200SP HA
- SIMATIC CFU PA
- SCALANCE XF204-2BA DNA ("Y-switch")

Benefits

- Ethernet at the field level
  - Integrated vertical and horizontal communication
  - Transmission of large amounts of data in real time
- Maximum availability if required
  - Changes during runtime
  - Freely scalable redundancy enables large cost reductions thanks to optimized custom solutions
- More flexibility
  - One shared plant network ensures free assignment of the devices to the controllers and makes it easy to expand the plant
  - Topologies are based on requirements and plant specification, which can result in savings of 60 % and more in cabling!
  - "One cable for all purposes" means better cost efficiency
- User-friendly
  - Simple device integration and fast device replacement during operation
  - Installation wizards and integrated device/network diagnostics
  - Implementation of secure communication layer in accordance with IEC 61784-3-3 (PROFIsafe)
- Investment protection
  - Integration of existing structures and technologies
  - Gradual transition from PROFIBUS DP to PROFINET

© Siemens 2019

Application

PROFINET completely adheres to the Ethernet standard in accordance with IEEE 802.3, which makes it the reliable future-proof standard that paves the way for digitalization in the process environment.

Combine investment protection with security for the future: on the one hand, the open Industrial Ethernet standard supports the integration of existing plant parts and technologies. Appropriate solutions and products, such as the IE/PB LINK for integration of PROFIBUS DP and the SIMATIC CFU PA for integration of PROFIBUS PA, are available for this. On the other hand, worldwide standardization in accordance with IEC 61158/61784 and consistent ongoing development ensure the use of PROFINET over the entire life cycle of the plant and beyond. Even wireless communication technologies such as WLAN in accordance with IEEE 802.11 and mobile communications can be reliably integrated.

Wired communication is also easier and more cost-effective with PROFINET: the motto "One cable for all purposes" supports parallel operation of profiles such as PROFIsafe, PROFIdrive and other TCP/IP protocols without impacting basic plant communication.

There is also greater convenience: the PROFINET diagnostics available by default simplify installation and provide support for plant servicing. Network problems and device conflicts are reliably detected and can be quickly remedied. This also forms the basis for preventive maintenance. These benefits are worth the investment over the service life of the plant.

Customized to your requirements

PROFINET allows you to freely scale the availability of your plant based on your requirements. In addition to media redundancy (MRP), two forms of system redundancy are also available:

- Simple system redundancy (S2)
- Modular system redundancy (R1)

"Configuration in Run" allows you to implement plant changes during runtime without affecting process engineering.

Flexible architectures can potentially allow significant savings in wiring. This is confirmed by reference projects. In one case, 27 km of wiring (with PROFIBUS DP) could be reduced to 9 km through the use of PROFINET. Flexible architectures also support easier plant expansion without the need for spares.

The new hardware components use the BusAdapter technology, which enables easy and flexible connection to the PROFINET network either with copper cables (RJ45 or FastConnect) or fiber-optic cable.


Function

Digitalization in the process industry significantly increases the amount of data (big data), requires continuous communication all the way to the field and needs flexible and secure communication networks. PROFINET is the answer:

- The best of both worlds
  - Compatible with PROFIBUS
  - Integrated device/network diagnostics
  - High data rates for more data, digital and in real time
  - Fail-safe communication is possible without special network components
- Standardization
  - Based on standard Ethernet according to IEEE 802.3
  - Preeminent open field bus standard worldwide
  - Supports IT services, for example TCP/IP
- Straightforward handling
  - Support during planning, operation and commissioning with automatic addressing and name assignment
  - Easy device replacement without additional tools with automatic neighborhood detection
  - Clear and simple installation guidelines

© Siemens 2019

Overview

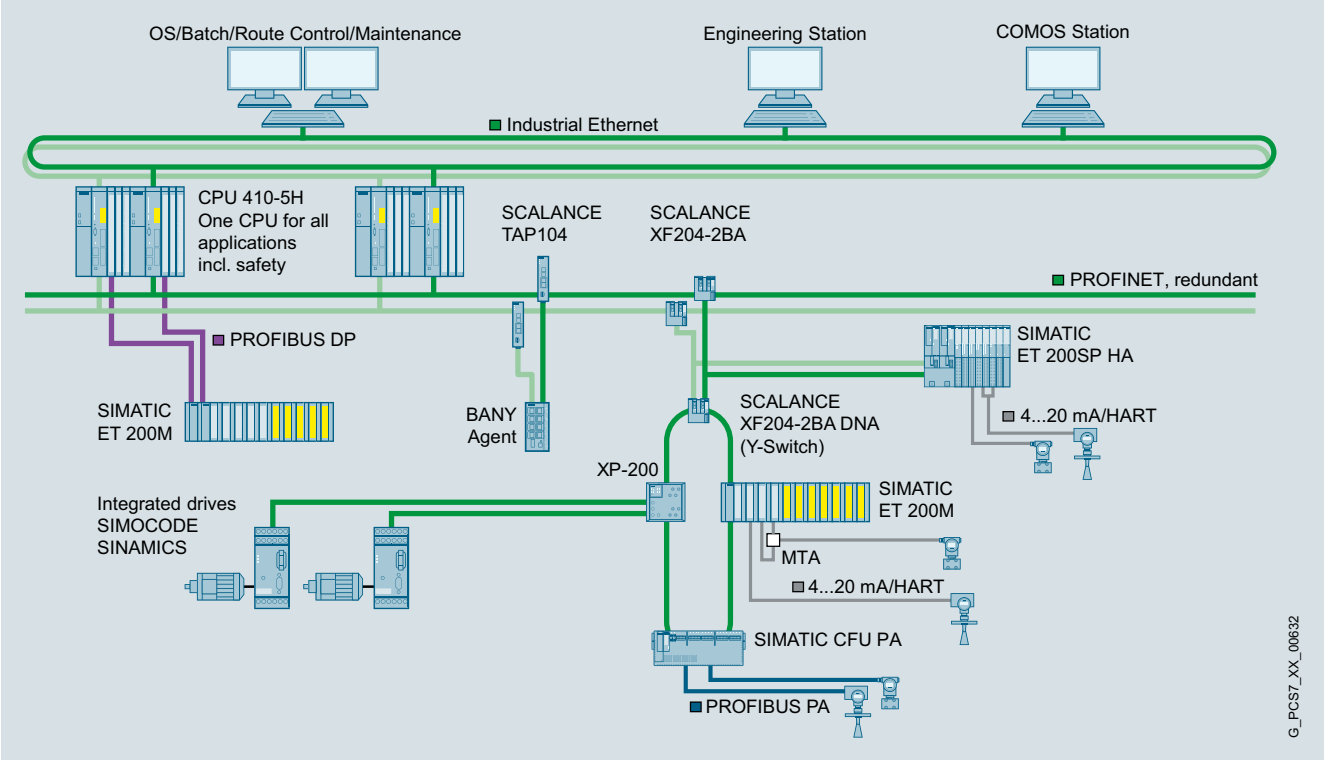

PROFINET in the process industry

When configuring PROFINET communication, it is generally recommendable to separate the field communication from the plant communication. In the context of the SIMATIC PCS 7 process control system, PROFINET mainly focuses on PROFINET IO communication between the automation systems (controllers) and the process I/O.

System components of SIMATIC PCS 7 with PROFINET capability

The SIMATIC PCS 7 system components suitable for PROFINET IO communication include:

- Automation systems (AS single stations and AS redundancy stations) with CPU 410-5H (firmware version V8.2) for complete PROFINET functionality
- SIMATIC PCS 7 AS RTX PROFINET and SIMATIC PCS 7 BOX RTX with PROFINET interface onboard
- SIMATIC ET 200SP HA with IM 155-6 PN interface module and BusAdapter
- SIMATIC CFU PA with BusAdapter
- SIMATIC ET 200M with IM 153-4 PN High Feature interface module
- SIMATIC ET 200SP with BusAdapter

In addition to specific PROFINET products, Industrial Ethernet products can also be used as network components, for example SCALANCE X switches and media converters, and FastConnect connecting elements, as well as electrical and optical transmission media (see "Industrial communication" chapter, "Industrial Ethernet", or "PROFINET/Industrial Ethernet" in the IK PI catalog).

Add-on product for SIMATIC PCS 7

In addition to the SIMATIC PCS 7 system components for PROFINET communication included in this catalog, the ST PCS 7 AO catalog includes add-on products for SIMATIC PCS 7 which support the integration of further PROFINET IO stations, e.g.

- SIMOCODE pro block library for integration of the SIMOCODE pro V PN motor management system via PROFINET IO
- Drive ES PCS 7 APL with function blocks and faceplates for integration of variable-speed SINAMICS drives via PROFINET IO
- Block library LIBRARY PAC/3WL/3VA SIMATIC PCS 7 for integration of 3VA power switches and 7KM PAC3200/4200 measuring devices
- AS-Interface block library for integration of AS-i slaves (sensors/actuators) via the IE/AS-i LINK PN IO (single or double master) on the PROFINET IO

© Siemens 2019

Overview

Industrial Ethernet/PROFINET switches specially designed for use in the process industry

To ensure full PROFINET functionality, special SCALANCE X switches, FastConnect connection elements and electrical and optical transmission media are available as network components for the connection of devices with PROFINET capability to automation systems (AS single stations and AS redundancy stations) with CPU 410-5H (firmware version V8.2).

The following switches are recommended for use with SIMATIC PCS 7 with PROFINET at the field level. These devices support the relevant functions to enable full use of the possibilities provided by PROFINET.

	SCALANCE XF204-2BA **SCALANCE XF204-2BA DNA**	**SCALANCE XC-200** **SCALANCE XC-200EEC**	**SCALANCE XP-200**
			
Installation	Control cabinet	Control cabinet	Outside control cabinet
Degree of protection	IP20	IP20	IP65
ATEX Zone 2	Yes	Yes	Yes
Interfaces	Electrical/optical with BusAdapter	Electrical/optical/SFPs	Electrical
Number of ports	4 (2 BA)	Max. 24, of which 2 Gbit ports (SFP)	Max. 16, of which 4 Gbit ports
Port characteristics	Depending on the type of BusAdapter (BA)	Max. 24 RJ45 Max. 2 SFP	8 × M12 D-coded or 12 × M12 D-/ 4 × M12 X-coded
SFPs	No	Yes	No
Use of BusAdapter (BA)	Yes	No	No
Temperature range	-40 to +70 °C	-40 to +70 °C	-40 to +70 °C
Conformal coating PCBs	Yes	Yes, for EEC versions	Yes, for EEC versions
PA ready	Yes	Yes	Yes
Dimensions W × H × D (in mm)	100 × 117 × 74	60/120 × 147 × 125	200/280 × 200 × 49

A description of the components specified can be found in the "Industrial Ethernet" section or under "PROFINET/Industrial Ethernet" in the IK PI catalog.

SCALANCE XF204-2BA: see page 10/30

SCALANCE XF204-2BA DNA (Y-Switch): see page 10/94

SCALANCE XC-200: see page 10/19

SCALANCE XP-200: see page 10/25

PA ready

For unrestricted use in process automation, IO devices must support at least the following functionalities:

- Simple system redundancy S2
- Media Redundancy Protocol (MRP)
- Configuration in RUN (CiR)

Siemens uses the PA ready symbols to uniquely identify the IO devices that meet the requirements of process automation with regard to availability and changes during operation.

Siemens thus places comparable requirements on PROFINET IO devices in process automation – e.g. PROFIBUS & PROFINET International (PI). The PI subdivides IO devices into conformance classes (CC) depending on their range of functions: CC-A, CC-B and CC-C. There is also the CC-B (PA), an extension of the CC-B, designed particularly for process automation. It includes the system redundancy requirement and MRP and Configuration in Run as options.

Less stringent requirements for PA ready apply if IO devices are connected at the end of a line or in a star topology:

Modular end devices (e.g. ET 200SP HA)

- Simple system redundancy S2
- Configuration in RUN (CiR)

Compact end devices (e.g. SIMOCODE)

- Simple system redundancy S2

Service bridge based on SCALANCE XC-200

The SCALANCE XC-200 has an important role in architecture with PROFINET since it can be specially configured as a "service bridge".

An example of SCALANCE XC208 configuration as a service bridge can be found in the Siemens Industry Online Support.

© Siemens 2019

SCALANCE XF-200BA DNA switches ("Y-Switch")

Overview



The SCALANCE XF204-2BA DNA from Siemens is a new compact Industrial Ethernet switch specially designed for use with redundant SIMATIC S7-400H systems in process automation. It follows the recommendations of NAMUR NE 21 and is therefore suitable for use in process automation. The switch with dual network access functionality (DNA or Y-switch functionality) combines a redundant PROFINET ring, consisting of S2 devices (field level), with a high-availability PROFINET system (R1 system).

- Connection of up to two modular BusAdapters (2 ports each) supported
- Enclosure in SIMATIC ET 200SP design (slim design, 100 mm wide) for space-saving use in small control boxes
- Integrated redundancy manager for configuring Fast Ethernet ring topologies with fast media redundancy MRP on device side
- End-to-end system diagnostics with PROFINET, SNMP access, integrated web server, SINEMA Server or SINEC NMS and automatic email transmission function for remote diagnostics and signaling via the network
- XF-200BA DNA versions are optimized for use in process automation and feature the following properties:
  - Conformal coating PCBs
  - Max. installation altitude 4 000 m—extended temperature range from -40 °C to +70 °C
  - NAMUR NE 21-compliant
  - Firmware support for S2 device and CiR/H-CiR
  - Release and integration capability for SIMATIC PCS 7

The following BusAdapters are currently released for use with SCALANCE XF204-2BA DNA:

- SIMATIC ET 200SP HA, BusAdapter BA 2×RJ45, 2 RJ45 sockets
- SIMATIC ET 200SP HA, BusAdapter BA 2×FC, 2 FastConnect connections
- SIMATIC BA 2xRJ45VD HA, 2 RJ45 sockets with VD technology (variable distance)
- SIMATIC ET 200SP, BusAdapter BA 2XRJ45, 2 x RJ45 sockets
- SIMATIC ET 200SP, BusAdapter BA 2xFC, 2x FastConnect connections
- SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45, 1x SCRJ FO connection and 1x RJ45 connection
- SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC, 1x SCRJ FO connection and 1x FastConnect (FC) connection
- SIMATIC ET 200SP, BusAdapter BA 2×SCRJ, 2 SCRJ FO connections

Product variant

SCALANCE XF204-2BA DNA

- PROFINET S2 devices are switched to a high-availability R1 system with the SCALANCE XF204-2BA DNA (DNA = Dual Network Access).

Benefits

get Designed for Industry

- Integration of S2 devices in a highly available automation system, thus minimizing downtimes and increasing productivity in process automation
- Setup of networks in SIMATIC PCS 7 systems with extended environmental conditions (conformal coating)
- Small frame size (SIMATIC ET 200SP design and BusAdapter concept)
- Simple, flexible integration into automation solutions through selection of different BusAdapters
- Modular design with BusAdapters allows efficient spare part storage by using the same BusAdapter in multiple devices
- Approvals for ATEX Zone 2/IECEx, cULus HazLoc, FM, thus use in Zone 2 hazardous areas possible
- Conforms to NAMUR NE 21, integration in all conventional process control systems, such as SIMATIC PCS 7
- Time savings during engineering, commissioning and in the operating phase of a plant by using the configuration and diagnostics integrated in STEP 7/TIA Portal
- Integration into the SINEMA Server or SINEC NMS network management system for integrated network diagnostics with central firmware management
- The 2xRJ45VD HA BusAdapter permits PROFINET communication up to 500 m
- Integration of switches in systems with simple S2 system redundancy and Configuration in Run (CiR/HCiR)
- Since Configuration in Run (CiR/H-CiR) is supported, PROFINET-defined configuration changes to the switch are performed during operation
- Easy integration in the process and system diagnostics with PROFINET via SIMATIC PCS 7

Design

The SCALANCE XF204-2BA DNA managed Industrial Ethernet switch is designed for mounting on a standard DIN rail. With its SIMATIC ET 200SP format enclosure (slim design), the device is optimally suited for integration in automation solutions in small control boxes, e.g. together with the SIMATIC ET 200SP.

- The SCALANCE XF204-2BA DNA switch with its rugged plastic enclosure with IP20 degree of protection is optimized for mounting on standard DIN rails. Thanks to the dimensions of the SIMATIC ET 200SP enclosure, the devices are ideally suited for integration into an automation solution with SIMATIC ET 200SP components.

The SCALANCE XF204-2BA DNA switch is available with the following port types/interfaces:

- 2 BusAdapter interfaces

© Siemens 2019

Ordering data	Article No.
SCALANCE XF-204-2BA DNA Industrial Ethernet switch	
Manageable Y-switch for linking S2 devices to an S7-400H with 2 x BusAdapter interfaces, 24 V DC redundant power supply, PN device, extended temperature range, conformal coating	
Configuration software on CD-ROM	
• **SCALANCE XF204-2BA DNA** 2 x BusAdapter interfaces (without pre-assembled BusAdapter)	**6GK5204-2AA00-2YF2**
Accessories	
SIMATIC ET 200SP PS 24 V/5 A	**6EP7133-6AB00-0BN0**
Stabilized power supply Input: 120/230 V AC Output: 24 V DC/5 A	
SIMATIC ET 200SP HA, BusAdapter BA 2×RJ45, 2 RJ45 sockets	**6DL1193-6AR00-0AA0**
PROFINET BusAdapter with Ethernet socket for standard RJ45 connector, with conformal coating PCBs	
SIMATIC ET 200SP HA, BusAdapter BA 2×FC, 2 FastConnect connections	**6DL1193-6AF00-0AA0**
PROFINET BusAdapter with FastConnect Ethernet connection for direct bus cable connection, with conformal coating PCBs	
BusAdapter BA 2xRJ45VD HA	**6GK5991-2VA00-8AA2**
BusAdapter with coated PCBs (conformal coating) and VD technology for connecting 2, 4 and 8-wire cables via standard RJ45 connectors	
ET 200SP, BusAdapter BA 2xSCRJ	**6ES7193-6AP00-0AA0**
SIMATIC ET 200SP, BusAdapter BA 2xSCRJ, 2 SCRJ FO connections for PROFINET	
ET 200SP, BusAdapter BA SCRJ/RJ45	**6ES7193-6AP20-0AA0**
SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45, media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection for PROFINET	
ET 200SP, BusAdapter BA SCRJ/FC	**6ES7193-6AP40-0AA0**
SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC, media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection for PROFINET	
C-PLUG (conformal coating)	**6GK1900-0AQ00**
C-plug removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or application data; can be used for SIMATIC NET products with C-plug slot, conformal coating	

	Article No.
IE TP cord RJ45/RJ45	
Pre-assembled 8-core $Cat6_A$ patch cable 4 x 2, with two RJ45 connectors, preferred length	
• 0.3 m	**6XV1870-3QHE30**
• 0.5 m	**6XV1870-3QHE50**
• 1 m	**6XV1870-3QH10**
• 2 m	**6XV1870-3QH20**
• 3 m	**6XV1870-3QH30**
• 4 m	**6XV1870-3QH40**
• 6 m	**6XV1870-3QH60**
• 10 m	**6XV1870-3QN10**
• 15 m	**6XV1870-3QN15**
• 20 m	**6XV1870-3QN20**
• 25 m	**6XV1870-3QN25**
• 30 m	**6XV1870-3QN30**
• 35 m	**6XV1870-3QN35**
• 40 m	**6XV1870-3QN40**
• 45 m	**6XV1870-3QN45**
• 50 m	**6XV1870-3QN50**
FO standard cable GP 50/125/1400	**6XV1873-2A**
Multimode cable, sold by the meter; max. length 1 000 m, minimum order 20 m, also available pre-assembled cable with LC connectors in various lengths	
SCALANCE TAP104	**6GK5104-0BA00-1SA2**
Test access port for the reaction-free extraction of Ethernet data frames (10/100 Mbps) from both transmission directions; extracts complete data traffic, including faulty frames, for further diagnostics.	

Notes:

- You can find more information on the FastConnect range in the https://cache.industry.siemens.com/dl/files/358/109766358/att_980998/v1/IE_cabling-technology_EN_Web.pdf ordering overview

10

© Siemens 2019

Overview



PN	DP-M	DP-S	ASi-M		
●	●				

- Compact gateway between PROFINET and PROFIBUS
  - Connection to Industrial Ethernet via integrated 2-port real-time switch with 100 Mbps full duplex connection with autosensing for automatic switchover
  - In case of replacement part: Connection to Industrial Ethernet also with 10 Mbps half duplex
  - Connection to PROFIBUS with 9.6 Kbps to 12 Mbps
- PROFINET proxy
  Connection of PROFIBUS DP slaves to PROFINET controllers in accordance with PROFINET standard:
  From the viewpoint of the controller, all DP slaves are handled like devices with PROFINET interface, i.e. the IE/PB Link PN IO is their proxy
- Cross-network PG/OP communication by means of S7 routing
- Cross-network access to data of S7 stations for visualization by means of S7 OPC server and S7 routing; via the IE/PB Link PN IO, access can be made from the Industrial Ethernet (e.g. for HMI applications with OPC client interface) to data of the S7 stations on the PROFIBUS by means of the S7 OPC server.
- High plant availability thanks to support of the Media Redundancy Protocol (MRP)
- Module replacement without the need for a programming device, using the C-plug removable data storage medium for backing up the configuration data
- Use in networks that support an exchange of devices without programming devices on the basis of the Link Layer Discovery Protocol (LLDP)
- SIMATIC ET200 SP design: use of the BusAdapter (BA) of the SIMATIC ET 200SP system for freely selecting the connection technology and physical characteristics for the PROFINET side

Benefits

get Designed for Industry

PROFINET applications

- Investment protection distributed I/O due to simple connection of PROFIBUS DP slaves to PROFINET controllers
- Also enables use in plants with PROFIsafe applications
- Independence from individual vendors through support of the PROFINET standard for distributed field devices
- Easy engineering and extensive diagnostics options due to optimum TIA integration

Applications with vertical integration

- Worldwide access to data of the PROFIBUS stations via Industrial Ethernet and Internet for vertical integration
- Access to process data from all enterprise levels
- Loading of STEP 7 programs from a central location

Design

The IE/PB Link PN IO has all the advantages of the SIMATIC ET200 SP design:

- Compact design;
  the front of the rugged plastic casing features:
  - Two RJ45 ports for connecting to Industrial Ethernet; the connection is made via the IE FC RJ45 Plug 90 with 90° cable outlet or via a standard patch cable
  - A 9-pin sub-D socket for connection to PROFIBUS
  - A 4-pin terminal strip for connecting the external redundant supply voltage of 24 V DC (two infeeds)
  - Diagnostics LEDs
- Optional connection possibility for Industrial Ethernet via BusAdapter (BA) of the SIMATIC ET 200SP system at the front
- Simple installation;
  the IE/PB Link PN IO is mounted on a DIN rail
- Can be operated without a fan
- Fast device replacement in the event of a fault by using the optional C-PLUG swap medium (not included in scope of supply)

© Siemens 2019

Ordering data

Ordering data	Article No.
IE/PB Link PN IO Gateway between Industrial Ethernet and PROFIBUS with PROFINET IO functionality, TCP/IP, S7 routing and data record routing, 10/100 Mbps Fast Ethernet, 9.6 to 12 Mbps PROFIBUS Including electronic manual on CD-ROM English, German, French, Spanish, Italian	**6GK1411-5AB10**
IE FC TP standard cable GP 2 x 2 (Type A) 4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. length 1 000 m, minimum order 20 m	**6XV1840-2AH10**
IE FC RJ45 plug 180 RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface	
• 1 pack = 1 unit	**6GK1901-1BB10-2AA0**
• 1 pack = 10 units	**6GK1901-1BB10-2AB0**
• 1 pack = 50 units	**6GK1901-1BB10-2AE0**
IE FC Stripping Tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	**6GK1901-1GA00**
C-PLUG Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used for SIMATIC NET products with C-plug slot	**6GK1900-0AB00**
PROFIBUS FC Standard Cable GP Standard type with special design for fast mounting, 2-wire, shielded,	**6XV1830-0EH10**
PROFIBUS FastConnect bus connection plug RS 485 plug 180 With insulation displacement terminals, with 180° cable outlet, for industrial PC, SIMATIC HMI OP, OLM; max. transmission rate 12 Mbps	**6GK1500-0FC10**
PROFIBUS FastConnect Stripping Tool Pre-adjusted stripping tool for fast stripping of PROFIBUS FastConnect bus cables	**6GK1905-6AA00**
S7-300 PS 307 load power supply 24 V DC	**6ES7307-1BA01-0AA0**

Accessories

C-PLUG

BusAdapter

The BusAdapters offer a free selection of connection technology and physical characteristics for the PROFINET interface. **Alternatively,** they can be used for the Industrial Ethernet interface on the device.

The following bus adapter versions are supported by the IE/PB LINK PN IO:

Versions with two PN copper interfaces (RJ45 or FastConnect (FC))

- BA 2xRJ45 with 2 RJ45 connections
- BA 2xFC with 2 FastConnect connections: enables maximum system availability, even when subjected to shocks and high electromagnetic loads. This is because the FastConnect cables are fully shielded and laid directly in the BusAdapter.

Versions with one or two PN fiber-optic cable (FOC) connections

- BA 2xSCRJ with 2 SCRJ FO connections with increased potential difference
- BA SCRJ / RJ45, each with one SCRJ FO and RJ45 connection (media converter)
- BA SCRJ / FC, each with one SCRJ FO and FastConnect connection (media converter)
- BA 2xLC with two glass fiber-optic connections (Lucent Connector) with increased potential difference
- BA SCRJ / RJ45, each with one glass fiber-optic and RJ45 connection (media converter)
- BA LC / FC with one glass fiber-optic and one FastConnect connection (media converter)

The version for connecting IP67 modules of the SIMATIC ET 200AL (BA-SEND, BA 1xFC) is not supported.

© Siemens 2019

PROFINET Bus Analyzer (BANY)

Overview




BANY Agents without TAP/with TAP, BANY Bus Analyzer Agent XM-400

PROFINET offers the manufacturing and process industry new ways to set up flexible and high-performance plant networks to meet stricter increased security requirements. To ensure that these functions are reliable and secure from the outset, and can be easily checked and optimized over the course of the plant life cycle, Siemens provides high-performance products for the validation, analysis and continuous diagnosis of simple and high-availability PROFINET networks. The PROFINET Bus Analyzer (BANY) detects critical states in your network before an overload occurs or indeed a section of the network fails.

Benefits

- Permanent network monitoring for preventive maintenance and avoiding faults
- Online analysis of network quality in real time
- Rapid fault analysis and performance improvements during plant operation
- Clear status and event display of all devices installed in the network
- Simulation of PROFINET communication with various different loads
- Checking configured cycle time on the basis of the frame deviation (jitter) measured
- Validation of network including logging

Design

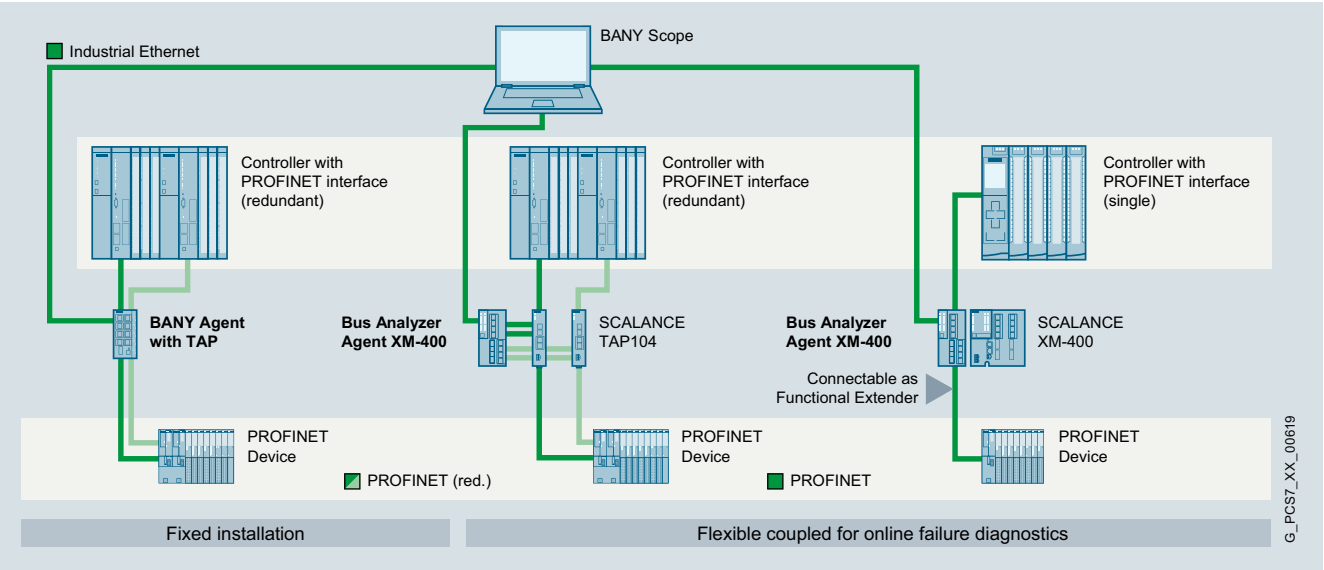

PROFINET Bus Analyzer (BANY)

© Siemens 2019

Design (continued)

BANY Agent

The BANY Agent hardware can be permanently integrated into the network for permanent plant monitoring. In the event of a fault, it can even be installed retroactively via a SCALANCE TAP104 or as a functional extender (Bus Analyzer Agent XM-400 only) on SCALANCE XM-400 switches for diagnosis during plant operation. Disconnection or interruption of the network in question is thus avoided and errors are rapidly analyzed so there are no long reproduction attempts.

BANY Agent enables the reaction-free extraction and evaluation of all frame communication online in real time. Thanks to two integrated TAPs (test access points), redundant PROFINET networks can also be evaluated.

BANY Scope

BANY Scope software enables access to multiple BANY Agents in the plant. This makes it possible to rapidly identify and eliminate error sources in the PROFINET networks in any part of the plant. The quality of the network can be quickly determined at any time on the basis of key data (network load, frame error, jitter, etc.).

For the validation of PROFINET networks, validation protocols are automatically created in accordance with the PROFINET planning and commissioning guidelines. Stress tests with differently simulated network loads can be carried out with the signal generator. This allows potential weak points to be identified and eliminated before the productive phase and ensures that plant availability meets strict requirements from the outset.

Validation is rounded off with the free PRONETA software, which automatically scans and clearly documents the topology, configuration and performance parameters of the PROFINET network. This allows qualified installation and efficient approval.

Function

- Frame recording in internal memory or on external memory media (USB) with exact time stamping (resolution 10 ns)
  - Comprehensive trigger functions for filtering the recorded data
  - Interface to Wireshark and other export functions for detailed frame analysis
- Real-time PROFINET analysis for automatic calculation of all relevant bus parameters (frame number, frame error, network load, cycle time, jitter, etc.) in tables and diagrams
- Signal generator for performing offline and online stress tests (measurement of the frame run time, analysis of PROFINET RT and IRT with different network loads)
- Device lists for displaying device names, IP addresses, MAC addresses, device status, events, interruptions, and failures
- Online value monitoring in real time without affecting actual communication performance
- Control interface using script or TCP commands

© Siemens 2019

Technical specifications

Article No.	9AE4140-1BA01	9AE4140-1BA00	9AE4140-2AA00
	BANY Agent with TAP	**BANY Agent without TAP**	**BANY Bus Analyzer Agent XM-400**
Mounting options	• DIN standard mounting rail 35 mm[1)] • SIMATIC S7-300 mounting rail • Wall	• DIN standard mounting rail 35 mm[1)] • SIMATIC S7-300 mounting rail • Wall	• DIN standard mounting rail 35 mm[1)] • SIMATIC S7-300 mounting rail • SIMATIC S7-1500 mounting rail
Degree of protection	IP20	IP20	IP20
Connectors for terminal devices or network components			
• Electrical (over twisted pair)	7 x RJ45 sockets with MDI-X assignment 10/100/1 000 Mbps (half/full duplex)	3 x RJ45 sockets with MDI-X assignment 10/100/1 000 Mbps (half/full duplex)	5 x RJ45 ports with MDI-X assignment 10/100/1 000 Mbps (half/full duplex) 4 x RJ45 ports with MDI-X assignment 10/100 Mbps (half/full duplex)
• Electrical	1 × USB	1 × USB	USB 1.1 and USB 2.0, max. 500 mA
Electrical specifications			
Supply voltage	24 V DC	24 V DC	24 V DC (20.4 … 28.8 V DC)
• Redundant power supply unit	No	No	No
• Redundant power supply possible	No	No	No
Overcurrent protection of the power supply	2 A / 32 V	2 A / 32 V	2 A / 32 V
Voltage over digital input/output	24 V DC	24 V DC	24 V DC
• Switching capacity (resistive load)	50 mA	50 mA	50 mA
Voltage at USB port	5 V DC	5 V DC	
• Output current, max.	500 mA	500 mA	
Current consumption	0.5 mA	0.3 mA	1 A
• Power loss	12 W	7.2 W	24 W
Permissible ambient conditions			
Storage/transport temperature	-40 to +70 °C	-40 to +70 °C	-40 to +85 °C
Operating temperature			
• Horizontal installation	-40 to +70 °C	-40 to +70 °C	-40 to +50 °C (stand-alone mode) -40 to +60 °C (XM400 function extender mode)
• Vertical installation	-40 to +50 °C	-40 to +50 °C	--
Max. ambient temperature at operating altitude			
• Horizontal installation 2 000 m and higher	65 °C	65 °C	50 °C (stand-alone mode) 60 °C (XM400 function extender mode)
• Horizontal installation 3 000 m and higher	60 °C	60 °C	50 °C
• Vertical installation 2 000 m and higher	45 °C	45 °C	--
• Vertical installation 3 000 m and higher	40 °C	40 °C	--
Max. relative humidity during operation at 25 °C	< 95% (no condensation)	< 95% (no condensation)	< 95% (no condensation)
Dimensions and weight			
Dimensions W x H x D in mm	60 × 125 × 125	40 × 125 × 125	70 × 150 × 125
Weight	1 400 g	1 100 g	750 g


[1)] Not for use in shipbuilding

Ordering data

	Article No.
BANY Agent without TAP Ethernet 2-channel, without TAP (Test Access Point), signal generator	**9AE4140-1BA00**
BANY Agent with TAP 2-channel integrated TAP (test access point), Ethernet 2-channel	**9AE4140-1BA01**
BANY Bus Analyzer Agent XM-400 2-channel integrated TAP, Ethernet 4-channel, functional extender interface, 4 × SFP slots, signal generator	**9AE4140-2AA00**
SCALANCE TAP104 Test access port for frame export, 2 × RJ45 ports, 10/100 Mbps, LED diagnostics, 24 V DC power supply, manual	**6GK5104-0BA00-1SA2**

© Siemens 2019

Overview

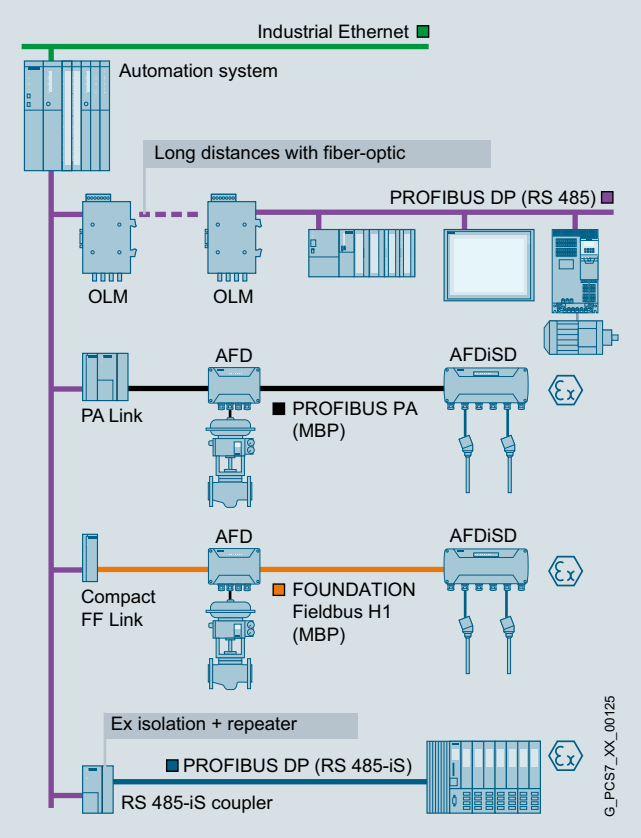

Communication at field level with PROFIBUS

Distributed peripherals such as remote I/O stations with their I/O modules, transmitters, drives, valves or operator terminals communicate with the automation systems (controllers) at field level through a powerful real-time bus system. This communication is characterized by:

- Cyclic transmission of process data
- Acyclic transfer of alarms, parameters and diagnostic data

PROFIBUS is predestined for these tasks because it enables high-speed communication with the intelligent distributed I/Os by means of a communications protocol (PROFIBUS DP) as well as communication and simultaneous power supply for transmitters and actuators (PROFIBUS PA).

PROFIBUS is simple, rugged and reliable, can be expanded online by further distributed components, and can be used in both standard environments and hazardous areas. It supports the coexistence of field devices from different vendors on one line (interoperability) as well as the vendor-independent exchangeability of devices from one profile family.

Benefits

SIMATIC PCS 7 utilizes the benefits of the PROFIBUS from start to finish:

- Small planning and engineering overheads as well as low commissioning costs
- Optimum distributed system structure with low hardware and space requirements
- Significantly reduced overheads for wiring, patching, distribution, power supply and field mounting
- High-speed communication with high measurement accuracy
- Efficient engineering, interoperability and replaceability of devices due to vendor-independent device description
- Short commissioning times due to short loop tests, simple parameter assignment and the absence of calibration work
- Bidirectional communication and high information content permit enhanced diagnostics functions for fast fault identification and elimination
- Optimum life cycle management thanks to processing and evaluation of diagnostics and status information by the maintenance station

Function

Users have numerous facilities for communication and line diagnostics, as well as for diagnostics of the intelligent field devices connected. Furthermore, the PROFIBUS is fully integrated into the global asset management with the maintenance station of the SIMATIC PCS 7 process control system.

For process automation, the following PROFIBUS functions are particularly relevant in addition:

- Integration of previously installed HART devices
- Redundancy
- Safety-related communication with PROFIsafe up to SIL 3 according to IEC 61508
- Time-of-day synchronization
- Time stamp

PROFIBUS transmission systems

PROFIBUS DP

- **RS 485**
  Simple and low-cost electrical transmission system based on shielded two-wire cable.
- **RS 485-iS**
  Intrinsically-safe electrical transmission system for hazardous areas up to Ex Zone 1 or 21, implemented using a shielded two-wire cable with a transmission rate of 1.5 Mbps.
- **Fiber-optic**
  Optical transmission system with glass or plastic fiber-optic cables, for fast transmission of large quantities of data in environments with high interferences or for covering long distances.

PROFIBUS PA

- **MBP (Manchester coded; bus powered)**
  Intrinsically-safe transmission system which permits simultaneous transmission of digital data and powering of the field devices by means of a two-wire cable. It is suitable for direct connection of devices in environments up to Ex Zone 1 or 21 and associated sensors/actuators in environments up to Ex Zone 0 or 20.

© Siemens 2019

PROFIBUS DP

Application



The PROFIBUS DP fieldbus enables the SIMATIC PCS 7 automation systems (controllers) to communicate with distributed I/Os from the ET 200 range (remote I/Os) as well as with field/process devices, CPUs/CPs and operator terminals that have a PROFIBUS DP interface. With the aid of the fieldbus isolating transformer (RS 485-iS coupler) and the RS 485-iS transmission system, PROFIBUS DP can be run as an intrinsically-safe fieldbus in all environments up to Ex Zone 1 or 21.

Controller communication with intelligent distributed devices on PROFIBUS PA, FOUNDATION Fieldbus H1 or HART I/Os is also implemented via PROFIBUS DP.

In a SIMATIC PCS 7 automation system, PROFIBUS DP lines can be connected to distributed process I/O both via a PROFIBUS DP interface in the CPU and via a CP 443-5 Extended communications module. On a PROFIBUS DP line, it is possible to operate up to 125 devices, and up to 31 devices with a PROFIBUS DP interface on one bus segment (32 nodes).

Electrical and optical transmission technologies offer many different configuration options for PROFIBUS DP networks. Electrical networks can span up to approx. 10 km. With optical transmission systems, the total size of the network is governed primarily by the cycle times as a result of the almost loss-free transmission.

With SIMATIC PCS 7, PROFIBUS DP topologies are always implemented through the standard electrical PROFIBUS DP connection on the automation system in the form of electrical or mixed (electrical/optical) networks. In the case of mixed networks, the transition between the two media is implemented by an optical link module (OLM). In regard to the communication between the nodes, there is no difference between electrical two-wire technology and fiber-optic technology.

Electrical networks can be configured with a line or tree topology. Mixed electrical/optical networks with OLMs as routers can be configured with a line, ring or star topology.

10

Technical specifications

PROFIBUS DP			
Data transmission	**RS 485**	**RS 485-iS**	**Fiber-optic**
Transmission rate	9.6 Kbps ... 12 Mbps	9.6 Kbps ... 1.5 Mbps	9.6 Kbps ... 12 Mbps
Cable	2-wire shielded	2-wire shielded	Plastic as well as multi-mode and single-mode glass-fiber
Type of protection		EEx(ib)	
Topology	Line, tree	Line	Ring, star, linear
Nodes per segment	32	32[1)]	–
Nodes per network (with repeater)	126	126	126
Cable length per segment depending on transfer rate	1 200 m at max. 93.75 Kbps 1 000 m at 187.5 Kbps 400 m at 500 Kbps 200 m at 1.5 Mbps 100 m at 12 Mbps	1 000 m at 187.5 Kbps[1)] 400 m at 500 Kbps[1)] 200 m at 1.5 Mbps[1)]	Max. 80 m (plastic) 2 ... 3 km (multimode glass fiber) > 15 km at 12 Mbps (single-mode glass-fiber)
Repeater for signal boosting with RS 485 networks	Max. 9	Max. 9[1)]	Not relevant


[1)] According to PROFIBUS installation guideline 2.262

© Siemens 2019

Overview

The simple and cost-effective 2-wire RS 485 transmission system is exceptionally suitable for networks with a linear/tree structure and high data transmission rates. Shielded, twisted pair cables are used as the transmission medium. The PROFIBUS DP nodes are connected to these bus cables using bus connectors.

Design

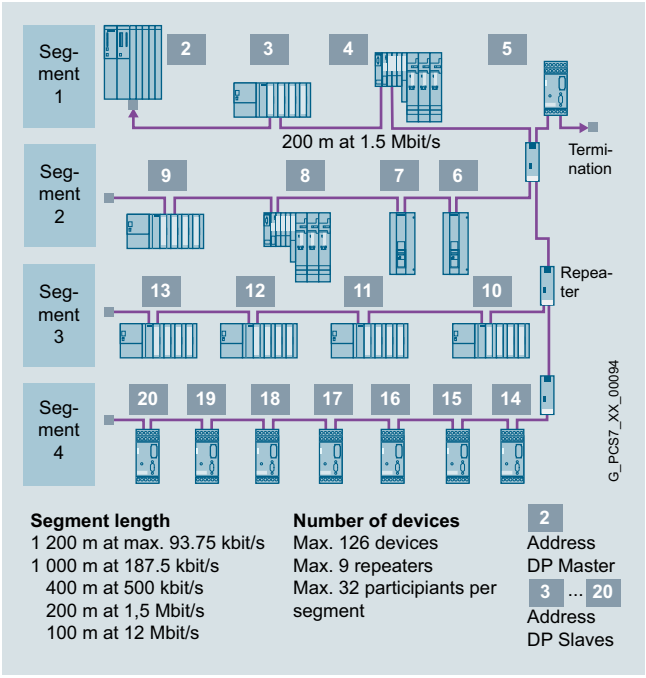

Configuration example of an electrical RS 485 network with linear/tree structure

The network size with an electrical RS 485 network is in total smaller than that with an optical network. However, by using segmenting and signal regeneration with up to 9 repeaters, distances from 1 km (at 12 Mbps) up to 10 km (at 187.5 Kbps) can be achieved depending on the transmission rate.

A segment can have up to 32 nodes (master/slaves), and the total network up to 126 nodes. The start and end of each segment must be terminated by an active bus resistor which is typically integrated in the device (e.g. repeater) or is available as an active RS 485 termination element.

The configuration example (figure above) shows a typical addressing scheme made up of multiple segments. Although repeaters are electrical nodes on the PROFIBUS, they are not assigned a slave address since they are not directly addressed by the master.

FastConnect



FastConnect Stripping Tool

PROFIBUS FastConnect is a system for fast and easy assembly of PROFIBUS copper cables. The system comprises compatible components:

- FastConnect Standard Cable for fast assembly
- FastConnect Stripping Tool
  With FastConnect Blade Cassettes (spare blade cassettes for the stripping tool)
- FastConnect bus connector for PROFIBUS

Repeater for PROFIBUS

A repeater links the individual bus segments with RS 485 technology. Main applications are:

- Increase in number of nodes and distances
- Electrical isolation of segments

If diagnostics functions for physical cable diagnostics are desired in addition to the standard repeater functionality, a diagnostics repeater can be used as an alternative. It monitors the copper bus cables in online mode. In the event of a fault it sends a diagnostic message with detailed information about the type and location of the fault to the DP master.

Active RS 485 terminating element

The active RS 485 terminating element is used to terminate bus segments. The component supplied with 24 V DC independent of the bus nodes provides a defined RS 485 signal level, and suppresses reflections on the line. Bus nodes (e.g. ET 200S) can be coupled and decoupled without feedback to/from PROFIBUS networks terminated by active RS 485 terminating elements.

© Siemens 2019

Design (continued)

RS 485-IS Coupler

The RS 485-iS coupler is an isolating transformer with which the PROFIBUS DP fieldbus can be routed intrinsically-safe into the hazardous area.

The RS 485-iS coupler has the following functions:

- Connection of intrinsically-safe PROFIBUS DP nodes, e.g. ET 200iSP or devices from other vendors with Ex i DP connection
- Conversion of the electrical PROFIBUS DP RS 485 transmission system into the intrinsically-safe RS 485-iS transmission system with a transmission rate of 1.5 Mbps
- Suitable as a safety barrier
- Additional use as a repeater in hazardous areas

The RS 485-iS coupler as an open resource can only be used in housings, cabinets or rooms for electrical equipment.

It is assembled on a SIMATIC S7-300 mounting rail which can be positioned horizontally or vertically.

The RS 485iS coupler is integrated into the PROFIBUS as follows:

- Connection to standard PROFIBUS DP via standard Sub-D socket (at the bottom on the RS 485-iS coupler, behind the right front door).
- Connection of PROFIBUS DP with RS 485-iS transmission system via screw terminals (at the top of the RS 485-iS coupler, behind the right front door)
- The last bus node on the intrinsically safe PROFIBUS DP segment (not further RS 485-iS couplers) must be terminated by a selectable terminating resistor using the connector, article number 6ES7972-0DA60-0XA0.

Ordering data

	Article No.
PROFIBUS FastConnect Standard Cable, violet Standard type with special design for fast mounting, 2-wire, shielded, cut-to-length Specify length in m Max. delivery unit 1 000 m, minimum order quantity 20 m	**6XV1830-0EH10**
Preferred lengths	
- 20 m	**6XV1830-0EN20**
- 50 m	**6XV1830-0EN50**
- 100 m	**6XV1830-0ET10**
- 200 m	**6XV1830-0ET20**
- 500 m	**6XV1830-0ET50**
- 1 000 m	**6XV1830-0EU10**
PROFIBUS FastConnect Standard Cable IS GP, blue Cable type for use in potentially explosive atmospheres, with special design for fast mounting, 2-wire, shielded, cut-to-length Specify length in m Max. delivery unit 1 000 m, minimum order quantity 20 m	**6XV1831-2A**
Further PROFIBUS cables with associated specifications	See Catalog IK PI
PROFIBUS FastConnect Stripping Tool Pre-adjusted tool for fast stripping of PROFIBUS FastConnect bus cables	**6GK1905-6AA00**
PROFIBUS FastConnect Blade Cassettes Spare blade cassettes for PROFIBUS FastConnect stripping tool, 5 units	**6GK1905-6AB00**
PROFIBUS FastConnect bus connector RS 485 with 90° cable outlet With insulation displacement 15.8 × 59 × 35.6 mm (W × H × D) Max. data transfer rate 12 Mbps	
• No programming port	**6ES7972-0BA52-0XA0**
• With programming port	**6ES7972-0BB52-0XA0**
PROFIBUS FastConnect bus connector RS 485 Plug 180 With 180° cable outlet, with insulation displacement system, for connection of PC, PG, OP	**6GK1500-0FC10**
Other bus connectors See Catalog IK PI	

	Article No.
RS 485 Repeater for PROFIBUS Data transfer rate max. 12 Mbps 24 V DC, IP20 enclosure	**6ES7972-0AA02-0XA0**
RS 485 Diagnostic Repeater For connection of up to 2 segments to PROFIBUS DP; with online diagnostics functions for monitoring the bus lines	**6ES7972-0AB01-0XA0**
Active RS 485 terminating element for PROFIBUS For terminating bus segments for data transfer rates from 9.6 Kbps to 12 Mbps	**6ES7972-0DA00-0AA0**
RS 485-IS Coupler Isolating transformer for connection of PROFIBUS DP segments with RS 485 and RS 485-iS transmission technologies Operating temperature -40 to +70 °C	**6ES7972-0AC80-0XA0**
PROFIBUS connector with selectable terminating resistor For connection of IM 152 to PROFIBUS DP with RS 485-iS transmission technology	**6ES7972-0DA60-0XA0**
S7-300 mounting rails Lengths:	
• 160 mm	**6ES7390-1AB60-0AA0**
• 482 mm	**6ES7390-1AE80-0AA0**
• 530 mm	**6ES7390-1AF30-0AA0**
• 830 mm	**6ES7390-1AJ30-0AA0**
• 2 000 mm	**6ES7390-1BC00-0AA0**

Note:


For more information on electrical PROFIBUS networks as well as components and accessories, particularly cable material for special applications, refer to Catalog IK PI, "PROFIBUS" chapter, section "Network components for PROFIBUS – electrical networks".

© Siemens 2019

Overview

Optical networks are more expensive than electrical RS 485 networks, but are insensitive to electromagnetic interference. In addition to purely optical networks, the combination of electrical and optical networks has been established in practice, providing users with the advantages of the respective transmission technologies.

Design

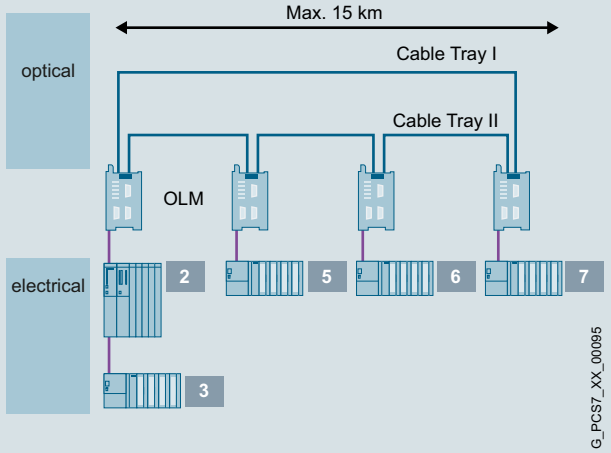

Length between 2 OLMs
Plastic: 80 m
PCF: 400 m
Glass: up to 3 km
(singlemode: 15 km)
Max. 12 Mbit/s

Number of devices
Max. 32 electrical participants per OLM
Max. 122 OLMs per OLM Ring (depending on PROFIBUS DP bus parameters)

Configuration example of an optical ring combined with an electrical network

A fault-tolerant ring structure of the optical network prevents communication losses if the cable is damaged or disconnected at any point. Electrical bus segments are incorporated into the optical ring using up to 122 optical link modules (OLMs). Depending on the OLM and bus cable version, the distance between two OLMs can be up to 15 km. A maximum of 32 electrical bus nodes can be operated on one OLM.

The configuration example shows a typical addressing scheme with mixed transmission technologies. Although OLMs are electrical nodes within their respective segment, they are not assigned a PROFIBUS slave address.



Optical Link Module OLM/G22

Optical link modules

Optical link modules (OLM) permit the construction of optical and hybrid (electrical/optical) networks in line, ring or star topologies.

OLMs can be combined with each other, and individual nodes or complete electrical segments can be integrated into the optical PROFIBUS network through an electrical interface.

OLMs are available with one (P11/G11) or two (P12/G12/G22) fiber-optic (FO) interfaces with BFOC connections. Depending on the version, they are suitable for the following distances when combined with the correspondingly specified plastic/glass fiber-optic cables:

Distance	Fiber-optic cable	OLM
Up to 80 m	POF-FOC	OLM/P11 or OLM/P12
Up to 400 m	PCF FOC	
Up to 3 km	Glass multimode FO	Depending on ambient temperature • 0 to +60 °C: OLM/G11, OLM/G12 or OLM/G22 • -25 to +60 °C: OLM/G12-EEC
Up to 10 km	Glass multimode FO	OLM/G11-1300 or OLM/G12-1300
Up to 15 km	Glass single-mode FO	

We recommend the OLM/G12 as the standard component for optical PROFIBUS networks both indoors and outdoors.

The OLMs have a compact metal housing suitable for DIN mounting rail assembly. They automatically recognize all PROFIBUS data transfer rates. Faults can be rapidly located as follows:

- Display of module status via floating signaling contact
- Checking of FO link quality (loss per section) via test output for optical receivers for logging and plausibility checks

Additional information and detailed technical specifications on the various OLM versions can be found in Catalog IK PI, chapter "PROFIBUS", section "Network components for PROFIBUS - Optical networks with OLM".

Bus cables

Suitable for the OLM/G12, fiber-optic cables (FOC) made of glass with 2 multimode fibers are preferred for optical PROFIBUS networks both indoors and outdoors.

The standard FIBER OPTIC CABLE is available in fixed lengths up to 2 000 m. It is pre-assembled with 4 BFOC connectors. A BFOC connector set with 20 connectors is available as an accessory.

Further fiber-optic cables as well as detailed technical specifications can be found in the IK PI Catalog, chapter "PROFIBUS", section "Network components for PROFIBUS - Optical networks".

© Siemens 2019

Ordering data	Article No.
FIBER OPTIC CABLE **Standard glass FO cable, splittable** Pre-assembled with 4 BFOC connectors	
Preferred lengths	
• 1 m	**6XV1820-5BH10**
• 5 m	**6XV1820-5BH50**
• 10 m	**6XV1820-5BN10**
• 20 m	**6XV1820-5BN20**
• 50 m	**6XV1820-5BN50**
• 100 m	**6XV1820-5BT10**
Other lengths and cables	See Catalog IK PI
BFOC Connector Set[1)] For standard and trailing FIBER OPTIC CABLES, 20 units	**6GK1901-0DA20-0AA0**
PROFIBUS OLM/P11 V4.1 Optical Link Module with one RS 485 port and one plastic FOC port (2 BFOC sockets), with signaling contact and measuring output	**6GK1503-2CA01**
PROFIBUS OLM/P12 V4.1 Optical Link Module with one RS 485 port and two plastic FOC ports (4 BFOC sockets), with signaling contact and measuring output	**6GK1503-3CA01**
PROFIBUS OLM/G11 V4.0 Optical Link Module with one RS 485 and one glass FOC interface (2 BFOC sockets), for standard distances up to 3 000 m, with signaling contact and measuring output	**6GK1503-2CB00**
PROFIBUS OLM/G12 V4.0 Optical Link Module with one RS 485 port and two glass FOC ports (4 BFOC sockets), for standard distances up to 3 km, with signaling contact and measuring output	**6GK1503-3CB00**
PROFIBUS OLM/G22 V4.0 Optical Link Module with two RS 485 ports and two glass FOC ports (4 BFOC sockets), for standard distances up to 3 km, with signaling contact and measuring output	**6GK1503-4CB00**
PROFIBUS OLM/G12-EEC V4.0 Optical Link Module with one RS 485 port and two glass FOC ports (4 BFOC sockets), for standard distances up to 3 km, suitable for extended temperature range from -25 to +60 °C, with signaling contact and measuring output	**6GK1503-3CD00**
PROFIBUS OLM/G11-1300 V4.0 Optical Link Module with one RS 485 port and one glass FOC port (2 BFOC sockets), 1 300 nm wavelength for long distances up to 15 km, with signaling contact and measuring output	**6GK1503-2CC00**
PROFIBUS OLM/G12-1300 V4.0 Optical Link Module with one RS 485 port and two glass FOC ports (4 BFOC sockets), 1 300 nm wavelength for long distances up to 15 km, with signaling contact and measuring output	**6GK1503-3CC00**

1) You can order supplementary components for the SIMATIC NET cabling range from your local contact. Technical support on this subject is available from:
Siemens,
SPG Industrial Network and Components, Fürth
J. Hertlein
Tel.: +49 911 750-4465 E-mail: juergen.hertlein@siemens.com

© Siemens 2019

Overview



In a SIMATIC PCS 7 automation system, PROFIBUS DP lines can be connected to distributed process I/O both via a PROFIBUS DP interface in the CPU and via a CP 443 5 Extended communications module.

If a module slot provided in the CPU for the PROFIBUS connection is still empty, an IF 964-DP interface module is required in addition.

With the AS 410 modular automation systems, an additional layer is applied to the PCB of CPU 410-5H Process Automation (conformal coating). To match the AS 410, a CP 443-5 Extended in the conformal coating version is therefore preferred (component of the AS bundle configuration).

For information on the type and number of configurable PROFIBUS DP interfaces, see chapter "Automation systems".

Benefits

Advantages of the CP 443-5 Extended communications module:

- Compact design; 9-pin Sub-D socket for connection to PROFIBUS DP
- Simple installation
  Can be plugged into AS rack slot; connection to the other S7-400 modules via backplane bus
- Operation without fan; backup battery or memory submodule are not required
- With additional PBC coating option (conformal coating)

Ordering data

	Article No.
SIMATIC NET CP 443-5 Extended Communications module for connection of SIMATIC S7-400 to PROFIBUS as DP master or for S7 communication, for increasing the number of DP lines, for data set routing with SIMATIC PDM and for 10-ms time stamping, electronic manual on CD; module occupies 1 slot	**6GK7443-5DX05-0XE0**
IF 964-DP Interface module for connection of another PROFIBUS DP line, for plugging into a free DP module slot of the CPU	**6ES7964-2AA04-0AB0**


© Siemens 2019

Overview



The Y-Link is a bus coupler for transition from a redundant PROFIBUS DP master system to a simple, single-channel PROFIBUS DP master system. It can be used to connect devices with only one PROFIBUS DP interface to the redundant PROFIBUS DP master system.

Design

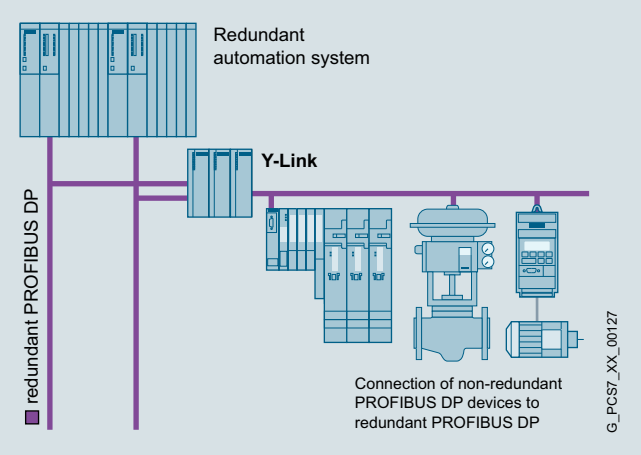

The Y-link comprises:

- 2 IM 153-2 High Feature Outdoor interface modules
- 1 Y-coupler including RS 485 repeater
- 1 BM IM/IM bus module for 2 IM 153-2 High Feature Outdoor modules
- 1 BM Y-coupler bus module

Evaluation of the Y-link diagnostics (and hence indirectly of the connected DP standard slaves) is supported by driver blocks.


It is recommendable to have a redundant -24 V DC supply for the Y-link, e.g. with two PS 307/PS 305 load power supplies.

Ordering data

Ordering data	Article No.
Y-Link For connection of devices with only one PROFIBUS DP interface to a redundant automation system, comprising: • 2 IM 153-2 High Feature Outdoor interface modules • 1 Y-coupler • 1 BM IM/IM bus module • 1 BM Y-coupler bus module	**6ES7197-1LA12-0XA0**
PS 307 load current supply Including connecting comb; 120/230 V AC; 24 V DC	
• 2 A; 40 mm wide	**6ES7307-1BA01-0AA0**
• 5 A; 60 mm wide	**6ES7307-1EA01-0AA0**
• 5 A, extended temperature range; 80 mm wide	**6ES7307-1EA80-0AA0**
• 10 A, 80 mm wide	**6ES7307-1KA02-0AA0**
PS 305 Load Power Supply 24/48/60/110 V DC; 24 V DC	
• 2 A, extended temperature range; 80 mm wide	**6ES7305-1BA80-0AA0**

© Siemens 2019

Overview

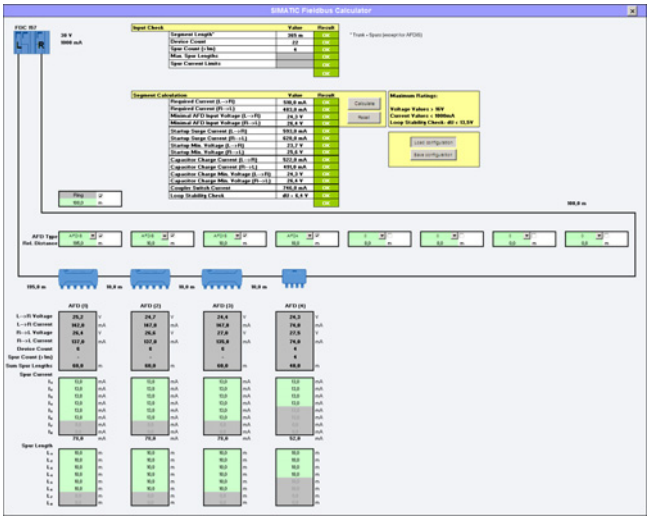

SIMATIC Fieldbus Calculator

Direct interfacing of the devices in the field, especially in the hazardous area, together with the information content of the communication, are of significant importance in the process industry. PROFIBUS PA, which permits both digital data transmission and the power supply on a two-wire cable with the intrinsically-safe MBP transmission system (Manchester Coded; Bus Powered) is tailored to these requirements. It is optimally suitable for direct integration of solenoid valves, sensors, and pneumatic actuators positioned in operating environments up to Ex Zone 1/21 or 0/20 into the process control system.

The typical response time of a transmitter of approx. 10 ms indicates that short cycle times can be achieved with the PROFIBUS PA even in the case of a segment configuration with up to 31 devices. Practically all typical applications of the process industry can be implemented, both in small and large plants. Bidirectional communication and high information content allow enhanced diagnostics for fast and exact fault detection and elimination. The standardized communications services guarantee interoperability and replaceability between multi-vendor field devices and remote configuration of the field devices during operation.

Safety communication with the PROFIsafe profile

The PROFIsafe profile allows seamless integration of safety communication into the PROFIBUS PA. You need not configure a separate safety bus for your safety-related applications. The PROFIBUS PA with the PROFIsafe profile is incorporated in "Safety Integrated for Process Automation". This comprehensive range of products and services from Siemens for fail-safe, fault-tolerant applications in the process industry offers you attractive and cost-effective alternatives to separate safety systems.

Redundant architectures

You can define the degree of redundancy separately for the controller, fieldbus and I/O levels of your plant depending on the automation task and the derived safety requirements, and match them to the field instrumentation (flexible modular redundancy, FMR). You can find an overview of the redundant architectures of PROFIBUS PA under "Design".

Network transition PROFIBUS PA to PROFIBUS DP

The PA link is preferred as the network transition from PROFIBUS PA to PROFIBUS DP. When using the PA link, the transmission rate on the PROFIBUS DP is independent of the lower-level PROFIBUS PA segments. The configuration of the PA link depends on the fieldbus architecture. The types of coupler described in the section "PA gateways" can be used for the configuration. With a small amount of data (small quantity framework) and low timing requirements, the DP/PA coupler can also be operated in stand-alone mode as a gateway.

Benefits

The advantages of distributed field automation and the use of the PROFIBUS PA profile include low hardware overheads, cost-effective engineering, increased operational safety and problem-free maintenance. These advantages are underlined by the following features:

- Modularity and uniformity from the sensor up to the control level enable new plant designs
- Implementation of intrinsically-safe applications through use of the fieldbus in hazardous areas
- Redundant PROFIBUS PA architectures (ring and line topologies with coupler redundancy) support Flexible Modular Redundancy (FMR) from the automation system (controller) down to a PA field device
- Safety-related and fault-tolerant applications with low device and cabling requirements
- Reduced configuration costs through simple, central engineering of the field devices (PROFIBUS PA and HART with SIMATIC PDM, also cross-vendor)
- Simple installation using two-wire cable for common power supply and data transmission
- Reduced commissioning costs through simplified loop check
- Low servicing costs thanks to simple wiring and comprehensive diagnostics capabilities

© Siemens 2019

Design


Examples of PROFIBUS PA architectures

The following graphical representations illustrate possible PROFIBUS PA configuration variants with DP/PA coupler and PA Link routers on the:


- PROFIBUS DP master, simple design (AS Single Station)
- PROFIBUS DP master, redundant design (AS Redundancy Station)

If the DP/PA coupler is operated independently as a PA gateway, then the PROFIBUS DP connection is directly on the coupler instead of via the interface module.

The number of PROFIBUS PA devices is limited according to the specifications in the "Technical specifications" section.

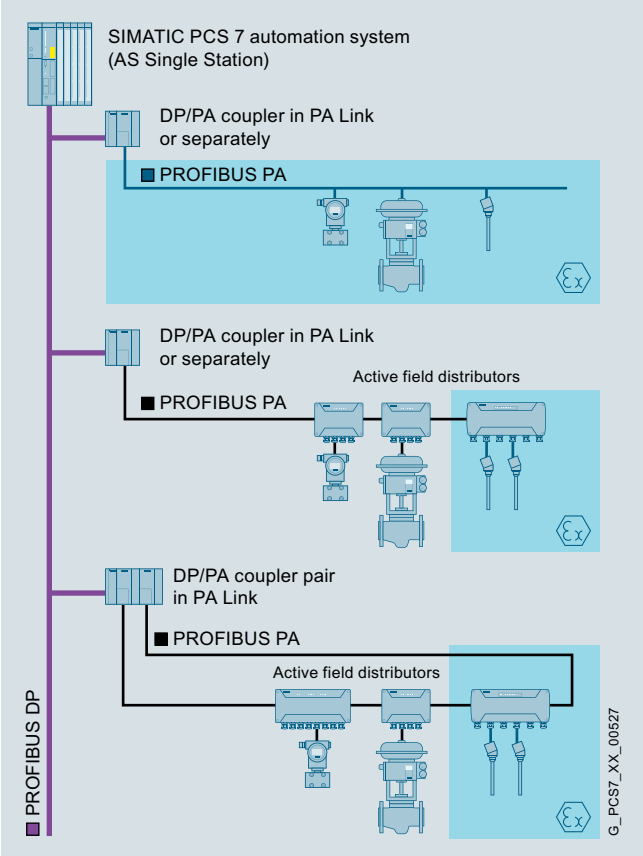

PROFIBUS PA on an AS Single Station as PROFIBUS DP master

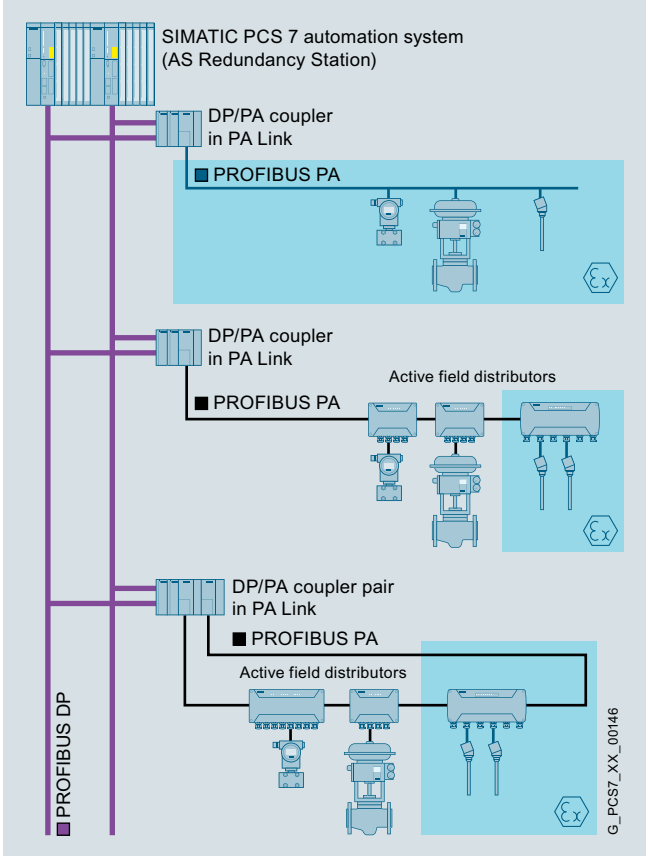

PROFIBUS PA on an AS Redundancy Station as PROFIBUS DP master

© Siemens 2019

Design (continued)

Line architecture with single coupler

In the line architecture with individual couplers, each line segment is connected to one DP/PA coupler each.

If the PA gateway is an independent DP/PA coupler, then a PROFIBUS PA line (line segment) can be connected. A maximum of 5 line segments can be operated via single couplers (max. 3 for mixed configurations with ring or coupler redundancy) on a PA link as PA gateway, equipped with up to 5 DP/PA couplers.

The PA gateway can be connected to a single or redundant PROFIBUS DP, depending on the version (see figures).

The FDC 157-0 is the first choice as the DP/PA coupler. When using this coupler, the PA-devices can be integrated into the line segment via AFD active field distributors, e.g. AFD4, AFD4 RAILMOUNT, AFD4 FM and AFD8 (approval for Ex Zone 2/22) and AFDiSD (approval for Ex Zone 1/21). The PA devices are connected to these field distributors via short-circuit-proof spur lines.

Alternatively, it is possible to operate up to 8 AFD field distributors, up to 5 AFDiSD field distributors or any combination of up to 5 AFDiSD and AFD field distributors in a line segment. With mixed AFDiSD/AFD operation, however, extended fieldbus diagnostics of the AFDiSD in the PROFIBUS PA is not possible. The last field distributor at the end of the line leading away from the DP/PA coupler automatically activates its bus terminating resistor.

Intrinsically-safe PA devices in hazardous areas in accordance with Ex Zone 1/21 or 0/20 are preferably integrated into a bus segment by means of AFDiSD active field distributors. For PA devices in Ex Zone 1/21, connection via a line segment on the DP/PA coupler Ex [i] (in the PA Link or independently) is a possible alternative. The devices are integrated separately into the line segment using SpliTConnect taps (via spur line or directly via SpliTConnect M12 outlet). A SpliTConnect terminator is required for the bus termination of the segment.

By grouping individual devices in different line segments, flexible modular redundancy is possible at device level.

Ring architecture with coupler and media redundancy

With the redundant DP/PA coupler pair (2 × FDC 157-0) of a PA gateway, a ring segment with automatic bus termination can also be implemented. Apart from the ring segment, only line segments with individual couplers can be configured on this PA gateway. The PA gateway can be connected to a single or a redundant PROFIBUS DP.

Integration of the PA field devices into the ring segment is carried out via active AFD or AFDiSD field distributors whose number is limited as with the line architectures (up to 8 AFD, up to 5 AFDiSD or up to 5 AFDiSD and AFD combined; for mixed AFDiSD and AFD operation, extended fieldbus diagnostics for the AFDiSD is not possible). These field distributors have galvanically isolated, short-circuit-proof spur line connections for connecting the PA devices.

At the device level, flexible modular redundancy is possible by grouping individual devices on different field distributors.

Special advantages of the ring architecture:

- High availability
- Transparent redundancy management of intelligent DP/PA couplers FDC 157-0 for the host system
- Active bus terminators for automatic bus termination in the FDC 157-0 DP/PA couplers and the AFD and AFDiSD active field distributors enable:
  - Automatic, smooth isolation of faulty subsegments in the event of a short-circuit or wire break
  - Modification of the ring configuration or instrumentation during operation, including the addition or removal of ring segments
- Safety-related and fault-tolerant applications with low device and cabling requirements

© Siemens 2019

Design (continued)

Cable lengths of bus segments and spur lines

The PROFIBUS PA is based on electrical transmission components. A shielded two-wire cable is used for digital data transmission and for the power supply of the field devices.

With line, tree and ring topologies, bus segments up to approx. 1.9 km can be configured. If AFD active field distributors are used, both the length of the spur lines for connecting devices and the quality of the cable used must also be considered when calculating the total length of the bus segment. Spur lines on the AFDiSD are not relevant to the total length of the bus segment.

For bus segments with active field distributors, the spur lines can have the following maximum lengths:

- Up to 120 m in accordance with IEC 61158-2
- Up to 120 m in accordance with IEC 60079-27 (FISCO)

With AFD active field distributors, these maximum values may be reduced depending on the number of spur lines of the bus segment (for details, see the "Technical specifications" section). With AFDiSD active field distributors, this reduction is canceled by the integrated repeater function.

The **SIMATIC Fieldbus Calculator** provides help in calculating and designing fieldbus segments:
https://support.industry.siemens.com/cs/ww/en/view/53842953

Intrinsically-safe PA devices in hazardous areas are preferably integrated into a bus segment by means of AFDiSD active field distributors. For PA devices in Ex zone 1/21, connection via a line segment on the PA gateway with DP/PA coupler Ex [i] is a possible alternative. In such a configuration the max. possible length per spur line is reduced to 30 m and per bus segment to 1 km.

Bus segments are terminated either automatically (for architectures with AFD or AFDiSD active field distributors) or with the passive terminating element for PROFIBUS PA (SpliTConnect terminator).

Technical specifications

PROFIBUS PA	
Data transmission	MBP
Transmission rate	31.25 Kbps
Cable	2-wire shielded
Type of protection	EEx(ia/ib)
Topology	Line, tree, ring
Active field distributors per segment/coupler	
• AFD	8
• AFDiSD or combinations of AFDiSD and AFD	5
PA devices per segment/coupler	31
PA devices per PA link	64
Max. current for all PA field devices of a segment (for PA gateways with FDC 157-0 coupler)	1 A
Cable length per segment	
• Standard	1 900 m
• EEx(ib)	1 900 m
• EEx(ia)	1 000 m
Bus segments with AFD Max. spur line length in relation to the total number of spur lines	
Number of spur lines (1 device per spur line)	
• 1 to 12 spur lines	120 m
• 13 to 14 spur lines	90 m
• 15 to 18 spur lines	60 m
• 19 to 24 spur lines	30 m
• 25 to 31 spur lines	1 m
Bus segments with AFDiSD Max. spur line length independent of total number of spur lines	
Number of spur lines (1 device per spur line)	
• 1 to 31 spur lines	
- Not intrinsically-safe	120 m
- Intrinsically-safe acc. to FISCO	120 m

© Siemens 2019

Overview



PA link, consisting here of IM 153-2 High Feature Outdoor and DP/PA coupler

To create a smooth network transition between PROFIBUS DP and PROFIBUS PA, the SIMATIC product range offers two versions: the DP/PA coupler and the PA link.

The following criteria can be applied when choosing the network transition:

- DP/PA coupler:
  For small quantity frameworks (volumes of data) and low timing requirements; data transfer rate on the PROFIBUS DP limited to 45.45 Kbps
- PA link:
  For large number of nodes and high cycle time requirements; data transfer rate on the PROFIBUS DP up to 12 Mbps

Application

The two PA gateways are based on two versions of the DP/PA coupler:

- Ex [i] DP/PA coupler (max. output current 110 mA)
  For implementation of PROFIBUS PA networks with a line or tree topology in environments up to Ex Zone 1/21; not for redundant architectures (coupler redundancy, ring)
- DP/PA coupler FDC 157-0 (max. output current 1 000 mA)
  For implementation of PROFIBUS PA networks with a line, tree or ring topology in environments up to Ex Zone 2/22; can be used for the "Ring" and "Line with coupler redundancy" redundant architectures.

DP/PA couplers are also integral components of the PA link (see design). The PA link connects PROFIBUS DP and PROFIBUS PA together, and decouples the transmission rates. In contrast to the DP/PA coupler gateway which limits the data transmission rate on the PROFIBUS DP to 45.45 Kbps, the PA link does not influence the performance of the PROFIBUS DP.

The PA link functions as a slave on the PROFIBUS DP and as a master on the PROFIBUS PA. From the viewpoint of the host PROFIBUS DP master, the PA link is a modular slave whose modules are the devices connected on the PROFIBUS PA. Addressing of these devices is carried out indirectly via the PA link that itself only requires one node address. The host PROFIBUS master can scan devices connected to the PA link all at once.

If the gateway is a DP/PA coupler, the nodes on the PROFIBUS PA are directly addressed by the PROFIBUS DP master (controller). The DP/PA coupler is an electrical node, but is transparent for communication between the master and PA field devices; it therefore does not require setting of parameters or addresses (exception: FDC 157-0 DP/PA coupler used as PROFIBUS diagnostics slave).

PROFIBUS diagnostics with FDC 157-0 DP/PA coupler, configured as PROFIBUS diagnostics slave

FDC 157-0 DP/PA couplers configured as PROFIBUS diagnostics slaves supply extensive diagnostic and status information via PROFIBUS for swift localization and correction of faults:


- I&M (identification & maintenance) data
- Current and voltage values on the main line
- Redundancy status
- Wire break
- Short-circuit
- Signal level

To this end, each of these DP/PA couplers FDC 157-0 requires its own PROFIBUS address. This applies independent of use in a PA link or as a PA gateway.

The PA link and DP/PA coupler are available for use in operating environments up to Ex Zone 2/22. Both are operated with 24 V DC. Assembly is on an S7-300 mounting rail with horizontal or vertical alignment.

© Siemens 2019

Design

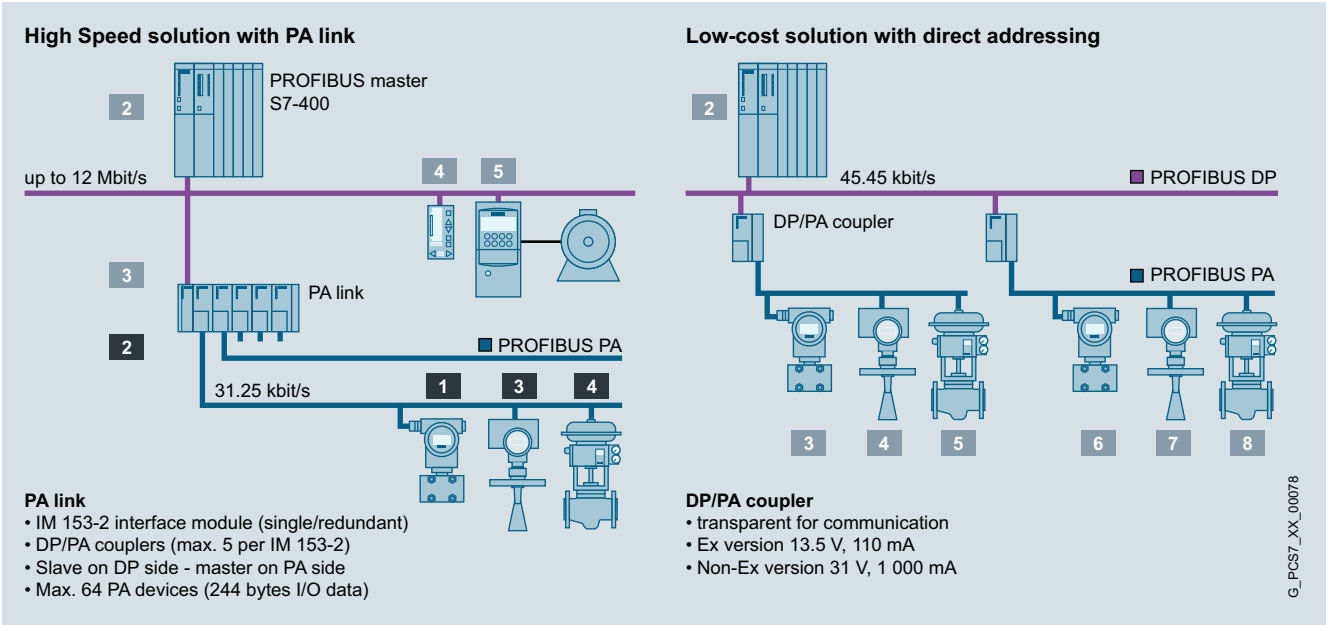

Configuration examples for PA link and DP/PA coupler

PA link

The PA link is a modular combination in S7-300 design consisting of the IM 153-2 High Feature Outdoor PROFIBUS DP interface module (with optional redundancy) and up to 5 DP/PA couplers (FDC 157-0 or Ex [i]).

All components of the PA link are interconnected through the S7 backplane bus. Use of active bus modules on the backplane allows hot swapping of individual modules and redundancy of the IM 153-2 High Feature Outdoor PROFIBUS DP interface modules and the FDC 157-0 DP/PA couplers. If redundancy and changes during operation are not required, passive bus connectors can be used instead of active bus modules.

The PS 307 or PS 305 load power supply can be used for the 24 V DC. With a redundant IM 153-2 High Feature Outdoor PROFIBUS DP interface module, a redundant 24 V DC supply is also recommended, e.g. using two PS 307/PS 305 load current supplies.

The PROFIBUS PA bus segments designed with the DP/PA couplers are physically separated as regards current infeed, but form one bus system in communication terms. A PROFIBUS PA ring segment or a PROFIBUS PA line segment with coupler redundancy can be operated on a PA link. Further PROFIBUS PA line segments can be operated on this PA link using individual couplers. The FDC 157-0 DP/PA couplers provided for the ring coupling or coupler redundancy must always be located at the right-hand end of a sequence of up to 5 couplers.

The following basic components are available for configuring the PA link:

- IM 153-2 High Feature Outdoor interface
- DP/PA coupler (Ex [i] and FDC 157-0)
- Components for redundant design and for hot swapping:
  - Mounting rail for hot swapping (as an alternative to the standard mounting rail)
  - BM PS/IM for 1 load power supply and 1 IM 153-2 High Feature Outdoor module
  - BM IM/IM for 2 IM 153-2 High Feature Outdoor modules, for redundant and non-redundant configuration
  - BM FDC for 1 DP/PA coupler Ex [i] or FDC 157-0 (up to 5 DP/PA couplers possible per PA link)
  - BM FDC/FDC for 2 DP/PA couplers FDC 157-0

Additive options:

- PS 307 for 120/230 V AC; 24 V DC load power supply, version in 2, 5 or 10 A, or
- PS 305 load power supply for 24/48/60/110 V DC; 24 V DC, 2 A

© Siemens 2019

Technical specifications

DP/PA Coupler	
Bus connection	
Connection for PROFIBUS PA	
• DP/PA coupler Ex [i]	2 terminals of a 4-pin screw-type terminal, integrated terminating resistor
• DP/PA coupler FDC 157-0	4-pin screw-type terminal for connection and looping through, selectable terminating resistor
Connection for PROFIBUS DP	9-pin D-sub connector Contact assignment as described in IEC 61158/EN 50170
Module-specific data	
Degree of protection	IP20
Transmission rate	
• On PROFIBUS DP	45.45 Kbps
• On PROFIBUS PA	31.25 Kbps
Communication protocol	PROFIBUS DP
Voltages, currents, potentials	
Supply voltage	24 V DC (20.4 … 28.8 V)
Reverse polarity protection	Yes
Overvoltage protection	Yes
Voltage at coupler output (PA)	
• DP/PA coupler Ex [i]	13 … 14 V DC
• DP/PA coupler FDC 157-0	31 ± 1 V DC
Voltage monitoring	15.5 V
Overvoltage monitoring	U > 35 V; latching cutoff
Voltage failure bridging	Min. 5 ms
Current at coupler output (PA) for supplying the PA field devices	
• DP/PA coupler Ex [i]	Max. 110 mA
• DP/PA coupler FDC 157-0	Max. 1 A
Galvanic isolation 24 V DC	
• PROFIBUS DP/PROFIBUS PA	Yes
• PROFIBUS DP/supply	Yes
• PROFIBUS PA/supply	Yes
• All electric circuits/functional grounding	Yes
Power consumption of modules (24 V DC)	
• DP/PA coupler Ex [i]	Max. 400 mA
• DP/PA coupler FDC 157-0	Max. 2.3 A
Module power loss	
• DP/PA coupler Ex [i]	Typ. 7 W
• DP/PA coupler FDC 157-0	Typ. 13.4 W
Status, interrupts, diagnostics	
Diagnostics displays DP/PA coupler Ex [i] and DP/PA coupler FDC 157-0	
• PROFIBUS DP bus monitoring	Yellow "DP" LED
• PROFIBUS PA bus monitoring	Yellow "PA" LED
• 24 V DC power supply monitoring	Green "ON" LED
Additive diagnostics displays of the DP/PA coupler FDC 157-0	
• Group error	Red LED "SF"
• Bus error	Red LED "BF"
• Monitoring DP/PA coupler (active coupler in redundant configuration)	Yellow "ACT" LED
Climatic conditions	
Permissible operating temperature DP/PA coupler Ex [i] and DP/PA coupler FDC 157-0	
• Horizontal installation	-25 to +60 °C
• Vertical installation	-25 to +40 °C
Dimensions and weight	
Dimensions (W × H × D) in mm	80 × 125 × 130
Weight	
• DP/PA coupler Ex [i]	Approx. 550 g
• DP/PA coupler FDC 157-0	Approx. 515 g

IM 153-2 High Feature Outdoor	
Bus connection	
• Connection for PROFIBUS DP	9-pin D-sub connector, contact assignment as described in IEC 61158/EN 50170, Vol. 2
Connectable lower-level components	
Number of couplers	
• DP/PA coupler	Max. 5
• Y coupler	1
Number of PA devices on PROFIBUS PA	Max. 64
Module-specific data	
Degree of protection	IP20
Transmission rate of the higher level DP master system	9.6; 19.2; 45.45; 93.75; 187.5; 500 Kbps 1.5; 3; 6; 12 Mbps
Communication protocol	PROFIBUS DP
Frame length	
• I/O data	Max. 244 bytes
• Configuration frame	Max. 244 bytes
• Diagnostics frame	Max. 244 bytes
• Parameter assignment frame	Max. 244 bytes
Voltages, currents, potentials	
Supply voltage	24 V DC (20.4 … 28.8 V)
Reverse polarity protection	Yes
Voltage failure bridging	20 ms
Galvanic isolation	
• To the higher-level DP master system	Yes
• To the DP/PA coupler or Y coupler	No
Power consumption of modules (24 V DC)	
• In the PA link	Max. 200 mA (at 20.4 V)
• In the Y link	Max. 400 mA (at 20.4 V)
Module power loss	
• In the PA link	Max. 2.6 W (at 28.8 V)
• In the Y link	Max. 3.6 W (at 28.8 V)
Infeed, mechanical design	4-pin screw terminal, short-circuiting link between PE and M24; the short-circuiting link must be removed for floating operation (independent of this, the DP interface is always floating)
Status, interrupts, diagnostics	
Diagnostic displays	
• Group error	Red LED "SF"
• Bus error on higher level DP master system	Red LED "BF 1"
• Bus error on underlying bus system	Red LED "BF 2"
• Module is active in redundancy mode	Yellow "ACT" LED
• 24 V DC power supply monitoring	Green "ON" LED
Climatic conditions	
Permissible operating temperature	
• Horizontal installation	-25 to +60 °C
• Vertical installation	-25 to +40 °C
Dimensions and weight	
Dimensions (W × H × D) in mm	40 × 125 × 130
Weight	Approx. 360 g

© Siemens 2019

PA routers

Ordering data	Article No.
DP/PA coupler For transition from RS 485 to MBP	
• DP/PA coupler Ex [i] Fieldbus coupler between PROFIBUS DP and PROFIBUS PA, EEx(ia) version, max. output current 110 mA; degree of protection IP20; permissible operating temperature 25 to +60 °C	**6ES7157-0AD82-0XA0**
• DP/PA coupler FDC 157-0 Fieldbus coupler between PROFIBUS DP and PROFIBUS PA, redundancy capable; integrated PROFIBUS diagnostics slave; max. output current 1 A; IP20 degree of protection; permissible operating temperature -25 to +60 °C	**6ES7157-0AC85-0XA0**
IM 153-2 High Feature Outdoor Interface module for PROFIBUS DP for ET 200M, PA link and Y link; redundancy capable; conformal coating, IP20 degree of protection; permissible operating temperature -25 to +60 °C	**6ES7153-2BA70-0XB0**
Accessories	
PS 307 load current supply Including connecting comb; 120/230 V AC; 24 V DC	
• 2 A; 40 mm wide	**6ES7307-1BA01-0AA0**
• 5 A; 60 mm wide	**6ES7307-1EA01-0AA0**
• 5 A, extended temperature range; 80 mm wide	**6ES7307-1EA80-0AA0**
• 10 A, 80 mm wide	**6ES7307-1KA02-0AA0**
PS 305 Load Power Supply 24/48/60/110 V DC; 24 V DC	
• 2 A, extended temperature range; 80 mm wide	**6ES7305-1BA80-0AA0**
Standard mounting rails (without hot swapping function)	
• Width 482 mm (19")	**6ES7390-1AE80-0AA0**
• Width 530 mm	**6ES7390-1AF30-0AA0**


	Article No.
Components for hot swap and for redundant configuration	
Active bus modules for hot swapping	
• BM PS/IM SIPLUS extreme For 1 load current supply and 1 IM 153-2 High Feature module; for hot swap function, permissible operating temperature -25 to +70 °C	**6AG1195-7HA00-2XA0**
• BM IM/IM For 2 IM 153-2 High Feature modules, for redundant and non-redundant configuration, for hot swap function, permissible operating temperature -25 to +60 °C	**6ES7195-7HD80-0XA0**
• BM FDC For 1 DP/PA coupler Ex [i] or FDC 157-0, for hot swap function, permissible operating temperature -25 to +60 °C	**6ES7195-7HF80-0XA0**
• BM FDC/FDC For 2 DP/PA couplers FDC 157-0, for hot swap function, permissible operating temperature -25 to +60 °C	**6ES7195-7HG80-0XA0**
Mounting rail for hot swapping For max. 5 active bus modules	
• Width 482 mm (19")	**6ES7195-1GA00-0XA0**
• Width 530 mm	**6ES7195-1GF30-0XA0**
• Width 620 mm	**6ES7195-1GG30-0XA0**
Covers 4 backplane bus covers and 1 cover for active bus module	**6ES7195-1JA00-0XA0**
Bundles	
I/O subsystem for PA link or ET 200M For PA Link or for ET 200M stations with up to 8 I/O modules, suitable for hot swapping, consisting of: • Mounting rail for active bus modules, 482 mm long (19 inches) • PS/IM bus module • PROFIBUS DP interface IM 153-2 High Feature Outdoor	**6ES7654-0XX10-1XA0**
I/O subsystem extended for PA link or ET 200M For PA Link or for ET 200M stations with up to12 I/O modules, suitable for hot swapping, consisting of: • Mounting rail for active bus modules, 620 mm long • PS/IM bus module • PROFIBUS DP interface IM 153-2 High Feature Outdoor	**6ES7654-0XX10-1XB0**
RED I/O subsystem for PA Link or ET 200M For operation of a PA Link or an ET 200M station on a redundant automation system of the S7-400 series, suitable for hot swapping, consisting of: • 2 PROFIBUS DP interfaces IM 153-2 High Feature Outdoor • 1 active bus module IM/IM Outdoor	**6ES7654-0XX20-0XA0**

© Siemens 2019

Overview



Active Field Distributor AFD4

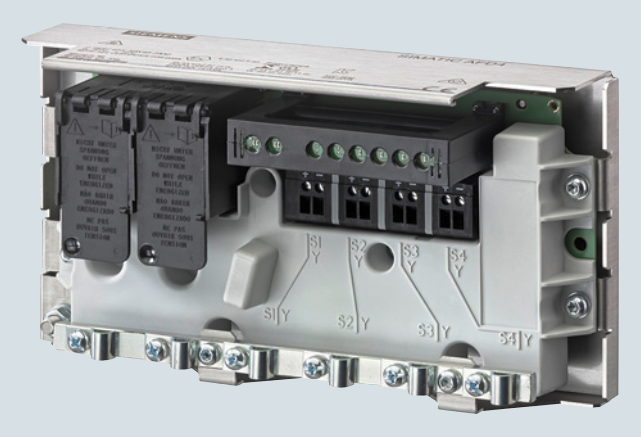

Active Field Distributor AFD4 RAILMOUNT



Active Field Distributor AFD8

Active Field Distributor AFD

Active field distributors (AFD) can be operated in environments in accordance with Division 2, Zone 2 or Zone 22. The following models are available:

- AFD4, AFD4 RAILMOUNT and AFD4 FM, with 4 spur line connections for 1 field device each
- AFD8 with 8 spur line connections for 1 field device each

An AFD4, AFD4 RAILMOUNT and AFD4 FM can therefore connect up to 4 field devices, and an AFD8 can connect up to 8 standard-compliant PROFIBUS PA-field devices via short-circuit proof spur line connections to a PA fieldbus segment (line/ring) with automatic bus termination.

The PA fieldbus segment can be connected to a single or redundant PROFIBUS DP via a PA gateway and can thus be seamlessly integrated into the SIMATIC PCS 7 process control system.

Up to 8 AFD active field distributors with a total of up to 31 connected field devices can be operated for each fieldbus segment. The number of field devices is also limited by the current consumption of the field devices. A maximum of 60 mA per spur line and a maximum of 1 A per segment is available for the field devices.

An AFD in a ring segment can be replaced during operation without resulting in failure of the segment.

For compliance with IP66 degree of protection, it is necessary to protect unused spur line connections using blanking plugs.



Active Field Distributor AFD8, open

Based on the AFD4, two product versions were developed with the AFD4 RAILMOUNT and the AFD4 FM with different intentions:

Specific product features of the AFD4 RAILMOUNT

The AFD4 RAILMOUNT is supplied without die-cast aluminum enclosure; it is a product variant of the AFD4 active field distributor with flexible installation options. It can be installed on a DIN mounting rail into an enclosure of choice, for example, one made of stainless steel, die-cast aluminum or plastic.

Specific product features of the AFD4 FM

The AFD4 FM with cFMus approval is adapted to the special requirements for product variants of the AFD4 active field distributor in the USA and Canada. The AFD4 FM features threaded plugs ex factory, because the cable glands of the AFD4 do not conform to the requirements of cFMus.

The threaded plugs for connecting the main and spur lines must be replaced by the cable glands and cables listed by UL or CSA. They must conform to the US National Electrical Code (NEC) and Canadian Electrical Code (CEC). The user is responsible for selection and ordering.

Available suppliers for suitable cable glands:

- Cooper Capri SAS
- CMP products

Due to the larger bushing for the main line (M20 instead of M16), sheathed main line cables can also be used for AFD4 FM.

The relevant requirements of the US National Electrical Code (ANSI/NFPA-70 NEC) must be met when installing the AFD4 FM.


© Siemens 2019

Overview (continued)

AFDiSD active field distributor



AFDiSD active field distributor

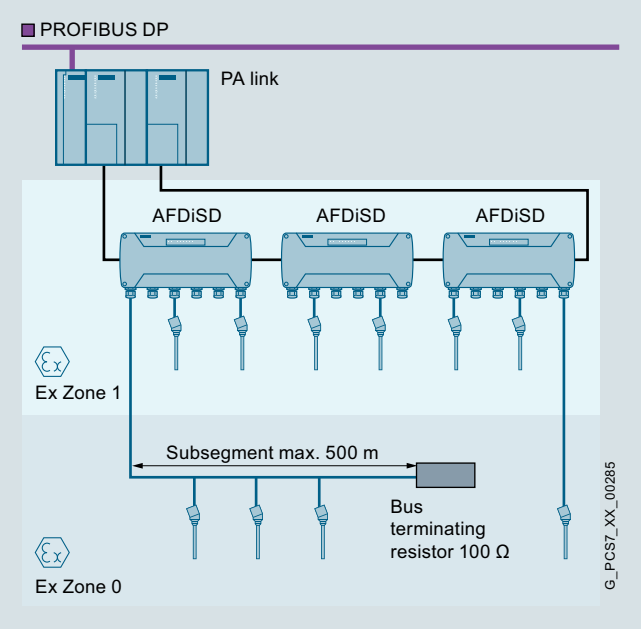

The AFDiSD (active field distributor intrinsically safe with optional extended PROFIBUS PA diagnostics) PROFIBUS PA field distributor can be operated in environments in accordance with Ex Zone 1/21 and 2/22. It is a compatible replacement for AFDiS.

AFDiSDs can integrate up to 6 intrinsically-safe PA field devices in a PA fieldbus segment (line/ring) via its intrinsically-safe, short-circuit proof spur line connections. Instead of the spur line, it is also possible to use a subsegment for 3 to 4 devices with a max. length of 500 m at connection S1. The spur lines with Ex [ia] type of protection as well as the subsegment can be routed into Zone 0/20.

Up to 5 AFDiSD active field distributors with a total of up to 31 field devices can be operated in a fieldbus segment. A limitation of 5 active field distributors is also mandatory for mixed operation of AFD and AFDiSD (extended PA fieldbus diagnostics in mixed operation).

The number of field devices per segment additionally depends on the current consumption of the devices and the cable lengths used. A current of 1 A is available for all field devices and the active field distributors of the segment.

With its integrated repeater function, AFDiSDs have the following advantages compared to the AFD:

- Spur line lengths are independent of the total number of spur lines in the bus segment
- Spur line lengths need not be taken into account when determining the total length of the bus segment

In environments in accordance with Ex Zone 2/22 or in non-hazardous areas, an AFDiSD in a ring segment can be replaced during operation without failure of the segment.

For compliance with IP66 degree of protection, it is necessary to protect unused spur line connections using blanking plugs.

Enhanced fieldbus diagnostics with AFDiSD in PROFIBUS PA

AFDiSD diagnostics are limited to short-circuits, loss of redundancy, detection of chatter, and failure of field devices. In addition, the extended fieldbus diagnostics, which can be activated per mode selector, enables comprehensive diagnostics of the entire PROFIBUS PA segment.

This includes, among others, the detection, recording and monitoring of:

- Topology (DP/PA coupler, AFDiSD)
- Voltage and current on the main and spur lines
- Signal and noise levels
- Capacitive unbalance to shield of main line

Configuration errors or defects can thus be rapidly detected and eliminated.

However, a prerequisite for application of the extended fieldbus diagnostics is that all active field distributors of the segment as well as the components of the PA link support this functionality. The following components satisfy this requirement:

- Active field distributor AFDiSD, Article No. 6ES7655-5DX60-1BB0
- IM 153-2 High Feature Outdoor interface module, Article No. 6ES7153-2BA70-0XB0
- DP/PA coupler FDC 157, Article No. 6ES7157-0AC85-0XA0

The interface module creates a topology model of the connected bus segment, and maps its status information. The DP/PA coupler and the locally installed active field distributor AFDiSD provide the interface module with the physical data of the bus segment for this purpose, as well as information on the status of the connected lines. The information provided by the interface module can be displayed on the PCS 7 Maintenance Station and evaluated by SIMATIC PDM.

When delivered from the factory, the enhanced fieldbus diagnostics is not activated in the AFDiSD. In this state, the functionality of the AFDiSD is equivalent to that of the AFDiS predecessor type.

© Siemens 2019

Technical specifications

Article number	**6ES7157-0AG81-0XA0**	**6ES7655-5DX40-2AA0**	**6ES7655-5DX40-1AA1**	**6ES7157-0AG82-0XA0**
	ACTIVE FIELD DISTRIBUTOR AFD4	ACTIVE FIELD DISTRIBUTOR AFD4 RAILMOUNT	ACTIVE FIELD DISTRIBUTOR AFD4 FM	ACTIVE FIELD DISTRIBUTOR AFD8
General information				
Product type designation	Active Field Distributor AFD4	Active Field Distributor AFD4	Active Field Distributor AFD4 FM	Active Field Distributor AFD8
Product description			AFD4 FM	
Product function				
• Repeater function	No	No	No	No
Supply voltage				
permissible range, lower limit (DC)	16 V	16 V	16 V	16 V
permissible range, upper limit (DC)	32 V	32 V	32 V	32 V
Reverse polarity protection	Yes; only in conjunction with FDC 157			Yes; only in conjunction with FDC 157
Overvoltage protection	No			No
Input current				
Current consumption (in no-load operation), typ.	24 mA; 54 mA at the end of the cable	24 mA; 54 mA at the end of the cable	24 mA; 54 mA at the end of the cable	34 mA; 64 mA at the end of the cable
Current consumption, max.	264 mA			514 mA
Power loss				
Power loss, typ.	384 mW	384 mW	384 mW	544 mW
Power loss, max.	3.2 W	3.2 W	3.2 W	4.1 W
Interfaces				
PROFIBUS PA				
• Transmission rate, max.	31.25 kbit/s	31.25 kbit/s	31.25 kbit/s	31.25 kbit/s
• Number of connectable PA field devices	4	4	4	8
• Current output to PA field devices, max.	240 mA	240 mA	240 mA	480 mA
• permissible current per spur line	60 mA	60 mA	60 mA	60 mA
Protocols				
PROFIBUS DP	No		No	No
PROFIBUS PA	Yes	Yes	Yes	Yes
AS-Interface	No		No	No
FOUNDATION Fieldbus H1	Yes	Yes	Yes	Yes
Interrupts/diagnostics/status information				
Status indicator	Yes	Yes	Yes	Yes
Alarms	No	No	No	No
Diagnostics function	Yes	Yes	Yes	Yes
Diagnostics indication LED				
• Main line status	Yes	Yes	Yes	Yes
• Main line failure	Yes			Yes
• Spur line status/fault	Yes	Yes	Yes	Yes
• automatic bus termination	Yes	Yes	Yes	Yes
Potential separation				
between main line and spur lines	No	No	No	No
Degree and class of protection				
Degree of protection acc. to EN 60529				
• IP66	Yes	No	Yes	Yes
Standards, approvals, certificates				
Use in hazardous areas				
• ATEX Zone 1	No	No	No	No
• ATEX Zone 21	No	No	No	No
• ATEX Zone 2	Yes	Yes	Yes	Yes
• ATEX Zone 22	Yes	Yes	Yes	Yes
• FM Class I Zone 1	No	No	No	No
• FM Class I Zone 2, Division 2	Yes	Yes	Yes	Yes

© Siemens 2019

Technical specifications (continued)

Article number	6ES7157-0AG81-0XA0 ACTIVE FIELD DISTRIBUTOR AFD4	6ES7655-5DX40-2AA0 ACTIVE FIELD DISTRIBUTOR AFD4 RAILMOUNT	6ES7655-5DX40-1AA1 ACTIVE FIELD DISTRIBUTOR AFD4 FM	6ES7157-0AG82-0XA0 ACTIVE FIELD DISTRIBUTOR AFD8
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	70 °C	70 °C	70 °C	70 °C
Ambient temperature during storage/transportation				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	85 °C	70 °C	85 °C	85 °C
Relative humidity				
• Operation, max.	95 %			95 %
Connection method				
Main line				
• Number of main lines	2	2	2	2
• Design of terminals	Screw terminal block	Screw terminal block	Screw terminal block	Screw terminal block
• Type of connection (enclosure cable gland)	M16		M20	M16
• Type of cable	Type A	Type A	Type A	Type A
• Cable diameter, min.	4 mm		6 mm	4 mm
• Cable diameter, max.	9 mm		13 mm	9 mm
• Conductor cross-section, min.	0.2 mm^2	0.2 mm^2	0.2 mm^2	0.2 mm^2
• Conductor cross-section, max.	2.5 mm^2	2.5 mm^2	2.5 mm^2	2.5 mm^2
• automatic bus termination	Yes	Yes	Yes	Yes
• permissible main line current	1 A	1 A	1 A	1 A
Spur line				
• Number of spur lines	4	4	4	8
• Design of terminals	Screw terminal block		Screw terminal block	Screw terminal block
• Type of connection (enclosure cable gland)	M16		M16	M16
• Type of cable	Type A	Type A	Type A	Type A
• Cable diameter, min.	4 mm		4 mm	4 mm
• Cable diameter, max.	9 mm		9 mm	9 mm
• Conductor cross-section, min.	0.2 mm^2	0.2 mm^2	0.2 mm^2	0.2 mm^2
• Conductor cross-section, max.	2.5 mm^2	2.5 mm^2	2.5 mm^2	2.5 mm^2
• total current output to field devices, max.	240 mA	240 mA	240 mA	480 mA
• Number of connectable field devices	4	4	4	8
• Current limitation per field device, max.	60 mA	60 mA	60 mA	60 mA
• No-load voltage, max.	30 V		30 V	
• Short-circuit current (test current); max.	6 mA	6 mA	6 mA	6 mA
• intrinsically safe according to FISCO model	No	No	No	No
• Debounce logic	Yes	Yes	Yes	Yes
Dimensions				
Width	220 mm	220 mm	220 mm	360 mm
Height	120 mm; without screw glands	120 mm	120 mm	120 mm; without screw glands
Depth	83 mm	83 mm	83 mm	83 mm
Weights				
Weight, approx.	2 000 g	1 000 g	2 000 g	3 000 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7655-5DX60-1BB0** ACTIVE FIELD DISTRIBUTOR AFDISD
General information	
Product type designation	AFDiSD active field distributor
Product description	Active field distributor with diagnostics
Product function	
• Repeater function	Yes
Supply voltage	
Design of the power supply	via fieldbus
permissible range, lower limit (DC)	16 V
permissible range, upper limit (DC)	32 V
Reverse polarity protection	Yes; only in conjunction with FDC 157
Overvoltage protection	Yes; only in conjunction with FDC 157
Input current	
Current consumption, max.	400 mA; at 20 V input voltage
Current consumption in the case of short-circuit at all spur lines	100 mA; at 24 V input voltage
Power loss	
Power loss, typ.	1.4 W; minimum - typ. specification not possible because load-dependent
Power loss, max.	5.9 W
Interfaces	
PROFIBUS PA	
• Transmission rate, max.	31.25 kbit/s
• Number of connectable PA field devices	6
• Current output to PA field devices, max.	260 mA; max. 180 mA total current of all field devices for operation in the permissible operating voltage range from 16 V to 32 V
• permissible current per spur line	40 mA; first spur line 60 mA
Protocols	
PROFIBUS DP	No
PROFIBUS PA	Yes
AS-Interface	No
FOUNDATION Fieldbus H1	Yes
Interrupts/diagnostics/status information	
Status indicator	Yes
Alarms	No
Diagnostics function	Yes
Diagnostics indication LED	
• Main line status	Yes
• Main line failure	Yes
• Spur line status/fault	Yes
• automatic bus termination	Yes
Potential separation	
between main line and spur lines	Yes
Isolation	
Isolation tested with	2 550 V DC
Degree and class of protection	
Degree of protection acc. to EN 60529	
• IP66	Yes

Article number	**6ES7655-5DX60-1BB0** ACTIVE FIELD DISTRIBUTOR AFDISD
Standards, approvals, certificates	
Use in hazardous areas	
• ATEX Zone 1	Yes
• ATEX Zone 21	Yes
• ATEX Zone 2	Yes
• ATEX Zone 22	Yes
• FM Class I Zone 1	No
• FM Class I Zone 2, Division 2	No
• Type of protection acc. to KEMA	14 ATEX 0044
• Test number KEMA	14 ATEX 0044
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C
• max.	70 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %
Connection method	
Main line	
• Number of main lines	2
• Design of terminals	Screw terminal block
• Type of connection (enclosure cable gland)	M20
• Type of cable	Type A
• Cable diameter, min.	6 mm
• Cable diameter, max.	13 mm
• Conductor cross-section, min.	0.2 mm^2
• Conductor cross-section, max.	2.5 mm^2
• automatic bus termination	Yes
• permissible main line current	1 A
Spur line	
• Number of spur lines	6
• Design of terminals	Screw terminal block
• Type of connection (enclosure cable gland)	M16
• Type of cable	Type A
• Cable diameter, min.	4 mm
• Cable diameter, max.	9 mm
• Conductor cross-section, min.	0.2 mm^2
• Conductor cross-section, max.	2.5 mm^2
• total current output to field devices, max.	260 mA; max. 180 mA total current of all field devices for operation in the permissible operating voltage range from 16 V to 32 V
• Number of connectable field devices	6
• Current limitation per field device, max.	40 mA; 60 mA on S1
• No-load voltage, max.	15.3 V
• short-circuit proof	Yes
• Short-circuit current (test current); max.	6 mA
• intrinsically safe according to FISCO model	Yes
• Debounce logic	Yes
Dimensions	
Width	380 mm
Height	85 mm
Depth	170 mm
Weights	
Weight, approx.	4 500 g

© Siemens 2019

Active field distributors for PA components

Ordering data	Article No.
Active field distributor (AFD) For integration of standard-compliant PA or FF field devices	
4 short-circuit-proof spur line connections for 1 field device each	
• AFD4 with cable glands	**6ES7157-0AG81-0XA0**
• AFD4 RAILMOUNT (without enclosure) For mounting on a DIN mounting rail in a suitable enclosure	**6ES7655-5DX40-2AA0**
• AFD4 FM with threaded plugs cFMus approvals for USA and Canada Note: Cable glands must be ordered separately.	**6ES7655-5DX40-1AA1**
8 short-circuit-proof spur line connections for 1 field device each	
• AFD8 with cable glands	**6ES7157-0AG82-0XA0**
AFDiSD (active field distributor intrinsically safe with optional extended PROFIBUS PA diagnostics) With 6 short-circuit proof spur line connections for the integration of standard-compliant intrinsically-safe PA or FF field devices	**6ES7655-5DX60-1BB0**

	Article No.
Accessories	
Blanking plugs For unused connections on the AFD and AFDiSD, 10 units	**6ES7157-0AG80-1XA1**
Additional components required for extended fieldbus diagnostics with AFDiSD	
IM 153-2 High Feature Outdoor Interface module for PROFIBUS DP for ET 200M, PA link and Y link; redundancy capable; conformal coating, IP20 degree of protection; permissible operating temperature -25 to +60 °C	**6ES7153-2BA70-0XB0**
DP/PA coupler FDC 157	**6ES7157-0AC85-0XA0**

© Siemens 2019

Overview

The following cables in different colors are offered for setting up PROFIBUS PA networks in accordance with IEC 61158-2 (for detailed information, refer to the IK PI Catalog, Industry Mall, or CA 01 Offline Mall under Network components for PROFIBUS, Electrical networks (PROFIBUS PA)):

- PROFIBUS FC Process Cable, 2-wire, shielded, black sheath
  For applications in non-intrinsically safe areas




- PROFIBUS FC Process Cable, 2-wire, shielded, blue sheath
  For applications in intrinsically safe areas



The FastConnect stripping tool can be used to strip the outer sheath and shield of the PROFIBUS FC Process Cables to the required lengths for PROFIBUS PA.

Design

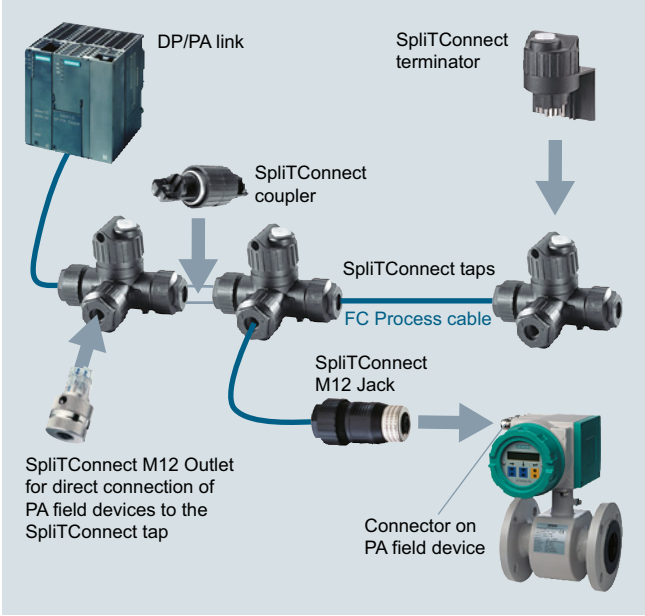

SpliTConnect

The SpliTConnect tap enables the design of fieldbus segments according to IEC 61158-2 with field device terminal points.

The SpliTConnect coupler can be used to construct a PROFIBUS PA hub by connecting SpliTConnect taps in series.

By replacing the contacting screw with the SpliTConnect terminator, the SpliTConnect tap can be used as a bus terminating element.

Terminal equipment can be connected directly through the FC process cable. Using the SpliTConnect M12 outlet, PA field devices can also be connected to the SpliTConnect tap by means of an M12 connection. The SpliTConnect M12 jack is a connecting element between an FC process cable and an M12 connector on the PROFIBUS PA field device. For details on SpliTConnect network components, see Catalog IK PI.

Ordering data

	Article No.
PROFIBUS FC Process Cable 2-wire, shielded	
• Sheath color: blue; for intrinsically safe applications	**6XV1830-5EH10**
• Sheath color: black; for non-intrinsically safe applications	**6XV1830-5FH10**
Sold by the meter: Max. delivery unit 1 000 m, minimum order quantity 20 m	
PROFIBUS FastConnect Stripping Tool Tool for fast stripping of the PROFIBUS FastConnect bus cable	**6GK1905-6AA00**
PROFIBUS FastConnect Blade Cassettes Spare blade cassettes for PROFIBUS FastConnect stripping tool, 5 units	**6GK1905-6AB00**
SpliTConnect Tap For implementing PROFIBUS PA segments and connecting PA field devices, insulation displacement system, IP67, 10 units	**6GK1905-0AA00**

	Article No.
SpliTConnect M12 Outlet Element for direct attachment of PA field devices to the SpliTConnect Tap, 5 units	**6GK1905-0AB10**
SpliTConnect Coupler Connection element for cascading SpliTConnect Taps to create neutral points, 10 units	**6GK1905-0AC00**
SpliTConnect Terminator For connecting PROFIBUS PA segments, 5 units	
• Terminator (Ex); can be used in hazardous areas	**6GK1905-0AD00**
• Terminator (non-Ex); cannot be used in hazardous areas	**6GK1905-0AE00**
SpliTConnect M12 jack Connection element between an FC process cable and M12 connector on the PROFIBUS PA field device, 5 units	**6GK1905-0AF00**

© Siemens 2019

FOUNDATION Fieldbus H1

Overview

Depending on operator preference, FOUNDATION Fieldbus (FF) H1 can be used in addition to PROFIBUS PA as the fieldbus for the direct connection of transmitters and actuators to the SIMATIC PCS 7 process control system.


Design

Examples of FOUNDATION Fieldbus H1 architectures

When FOUNDATION Fieldbus H1 is integrated in the SIMATIC PCS 7 process control system, PROFIBUS DP acts as a link. The following graphical representations show possible FOUNDATION Fieldbus H1 architectures with:

- PROFIBUS DP master in non-redundant design (AS Single Station)
- PROFIBUS DP master in redundant design (AS Redundancy Station)

Depending on the configured PROFIBUS DP master, the gateway between PROFIBUS DP and FOUNDATION Fieldbus H1 is formed by a single Compact FF Link (AS Single Station) or a redundant Compact FF Link pair (AS Redundancy Station) (for details, see graphics). One FF fieldbus segment can be operated on each gateway.

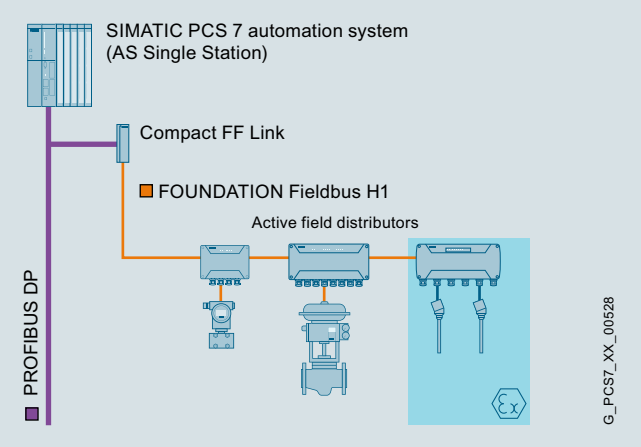


FOUNDATION Fieldbus H1 on an AS Single Station as PROFIBUS DP master

Line architecture with single Compact FF Link

A line segment can be connected to an individual PROFIBUS DP line via a Compact FF Link. The FF-field devices can be integrated into the line segment via AFD active field distributors, e.g. AFD4, AFD4 RAILMOUNT, AFD4 FM and AFD8 (approval for Ex Zone 2/22) and AFDiSD (approval for Ex Zone 1/21). The FF-field devices are connected to these field distributors using short-circuit-proof spur lines.

Alternatively, it is possible to operate up to 8 AFD field distributors, up to 5 AFDiSD field distributors or any combination of up to 5 AFDiSD and AFD field distributors in a line segment. The last field distributor at the end of the line farthest away from the Compact FF Link automatically activates its bus terminating resistor.

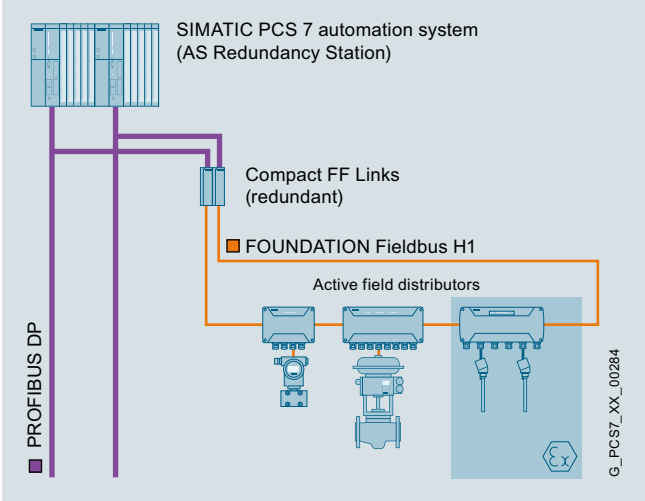

FOUNDATION Fieldbus H1 on an AS Redundancy Station as PROFIBUS DP master

Ring architecture with redundant Compact FF Links

The highest availability can be achieved with a FOUNDATION Fieldbus H1 ring segment, which can be connected to a redundant PROFIBUS DP via a redundant Compact FF Link pair.

The FF field devices are integrated into the ring segment using the short-circuit-proof spur lines of the AFD or AFDiS active field distributors. The number of field distributors is limited as with the line architectures (up to 8 AFD, up to 5 AFDiS or any combination of up to 5 AFDiS and AFD).

The bus is terminated automatically and is immediately adapted in the event of changes or faults on the bus. An extension on the fieldbus or replacement of a Compact FF Link during operation is possible.

© Siemens 2019

Function

Properties of FOUNDATION Fieldbus H1

Like PROFIBUS PA, the FOUNDATION Fieldbus H1 is based on IEC 61158-2. With MBP (Manchester coded Bus Powered) transmission system, digital data is transmitted and power is supplied to the bus nodes on a shielded two-wire cable. The constant transmission rate is 31.25 Kbps.

Up to 32 bus nodes (Compact FF Link + field devices) can be operated on one fieldbus segment (typically 8 to 12 devices). The field devices are integrated into the fieldbus segment via AFD (approval for Ex Zone 2/22) or AFDiS (approval for Ex Zone 1/21) active field distributors. Intrinsically-safe FF devices connected via AFDiS active field distributors can be installed in hazardous areas in accordance with Ex Zone 1/21 or 0/20.

The total length of the fieldbus segment is restricted to 1 900 m. If AFDs (active field distributors) are used, both the length of the spur lines for connecting devices and the quality of the cable used must also be considered when calculating the total length of the bus segment. Spur lines on the AFDiSD are not relevant to the total length of the bus segment.

The spur lines can have the following maximum lengths:

- Up to 120 m in accordance with IEC 61158-2
- Up to 120 m in accordance with IEC 60079-27 (FISCO)

With AFD active field distributors, the maximum values are reduced if necessary, depending on the number of spur lines of the bus segment (for details, see the "Technical specifications" section). With AFDiSD active field distributors, this reduction is canceled by the integrated repeater function.

The **SIMATIC Fieldbus Calculator** provides help in calculating and designing fieldbus segments:
https://support.industry.siemens.com/cs/ww/en/view/53842953

The FOUNDATION Fieldbus H1 combines cyclic and acyclic communication. Time-critical tasks such as the transfer of process data are executed cyclically according to an exact processing schedule. On the other hand, non-time-critical information such as maintenance/diagnostics data or configuration data is transferred acyclically.

Device management with EDD

The field device data for the following block types are distributed according to the block model:

- Device block (device-specific information)
- Function block (implemented functions)
- Transmission block (function for controlling input/output variables of a function block)

Fieldbus Foundation provides pre-defined device descriptions (standard DD) for the basic functions of specific field device types. The basic functions of the devices (e.g. analog input, digital output, etc.) are implemented by means of various standard function and transmission blocks.

The device descriptions are interpreted with SIMATIC PDM.

Control in the field

Function and transmission blocks can also be interconnected to form control loops. Together with suitable field devices, such a control application operates independent of the controller (automation system) of the control system.

Characteristic features at a glance

- Bus power supply to the field devices
- Topology: Line, tree, ring
- Integration of intrinsically safe field devices in hazardous areas with barriers
- Deterministic time response
- Interoperability due to standardized bus interface and device integration with standardized device descriptions
- Support of "Control in the field"

Integration

Integration in SIMATIC PCS 7

The FOUNDATION Fieldbus H1 can be integrated seamlessly in the SIMATIC PCS 7 process control system using PROFIBUS DP as link. The gateway between PROFIBUS DP and FOUNDATION Fieldbus H1 is realized with Compact FF Links. Either a single Compact FF Link or a redundant pair is used based on the selected bus architecture (see "Design" section).

Engineering of the FOUNDATION Fieldbus H1 segments is implemented as for PROFIBUS PA. Diagnostic information and configured maintenance information for Compact FF Links and FF devices are available via the SIMATIC PCS 7 Maintenance Station. SIMATIC PCS 7 generates the diagnostics screens automatically.

System requirements


- System software SIMATIC PCS 7 V8.1+ SP1 or higher
- SIMATIC PDM V8.2+SP1 or higher with SIMATIC PDM Communication FOUNDATION Fieldbus

Technical specifications

FOUNDATION Fieldbus H1	
Data transmission	MBP
Transmission rate	31.25 Kbps
Cable	2-wire shielded
Topology	Line, tree, ring
FF devices per segment/FF Link	31
Active field distributors per segment/ FF Link	
• AFD	8
• AFDiSD or combinations of AFDiSD and AFD	5
Max. total current consumption of all FF field devices	0.5 A
Cable length per segment	1 900 m
Bus segments with AFD	
Max. spur line length in relation to the total number of spur lines	
Number of spur lines (1 device per spur line)	
• 1 to 12 spur lines	120 m
• 13 to 14 spur lines	90 m
• 15 to 18 spur lines	60 m
• 19 to 24 spur lines	30 m
• 25 to 31 spur lines	1 m
Bus segments with AFDiSD	
Max. spur line length independent of total number of spur lines	
Number of spur lines (1 device per spur line)	
• 1 to 31 spur lines	
- Not intrinsically-safe	120 m
- Intrinsically-safe acc. to FISCO	120 m

© Siemens 2019

Overview

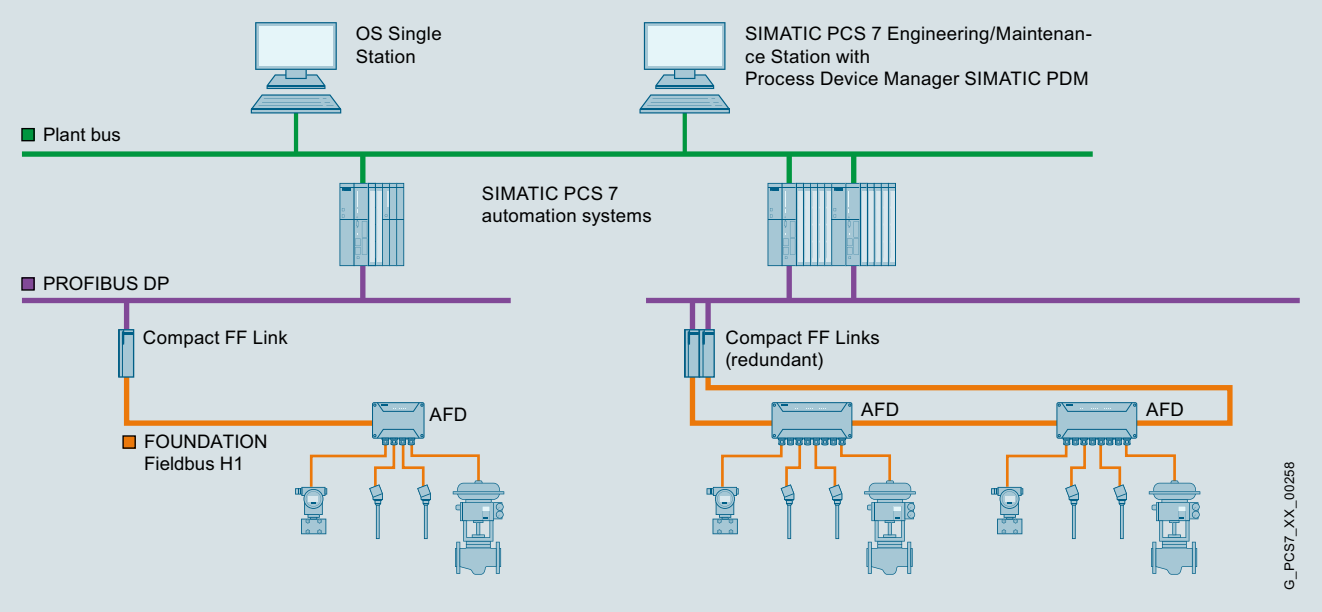

Examples of DP/FF gateways with Compact FF Link

A gateway based on the Compact FF Link between PROFIBUS DP and FOUNDATION Fieldbus H1 (FF) enables integration of a fieldbus segment with up to 31 standard-compliant FF-H1 field devices in the SIMATIC PCS 7 process control system. If the PROFIBUS DP master and PROFIBUS DP are implemented without redundancy, the gateway can be realized with a single Compact FF Link. With redundant implementation of the PROFIBUS DP master and PROFIBUS DP, a redundant Compact FF Link pair is required for the gateway.

The Compact FF Link is simultaneously a slave on PROFIBUS DP and the master on FOUNDATION Fieldbus H1. It decouples the hardware, communication protocols, and time response of the two bus systems.

A PROFIBUS address from 1 to 125 must be assigned for the Compact FF Link. In the case of redundant architecture, identical PROFIBUS addresses must be set for both Compact FF Links.

As the FF link master, the compact FF link controls the distributed communication of the FOUNDATION Fieldbus H1 segment deterministically using LAS (link active scheduler). If the Compact FF Link fails, a redundant partner module or a field device with the "Backup Link Master" property takes over the communication control. FF field devices in an FF segment are thus able to execute closed-loop control functions (Control in the Field) even independent of the higher-level controller.

Design



Compact FF Link

The Compact FF Link is a S7-300 format device, consisting of a PROFIBUS DP interface (DPV1 slave) and a field device coupler for a subordinate FF bus segment. It can operated individually or redundantly in a pair.

The following architectures are thus possible (also refer to "FOUNDATION Fieldbus H1" section under "Design"):

- Single PROFIBUS DP interface (1 × Compact FF Link)
  - Line architecture with single Compact FF Link
- Redundant PROFIBUS DP interface (2 × Compact FF Link)
  - Ring architecture with redundant Compact FF Link pair (link and media redundancy)

© Siemens 2019

Design (continued)

Compact FF Link in non-redundant mode

If the FF segment is connected to PROFIBUS DP via a single compact FF link, the link can be mounted directly on a standard mounting rail.

If the 24 V DC incoming supply is not from a central power supply of the plant, a PS 307 or PS 305 load power supply can be used.

Compact FF Links in redundant mode

In a redundant configuration, the BM Compact FF Link bus module is first mounted on a mounting rail for "hot swapping". The two redundant Compact FF Links are then inserted. This enables a Compact FF Link to be replaced during operation.

In the case of a redundant Compact FF Link pair, a redundant 24 V DC supply is also recommended, e.g. with two PS 307/ PS 305 load power supplies.

Technical specifications

Compact FF Link	
Design and equipment features	
Function	Bus link of PROFIBUS DP (slave functionality) and FOUNDATION Fieldbus H1 (link master functionality) with support of the "Configuration in Run" functionality
Installation type/mounting	Front mounting, preferably on mounting rail
Degree of protection according to EN 60529	IP20
Voltages, currents, potentials	
Rated supply voltage	24 V DC (20.4 V … 28.8 V)
Input current, max. current consumption	1.3 A
External fusing of power supply lines (recommended)	Min. 4 A
Rated output voltage for FF H1	31 V DC ± 1 V
• Overvoltage monitoring	U > 35 V; latching shutdown
• Voltage failure bridging	5 ms
Output current for FF H1 (for supply of all FF field devices)	0.5 A
Power loss	8 W
Galvanic isolation	
• FF H1 to PROFIBUS DP	Yes
• DP master system to FF H1	Yes
• FF H1/24 V DC supply / PROFIBUS DP	Yes
• All electric circuits/functional grounding	Yes
Frame length	
• Input/output data	244 bytes/244 bytes
• Configuration frame	Max. 244 bytes
• Diagnostics frame	Max. 244 bytes
• Parameter assignment frame	Max. 244 bytes
Interfaces	
Interface hardware	RS 485 - yes; FOC - no
PROFIBUS DP	
• Permissible device addresses	1 to 125
• Transmission rate (automatic detection)	Max. 12 Mbps
• Bus protocol/transmission protocol	PROFIBUS DP
• Transmission mode	RS 485
• Connection	9-pin D-sub connector
FOUNDATION Fieldbus H1	
• Transmission rate	31.25 Kbps
• Bus protocol/transmission protocol	FOUNDATION Fieldbus H1
• Transmission mode	MBP
• Connection	2-pin screw terminal

Status, interrupts, diagnostics	
Status displays	
• Group error	Red LED "SF"
• Bus error on higher level DP master system	Red "BF DP" LED
• Bus error on subordinate FF H1	Red "BF FF" LED
• Active PROFIBUS DP channel	Yellow "ACT DP" LED
• Active FF H1 channel	Yellow "ACT FF" LED
• 24 V DC power supply monitoring	Green "ON" LED
Climatic conditions	
Ambient temperature in operation	
• Horizontal installation	-40 to +70 °C
• Vertical installation	-40 to +50 °C
Permissible storage/transport temperature	-40 to +85 °C
Relative humidity during operation	Max. 95%, without condensation
Approvals for potentially explosive atmospheres	
• Gas	ATEX II 3 G Ex nA II T4
• Dust	No
• Equipment Ex ia/Ex ib	No/No
Standards, specifications, approvals	
CE mark according to 2004/108/EC, 94/9/EC	Yes
UL approval	Yes
RCM (formerly C-Tick)	Yes
KC certification	Yes
EAC (formerly Gost-R)	Yes
PROFIBUS standard	IEC 61784-1 CP 3/1
FOUNDATION Fieldbus guideline	IEC 61158-2
Dimensions and weight	
Dimensions (W × H × D) in mm	40 × 125 × 130
Weight	Approx. 350 g

© Siemens 2019

FF routers

Ordering data	Article No.
Compact FF Link DP/FF gateway, 40 mm wide, FOUNDATION Fieldbus link master, with redundancy capability; physical interface to the FOUNDATION Fieldbus H1 with integrated bus power supply up to 0.5 A and integrated diagnostics; degree of protection IP20; for extended temperature range, permissible operating temperature -40 to +70 °C	**6ES7655-5BA00-0AB0**
Accessories	
PS 307 load power supply Including connecting comb; 120/230 V AC; 24 V DC	
• 2 A; 40 mm wide	**6ES7307-1BA01-0AA0**
• 5 A; 60 mm wide	**6ES7307-1EA01-0AA0**
• 5 A, extended temperature range; 80 mm wide	**6ES7307-1EA80-0AA0**
• 10 A, 80 mm wide	**6ES7307-1KA02-0AA0**
PS 305 load power supply 24/48/60/110 V DC; 24 V DC	
• 2 A, extended temperature range; 80 mm wide	**6ES7305-1BA80-0AA0**


	Article No.
Components for stand-alone operation	
Standard mounting rails (without hot swapping function)	
• Width 482 mm (19")	**6ES7390-1AE80-0AA0**
• Width 530 mm	**6ES7390-1AF30-0AA0**
Components for redundant operation	
BM Compact FF Link Bus module for 2 Compact FF Links; for redundant operation	**6ES7655-5EF00-0AA0**
Mounting rail for hot swapping	
• Width 482 mm (19")	**6ES7195-1GA00-0XA0**
• Width 530 mm	**6ES7195-1GF30-0XA0**
• Width 620 mm	**6ES7195-1GG30-0XA0**
• 2 000 mm wide	**6ES7195-1GC00-0XA0**
Covers 4 backplane bus covers and 1 cover for active bus module	**6ES7195-1JA00-0XA0**

© Siemens 2019

Overview



Active Field Distributor AFD4

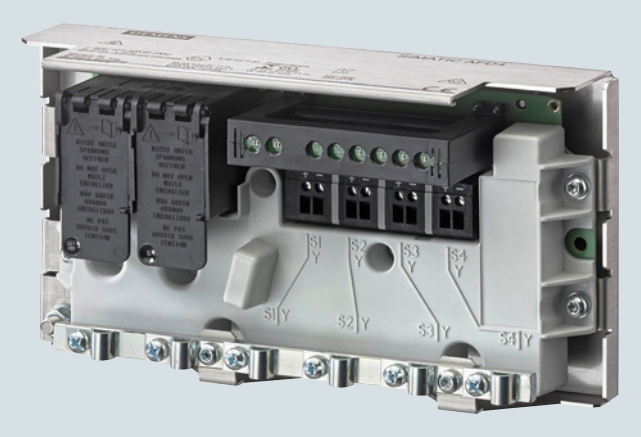

Active Field Distributor AFD4 RAILMOUNT



Active Field Distributor AFD8

Active Field Distributor AFD

Active field distributors (AFD) can be operated in environments in accordance with Division 2, Zone 2 or Zone 22. The following models are available:

- AFD4, AFD4 RAILMOUNT or AFD4 FM with 4 spur line connections for 1 field device each
- AFD8 with 8 spur line connections for 1 field device each

An AFD4/AFD4 RAILMOUNT/AFD4 FM can therefore integrate up to 4, and an AFD8 up to 8 standard-compliant FF (FOUNDATION Fieldbus H1) field devices via short-circuit proof spur line connections to a fieldbus segment (line/ring) with automatic bus termination.

The FF fieldbus segment can be connected to a single or redundant PROFIBUS DP via an FF gateway and can thus be seamlessly integrated into the SIMATIC PCS 7 process control system.

Up to 8 AFD active field distributors with a total of up to 31 connected field devices can be operated for each fieldbus segment. The number of field devices is also limited by the current consumption of the field devices. A maximum of 60 mA per spur line and a maximum of 0.5 A per segment is available for the field devices.

An AFD in a ring segment can be replaced during operation without resulting in failure of the segment.

For compliance with IP66 degree of protection, it is necessary to protect unused spur line connections using blanking plugs.

Based on the AFD4, two product versions with different intentions were developed with the AFD4 RAILMOUNT and the AFD4 FM:

Specific product features of the AFD4 RAILMOUNT

The AFD4 RAILMOUNT is supplied without die-cast aluminum enclosure; it is a product model of the AFD4 active field distributor with flexible installation options. It can be installed on a DIN mounting rail into an enclosure of choice, for example, one made of stainless steel, die-cast aluminum or plastic.

Specific product features of the AFD4 FM

The AFD4 FM with cFMus approval is adapted to the special requirements for product variants of the AFD4 active field distributor in the USA and Canada. The AFD4 FM features threaded plugs ex factory, because the cable glands of the AFD4 do not conform to the requirements of cFMus.

The threaded plugs for connecting the main and spur lines must be replaced by the cable glands and cables listed by UL or CSA. They must conform to the US National Electrical Code (NEC) and Canadian Electrical Code (CEC). The user is responsible for selection and ordering.

Available suppliers for suitable cable glands:

- Cooper Capri SAS
- CMP products

Due to the larger bushing for the main line (M20 instead of M16), sheathed main line cables can also be used for AFD4 FM.

The relevant requirements of the US National Electrical Code (ANSI/NFPA-70 NEC) must be met when installing the AFD4 FM.


© Siemens 2019

Overview (continued)

AFDiSD active field distributor



AFDiSD active field distributor

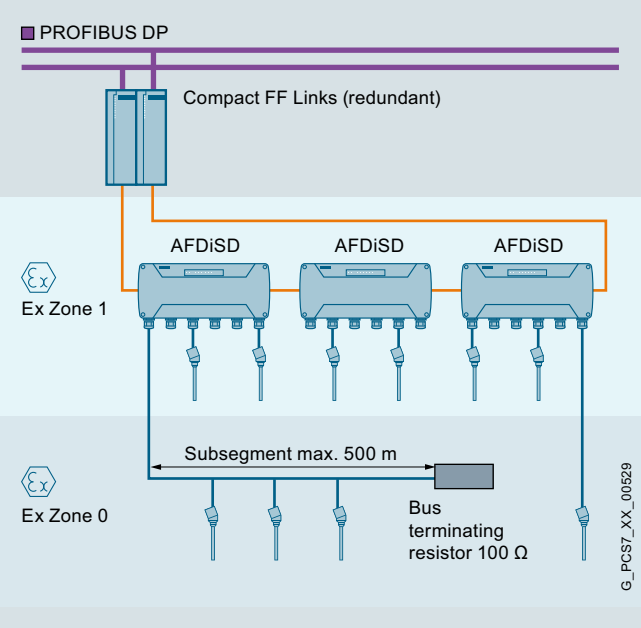

The AFDiS (Active Field Distributor intrinsically Safe) is an active field distributor for operating environments in accordance with Ex Zones 1/21 and 2/22. It can integrate up to 6 intrinsically-safe FF field devices into an FF fieldbus segment (line/ring) via its intrinsically-safe, short-circuit-proof spur line connections. Instead of the spur line, it is also possible to use a subsegment for 3 to 4 devices with a max. length of 500 m at connection S1 of the AFDiS. The spur lines with Ex [ia] type of protection as well as the subsegment can be routed into Zone 0/20.

Up to 5 AFDiS field distributors with a total of up to 31 field devices can be operated in a fieldbus segment. The limitation to 5 field distributors is also mandatory for mixed operation of AFD and AFDiS.

The number of field devices per segment additionally depends on the current consumption of the devices. A current of 0.5 A is available for all field devices of the segment.

With the integrated repeater function, the AFDiS has the following advantages compared to the AFD:

- Spur line lengths are independent of the total number of spur lines in the bus segment.
- Spur line lengths need not be taken into account when determining the total length of the bus segment.

In environments in accordance with Ex Zone 2/22 or in non-hazardous areas, an AFDiSD in a ring segment can be replaced during operation without failure of the segment.

For compliance with IP66 degree of protection, it is necessary to protect unused spur line connections using blanking plugs.

© Siemens 2019

Technical specifications

Article number	**6ES7157-0AG81-0XA0** ACTIVE FIELD DISTRIBUTOR AFD4	**6ES7655-5DX40-2AA0** ACTIVE FIELD DISTRIBUTOR AFD4 RAILMOUNT	**6ES7655-5DX40-1AA1** ACTIVE FIELD DISTRIBUTOR AFD4 FM	**6ES7157-0AG82-0XA0** ACTIVE FIELD DISTRIBUTOR AFD8
General information				
Product type designation	Active Field Distributor AFD4	Active Field Distributor AFD4	Active Field Distributor AFD4 FM	Active Field Distributor AFD8
Product description			AFD4 FM	
Product function				
• Repeater function	No	No	No	No
Supply voltage				
permissible range, lower limit (DC)	16 V	16 V	16 V	16 V
permissible range, upper limit (DC)	32 V	32 V	32 V	32 V
Reverse polarity protection	Yes; only in conjunction with FDC 157			Yes; only in conjunction with FDC 157
Overvoltage protection	No			No
Input current				
Current consumption (in no-load operation), typ.	24 mA; 54 mA at the end of the cable	24 mA; 54 mA at the end of the cable	24 mA; 54 mA at the end of the cable	34 mA; 64 mA at the end of the cable
Current consumption, max.	264 mA			514 mA
Power loss				
Power loss, typ.	384 mW	384 mW	384 mW	544 mW
Power loss, max.	3.2 W	3.2 W	3.2 W	4.1 W
Interfaces				
PROFIBUS PA				
• Transmission rate, max.	31.25 kbit/s	31.25 kbit/s	31.25 kbit/s	31.25 kbit/s
• Number of connectable PA field devices	4	4	4	8
• Current output to PA field devices, max.	240 mA	240 mA	240 mA	480 mA
• permissible current per spur line	60 mA	60 mA	60 mA	60 mA
Protocols				
PROFIBUS DP	No		No	No
PROFIBUS PA	Yes	Yes	Yes	Yes
AS-Interface	No		No	No
FOUNDATION Fieldbus H1	Yes	Yes	Yes	Yes
Interrupts/diagnostics/status information				
Status indicator	Yes	Yes	Yes	Yes
Alarms	No	No	No	No
Diagnostics function	Yes	Yes	Yes	Yes
Diagnostics indication LED				
• Main line status	Yes	Yes	Yes	Yes
• Main line failure	Yes			Yes
• Spur line status/fault	Yes	Yes	Yes	Yes
• automatic bus termination	Yes	Yes	Yes	Yes
Potential separation				
between main line and spur lines	No	No	No	No
Degree and class of protection				
Degree of protection acc. to EN 60529				
• IP66	Yes	No	Yes	Yes
Standards, approvals, certificates				
Use in hazardous areas				
• ATEX Zone 1	No	No	No	No
• ATEX Zone 21	No	No	No	No
• ATEX Zone 2	Yes	Yes	Yes	Yes
• ATEX Zone 22	Yes	Yes	Yes	Yes
• FM Class I Zone 1	No	No	No	No
• FM Class I Zone 2, Division 2	Yes	Yes	Yes	Yes

© Siemens 2019

Technical specifications (continued)

Article number	6ES7157-0AG81-0XA0 ACTIVE FIELD DISTRIBUTOR AFD4	6ES7655-5DX40-2AA0 ACTIVE FIELD DISTRIBUTOR AFD4 RAILMOUNT	6ES7655-5DX40-1AA1 ACTIVE FIELD DISTRIBUTOR AFD4 FM	6ES7157-0AG82-0XA0 ACTIVE FIELD DISTRIBUTOR AFD8
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	70 °C	70 °C	70 °C	70 °C
Ambient temperature during storage/transportation				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	85 °C	70 °C	85 °C	85 °C
Relative humidity				
• Operation, max.	95 %			95 %
Connection method				
Main line				
• Number of main lines	2	2	2	2
• Design of terminals	Screw terminal block	Screw terminal block	Screw terminal block	Screw terminal block
• Type of connection (enclosure cable gland)	M16		M20	M16
• Type of cable	Type A	Type A	Type A	Type A
• Cable diameter, min.	4 mm		6 mm	4 mm
• Cable diameter, max.	9 mm		13 mm	9 mm
• Conductor cross-section, min.	0.2 mm^2	0.2 mm^2	0.2 mm^2	0.2 mm^2
• Conductor cross-section, max.	2.5 mm^2	2.5 mm^2	2.5 mm^2	2.5 mm^2
• automatic bus termination	Yes	Yes	Yes	Yes
• permissible main line current	1 A	1 A	1 A	1 A
Spur line				
• Number of spur lines	4	4	4	8
• Design of terminals	Screw terminal block		Screw terminal block	Screw terminal block
• Type of connection (enclosure cable gland)	M16		M16	M16
• Type of cable	Type A	Type A	Type A	Type A
• Cable diameter, min.	4 mm		4 mm	4 mm
• Cable diameter, max.	9 mm		9 mm	9 mm
• Conductor cross-section, min.	0.2 mm^2	0.2 mm^2	0.2 mm^2	0.2 mm^2
• Conductor cross-section, max.	2.5 mm^2	2.5 mm^2	2.5 mm^2	2.5 mm^2
• total current output to field devices, max.	240 mA	240 mA	240 mA	480 mA
• Number of connectable field devices	4	4	4	8
• Current limitation per field device, max.	60 mA	60 mA	60 mA	60 mA
• No-load voltage, max.	30 V		30 V	
• Short-circuit current (test current); max.	6 mA	6 mA	6 mA	6 mA
• intrinsically safe according to FISCO model	No	No	No	No
• Debounce logic	Yes	Yes	Yes	Yes
Dimensions				
Width	220 mm	220 mm	220 mm	360 mm
Height	120 mm; without screw glands	120 mm	120 mm	120 mm; without screw glands
Depth	83 mm	83 mm	83 mm	83 mm
Weights				
Weight, approx.	2 000 g	1 000 g	2 000 g	3 000 g

© Siemens 2019

Technical specifications (continued)

Article number	6ES7655-5DX60-1BB0 ACTIVE FIELD DISTRIBUTOR AFDISD
General information	
Product type designation	AFDiSD active field distributor
Product description	Active field distributor with diagnostics
Product function	
• Repeater function	Yes
Supply voltage	
Design of the power supply	via fieldbus
permissible range, lower limit (DC)	16 V
permissible range, upper limit (DC)	32 V
Reverse polarity protection	Yes; only in conjunction with FDC 157
Overvoltage protection	Yes; only in conjunction with FDC 157
Input current	
Current consumption, max.	400 mA; at 20 V input voltage
Current consumption in the case of short-circuit at all spur lines	100 mA; at 24 V input voltage
Power loss	
Power loss, typ.	1.4 W; minimum - typ. specification not possible because load-dependent
Power loss, max.	5.9 W
Interfaces	
PROFIBUS PA	
• Transmission rate, max.	31.25 kbit/s
• Number of connectable PA field devices	6
• Current output to PA field devices, max.	260 mA; max. 180 mA total current of all field devices for operation in the permissible operating voltage range from 16 V to 32 V
• permissible current per spur line	40 mA; first spur line 60 mA
Protocols	
PROFIBUS DP	No
PROFIBUS PA	Yes
AS-Interface	No
FOUNDATION Fieldbus H1	Yes
Interrupts/diagnostics/status information	
Status indicator	Yes
Alarms	No
Diagnostics function	Yes
Diagnostics indication LED	
• Main line status	Yes
• Main line failure	Yes
• Spur line status/fault	Yes
• automatic bus termination	Yes
Potential separation	
between main line and spur lines	Yes
Isolation	
Isolation tested with	2 550 V DC
Degree and class of protection	
Degree of protection acc. to EN 60529	
• IP66	Yes

Article number	6ES7655-5DX60-1BB0 ACTIVE FIELD DISTRIBUTOR AFDISD
Standards, approvals, certificates	
Use in hazardous areas	
• ATEX Zone 1	Yes
• ATEX Zone 21	Yes
• ATEX Zone 2	Yes
• ATEX Zone 22	Yes
• FM Class I Zone 1	No
• FM Class I Zone 2, Division 2	No
• Type of protection acc. to KEMA	14 ATEX 0044
• Test number KEMA	14 ATEX 0044
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C
• max.	70 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %
Connection method	
Main line	
• Number of main lines	2
• Design of terminals	Screw terminal block
• Type of connection (enclosure cable gland)	M20
• Type of cable	Type A
• Cable diameter, min.	6 mm
• Cable diameter, max.	13 mm
• Conductor cross-section, min.	0.2 mm^2
• Conductor cross-section, max.	2.5 mm^2
• automatic bus termination	Yes
• permissible main line current	1 A
Spur line	
• Number of spur lines	6
• Design of terminals	Screw terminal block
• Type of connection (enclosure cable gland)	M16
• Type of cable	Type A
• Cable diameter, min.	4 mm
• Cable diameter, max.	9 mm
• Conductor cross-section, min.	0.2 mm^2
• Conductor cross-section, max.	2.5 mm^2
• total current output to field devices, max.	260 mA; max. 180 mA total current of all field devices for operation in the permissible operating voltage range from 16 V to 32 V
• Number of connectable field devices	6
• Current limitation per field device, max.	40 mA; 60 mA on S1
• No-load voltage, max.	15.3 V
• short-circuit proof	Yes
• Short-circuit current (test current); max.	6 mA
• intrinsically safe according to FISCO model	Yes
• Debounce logic	Yes
Dimensions	
Width	380 mm
Height	85 mm
Depth	170 mm
Weights	
Weight, approx.	4 500 g

© Siemens 2019


Ordering data	Article No.
Active field distributor (AFD) For integration of standard-compliant PA or FF field devices	
4 short-circuit-proof spur line connections for 1 field device each	
• AFD4 with cable glands	**6ES7157-0AG81-0XA0**
• AFD4 RAILMOUNT (without enclosure) For mounting on a DIN mounting rail in a suitable enclosure	**6ES7655-5DX40-2AA0**
8 short-circuit-proof spur line connections for 1 field device each	
• AFD8 with cable glands	**6ES7157-0AG82-0XA0**
AFDiSD (active field distributor intrinsically safe with optional extended PROFIBUS PA diagnostics) With 6 short-circuit proof spur line connections for the integration of standard-compliant intrinsically-safe PA or FF field devices	**6ES7655-5DX60-1BB0**
Accessories	
Blanking plugs For unused connections on the AFD and AFDiSD, 10 units	**6ES7157-0AG80-1XA1**

© Siemens 2019


Overview

Depending on the field of application, cables in different colors are offered for setting up FOUNDATION Fieldbus H1 networks in accordance with IEC 61158-2:

- FOUNDATION Fieldbus Cable, 2-wire, shielded, yellow sheath
  For applications in non-intrinsically safe areas

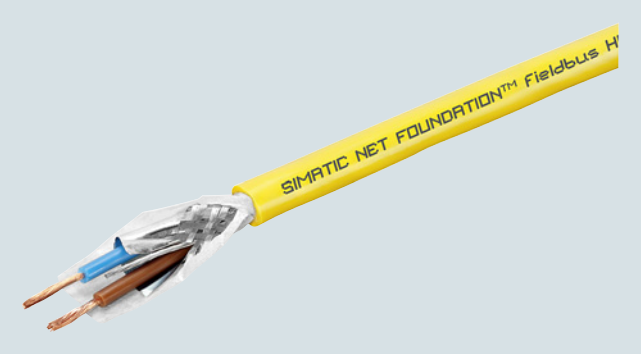

- FOUNDATION Fieldbus Cable, 2-wire, shielded, blue sheath
  For applications in intrinsically safe areas

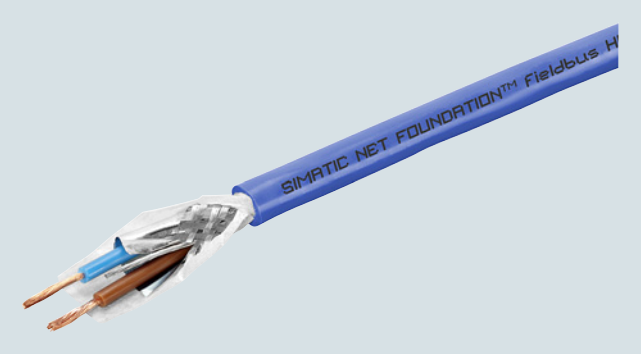


Ordering data

	Article No.
FOUNDATION Fieldbus Cable Bus cable according to IEC 61158-2, 2-wire, shielded; stranded filler wires	
• Sheath color: yellow; for non-intrinsically safe applications	**6XV1830-5HH10**
• Sheath color: blue; for intrinsically safe applications	**6XV1830-5GH10**
Sold by the meter: Max. delivery unit 1 000 m, minimum order quantity 20 m	

© Siemens 2019

Overview

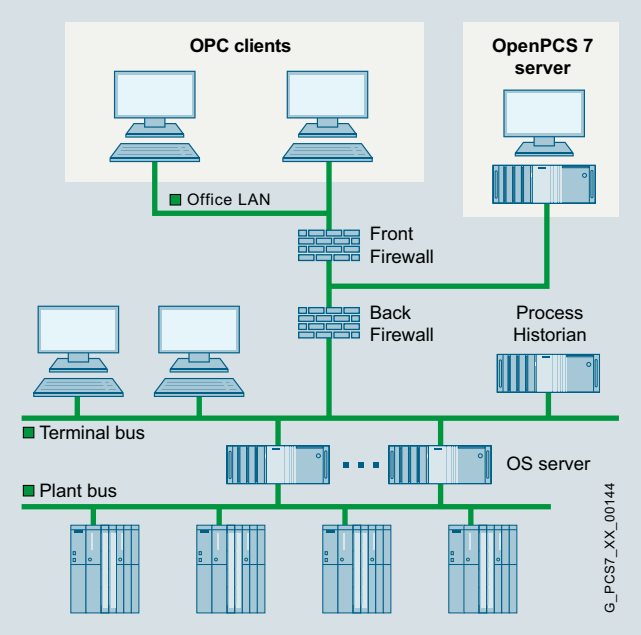

Use the OpenPCS 7 interface to directly integrate the SIMATIC PCS 7 process control system into host systems for production planning, process data evaluation and management. These higher-level systems (OPC clients) can access SIMATIC PCS 7 process data by means of the OpenPCS 7 server. However, access to SIMATIC BATCH data is not possible.

The OpenPCS 7 server collects data for the OPC clients. Depending on the system configuration, these data may be distributed across different SIMATIC PCS 7 stations (OS server, central archive server). It covers the distribution of data with respect to:

- Time period (OS1/OS2/…)
- Location (OS1/OS2/...)
- Redundancy (OS1 master/OS1 standby …)

Design

The OpenPCS 7 server can be operated in two different configurations:

- Autonomous OpenPCS 7 server based on a SIMATIC PCS 7 Industrial Workstation in the client version (recommended preferred configuration)
- Multi-functional SIMATIC PCS 7 Industrial Workstation, client version, with OpenPCS 7 server and OS client functionalities (OpenPCS 7 server/OS client)

Function

The OpenPCS 7 interface is based on various OPC specifications (openness, productivity, collaboration). In addition to Microsoft's DCOM technology (Distributed Component Object Model), it also supports the more sophisticated OPC UA (Unified Architecture) protocol for communication between applications.

Special features of OPC UA:

- Data transfer combined with machine-readable semantic data description
- Platform independence
- Access via firewalls and over the Internet
- Communication reliability
- Security implementation

Access facilities of OPC clients

OPC DA (data access server) or
OPC UA DA (unified architecture data access)

For read and write access to process values

As an OPC DA or OPC UA DA server, the OpenPCS 7 server provides other applications with current data from the OS data management. The OPC client can log itself onto ongoing changes and also write values.

OPC HDA (historical data access server) or
OPC UA HA (unified architecture historical access)

For read access to archived process values

As an OPC HDA or OPC UA HA server, the OpenPCS 7 server provides other applications with historical data from the OS archive system. The OPC client, e.g. a reporting tool, can specifically request the required data by defining the start and end of a time interval. In addition, the OPC HDA server offers a wide range of aggregate functions, including variance, mean value and integral. This enables preprocessing by the HDA server, thus contributing to reducing the communication load.

OPC A&E (alarm & events server) or
OPC UA A&C (unified architecture alarms & conditions)

For read access to messages, alarms and events

As an OPC A&E or OPC UA A&C server, the OpenPCS 7 server passes on OS messages together with all accompanying process values to the subscribers at the production and corporate management levels. Some messages can be acknowledged there. Filter mechanisms and subscriptions ensure that only selected, modified data are transmitted.

OPC "H" A&E (historical alarm & events server)

For read access to archived alarms and messages

Thanks to a Siemens extension of the OPC A&E standard interface, the OpenPCS 7 server is able to transmit historic alarms and messages from the archive to subscribers at the production and corporate control levels. Archived messages cannot be read via OPC UA A&C.

OLE DB

Simple, standardized direct access to the archive data in the Microsoft SQL Server database of the operator system is possible with the OLE-DB. Through this, all OS archive data are accessible with the accompanying process values, message texts and user texts.

© Siemens 2019

Ordering data

	Article No.
Multi-functional OpenPCS 7 Server/OS Client	
SIMATIC PCS 7 OpenPCS 7/OS Client V9.0 OpenPCS 7 software for expansion of an existing OS client with OpenPCS 7 server functionality 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, Certificate of License	**6ES7658-0GX58-2YB0**
• Delivery form online License key download, online Certificate of License Note: E-mail address required!	**6ES7658-0GX58-2YH0**

	Article No.
Autonomous OpenPCS 7 server	
SIMATIC PCS 7 OpenPCS 7 V9.0 OpenPCS 7 software for a separate OpenPCS 7 server, based on the hardware of the SIMATIC PCS 7 Workstation, client version 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation No SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, Certificate of License	**6ES7658-0HX58-2YB0**
• Delivery form online License key download, online Certificate of License Note: E-mail address required!	**6ES7658-0HX58-2YH0**

More information

To ensure safe operation of the plant, you need to take suitable security measures that also include IT security (e.g. network segmentation). You can find more information on the topic of Industrial Security on the Internet at
http://www.siemens.com/industrial-security

© Siemens 2019

Overview



The actuator/sensor interface (AS-Interface) is a heterogeneous bus system for networking simple, usually binary actuators and sensors at the lowest field level. It is then possible to replace a cable harness with parallel wiring by a simple two-wire cable for simultaneous transmission of data and power.

The AS-Interface operates according to the master/slave principle. The AS-i master module (DP/AS-i LINK Advanced, CP 343-2, CP 343-2P, IE/AS-i LINK PN IO or communications module CM AS-i Master ST) controls the slaves (sensors/actuators) connected via AS-i cable. Up to 62 AS-Interface slaves can be operated on an AS-Interface master module.

Note:

AS-Interface is integrated as a *subordinate* bus in SIMATIC PCS 7. For further information on the AS-Interface, see Catalogs IK PI and IC 10.


Design




IE/AS-i LINK PN IO (single master and double master)

The AS-Interface can be integrated into the SIMATIC PCS 7 process control system as follows:

- Direct connection on the PROFIBUS DP via DP/AS-i LINK Advanced (AS-i single or double master)
- Connection via a CP 343-2 or CP 343-2P AS-i master module in an ET 200M remote I/O station on the PROFIBUS DP
- Direct connection on the PROFINET IO via IE/AS-i LINK PN IO (AS-i single or double master) or via ET 200SP with the CM AS-i Master ST communications module

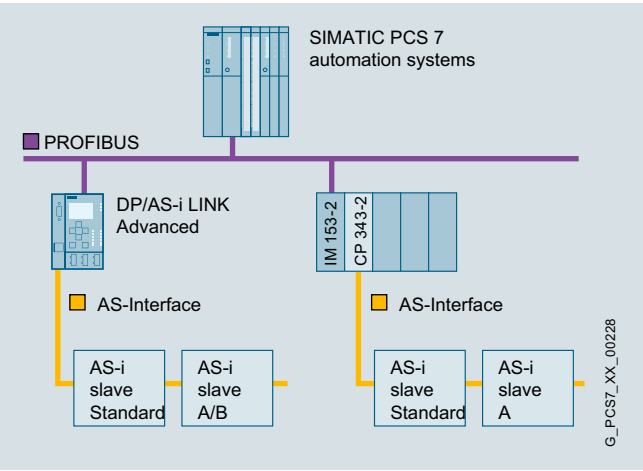

AS-i integration in SIMATIC PCS 7 via PROFIBUS DP

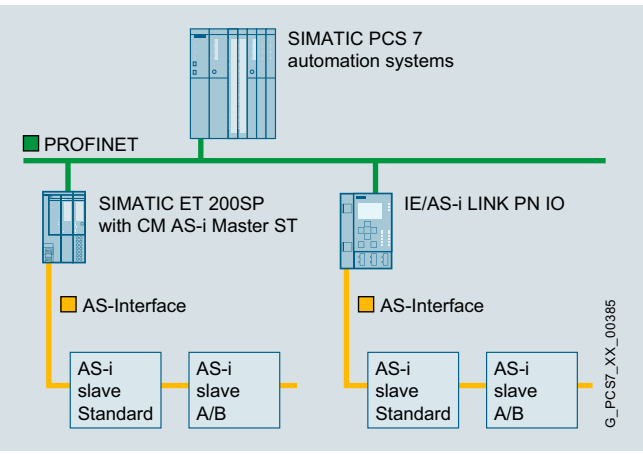

AS-i integration in SIMATIC PCS 7 via PROFINET IO

© Siemens 2019

Design (continued)

System components

The basic components of a system installation are:

- AS-Interface master (alternatives):
  - DP/AS-i Link Advanced (AS-i single or double master)
  - CP 343-2 or CP 343-2P (both can be operated in an ET 200M remote I/O station)
  - IE/AS-i LINK PN IO (AS-i single or double master)
  - ET 200SP with the CM AS-i Master ST communications module
- AS-Interface block library for SIMATIC PCS 7 (add-on product, see catalog "Add-ons for SIMATIC PCS 7", chapter "Libraries/Blocks/Tools")
- AS-Interface shaped cable (use of round cable also possible if preferred)
- Modules for connecting standard sensors/actuators
- Power supply unit for powering the slaves
- Actuators and sensors with an integrated slave ASIC
- Address programming device for setting the slave address

AS-i slaves

You can use all digital AS-i standard slaves as well as digital AS-i A/B slaves in accordance with the AS-i specification V3.0. Analog AS-i slaves can also be integrated via the DP/AS-i Link Advanced or the IE/AS-i LINK PN IO.

Note:

The CP 343-2 and CP 343-2P AS-i masters transfer I/O data from AS-i slaves with a B address via data records and not via the cyclic process image (partition). To prevent delays in the communication process of the driver blocks for B slaves, it is recommended to avoid using AS-i slaves with B addresses for SIMATIC PCS 7 configurations with CP 343-2 or CP 343-2P.

Ordering data

	Article No.
CM AS-i Master ST communications module • AS-Interface master for SIMATIC ET 200SP, for plugging onto BaseUnit Type C0 • Corresponds to AS-Interface Specification V3.0 • Dimensions (W x H x D / mm): 20 x 73 x 58	**3RK7137-6SA00-0BC1**
DP/AS-i Link Advanced Network transition between PROFIBUS DP and AS-Interface; master profiles M3 and M4, enhanced AS-Interface specification V3.0; IP20 degree of protection; manual on CD (English, German, French, Spanish, Italian)	
• Single master with display	**6GK1415-2BA10**
• Dual master with display	**6GK1415-2BA20**
CP 343-2 Communications module for connecting SIMATIC S7-300 and ET 200M to AS-Interface; configuration of the AS-i network by means of SET key; including manual on CD (German, English, French, Spanish, Italian); without front panel connector	**6GK7343-2AH01-0XA0**
CP 343-2P Communications module for the connection of SIMATIC S7-300 and ET 200M to AS-Interface; configuration of the AS-i network by means of SET key or HW Config (as of STEP 7 V5.2); including manual on CD (English, German, French, Spanish, Italian); without front connector	**6GK7343-2AH11-0XA0**
Front connector 20-pin, with screw contacts	**6ES7392-1AJ00-0AA0**
IE/AS-i LINK PN IO Network transition between PROFINET/Industrial Ethernet and AS-Interface with IP20 degree of protection; including COMBICON plug-in screw-type terminals for connecting the AS-Interface cable	
• Single master with display	**6GK1411-2AB10**
• Dual master with display	**6GK1411-2AB20**
Additional accessories For cable material, plugs, and further accessories, see Catalog IC 10 or Industry Mall/CA 01 under "Automation engineering – Industrial Controls – Industrial Communication – AS-Interface"	

© Siemens 2019

CP 341 communication module

Overview



CP 341 communications module

Modbus can be connected to PROFIBUS DP using an ET 200M with CP 341 communications module. This module enables fast and efficient exchange of data through point-to-point coupling.

The CP 341 communications module is available in 3 versions with different transmission physics:

- RS 232C (V.24)
- 20 mA (TTY)
- RS 422/RS 485 (X.27)

The Modbus Master or Modbus Slave loadable drivers are needed for the Modbus coupling.

Ordering data

	Article No.
CP 341 communications module With 1 RS 232 C (V.24) interface	**6ES7341-1AH02-0AE0**
RS 232 connecting cable For coupling to SIMATIC S7	
• 5 m	**6ES7902-1AB00-0AA0**
• 10 m	**6ES7902-1AC00-0AA0**
• 15 m	**6ES7902-1AD00-0AA0**
CP 341 communications module With 1 20 mA (TTY) interface	**6ES7341-1BH02-0AE0**
20 mA (TTY) connecting cable For coupling to SIMATIC S7	
• 5 m	**6ES7902-2AB00-0AA0**
• 10 m	**6ES7902-2AC00-0AA0**
• 50 m	**6ES7902-2AG00-0AA0**
CP 341 communications module With 1 RS 422/485 (X.27) interface	**6ES7341-1CH02-0AE0**
RS 422/485 connecting cable For coupling to SIMATIC S7	
• 5 m	**6ES7902-3AB00-0AA0**
• 10 m	**6ES7902-3AC00-0AA0**
• 50 m	**6ES7902-3AG00-0AA0**
Loadable drivers for CP 341	
MODBUS master (RTU format)	
• Single license	**6ES7870-1AA01-0YA0**
• Single license, without software and documentation	**6ES7870-1AA01-0YA1**
MODBUS slave (RTU format)	
• Single license	**6ES7870-1AB01-0YA0**
• Single license, without software and documentation	**6ES7870-1AB01-0YA1**

© Siemens 2019



11/2 Introduction

11/6 Central I/O for SIMATIC PCS 7
11/6 Central I/O Modules
11/7 Expansion Units for Central I/O

11/8 Power Supplies
11/9 Single-Phase Power Supplies, 24 V DC
11/10 Single and 2-Phase Power Supplies 24 V DC
11/11 3-phase modular power supplies, 24 V DC
11/12 3-phase power supply system, 24 V DC
11/14 Expansion Modules
11/16 SITOP DC UPS Uninterruptible Power Supplies

11/19 SIMATIC CFU
11/19 SIMATIC CFU
11/22 SIMATIC CFU PA Edition
11/28 SIMATIC CFU DIQ Edition
11/33 BusAdapter
11/35 BusAdapter/Accessories

11/36 SIMATIC ET 200SP HA
11/39 Interface Module
11/41 Digital I/O modules
11/49 Analog I/O Modules
11/55 Digital/Analog Module
11/58 Carrier Modules
11/61 Terminal blocks
11/64 BusAdapter

11/65 SIMATIC ET 200iSP
11/67 Power Supply Unit
11/69 Interface Module
11/72 Digital Electronics Modules
11/80 Analog Electronics Modules
11/87 Safety-related electronics modules
11/92 Watchdog module
11/93 RS 485-iS Coupler
11/95 Stainless Steel Wall Enclosure


11/97 SIMATIC ET 200M for SIMATIC PCS 7
11/98 Power Supply
11/99 Interface Modules
11/100 Accessories
11/102 Bundles
11/103 Digital Modules
11/108 Analog Modules
11/111 Analog Modules with HART
11/118 Ex Digital/Analog Modules
11/124 F Digital/Analog Modules
11/126 Control Modules
11/128 Counter Modules
11/129 MTA Terminal Modules

11/133 SIMATIC ET 200SP for SIMATIC PCS 7
11/136 Interface modules and BusAdapters
11/138 BaseUnits and I/O modules
11/140 Digital I/O modules
11/142 Analog I/O modules

11/145 SIMATIC ET 200pro for SIMATIC PCS 7
11/147 IM 154-2 DP High Feature Interface Module
11/148 Digital Electronics Modules EM 141, EM 142
11/149 Analog Electronics Modules EM 144, EM 145
11/151 Safety-related Electronics Modules
11/152 Power Module PM-E
11/153 Power Supply for ET 200pro

© Siemens 2019

Overview

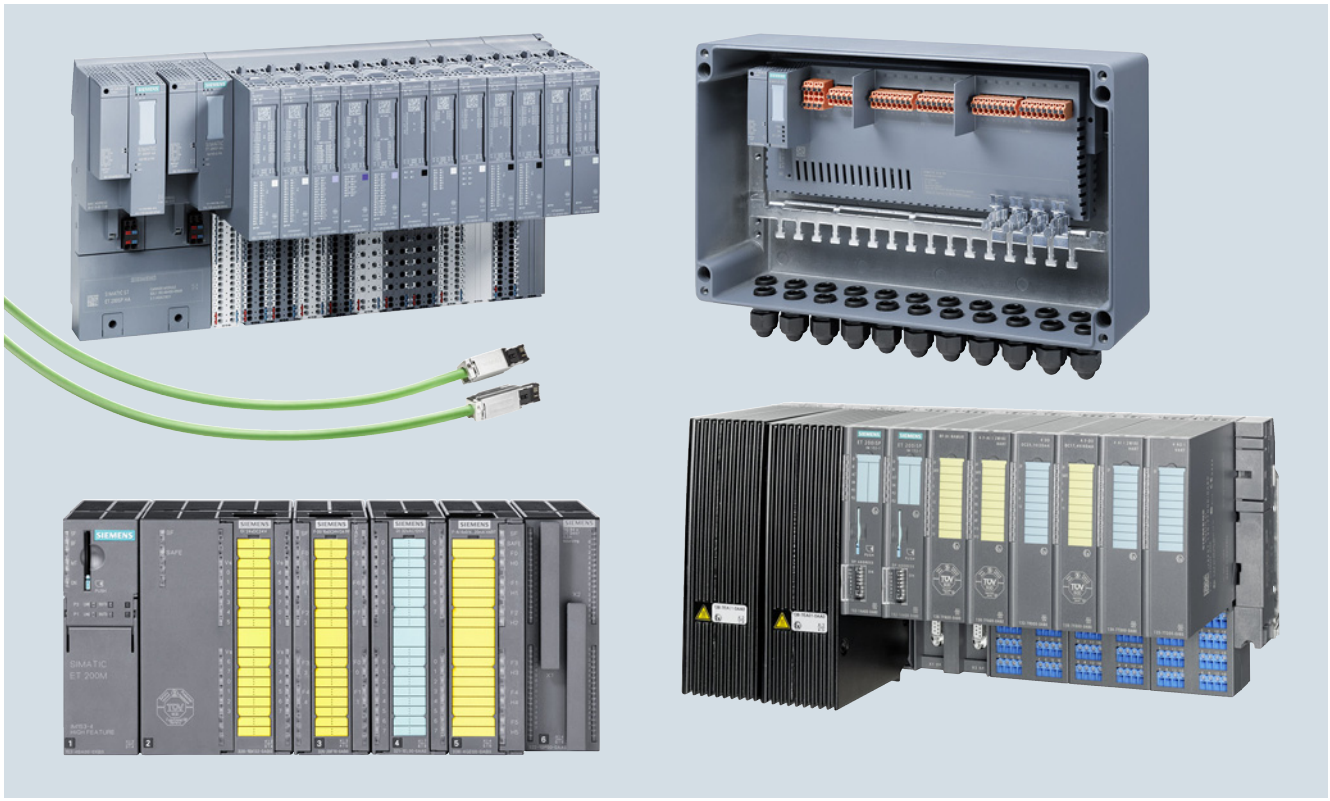

SIMATIC ET 200 remote I/O stations for SIMATIC PCS 7 (main SIMATIC ET 200SP HA, SIMATIC CFU PA, SIMATIC ET 200M and SIMATIC ET 200iSP series)

The SIMATIC PCS 7 process control system offers a variety of possibilities for detecting and outputting process signals via sensors and actuators as well as for connecting process I/O to the automation systems:

- Signal and function modules in remote I/O stations on the fieldbus
  - PROFIBUS DP (ET 200M, ET 200iSP, ET 200pro)
  - PROFINET IO (ET 200SP HA, SIMATIC CFU, ET 200M, ET 200SP)
- Analog and digital I/O modules of the SIMATIC S7-400 operated centrally in the automation system

SIMATIC S7-400 signal modules used centrally in the automation system are suitable for small applications or plants with few remote locations. In practice, however, distributed process I/Os are mainly used which, depending on the type, also support redundant configurations or operation in explosive gas/dust atmospheres:

- SIMATIC ET 200 remote I/Os in conjunction with classic field/process devices and HART field devices
- Intelligent field/process devices for direct fieldbus connection

Especially convincing arguments for distributed process I/O include:

- Modularity and consistency
- Flexible adaptability to the plant structure
- Minimum cabling and engineering requirements
- Low commissioning, servicing and lifecycle costs
- Wide technical bandwidth

© Siemens 2019

Design

Comparison of distributed I/O systems for SIMATIC PCS 7


I/O system	SIMATIC CFU	ET 200SP HA	ET 200iSP	ET 200M	ET 200SP	ET 200pro
						
Design						
Degree of protection	IP20	IP20	IP30	IP20	IP20	IP65/IP66/IP67
Design	Compact	Modular	Modular	Modular	Discretely scalable	Modular
Assembly	Mounting rail	Mounting rail	Mounting rail	Mounting rail	Standard mounting rail	Mounting rail
Connection system for sensors/actuators	Multi-wire connection screw-type connections	Multi-wire connection Push-in terminals	Multi-wire connection Spring-loaded/ screw-type connections	Single-wire connection Spring-loaded/ screw-type connections, FastConnect, TopConnect	Single/multi-conductor connection Push-in terminals	M8, M12, M23
Special applications						
Safety engineering	–	–	●	●	–	●
For use in hazardous areas	Zones 2, 22	Zone 2	Zones 1, 21	Zone 2	Zone 2	–
Increased availability	Redundant	Switched, redundant	Switched, redundant	Switched, redundant	–	–
Temperature range	-40 to +70 °C (horizontal)	-40 to +70 °C (horizontal)	-20 … +70 °C (horizontal)	0 … +60 °C[1] (horizontal))	0 … +60 °C[1)] (horizontal)	-25 … +55 °C (horizontal)
Vibration resistance (continuous)	1 g	1 *g*	1 *g*	1 *g*	Up to 5 *g*	5 *g* (module-dependent)
Communication						
PROFIBUS (Cu/FO)	– / –	– / –	● / – (1.5 Mbps)	● / – (12 Mbps)	● / –	● / ● (12 Mbps)
PROFINET (Cu/FO)	● / ●	● / ●	– / –	● / –	● / ●	– / –
System functions						
Permanent wiring	●	●	●	● (plugging and removal)	●	–
Hot swapping	–	●	●	● (with active backplane bus)	●	●
Expansion/ configuration during ongoing operation	●	● / ●	● / ●	● / ●	– / –	– / –
Diagnostics (module-dependent)	Channel-discrete	Channel-discrete	Channel-discrete	Channel-discrete	Channel-discrete	Channel-discrete
Functions						
Digital channels	●	●	●	●	●	●
Analog channels	●	●	●	●	●	●
incl. HART	PROFIBUS PA	●	●	●	●	–
Motor starter	–	Available soon	–	–	–	–
Pneumatic interface	–	Available soon	●	–	–	–
Technological functions	Available soon	Available soon	Counting, frequency measuring	Counting/measuring, controlling, weighing	–	–

[1)] Also available as a SIPLUS component for extended temperature range -25/-40 … +60/+70 °C and corrosive atmosphere/condensation (see details at www.siemens.com/siplus)

© Siemens 2019

Design (continued)

Integration of process I/O in the hazardous area

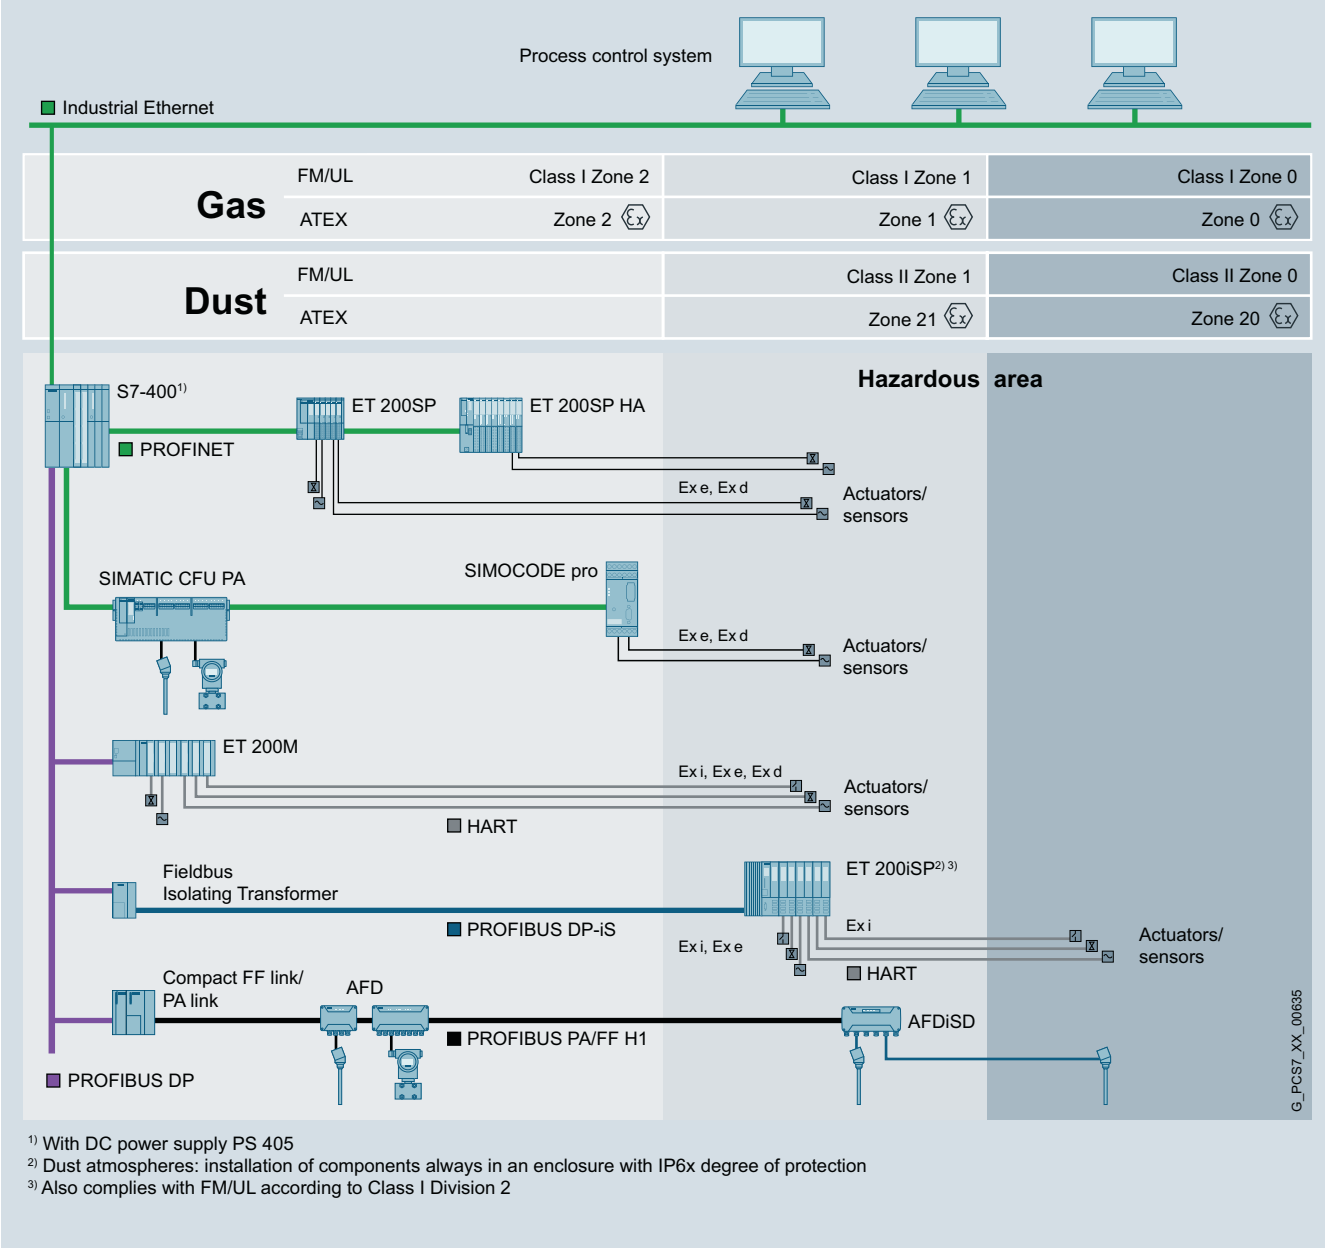

¹⁾ With DC power supply PS 405
²⁾ Dust atmospheres: installation of components always in an enclosure with IP6x degree of protection
³⁾ Also complies with FM/UL according to Class I Division 2

Process I/O in explosive gas and dust atmospheres

The figure shows the possible applications for the SIMATIC PCS 7 process I/O with consideration of different environmental conditions.

Field devices on the PROFIBUS PA or FOUNDATION Fieldbus H1

Field devices located in Ex zones 0, 1, 2, 20, 21 or 22 can be integrated in SIMATIC PCS 7 via various active field distributors on the PROFIBUS PA or FOUNDATION Fieldbus H1. The active field distributor AFDiSD is required for field devices in Ex zones 0, 1, 20 or 21.

ET 200iSP distributed I/O

ET 200iSP remote I/O stations suitable for gas/dust atmospheres can be installed directly in the Ex zones 1, 2, 21 or 22 as well as in non-hazardous areas. The intrinsically-safe sensors, actuators and HART field devices can also be located in zone 0 or 20 if necessary.

ET 200M, ET 200SP and ET 200SP HA distributed I/O

ET 200M, ET 200SP and ET 200SP HA remote I/O stations can be used in Ex zone 2 as well as in non-hazardous areas. The actuators/sensors can also be positioned in Ex zone 1 or 21. Special Ex I/O modules are available for this in the ET 200M product range.

© Siemens 2019

Design (continued)

ET 200pro distributed I/O

ET 200pro remote I/O stations are designed for use in non-hazardous areas.

Intrinsically-safe operator panel

An intrinsically-safe operator panel can be used in hazardous areas, zone 1, 2, 21 or 22, if required. For further information on this operator panel, see under SIMATIC HMI Thin Client Ex in the Catalog "Add-ons for the SIMATIC PCS 7 process control system", Section "Operator control and monitoring".

Function

Possible online modifications among the process I/Os		
Remote I/O	**PROFIBUS DP**	**PROFINET**
SIMATIC ET 200SP HA		• Adding ET 200SP HA stations • Adding I/O modules to the station • Changing the parameter settings of I/O modules • Configuration of connected HART field devices with SIMATIC PDM
SIMATIC CFU		• Adding CFU • Adding field devices to CFU • Changing the parameter settings of the CFU and connected PROFIBUS PA field devices over SIMATIC PDM
SIMATIC ET 200M	• Adding of ET 200M stations • Adding of I/O modules to the station • Changing the parameter settings of I/O modules • Parameterization of connected HART field devices with SIMATIC PDM	
SIMATIC ET 200iSP	• Adding of ET 200iSP stations • Adding of modules for the station • Re-configuration of modules • Parameterization of connected HART field devices using SIMATIC PDM	
SIMATIC ET 200pro	• Adding of ET 200pro stations	
PROFIBUS DP, PROFIBUS PA, FOUNDATION Fieldbus H1	• Adding of PROFIBUS DP stations • Adding of PA links and PA field devices • Parameterization of PA or FF field devices with SIMATIC PDM	

More information

For special blocks and block libraries for integration of field/process devices in SIMATIC PCS 7, e.g. devices from drive and weighing systems, see the Industry Mall as well as Catalog ST PCS 7 AO, "Add-ons for the SIMATIC PCS 7 Process Control System".

For information and Ordering data on field/process devices, drive and motor management systems from Siemens, see the Industry Mall as well as the PDF versions of the corresponding catalogs on the Internet.

© Siemens 2019

Overview



Signal modules from the SIMATIC S7-400 range can be used in the SIMATIC PCS 7 automation system if necessary. These are primarily an alternative to use of distributed I/Os in the case of small applications or systems with a small distributed configuration.

For SIMATIC PCS 7, the I/O modules listed in the Ordering data have been selected from the range of S7-400 signal modules.

Notes:

Apart from these selected modules it is also possible to use - with limitations in functions - all other I/O modules from the current range of S7-400 signal modules.

All process data from the I/O are available for PCS 7 engineering in the CFC, and can be graphically interconnected to the signal name in the signal list. Diagnostics information is generated automatically when using the I/O modules listed here.

When using other I/O modules, integration in SIMATIC PCS 7 is limited to the process data, i.e. the full scope of diagnostics functions is not automatically available. These modules can therefore only be used meaningfully in SIMATIC PCS 7 if the diagnostics capability can be omitted.

Online modifications and redundancy are not supported by the central I/O.

Technical specifications

You can find the detailed technical data of the S7-400 modules at the following points:


- Catalog ST 70 or
- Industry Mall/CA 01 under "Automation technology – Automation systems – SIMATIC industrial automation systems – Controllers – Advanced Controller – S7-400/S7-400H/ S7-400F/FH"

Ordering data

	Article No.
SM 421 Digital Input Modules	
• 32 inputs, 24 V DC	**6ES7421-1BL01-0AA0**
• 32 inputs, 120 V AC/DC	**6ES7421-1EL00-0AA0**
• 16 inputs, 24 V DC, with process/diagnostics interrupt	**6ES7421-7BH01-0AB0**
• 16 inputs, 24 to 60 V AC/DC, with process/diagnostics interrupt	**6ES7421-7DH00-0AB0**
• 16 inputs, 120/230 V AC/DC, inputs according to IEC 1131-2 Type 2	**6ES7421-1FH20-0AA0**
SM 422 Digital Output Modules	
• 32 outputs; 24 V DC, 0.5 A	**6ES7422-1BL00-0AA0**
• 32 outputs; 24 V DC, 0.5 A; with diagnostics	**6ES7422-7BL00-0AB0**
• 16 outputs; 24 V DC, 2 A	**6ES7422-1BH11-0AA0**
• 16 outputs; relay contacts	**6ES7422-1HH00-0AA0**
• 16 outputs; 120/230 V AC, 2 A	**6ES7422-1FH00-0AA0**
SM 431 Analog Input Modules	
• 16 inputs, non-floating, 13 bit	**6ES7431-0HH00-0AB0**
• 8 inputs, floating, 13 bit	**6ES7431-1KF00-0AB0**
• 8 inputs, floating, 14 bit, with linearization (RTD/TC)	**6ES7431-1KF10-0AB0**
• 8 inputs, floating, 14 bit	**6ES7431-1KF20-0AB0**
• 16 inputs, floating, 16 bit; hardware interrupt capability, with diagnostics interrupt	**6ES7431-7QH00-0AB0**
• 8 inputs, floating, 16 bit; hardware interrupt capability, for thermocouples, with diagnostics interrupt	**6ES7431-7KF00-0AB0**
• 8 inputs, floating, 16 bit; hardware interrupt capability, for thermal resistors, with diagnostics interrupt	**6ES7431-7KF10-0AB0**
SM 432 Analog Output Modules	
• 8 outputs, floating, 13 bit; for ± 10 V, 0 to 10 V, 1 to 5 V, ± 20 mA, 0 to 20 mA, 4 to 20 mA	**6ES7432-1HF00-0AB0**
Front Connector (1 unit)	
• With screw contacts	**6ES7492-1AL00-0AA0**
• With spring clamps	**6ES7492-1BL00-0AA0**
• With crimp contacts	**6ES7492-1CL00-0AA0**

© Siemens 2019

Overview

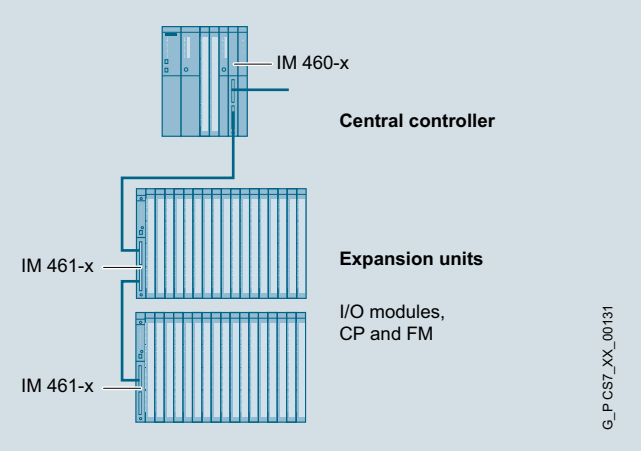

Expansion units can be used for the distributed expansion of the SIMATIC S7-400. The IM 460-x interface modules are used as the interface for these expansion units.

Restrictions compared to standard I/O modules from the ET 200M range

- No redundant interfacing of expansion units
- No configuration during operation

Racks

The universal racks (UR) are used for SIMATIC PCS 7. They can be used as central racks and as expansion racks. Other racks: see Catalog ST 70.

Ordering data

	Article No.
IM 460-0 interface module • Transmitter module for central controller • Without transmission of voltage to the expansion unit • Cable up to 5 m long • With K-bus for communication with CPs and FMs in the expansion unit • For connecting as many as 8 expansion units	**6ES7460-0AA01-0AB0**
IM 461-0 Interface Module Corresponding receiver module for the expansion unit	**6ES7461-0AA01-0AA0**
IM 460-1 Interface Module • Transmitter module for central controller • With transmission of the 5 V supply for I/O modules • Cable up to 1.5 m long • Without transmission of the K-bus, hence solely for communication from I/O modules	**6ES7460-1BA01-0AB0**
IM 461-1 Interface Module Corresponding receiver module for the expansion unit	**6ES7461-1BA01-0AA0**
IM 460-3 Interface Module • Transmitter module for central controller • Without transmission of voltage to the expansion unit • Cable up to 100 m long • With K-bus for communication with CPs and FMs in the expansion unit • For connecting as many as 8 expansion units	**6ES7460-3AA01-0AB0**
IM 461-3 Interface Module Corresponding receiver module for the expansion unit	**6ES7461-3AA01-0AA0**
UR1 rack for central and expansion units • 18 slots • Suitable for redundant power supply	**6ES7400-1TA01-0AA0**
UR2 rack for central and expansion units • 9 slots • Suitable for redundant power supply	**6ES7400-1JA01-0AA0**
Accessories	
468-1 Connecting Cable for connecting IM 460-0 and IM 461-0; IM 460-3 and IM 461-3	
• 0.75 m	**6ES7468-1AH50-0AA0**
• 1.5 m	**6ES7468-1BB50-0AA0**
• 5 m	**6ES7468-1BF00-0AA0**
Additional lengths for connecting IM 460-3 and IM 461-3	
• 10 m	**6ES7468-1CB00-0AA0**
• 25 m	**6ES7468-1CC50-0AA0**
• 50 m	**6ES7468-1CF00-0AA0**
• 100 m	**6ES7468-1DB00-0AA0**
Terminator for IM 461-0	**6ES7461-0AA00-7AA0**
468-3 Connecting Cable for connecting IM 460-1 and IM 461-1	
• 0.75 m	**6ES7468-3AH50-0AA0**
• 1.5 m	**6ES7468-3BB50-0AA0**

© Siemens 2019

Overview



SITOP modular

A reliable 24-V power supply is a basic condition for every plant operation. With MTBF ratings of up to 1 million hours at full load in continuous operation, SITOP power supplies meet the particularly stringent requirements for process automation.

For world-wide use, the 1, 2 or 3-phase DIN rails provide a wide ambient temperature range of -25 … +70 °C as well as comprehensive international approvals such as ATEX, Class I Div2, IECex or GL.


The innovative SITOP PSU8600 power supply system can be fully integrated in the plant via PROFINET and thereby offers completely new configuration and diagnostic capabilities. It is thus possible to individually adjust and monitor the voltage and current of each output. For the first time, users have access to information about the control circuit including energy flow data.



SITOP add-on modules and UPS1600

24-V power units with output capacities up to 1000 W can be individually adapted to the plant configuration and plant expansion and combined with redundancy, selectivity or DC USP modules. This means that you can expand the system to even include complete all-round protection.

The SITOP library is available with blocks and faceplates for direct integration into SIMATIC PCS 7. This means that PCS 7 users automatically receive information about operating states, maintenance requirements (e.g. battery replacement) and faults (e.g. power failure, short-circuit or overload in 24V circuits).

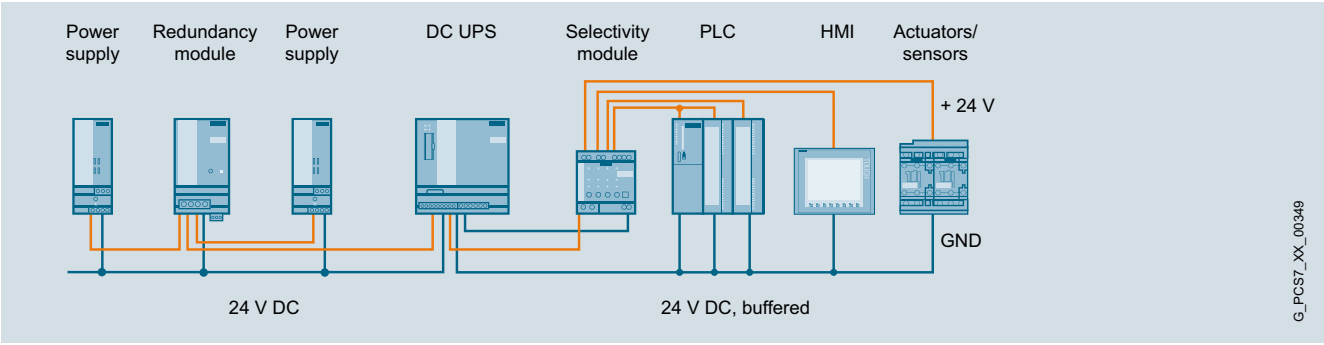

24 V DC power supply with add-on modules and DC UPS

More information

You can find detailed information and technical specifications for the 1-phase, 2-phase and 3-phase SITOP modular power supplies, for the SITOP PSU8600 power supply system, for the redundancy, buffer and selectivity modules, as well as for corresponding 24 V DC uninterruptible power supplies in the Catalog KT 10.1.

Additional information is available via the Internet at:

- SITOP power supplies:
  www.siemens.com/sitop
- CAx data (2D, 3D, circuit diagram macros):
  www.siemens.com/sitop-cax
- Operating instructions:
  www.siemens.com/sitop/manuals

SITOP Selection Tool

The SITOP Selection Tool helps you select the power supply and DC UPS for your specific application easily and quickly:
www.siemens.com/sitop-selection-tool

SITOP library for SIMATIC PCS 7

SIMATIC PCS 7 V8.0 with SP2, V8.1, V8.1 with SP1, V8.2 are supported.
https://support.industry.siemens.com/cs/ww/en/view/109476154

SIMATIC PCS 7 Standard Architectures manual (chapter 18, 24 V DC supply concepts)

https://support.industry.siemens.com/cs/ww/en/view/109739629

Application example: Integration of a SITOP 24V power supply in SIMATIC PCS 7

https://support.industry.siemens.com/cs/ww/de/view/109481908

© Siemens 2019

Overview

- 24 V DC/5 A, 10 A, 20 A and 40 A
- Single-phase wide-range input allows connection to any supply system and ensures safety in the case of voltage supply deviations
- Extremely slim design – no lateral installation clearances required
- Power Boost with 3 times the rated current (for 25 ms) for tripping protective devices
- Extra power with 1.5 times the rated current (5 s/min) for brief, operational overload
- Optional short-circuit behavior between constant current and restart
- Optional symmetrical load distribution for parallel operation
- Operating status display on 3 LEDs
- Extremely high efficiency up to 94%
- Large temperature range from -25 °C to +70 °C
- Comprehensive certifications, such as cULus, ATEX, IECex or GL
- Direct integration in SIMATIC PCS 7 via SITOP library

Design

Product overview

Modules		Versions	Input	Output
Power supplies				
	SITOP modular, 1-phase, 24 V DC	PSU8200, 5 A	120/230 V AC	24 V DC, 5 A
		PSU8200, 10 A	120/230 V AC	24 V DC, 10 A
	SITOP modular, 1-phase, 24 V DC	PSU8200, 20 A	120 ... 230 V AC/DC	24 V DC, 20 A
		PSU8200, 40 A	120/230 V AC	24 V DC, 40 A

Ordering data

	Article No.
SITOP modular power supplies, 1-phase, 24 V DC	
SITOP PSU8200, 1-phase, 24 V DC, 5 A Stabilized power supply Input: 120/230 V AC Output: 24 V DC/5 A	**6EP3333-8SB00-0AY0**
SITOP PSU8200, 1-phase, 24 V DC, 10 A Stabilized power supply Input: 120/230 V AC Output: 24 V DC/10 A	**6EP3334-8SB00-0AY0**
SITOP PSU8200, 1-phase, 24 V DC, 20 A Stabilized power supply Input: 120 … 230 V AC / 110 … 220 V DC Output: 24 V DC/20 A	**6EP1336-3BA10**
SITOP PSU8200, 1-phase, 24 V DC, 40 A Stabilized power supply Input: 120/230 V AC Output: 24 V DC/40 A	**6EP3337-8SB00-0AY0**

© Siemens 2019

Single and 2-Phase Power Supplies 24 V DC

Overview

- 24 V DC/5 A and 10 A, also available as version with PCB with protective coating.
- 1-phase and 2-phase ultra-wide input range
- Extremely slim design – no lateral installation clearances required
- Power Boost with 3 times the rated current (for 25 ms) for tripping protective devices
- Extra power with 1.5 times the rated current (5 s/min) for brief, operational overload
- Optional short-circuit behavior between constant current and restart
- Optional symmetrical load distribution for parallel operation
- Operating status display on 3 LEDs
- High degree of efficiency of up to 91%
- Large temperature range from -25 °C to +70 °C
- Comprehensive certifications, such as cULus, ATEX, IECex or GL
- Direct integration in SIMATIC PCS 7 via SITOP library

Design

Product overview

Modules		Versions	Input	Output
Power supplies				
	SITOP modular, 1-phase and 2-phase, 24 V DC	PSU200M, 5 A	120/230 ... 500 V AC	24 V DC, 5 A
		PSU200M, 10 A	120/230 ... 500 V AC	24 V DC, 10 A
	SITOP modular PLUS, 1-phase and 2-phase, 24 V DC, with protective coating	PSU200M, 5 A	120/230 ... 500 V AC	24 V DC, 5 A
		PSU200M, 10 A	120/230 ... 500 V AC	24 V DC, 10 A

Ordering data

	Article No.
SITOP modular power supplies, 1-phase and 2-phase, 24 V DC	
SITOP PSU200M, 1-phase and 2-phase, 24 V DC, 5 A Stabilized power supply Input: 120 … 230 V / 230 … 500 V AC Output: 24 V DC/5 A	**6EP1333-3BA10**
SITOP PSU200M PLUS, 1-phase and 2-phase, 24 V DC, 5 A Stabilized power supply Input: 120 … 230 V / 230 … 500 V AC Output: 24 V DC/5 A Version with protective coating	**6EP1333-3BA10-8AC0**
SITOP PSU200M, 1-phase and 2-phase, 24 V DC, 10 A Stabilized power supply Input: 120 … 230 V / 230 … 500 V AC Output: 24 V DC/10 A	**6EP1334-3BA10**
SITOP PSU200M PLUS, 1-phase and 2-phase, 24 V DC, 10 A Stabilized power supply Input: 120 … 230 V / 230 … 500 V AC Output: 24 V DC/10 A Version with protective coating	**6EP1334-3BA10-8AB0**

© Siemens 2019

Overview

- 24 V DC/20 A and 40 A
- 3-phase wide-range input from 320 to 575 V AC for global use
- Extremely slim design – no lateral installation clearances required
- Power Boost with 3 times the rated current (for 25 ms) for tripping protective devices
- Extra power with 1.5 times the rated current (5 s/min) for brief, operational overload
- Optional short-circuit behavior between constant current and restart
- Optional symmetrical load distribution for parallel operation
- Operating status display on 3 LEDs
- Extremely high efficiency up to 94%
- Large temperature range from -25 °C to +70 °C
- Comprehensive certifications, such as cULus, ATEX, IECex and GL
- Direct integration in SIMATIC PCS 7 via SITOP library

Design

Product overview

Modules		Versions	Input	Output
Power supplies				
	SITOP modular, 3-phase, 24 V DC	PSU8200, 20 A	3 AC 400 ... 500 V	24 V DC, 20 A
		PSU8200, 40 A	3 AC 400 ... 500 V	24 V DC, 40 A

Ordering data

	Article No.
SITOP modular power supplies, 3-phase, 24 V DC	
SITOP PSU8200, 3-phase, 24 V DC, 20 A Stabilized power supply Input: 3 AC 400 … 500 V Output: 24 V DC/20 A	**6EP3436-8SB00-0AY0**
SITOP PSU8200, 3-phase, 24 V DC, 40 A Stabilized power supply Input: 3 AC 400 … 500 V Output: 24 V DC/40 A	**6EP1437-3BA10**

© Siemens 2019

3-phase power supply system, 24 V DC

Overview



The unique SITOP PSU8600 power supply system sets new standards for industrial power supplies. Voltage and current response thresholds can be set individually for each output of this power supply system. Selective monitoring of each output for overload also enables fast fault location. Depending on requirements, additional modules from the modular system can be added without wiring overhead, for example, to buffer against transient power failures.

Comprehensive diagnostic and maintenance information is available via PROFINET and can be evaluated and visualized directly in SIMATIC PCS 7. Optimal support is also provided for energy management of a plant: From the acquisition of energy data from individual outputs, the specific activation and deactivation of outputs via PROFIenergy, to direct integration in power management systems.

Special features

- Reduced space requirement and costs due to multiple integrated outputs with selective monitoring
- Individually configurable outputs (voltage from 5 V to 28 V, power response threshold value from 0.5 A to 5 A or 10 A)
- Compensation for power losses can be set separately for each output
- Narrow width without lateral installation clearances
- Low temperature rise in the control cabinet due to very high efficiency
- Two integrated Ethernet/PROFINET ports (no external switch required)
- OPC UA Server functionality for parameter assignment and data communication
- Can be added without wiring overhead (more outputs, buffer module for bridging transient power failures)
- Preventive maintenance reduces downtimes
- Energy savings during breaks through targeted switching of outputs (via STEP 7 program or PROFIenergy profile)
- SIMATIC S7 function blocks for easy integration in STEP 7 user programs and faceplates for operator control and monitoring.
- Direct integration in SIMATIC PCS 7 via SITOP library

© Siemens 2019

Design

Product overview

Modules		Versions	Input	Output
PSU8600 basic units				
	SITOP power supply system, 3-phase, 24 V DC	PSU8600, 20 A	3 AC 400 to 500 V	24 V DC, 20 A
		PSU8600, 40 A	3 AC 400 to 500 V	24 V DC, 40 A
		PSU8600, 20 A/5 × 4 A	3 AC 400 to 500 V	24 V DC, 20 A/4 × 5 A
		PSU8600, 40 A/5 × 10 A	3 AC 400 to 500 V	24 V DC, 40 A/4 × 10 A
CNX8600 for expanding outputs				
	SITOP CNX8600 4 × 5 A expansion module	CNX8600, 4 × 5 A	24 V DC	24 V DC, 4 × 5 A
	SITOP CNX8600 4 × 10 A expansion module	CNX8600, 4 × 10 A	24 V DC	24 V DC, 4 × 10 A
BUF8600 buffer				
	SITOP BUF8600 buffer module	BUF8600, 100 ms/40 A BUF8600, 300 ms/40 A BUF8600, 4 s/40 A BUF8600, 10 s/40 A	24 V DC	24 V DC, 40 A

Ordering data


	Article No.
SITOP PSU8600 3-phase, 24 V DC/20 A with PN/IE connection Stabilized power supply Input: 3 AC 400 … 500 V Output: 24 V DC/20 A	**6EP3436-8SB00-2AY0**
SITOP PSU8600 3-phase, 24 V DC/40 A with PN/IE connection Stabilized power supply Input: 3 AC 400 … 500 V Output: 24 V DC/40 A	**6EP3437-8SB00-2AY0**
SITOP PSU8600 3-phase, 24 V DC/20 A/4 × 5 A with PN/IE connection Stabilized power supply Input: 3 AC 400 … 500 V Output: 24 V DC/20 A	**6EP3436-8MB00-2CY0**
SITOP PSU8600 3-phase, 24 V DC/40 A/4 × 10 A with PN/IE connection Stabilized power supply Input: 3 AC 400 … 500 V Output: 24 V DC / 40 A/4 × 10 A	**6EP3437-8MB00-2CY0**

	Article No.
SITOP CNX8600 4 × 5 A expansion module For SITOP PSU8600 Output: 24 V DC / 4 × 5 A	**6EP4436-8XB00-0CY0**
SITOP CNX8600 4 × 10 A expansion module For SITOP PSU8600 Output: 24 V DC / 4 × 10 A	**6EP4437-8XB00-0CY0**
SITOP BUF8600 100 ms buffer module For SITOP PSU8600 Buffer capacity 100 ms/40 A	**6EP4297-8HB00-0XY0**
SITOP BUF8600 300 ms buffer module For SITOP PSU8600 Buffer capacity 300 ms/40 A	**6EP4297-8HB10-0XY0**
SITOP BUF8600 4 s buffer module For SITOP PSU8600 Buffer capacity 4 s/40 A	**6EP4293-8HB00-0XY0**
SITOP BUF8600 10 s buffer module For SITOP PSU8600 Buffer capacity 10 s/40 A	**6EP4295-8HB00-0XY0**
Device labeling plates	**3RT1900-1SB20**

© Siemens 2019

Overview


Redundancy modules

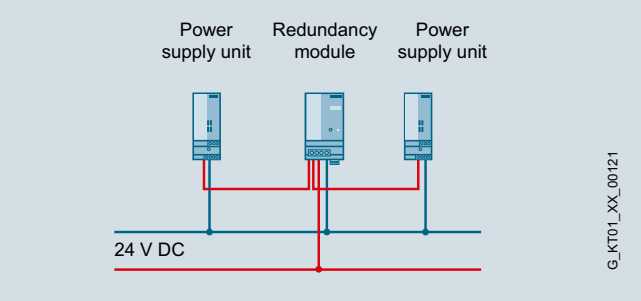

SITOP redundancy modules

- High availability of the 24 V DC supply thanks to redundant configuration
- Decoupling of two power supplies of the same type in parallel operation via diodes
- 24 V DC power supply is maintained in the event of a power failure
- Compact redundancy modules for power supply units up to 40 A
- Diagnostic signal via LED and signaling contacts
- Adjustable switching threshold for LED and signaling contacts
- Direct integration in SIMATIC PCS 7 via SITOP library


Buffer module

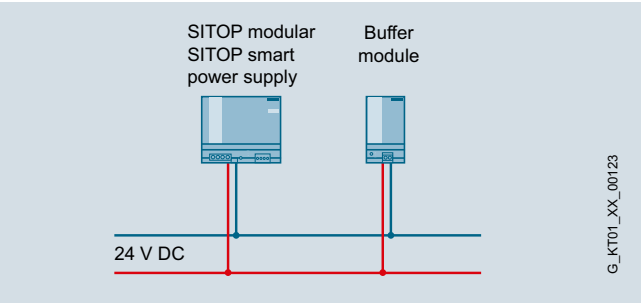

SITOP buffer module

- Buffering the load current during brief power interruptions
- Maintenance-free capacitors with short charging times as energy storage units
- Wiring parallel to the output of the power supply
- Parallel switching of several buffer modules possible
- A supply voltage > 20.5 V is signaled by an LED on the device.
- Buffer time up to: 200 ms at 40 A, 400 ms at 20 A, 800 ms at 10 A, 1.6 s at 5 A load current

Selectivity modules

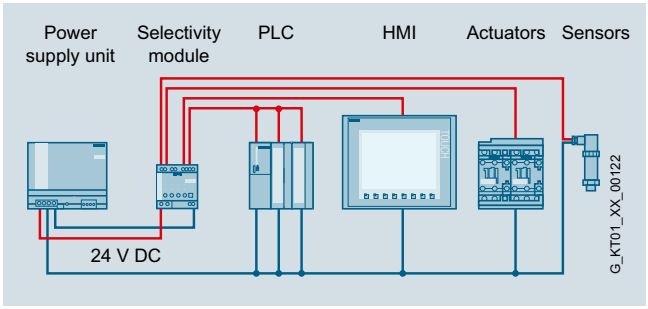

SITOP selectivity modules

- Distribution of the load current over up to 4 current circuits with individually adjustable maximum current
- Monitoring of individual partial currents
- Reliable tripping regardless of cable lengths and cross-sections
- Selective cutoff of current circuits at overload or short-circuit
- Simple commissioning thanks to manual switch on/off of outputs
- Sequential connection delay of feeders reduces total inrush current
- Sealable transparent cover over adjusters for currents and times protect against maladjustment
- Remote reset possible from a central location
- Signaling via LEDs (channel-by-channel) and remote diagnostics via common signaling contact or single-channel signaling
- Evaluation of the status of 4 current circuits of selectivity modules with single-channel signaling via SIMATIC S7 function blocks.
- Direct integration in SIMATIC PCS 7 via SITOP library

© Siemens 2019

Design

Product overview

Modules		Versions	Input	Output
Redundancy modules				
	SITOP redundancy module PSE202U	24 V DC, 40 A	24 V DC	U_e – approx. 0.5 V
		24 V DC, 10 A	24 V DC	U_e – approx. 0.5 V
Buffer module				
	SITOP buffer module	--	24 V DC	Ue - approx. 1 V
Selectivity modules				
	SITOP selectivity module PSE200U, 3 A, 4-channel, 4 × 3 A Adjustable output current: 0.5 ... 3 A	With common signal contact	24 V DC	Ue - approx. 0.2 V
		NEC Class 2 with common signal contact		
		With single-channel signaling		
		NEC Class 2 with single-channel signaling		
	SITOP selectivity module PSE200U, 10 A, 4-channel, 4 × 10 A Adjustable output current: 3 ... 10 A	Without single-channel signaling (common signaling contact)	24 V DC	Ue - approx. 0.2 V
		With single-channel signaling		

Ordering data

	Article No.
Add-on modules for SITOP modular power supplies	
Redundancy modules	
Redundancy module SITOP PSE202U, 24 V DC/40 A Suitable for decoupling two SITOP power supplies each with a maximum of 20 A output current Input: 24 V DC Output: Ue - approx. 0.5 V	**6EP1961-3BA21**
Redundancy module SITOP PSE202U, 24 V DC/10 A Suitable for decoupling two SITOP power supplies each with a maximum of 5 A output current Input: 24 V DC Output: Ue - approx. 0.5 V	**6EP1964-2BA00**
Buffer module	
SITOP PSE201U buffer module For SITOP modular and SITOP smart buffer time 100 ms to 10 s, depending on load current Input: 24 V DC Output: Ue - approx. 1 V	**6EP1961-3BA01**


	Article No.
Selectivity modules	
SITOP PSE200U selectivity module, 3 A 4-channel (4 × 3 A) Input: 24 V DC Output: Ue – approx. 0.2 V Adjustable output current 0.5 to 3 A	
• With common signal contact	**6EP1961-2BA11**
• NEC Class 2 with common signal contact	**6EP1961-2BA51**
• With single-channel signaling	**6EP1961-2BA31**
• NEC Class 2 with single-channel signaling	**6EP1961-2BA61**
SITOP PSE200U selectivity module, 10 A 4-channel (4 × 10 A) Input: 24 V DC Output: Ue – approx. 0.2 V Adjustable output current 3 to 10 A	
• Without single-channel signaling (common signaling contact)	**6EP1961-2BA21**
• With single-channel signaling	**6EP1961-2BA41**

© Siemens 2019

SITOP DC UPS Uninterruptible Power Supplies


Overview

SITOP DC UPS with capacitors

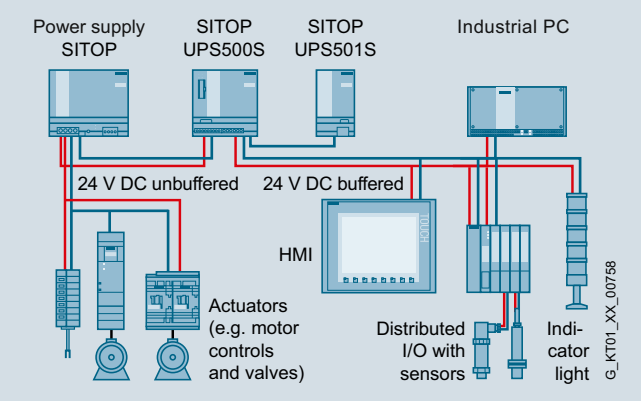

- Buffering of 24 V DC up to 15 A
- Buffering of power failures for up to several minutes enables data backup and controlled shutdown
- Ambient temperatures up to +60 °C
- Short charging times
- Maintenance-free operation and long lifetime, also at high temperatures
- Status messages via LEDs and floating signaling contacts
- Communication with controller/IPC via USB
- Extension of the buffer time with up to 3 expansion modules

SITOP UPS1600 DC UPS modules with UPS1100 battery modules

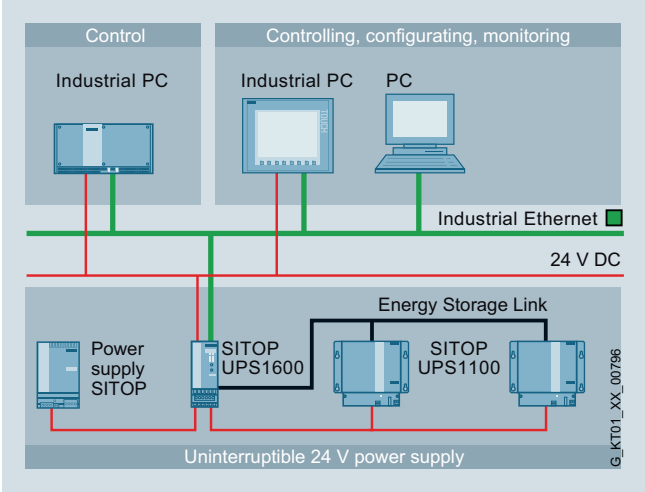

- High-performance DC UPS modules in space-saving, slim design
- 24 V DC buffering for a few hours for the purpose of continuing processes
- High overload capability for mains and buffer mode
- Starting from the battery module supports stand-alone mode, e.g. for starting generators
- Open communication via USB or two Ethernet/ PROFINET ports; OPC UA Server functionality for parameter assignment and data communication
- Easy configuration thanks to automatic detection of battery modules
- High reliability and availability due to monitoring of the operational readiness, battery feed, aging and charging status
- Battery-saving charging due to temperature-specific charging characteristic
- Defined shutdown of several IPCs or controllers on one UPS (versions with Ethernet/PROFINET)
- Remote monitoring via integrated web server (versions with Ethernet/PROFINET)
- SIMATIC S7 function blocks for easy integration in STEP 7 user programs and faceplates for operator control and monitoring.
- Direct integration in SIMATIC PCS 7 via SITOP library

The intelligent UPS1600 battery management charges the UPS1100 with the optimal, temperature-controlled charging characteristics and monitors the status (operating data and diagnostic information) of the connected battery modules via the energy storage link. For longer backup times, up to six same type battery modules can be connected in parallel.

© Siemens 2019

Design

Product overview

Modules		Versions	Input	Output
Uninterruptible 24 V DC power supplies				
SITOP DC UPS with capacitors				
	SITOP DC UPS basic device UPS500S, 15 A, IP20, can be expanded with SITOP UPS501S	Power 2.5 KW	24 V DC (22 ... 29 V)	24 V DC (23.3 ... 24.7 V DC or 24 V ± 3 %)
		Power 5 KW		
	SITOP DC UPS expansion module UPS501S, 7 A	Power 5 KW	24 V DC	24 V DC
	SITOP DC UPS basic device UPS500P, 7 A, IP65, cannot be expanded	Power 5 KW	24 V DC (22.5 ... 29 V DC)	24 V DC (23.3 ... 24.7 V DC or 24 V ± 3 %)
		Power 10 KW		
SITOP DC UPS with battery modules				
SITOP UPS1600 DC UPS, can be combined with SITOP UPS1100 battery modules				
	SITOP UPS1600 24 V/10 A	Without communications interface	24 V DC (21 … 29 V)	Normal mode: U_e – approx. 0.01 × I Buffer mode: 27 V DC (no load); 24 V (50% battery rated current); 22 V (100% battery rated current); 18.5 V (exhaustive discharge protection)
		USB interface		
		2 Ethernet/PROFINET interfaces		
	SITOP UPS1600 24 V/20 A	Without communications interface		
		USB interface		
		2 Ethernet/PROFINET interfaces		
	SITOP UPS1600 24 V/40 A	Without communications interface		
		USB interface		
		2 Ethernet/PROFINET interfaces		
SITOP UPS1100 battery modules for SITOP UPS1600 DC UPS modules				
	SITOP UPS1100 battery module for SITOP UPS1600, 10 A	24 V DC, 1.2 Ah	--	24 V DC, 22 ... 27.0 V DC (no load)
		24 V DC, 2.5 Ah, high temperature		
	SITOP UPS1100 battery module for SITOP UPS1600, 10 A and 20 A	24 V DC, 3.2 Ah	--	24 V DC, 22 ... 27.0 V DC (no load)
		24 V DC, 7 Ah		
		24 V DC, 5 Ah LIFePo		24 V DC, 22 ... 28.8 V DC (no load)
	SITOP UPS1100 battery module for SITOP UPS1600, 20 A and 40 A	24 V DC, 12 Ah	--	24 V DC, 22 ... 27.0 V DC (no load)

SITOP Selection Tool

The SITOP Selection Tool offers detailed selection guidance according to criteria such as the required backup time, nominal current, peak current and battery connection threshold:
www.siemens.com/sitop-selection-tool

© Siemens 2019


SITOP DC UPS Uninterruptible Power Supplies

Ordering data	Article No.
Uninterruptible 24 V DC power supplies	
DC UPS with capacitors	
DC UPS basic device SITOP UPS500S, 15 A Degree of protection IP20, input: 24 V DC; Output: 24 V DC; USB port; can be expanded with SITOP UPS501S	
• Power 2.5 KW	**6EP1933-2EC41**
• Power 5 KW	**6EP1933-2EC51**
DC UPS expansion module SITOP UPS501S, 7 A For connection to the basic device; Input: 24 V DC; Output: 24 V DC; power 5 KW	**6EP1935-5PG01**
DC UPS basic device SITOP UPS500P, 7 A Degree of protection IP65, input: 24 V DC; Output: 24 V DC; USB port; cannot be expanded	
• Power 5 KW	**6EP1933-2NC01**
• Power 10 KW	**6EP1933-2NC11**
SITOP UPS1600 DC UPS can be combined with SITOP UPS1100 battery module	
DC UPS module SITOP UPS1600, 24 V/10 A Input: 24 V DC; Output: 24 V DC	
• Without communications interface	**6EP4134-3AB00-0AY0**
• With USB interface	**6EP4134-3AB00-1AY0**
• With 2 Ethernet/PROFINET interfaces	**6EP4134-3AB00-2AY0**
DC UPS module SITOP UPS1600, 24 V/20 A Input: 24 V DC; Output: 24 V DC	
• Without communications interface	**6EP4136-3AB00-0AY0**
• With USB interface	**6EP4136-3AB00-1AY0**
• With 2 Ethernet/PROFINET interfaces	**6EP4136-3AB00-2AY0**
DC UPS module SITOP UPS1600, 24 V/40 A Input: 24 V DC; Output: 24 V DC	
• Without communications interface	**6EP4137-3AB00-0AY0**
• With USB interface	**6EP4137-3AB00-1AY0**
• With 2 Ethernet/PROFINET interfaces	**6EP4137-3AB00-2AY0**

	Article No.
SITOP UPS1100 battery module for DC UPS module SITOP UPS1600	
Battery module SITOP UPS1100 24 V/1.2 Ah With maintenance-free, sealed rechargeable lead batteries for DC UPS module SITOP UPS1600, 10 A	**6EP4131-0GB00-0AY0**
Battery module SITOP UPS1100 24 V/3.2 Ah With maintenance-free, sealed rechargeable lead batteries for DC UPS module SITOP UPS1600, 10 A and 20 A	**6EP4133-0GB00-0AY0**
Battery module SITOP UPS1100 24 V/7 Ah With maintenance-free, sealed rechargeable lead batteries for DC UPS module SITOP UPS1600, 10 A and 20 A	**6EP4134-0GB00-0AY0**
Battery module SITOP UPS1100 24 V/5 Ah With maintenance-free, sealed lithium-ion rechargeable batteries for DC UPS module SITOP UPS1600, 10 A and 20 A	**6EP4133-0JB00-0AY0**
Battery module SITOP UPS1100 24 V/12 Ah With maintenance-free, sealed rechargeable lead batteries for DC UPS module SITOP UPS1600, 20 A and 40 A	**6EP4135-0GB00-0AY0**
SITOP UPS 1100 battery module 2.5 Ah, high temperature With maintenance-free, sealed rechargeable pure-lead batteries for DC UPS module SITOP UPS1600, 10 A	**6EP4132-0GB00-0AY0**

© Siemens 2019

Overview

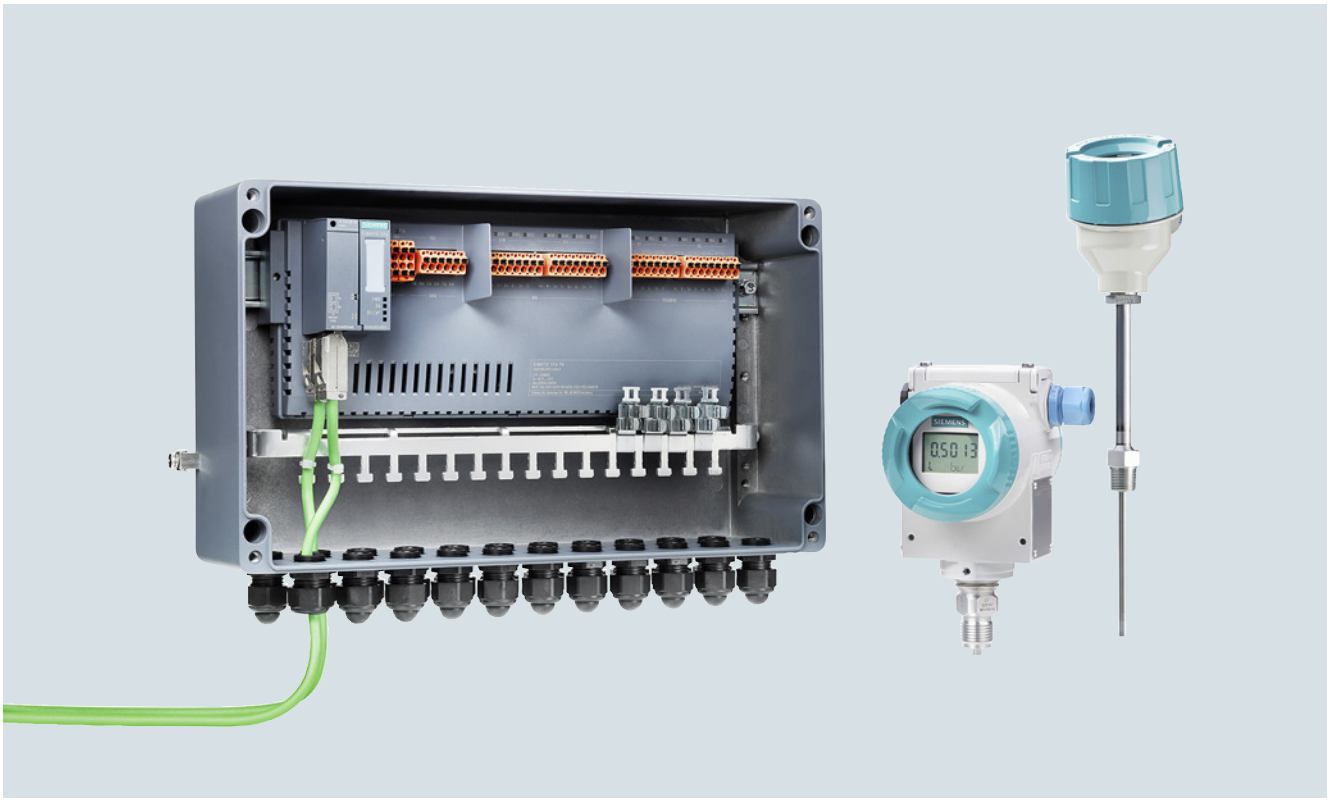

Smart Field Distributor – SIMATIC Compact Field Unit

Digitalization is an important catalyst for the process industry. When developing SIMATIC PCS 7 V9.0 – the new version of the proven SIMATIC PCS 7 process control system – the emphasis was placed on a forward-looking approach encompassing potential digitalization down to the field level.

The system solution was therefore expanded with special high-performance and compact hardware products that support PROFINET – the world's leading Industrial Ethernet standard – and create more freedom for plant layout and operation.

With the new SIMATIC Compact Field Unit (CFU), we are re-interpreting the conventional approach to field device connection. You benefit from more flexibility and easier handling, coupled with maximum availability. This allows you to efficiently transfer your familiar system concept to the digital world.

Today's challenges for field device connection:


- High overhead for device integration and replacement
- Complicated, error-prone wiring and routing over multiple levels, making the hardware FAT very complex
- Extremely long copper cables and numerous terminal points in the field
- Multiple individual control cabinets
- Large numbers of different components and protocols necessitate costly spare parts inventories and training sessions
- High planning and documentation costs

© Siemens 2019

Overview (continued)

SIMATIC CFU – The answer to these challenges

Mode of operation

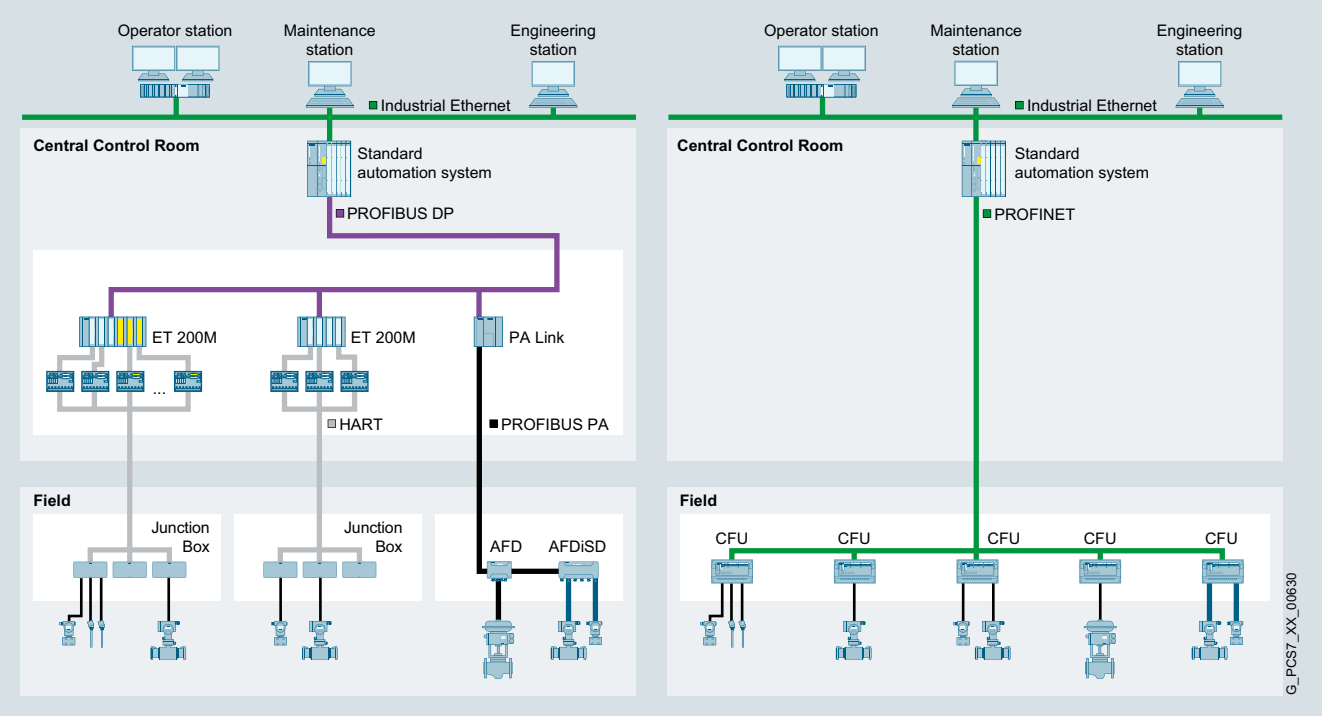

Field device connection with previous technology (left) and with SIMATIC CFU (right)

The new SIMATIC Compact Field Unit (CFU) is a real game-changer in field device connection and offers you entirely new prospects regarding simplicity and flexibility. The compact field distributor is installed at the process level and is connected via PROFINET directly to the process control system to form the foundation for digitalization in the field. Utilization of digital field-bus communication considerably simplifies device interfacing compared to conventional 4 … 20 mA engineering.

Greater flexibility thanks to consistent decentralization

Distributed installation of the SIMATIC CFU means that classic control cabinets are no longer required and you can make considerable savings in cabling and the number of terminal points, as well as reducing planning and documentation overheads. The high granularity (16 I/O per SIMATIC CFU) enables flexible assignment to the higher-level controllers.

© Siemens 2019

Function



The SIMATIC CFU was specifically designed to meet the requirements of the process industry in the Industry 4.0 environment (application example: SIMATIC CFU in a standard cast aluminum housing).

System integration via Industrial Ethernet standard

- Flexible connection options via PROFINET
- Ready for Process Automation (PA Ready):
  - Redundant PROFINET connection (S2) for maximum availability
  - Media redundancy (MRP)
  - Configuration in RUN (CiR)
- Bus Adapter (electrical, optical or combination)

Ready for distributed use

- Installation up to hazardous zone 2/22 (with conformal housing)
- Extended temperature range from -40 to +70 °C
- Conformal coating deployment at elevations up to 4 000 m
- Implementation of increased interference immunity according to NAMUR NE 21
- Optional: Aluminum enclosure for direct field deployment in zone 2/22


More information

Configuring with SIMATIC PCS 7 and third-party systems

See information in Siemens Industry Online Support
https://support.industry.siemens.com/cs/ww/en/view/109749357

© Siemens 2019

Overview

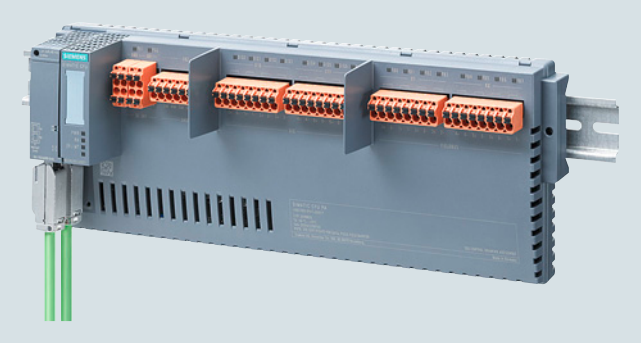

SIMATIC CFU here with BusAdapter, PROFINET bus cable and push-in terminals

SIMATIC CFU PA Edition

Plug-and-produce simplicity

Digitalization requires a digital infrastructure facilitating integrated digital communication right down to the sensors and actuators. You can use the established and proven PROFIBUS PA standard to achieve this. It is integrated into the PA Edition of the SIMATIC CFU, thus combining ruggedness and easy handling with all the advantages of the PROFINET standard based on Industrial Ethernet. Connected devices are automatically addressed. The device is integrated via standardized communication profiles.

This innovative new implementation of the PROFIBUS PA concept makes it possible to combine the simplicity of a point-to-point wiring system with the scalability of digital PROFIBUS PA fieldbus communication. As with digital field devices, it is not necessary to know prior to connection whether the discrete field device is a sensor or actuator – This can be easily configured afterwards via software.

Combination of digital fieldbus and discrete I/Os

- 8 × digital fieldbus (PROFIBUS PA)
- 8 × digital inputs/outputs, freely configurable
  (1 x counter functionality / frequency measurement)

Easy to use

- Automatic addressing of PROFIBUS PA field devices
- System-supported detection and integration of PROFIBUS PA field devices into the process control system
  - Utilization of standardized PA profiles
  - Commissioning, device replacement and maintenance wizards
- Implementation of diagnostic messages according to NAMUR NE 107
- Installation on a 35 mm DIN rail

Aluminum field housing



SIMATIC CFU aluminum field housing, open



SIMATIC CFU aluminum field housing, closed

The die-cast aluminum housing is suitable for use in zone 2/22 hazardous areas. The following are included in the housing scope of delivery:

- 22 × M20 plastic cable glands (incl. blanking plugs)
- 35 mm DIN rail
- Rail for strain relief and shield support

The housing has a display window for LED diagnostics.

If FM approval is required, a separate version of the housing can be purchased (SIMATIC CFU FM aluminum field housing).

© Siemens 2019

Technical specifications

Article number	**6ES7655-5PX11-1XX0** SIMATIC CFU PA BUNDLE	**6ES7655-5PX11-1AX0** SIMATIC CFU PA Bundle with Alu housing
General information		
Product type designation	Compact Field Unit	-
Number of channels	16	-
Product function		
• I&M data	Yes; I&M0 to I&M4	-
• The user can configure digital channels as input/output as required	Yes	-
• Digital channels can be parameterized	Yes	-
Engineering with		
• STEP 7 TIA Portal configurable/ integrated as of version	- / -	-
• STEP 7 configurable/integrated as of version	V5.6 HF2 and higher	-
• PCS 7 configurable/integrated as of version	V9.0 SP2 and higher	-
• PROFIBUS as of GSD version/GSD revision	- / -	-
• PROFINET as of GSD version/GSD revision	GSDML V2.3	-
Operating mode		
• Counter	Yes	-
Installation type/mounting		
Mounting	on 35 mm DIN rail, 2 spacing units wide	-
Mounting position	Horizontal, vertical	Horizontal, vertical
Recommended mounting position	-	horizontal set up
Supply voltage		
Type of supply voltage	24 V DC	-
Rated value (DC)	24 V	-
permissible range, lower limit (DC)	19.2 V	-
permissible range, upper limit (DC)	28.8 V	-
Reverse polarity protection	Yes	-
Short-circuit protection	Yes	-
Redundant power supply	Yes	-
Mains buffering		
• Mains/voltage failure stored energy time	5 ms; Bridging for field devices and communication	-
Input current		
Current consumption (rated value)	2.5 A	-
Current consumption, max.	2.55 A	-
Inrush current, max.	8 A	-
I^2t	0.3 $A^2 \cdot s$	-
Encoder supply		
Number of outputs	8	-
Output voltage encoder supply, min.	18.2 V	-
Short-circuit protection	Yes; Electronic	-
Output current		
• up to 60 °C, max.	2 A	-
• up to 70 °C, max.	1 A	-
Power loss		
Power loss, typ.	8.2 W; Depending on the type of BusAdapter used (typ. RJ45)	-
Address area		
Address space per station		
• Address space per station, max.	1 440 byte; Dependent on configuration	-

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7655-5PX11-1XX0** SIMATIC CFU PA BUNDLE	**6ES7655-5PX11-1AX0** SIMATIC CFU PA Bundle with Alu housing
Digital inputs		
Number of digital inputs	8	-
Source/sink input	Yes; P-reading	-
Input characteristic curve in accordance with IEC 61131, type 1	Yes	-
Input characteristic curve in accordance with IEC 61131, type 2	No	-
Input characteristic curve in accordance with IEC 61131, type 3	Yes	-
Pulse extension	No	-
Number of simultaneously controllable inputs		
horizontal installation		
- up to 60 °C, max.	8; Total current must be observed, see DQ	-
- up to 70 °C, max.	8; Total current must be observed, see DQ	-
vertical installation		
- up to 60 °C, max.	8; Total current must be observed, see DQ	-
Digital input functions, parameterizable		
• Counter	Yes	-
- Number, max.	1	-
- Counting frequency, max.	1 kHz	-
- Counting width	32 bit	-
- Counting direction up/down	Yes; Up	-
Input voltage		
• Rated value (DC)	24 V	-
• for signal "0"	-30 to +5V	-
• for signal "1"	+11 to +30V	-
Input current		
• for signal "1", typ.	2.5 mA; Typical	-
Input delay (for rated value of input voltage)		
for standard inputs		
- parameterizable	No	-
- at "0" to "1", max.	3.2 ms; for counter function 0,1 ms	-
- at "1" to "0", max.	3.2 ms; for counter function 0,1 ms	-
Cable length		
• shielded, max.	1 000 m	-
• unshielded, max.	600 m	-
Digital outputs		
Type of digital output	Transistor	-
Number of digital outputs	8	-
Current-sinking	No	-
Current-sourcing	Yes	-
Short-circuit protection	Yes	-
• Response threshold, typ.	0.7 to 1.3 A	-
Limitation of inductive shutdown voltage to	Typ. L+ (-50 V)	-
Controlling a digital input	Yes	-
Switching capacity of the outputs		
• on lamp load, max.	5 W	-
Load resistance range		
• lower limit	48 Ω	-
• upper limit	12 kΩ	-
Output voltage		
• Type of output voltage	DC	-
• for signal "1", min.	U_e minus 1 V	-

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7655-5PX11-1XX0** SIMATIC CFU PA BUNDLE	**6ES7655-5PX11-1AX0** SIMATIC CFU PA Bundle with Alu housing
Output current		
• for signal "1" rated value	0.5 A	-
• for signal "0" residual current, max.	0.1 mA	-
Output delay with resistive load		
• "0" to "1", max.	50 µs	-
• "1" to "0", max.	100 µs	-
Parallel switching of two outputs		
• for uprating	No	-
• for redundant control of a load	No	-
Switching frequency		
• with resistive load, max.	100 Hz	-
• with inductive load, max.	2 Hz	-
• on lamp load, max.	10 Hz	-
Total current of the outputs		
• Current per channel, max.	0.5 A	-
horizontal installation		
- up to 60 °C, max.	2 A	-
- up to 70 °C, max.	1 A	-
vertical installation		
- up to 60 °C, max.	2 A	-
Cable length		
• shielded, max.	1 000 m	-
• unshielded, max.	600 m	-
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	-
- permissible quiescent current (2-wire sensor), max.	1.5 mA	-
Interfaces		
Number of PROFINET interfaces	1	-
Number of PROFIBUS interfaces	0	-
PROFIBUS PA		
• Transmission rate, max.	31.25 kbit/s	-
• Number of connectable PA field devices	8; Electrically isolated from other interfaces, isolation tested at 2 500 V DC	-
• Current output to PA field devices, max.	320 mA	-
• permissible current per spur line	40 mA	-
• Automatic addressing	Yes	-
• System-supported integration of field devices via PA profiles	Yes	-
• Extended fieldbus diagnostics	Yes	-
1. Interface		
Interface type	PROFINET	-
Isolated	Yes	-
Interface types		
• Number of ports	2	-
• integrated switch	Yes	-
• BusAdapter (PROFINET)	Yes	-
Protocols		
• PROFINET IO Device	Yes	-
• PROFIBUS DP slave	No	-
Interface types		
RJ 45 (Ethernet)		
• 100 Mbps	Yes	-
• Autonegotiation	Yes	-
• Autocrossing	Yes	-

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7655-5PX11-1XX0** SIMATIC CFU PA BUNDLE	**6ES7655-5PX11-1AX0** SIMATIC CFU PA Bundle with Alu housing
Protocols		
Supports protocol for PROFINET IO	Yes	-
Redundancy mode		
• MRP	Yes	-
• PROFINET system redundancy (S2)	Yes; Type S2	-
Open IE communication		
• LLDP	Yes	-
Isochronous mode		
Isochronous operation (application synchronized up to terminal)	No	-
Interrupts/diagnostics/status information		
Status indicator	Yes	-
Alarms	Yes	-
Diagnostics function	Yes	-
Diagnostic messages		
• Monitoring of encoder power supply	Yes	-
• Wire-break	Yes	-
• Short-circuit	Yes	-
Diagnostics indication LED		
• RUN LED	Yes; Green LED	-
• ERROR LED	Yes; Red LED	-
• MAINT LED	Yes; Yellow LED	-
• Monitoring of the supply voltage (PWR-LED)	Yes	-
• Digital input status indicator	Yes	-
• Digital output status indicator	Yes	-
• Spur line status/fault	Yes	-
Potential separation		
between the channels and PROFINET	Yes	-
Potential separation digital inputs		
• between the channels	No	-
• between the channels and the power supply of the electronics	No	-
Potential separation digital outputs		
• between the channels	No	-
• between the channels and the power supply of the electronics	No	-
Isolation		
Isolation tested with	1 500 V AC between PROFINET and electronics	-
Degree and class of protection		
Degree of protection acc. to EN 60529	IP20	-
• IP66	-	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C	-
• max.	70 °C	-
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	70 °C	70 °C
Relative humidity		
• Operation, max.	95 %	-
Connection method		
Design of electrical connection	Connection plug	-

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7655-5PX11-1XX0** SIMATIC CFU PA BUNDLE	**6ES7655-5PX11-1AX0** SIMATIC CFU PA Bundle with Alu housing
Spur line		
• Number of spur lines	8	-
• Type of cable	Type A	-
• Cable diameter, min.	6 mm	-
• Cable diameter, max.	12 mm	-
• Conductor cross-section, min.	0.2 mm^2	-
• Conductor cross-section, max.	2.5 mm^2	-
• Cable length, max.	120 m	-
• total current output to field devices, max.	320 mA	-
• Number of connectable field devices	8	-
• Current limitation per field device, max.	40 mA	-
• No-load voltage, max.	15.3 V	-
• short-circuit proof	Yes	-
• Short-circuit current (test current); max.	8 mA	-
• intrinsically safe according to FISCO model	Yes	-
• Debounce logic	Yes	-
Dimensions		
Width	329 mm	414 mm
Height	123 mm	266 mm
Depth	74 mm	111 mm
Weights		
Weight, approx.	650 g	5.5 kg

Ordering data

	Article No.
SIMATIC CFU PA bundle with push-in terminals Comprising: • SIMATIC CFU PA, Article No. 6ES7655-5PX11-0XX0 • SIMATIC CFU push-in terminals, Article No. 6ES7655-5PX00-1XX0 pre-assembled and tested	**6ES7655-5PX11-1XX0**
SIMATIC CFU PA bundle with aluminum enclosure Comprising: • SIMATIC CFU PA, Article No. 6ES7655-5PX11-0XX0 • SIMATIC CFU push-in terminals, Article No. 6ES7655-5PX00-1XX0 • Aluminum enclosure with cable glands, shield busbar, shield connection clamps pre-assembled and tested	**6ES7655-5PX11-1AX0**

© Siemens 2019

Overview

SIMATIC CFU DIQ Edition

Individual, customer-specific solutions and flexible system/plant extensions are requirements that are becoming increasingly important in the process industry due to digitalization. SIMATIC CFU DIQ Edition with 16 freely configurable digital IO channels offers a solution for the growing demands of distributed I/O.

SIMATIC CFU also has expansion functions for optional configuration. Two additional operating modes can be activated for selected digital inputs. "Counter" operating mode and "Frequency measurement" operating mode with a cut-off frequency of 1 kHz.

Actuator disconnection can be set for the digital outputs. The actuator disconnection of the SIMATIC CFU uses a monitoring channel (DI channel) to quickly set all digital outputs to a low digital level.

- 16 × digital inputs/outputs, freely configurable
  (2 x counter functionality / frequency measurement)

Aluminum field housing



SIMATIC CFU aluminum field housing, open



SIMATIC CFU aluminum field housing, closed

The die-cast aluminum housing is suitable for use in zone 2/22 hazardous areas. The following are included in the housing scope of delivery:

- 22 × M20 plastic cable glands (incl. blanking plugs)
- 35 mm DIN rail
- Rail for strain relief and shield support

The housing has a display window for LED diagnostics.

If FM approval is required, a separate version of the housing can be purchased (SIMATIC CFU FM aluminum field housing).

© Siemens 2019

Technical specifications

Article number	**6ES7655-5PX31-1AX0** SIMATIC CFU DIQ with Alu housing	**6ES7655-5PX31-1XX0** SIMATIC CFU DIQ
General information		
Product type designation	-	Compact Field Unit
Number of channels	-	16
Product function		
• I&M data	-	Yes; I&M0 to I&M4
• The user can configure digital channels as input/output as required	-	Yes
• Digital channels can be parameterized	-	Yes
Engineering with		
• STEP 7 TIA Portal configurable/ integrated as of version	-	- / -
• STEP 7 configurable/integrated as of version	-	V5.6 HF2 and higher
• PCS 7 configurable/integrated as of version	-	V9.0 SP2 and higher
• PROFIBUS as of GSD version/GSD revision	-	- / -
• PROFINET as of GSD version/GSD revision	-	GSDML V2.3
Operating mode		
• Counter	-	Yes
Installation type/mounting		
Mounting	-	on 35 mm DIN rail, 2 spacing units wide
Mounting position	Horizontal, vertical	Horizontal, vertical
Recommended mounting position	horizontal set up	-
Supply voltage		
Type of supply voltage	-	24 V DC
Rated value (DC)	-	24 V
permissible range, lower limit (DC)	-	19.2 V
permissible range, upper limit (DC)	-	28.8 V
Reverse polarity protection	-	Yes
Short-circuit protection	-	Yes
Redundant power supply	-	Yes
Mains buffering		
• Mains/voltage failure stored energy time	-	5 ms; For communication
Input current		
Current consumption (rated value)	-	5.12 A
Current consumption, max.	-	5.13 A
Inrush current, max.	-	4.8 A
I^2t	-	0.073 $A^2 \cdot s$
Encoder supply		
Number of outputs	-	16
Output voltage encoder supply, min.	-	18.2 V
Short-circuit protection	-	Yes; Electronic
Output current		
• up to 60 °C, max.	-	5 A
• up to 70 °C, max.	-	4 A
Power loss		
Power loss, typ.	-	2.88 W; Depending on the type of BusAdapter used (typ. RJ45)
Address area		
Address space per station		
• Address space per station, max.	-	1 440 byte; Dependent on configuration

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7655-5PX31-1AX0** SIMATIC CFU DIQ with Alu housing	**6ES7655-5PX31-1XX0** SIMATIC CFU DIQ
Digital inputs		
Number of digital inputs	-	16
Source/sink input	-	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	-	Yes
Input characteristic curve in accordance with IEC 61131, type 2	-	No
Input characteristic curve in accordance with IEC 61131, type 3	-	Yes
Pulse extension	-	No
Number of simultaneously controllable inputs		
horizontal installation		
- up to 60 °C, max.	-	16; Total current must be observed, see DQ
- up to 70 °C, max.	-	16; Total current must be observed, see DQ
vertical installation		
- up to 60 °C, max.	-	16; Total current must be observed, see DQ
Digital input functions, parameterizable		
• Counter	-	Yes
- Number, max.	-	2
- Counting frequency, max.	-	1 kHz
- Counting width	-	32 bit
- Counting direction up/down	-	Yes; Up
Input voltage		
• Rated value (DC)	-	24 V
• for signal "0"	-	-30 to +5V
• for signal "1"	-	+11 to +30V
Input current		
• for signal "1", typ.	-	2.5 mA; Typical
Input delay (for rated value of input voltage)		
for standard inputs		
- parameterizable	-	No
- at "0" to "1", max.	-	3.2 ms; for counter function 0,1 ms
- at "1" to "0", max.	-	3.2 ms; for counter function 0,1 ms
Cable length		
• shielded, max.	-	1 000 m
• unshielded, max.	-	600 m
Digital outputs		
Type of digital output	-	Transistor
Number of digital outputs	-	16
Current-sinking	-	No
Current-sourcing	-	Yes
Short-circuit protection	-	Yes
• Response threshold, typ.	-	0.7 to 1.3 A
Limitation of inductive shutdown voltage to	-	Typ. L+ (-50 V)
Controlling a digital input	-	Yes
Switching capacity of the outputs		
• on lamp load, max.	-	5 W
Load resistance range		
• lower limit	-	48 Ω
• upper limit	-	12 kΩ
Output voltage		
• Type of output voltage	-	DC
• for signal "1", min.	-	*Ue* minus 1 V
Output current		
• for signal "1" rated value	-	0.5 A
• for signal "0" residual current, max.	-	0.1 mA

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7655-5PX31-1AX0** SIMATIC CFU DIQ with Alu housing	**6ES7655-5PX31-1XX0** SIMATIC CFU DIQ
Output delay with resistive load		
• "0" to "1", max.	-	50 µs
• "1" to "0", max.	-	100 µs
Parallel switching of two outputs		
• for uprating	-	No
• for redundant control of a load	-	No
Switching frequency		
• with resistive load, max.	-	100 Hz
• with inductive load, max.	-	2 Hz
• on lamp load, max.	-	10 Hz
Total current of the outputs		
• Current per channel, max.	-	0.5 A
horizontal installation		
- up to 60 °C, max.	-	5 A
- up to 70 °C, max.	-	4 A
vertical installation		
- up to 60 °C, max.	-	5 A
Cable length		
• shielded, max.	-	1 000 m
• unshielded, max.	-	600 m
Encoder		
Connectable encoders		
• 2-wire sensor	-	Yes
- permissible quiescent current (2-wire sensor), max.	-	1.5 mA
Interfaces		
Number of PROFINET interfaces	-	1
Number of PROFIBUS interfaces	-	0
1. Interface		
Interface type	-	PROFINET
Isolated	-	Yes
Interface types		
• Number of ports	-	2
• integrated switch	-	Yes
• BusAdapter (PROFINET)	-	Yes
Protocols		
• PROFINET IO Device	-	Yes
• PROFIBUS DP slave	-	No
Interface types		
RJ 45 (Ethernet)		
• 100 Mbps	-	Yes
• Autonegotiation	-	Yes
• Autocrossing	-	Yes
Protocols		
Supports protocol for PROFINET IO	-	Yes
Redundancy mode		
• MRP	-	Yes
• PROFINET system redundancy (S2)	-	Yes; Type S2
Open IE communication		
• LLDP	-	Yes
Isochronous mode		
Isochronous operation (application synchronized up to terminal)	-	No
Interrupts/diagnostics/status information		
Status indicator	-	Yes
Alarms	-	Yes
Diagnostics function	-	Yes

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7655-5PX31-1AX0** SIMATIC CFU DIQ with Alu housing	**6ES7655-5PX31-1XX0** SIMATIC CFU DIQ
Diagnostic messages		
• Monitoring of encoder power supply	-	Yes
• Wire-break	-	Yes
• Short-circuit	-	Yes
Diagnostics indication LED		
• RUN LED	-	Yes; Green LED
• ERROR LED	-	Yes; Red LED
• MAINT LED	-	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	-	Yes
• Digital input status indicator	-	Yes
• Digital output status indicator	-	Yes
Potential separation		
between the channels and PROFINET	-	Yes
Potential separation digital inputs		
• between the channels	-	No
• between the channels and the power supply of the electronics	-	No
Potential separation digital outputs		
• between the channels	-	No
• between the channels and the power supply of the electronics	-	No
Isolation		
Isolation tested with	-	1 500 V AC between PROFINET and electronics
Degree and class of protection		
Degree of protection acc. to EN 60529	-	IP20
• IP66	Yes	-
Ambient conditions		
Ambient temperature during operation		
• min.	-	-40 °C
• max.	-	70 °C
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	70 °C	70 °C
Relative humidity		
• Operation, max.	-	95 %
Connection method		
Design of electrical connection	-	Connection plug
Dimensions		
Width	414 mm	329 mm
Height	266 mm	123 mm
Depth	111 mm	74 mm
Weights		
Weight, approx.	5.5 kg	610 g

Ordering data

	Article No.
SIMATIC CFU DIQ with aluminum housing Comprising: • SIMATIC CFU DIQ, Article No. 6ES7655-5PX31-0XX0 • SIMATIC CFU push-in terminals, Article No. 6ES7655-5PX00-1XX0 • Aluminum housing with cable glands, shield busbar, shield connection clamp pre-assembled and tested	**6ES7655-5PX31-1AX0**

	Article No.
SIMATIC CFU DIQ Comprising: • SIMATIC CFU DIQ, Article No. 6ES7655-5PX31-0XX0 • SIMATIC CFU push-in terminals, Article No. 6ES7655-5PX31-1XX0 pre-assembled and tested	**6ES7655-5PX31-1XX0**

© Siemens 2019

Overview



BusAdapter BA 2×RJ45, 2×FC and 2×LC

BusAdapter

A BusAdapter as a separate component allows a free choice of SIMATIC CFU connection to PROFINET:

- BA 2×RJ45:
  2 electrical connections for bus cables with standard RJ45 connectors
- BA 2×FC:
  2 electrical connections for direct connection of FastConnect bus cables
- BA 2×LC:
  2 optical ports for fiber-optic cables
- BA 1×LC, 1×RJ45:
  Combination bus adapter comprising 1 optical connection and one electrical connection standard RJ45
- BA 1×LC, 1×FC:
  Combination bus adapter 1 optical connection and 1 electrical connection for direct connection of FastConnect bus cable
- BA 2×RJ45 VD:
  2 electrical connections for Ethernet communication via 2, 4 or 8-wire copper cables and distances up to 500 m

Technical specifications

Article number	**6DL1193-6AR00-0AA0** ET 200SP HA, BUSADAPTER BA 2XRJ45	**6DL1193-6AF00-0AA0** ET 200SP HA, BUSADAPTER BA 2XFC	**6DL1193-6AG00-0AA0** ET 200SP HA, BUSADAPTER BA 2XLC
General information			
Product type designation	BA 2x RJ45	BA 2xFC	BA 2xLC
Interfaces			
Number of PROFINET interfaces	1; 2 ports (switch) RJ45	1; 2 ports (switch) FC	1; 2 ports (switch) LC Multimode Glass Fibre
Supports protocol for PROFINET IO			
• Number of RJ45 ports	2	-	-
• Number of FC (FastConnect) connections	-	2	-
• Number of LC ports	-	-	2
Cable length			
- Cu conductors	100 m	100 m	-
- Multimode graded-index fiber 50/125 µm	-	-	3 km
- Multimode graded-index fiber 62.5/125 µm	-	-	3 km
Ambient conditions			
Ambient temperature during operation			
• min.	-40 °C	-40 °C	-40 °C
• max.	70 °C	70 °C	65 °C; Redundant design (2x 6DL1155-6AU00-0PM0): max. 60 °C horizontal, max. 50 °C vertical. When using different I/O devices, the derating specified there must be observed.
Dimensions			
Width	20 mm	20 mm	20 mm
Height	69.5 mm	69.5 mm	75 mm; Without protective caps (approx. 8 mm)
Depth	59 mm	59 mm	59 mm
Weights			
Weight, approx.	46 g	53 g	60 g

© Siemens 2019

Technical specifications (continued)

Article number	**6DL1193-6AG20-0AA0** ET 200SP HA, BUSADAPTER BA LC/RJ45	**6DL1193-6AG40-0AA0** ET 200SP HA, BUSADAPTER BA LC/FC
General information		
Product type designation	BA LC/RJ45	BA LC/FC
Interfaces		
Number of PROFINET interfaces	1; 2 ports (switch) LC / RJ45	1; 2 ports (switch) LC / FC
Supports protocol for PROFINET IO		
• Number of RJ45 ports	1	
• Number of FC (FastConnect) connections	-	1
• Number of LC ports	1; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX	1; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX
Cable length		
- Cu conductors	100 m	100 m
- Multimode graded-index fiber 50/125 µm	3 km	3 km
- Multimode graded-index fiber 62.5/125 µm	3 km	3 km
Standards, approvals, certificates		
RoHS conformity	Yes	Yes
China RoHS compliance	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C	-40 °C
• max.	70 °C; = Tmax for horizontal installation; for vertical installation Tmax = 60 °C	65 °C; = Tmax for horizontal installation; for vertical installation Tmax = 60 °C
Dimensions		
Width	20 mm	20 mm
Height	75 mm; Without protective caps (approx. 8 mm)	75 mm; Without protective caps (approx. 8 mm)
Depth	59 mm	59 mm
Weights		
Weight, approx.	32 g	50 g

Article number	**6GK5991-2VA00-8AA2** BA 2xRJ45VD HA
Interfaces	
Number of electrical connections	
• for network components or terminal equipment maximum	2
Number of 10/100 Mbit/s RJ45 ports	2
Type of electrical connection	
• for network components or terminal equipment	RJ45
Operating mode	
• Standard Ethernet	Yes
• VD	Yes

© Siemens 2019

Ordering data	Article No.
BusAdapter	
BusAdapter BA 2×RJ45 2 × RJ45 connections for PROFINET (standard Ethernet socket)	**6DL1193-6AR00-0AA0**
BusAdapter BA 2×FC 2 × FastConnect (FC) connections for PROFINET	**6DL1193-6AF00-0AA0**
BusAdapter BA 2×LC 2 × glass fiber-optic connections	**6DL1193-6AG00-0AA0**
BusAdapter BA LC/RJ45 2 × glass fiber-optic connections	**6DL1193-6AG20-0AA0**
BusAdapter BA LC/FC 2 × glass fiber-optic connections	**6DL1193-6AG40-0AA0**
BusAdapter BA 2×RJ45 (VD) 2 × electrical connections for Ethernet communication via 2, 4 or 8-wire copper cables and distances up to 500 m	**6GK5991-2VA00-8AA2**

Accessories	Article No.
Shield terminals for aluminum field housing	
SIMATIC CFU shield terminals 4 shield terminals as an optional accessory for SIMATIC CFU aluminum field housing, for simple and secure shielding of up to 8 PROFIBUS PA field devices	Not yet available **6ES7655-5PX00-0XX1**
Connection technology	
SIMATIC CFU screw-type terminals Complete set of screw-type terminals for SIMATIC CFU: two-tier 2×2 (24 V), single-tier 1×6 (GND) and single-tier 4×8 (IO)	**6ES7655-5PX00-2XX0**
SIMATIC CFU push-in terminals Complete set of push-in terminals for SIMATIC CFU: two-tier 2×2 (24 V), single-tier 1×6 (GND) and single-tier 4×8 (IO)	**6ES7655-5PX00-1XX0**

© Siemens 2019

Overview



ET 200SP HA, station with 2 redundant interface modules

Compact design, flexible connection possibilities and high system availability with redundant PROFINET connections: the SIMATIC ET 200SP HA distributed I/O system is perfectly suited to the requirements of the process industry. The new design allows up to 56 I/O modules per station. An impressively high concentration of up to 32 channels on a module that is only 22.5 mm wide allows for maximum economy in the control cabinet.

Redundant PROFINET connections allow the connection of high-availability controllers via two independent networks, with a choice of copper or fiber-optic cables. The system can be scaled and extended in small steps using a variety of available modules, for example with digital and analog I/Os as well as NAMUR, HART, and other protocols. All 24 V standard signals are connected via an identical terminal block type, which allows a high degree of standardization for the control cabinets.

The SIMATIC ET 200SP HA is designed for use in the control cabinet as well as for hazardous areas up to zone 2. The extended temperature range from -40 to +70 °C and the conformal coating of all components allow direct installation in the field.


You also benefits in engineering from seamless integration in SIMATIC PCS 7. The SIMATIC ET 200SP HA in combination with the Advanced Process Library also offers flexible and simple online parameter assignment and selection of up to four HART variables per channel.

Benefits

Highlights at a glance

- Availability
  - Redundancy at the PROFINET interface (S2 or R1)
  - Terminal block with integrated I/O redundancy
  - Hot swapping during runtime
  - Station expansion possible during runtime
- Easy to use
  - Compact modules with permanent wiring
  - One terminal block for all 24 V standard signals
  - Tool-free connection system with push-in terminals
- Compact design
  - Compact with up to 56 I/O modules per station
  - High concentration of up to 32 channels on a module that is only 22.5 mm wide
  - System-integrated power bus
- Seamless integration in SIMATIC PCS 7
- PROFINET IO communication standard

Design

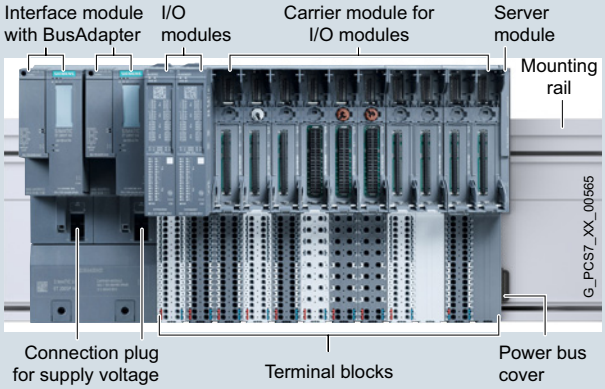

ET 200SP HA for SIMATIC PCS 7, design

Easy handling and high availability

The SIMATIC ET 200SP HA impresses with its particularly simple installation and assembly. The new terminal layout and push-in technology make tool-free wiring possible. Control cabinet configuration is particularly flexible, as the separation of mechanical and electronic components allows the station to be pre-wired without I/O modules. Empty modules can be inserted in the integrated terminal blocks and easily replaced at any time. Station extension during operation offers additional advantages for plant flexibility and availability.

In addition to the option of operating the SIMATIC ET 200SP HA station redundantly over the PROFINET interface, you can also operate the I/O modules redundantly. This option is implemented using a terminal block for integrated I/O redundancy, which is very cost-effective and saves a lot of space. The new design with standardized terminal blocks makes redundant wiring as simple as single operation.

© Siemens 2019

Design (continued)

Main components of the SIMATIC ET 200SP HA distributed I/O system

The SIMATIC ET 200SP HA distributed I/O system consists of the following components:

Mounting rail

The mounting rail is required for fitting an ET 200SP HA station in the control cabinet. The carrier modules for interface modules, the carrier modules for the I/O modules, and the server module are attached to the mounting rail.

Carrier module for IM interface module

Two versions of the IM carrier modules are available:

- IM single carrier module for 1 interface module, for single connection to PROFINET
- IM redundant carrier module for 2 interface modules, for redundant connection to PROFINET

IM 155-6 PN interface module and BusAdapter

The interface module ensures communication between the ET 200SP HA station and the SIMATIC PCS 7 automation system (controller) over PROFINET. A BusAdapter as a separate component allows a free choice of connection technology:

- BA 2×RJ45: 2 electrical connections for bus cable with standard RJ45 connector
- BA 2×FC: 2 electrical connections for direct connection of FastConnect bus cable
- BA 2×LC: 2 optical ports for fiber-optic cables

Carrier module and terminal blocks for I/O modules

The slots for the I/O modules are created by connecting carrier modules and terminal blocks. The carrier modules provide the electrical and mechanical connections for the individual modules; the terminal blocks contain the process terminals for connecting sensors, actuators and other devices.

Two versions of the carrier modules are available, one with 2 slots and one with 8 slots for I/O modules.

The selection of available terminal blocks determines the following properties:

- Type of load voltage supply
- Formation of potential groups
- Type of required I/O module
- Redundant configuration of I/O modules

I/O modules

Modules with 8 or 16 digital channels (DI, DQ) and with 8 or 16 analog channels (AI, AQ) are available as I/O modules. A relay module (RQ) and a universal analog/digital module (AI-DI/DQ) can also be supplied.

All I/O modules with a signal voltage of up to 24 V DC can also be used redundantly.

Slot covers can be attached if I/O modules are not to be inserted in slots or slots are to be reserved for later expansion. You can insert a label strip for the planned I/O module on the front of the slot cover.

Server module and power bus cover

The server module and power bus cover complete the configuration of the ET 200SP HA station. The power bus cover protects the power bus contacts.

Function

Main functions

Compact I/O modules

- Up to 32 channels on a module that is 22.5 mm wide
- Up to 56 modules per station

Perfectly suited for applications in the field

- For installation in hazardous areas up to zone 2
- Extended temperature range: -40 to +70 °C
- Enhanced interference immunity in accordance with NAMUR recommendation NE21
- Conformal coating on all components
- Can be used at altitudes of up to 4 000 meters

Wide range of supported module types

- 16×AI, 8×AO HART, 16×DI, 16×DO etc.


Standard I/O terminal block

- For all 24 V signals AI, AO, DI, DO

© Siemens 2019

Function (continued)

Redundant configurations

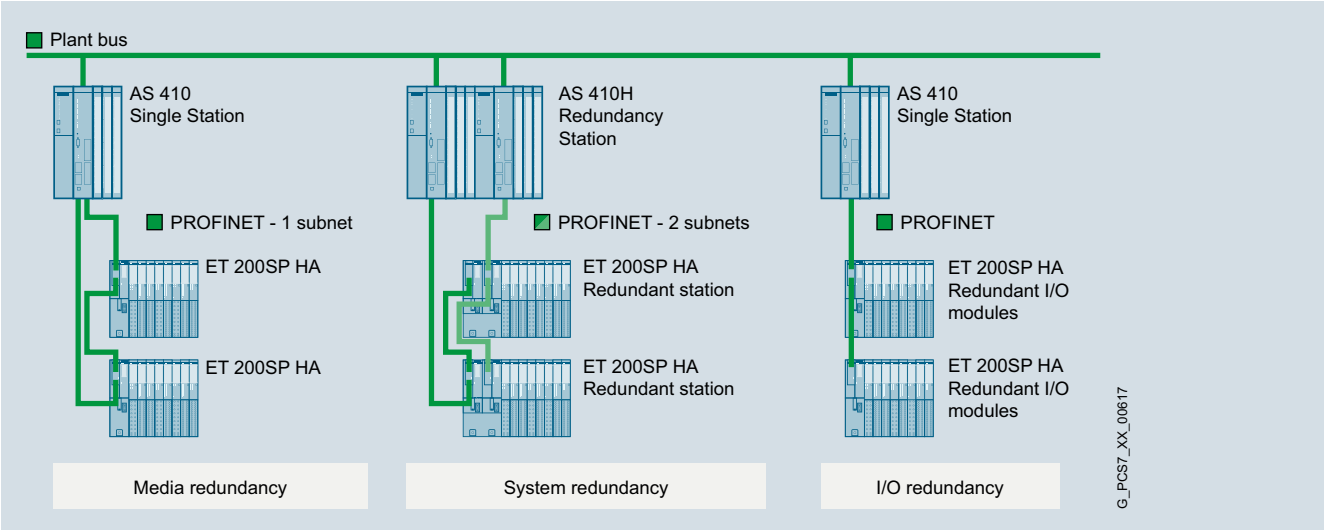

SIMATIC ET 200SP HA, basic redundant configurations

The availability of the ET 200SP HA distributed I/O can if necessary be increased with redundant configurations. A number of different configurations are possible (the individual redundant configurations can also be combined):

Media redundancy

ET 200SP HA stations with 1 interface module each are connected to an automation system in a ring topology. At least one device in the ring takes on the role of the redundancy manager; the other devices in the rin are redundancy clients. The automation system is configured as MRP manager.

If the ring topology is interrupted, the ET 200SP HA stations in the system remain available.

One of the following functions is possible in runtime:

- Connecting and removing ET 200SP HA stations
- Replacing PROFINET cables

System redundancy

ET 200SP HA stations are connected to a redundant automation system. All components used redundantly are in continuous operation. If a redundancy partner fails, the function is maintained by transferring the master role or selecting a different communication path.

The ET 200SP HA stations remain available in the PROFINET IO system if a CPU or a PROFINET cable fails.

One of the following functions is possible in runtime:

- Connecting and removing ET 200SP HA stations
- Replacing PROFINET cables
- Replacing a CPU

I/O redundancy

To configure I/O redundancy, 2 I/O modules of the same type are inserted beside each other in a terminal block for redundant configuration (width: 45 mm). This terminal block connects the process signals of the two modules to a common process terminal. The advantages are:

- There is less wiring work than for connecting separate I/O modules, as interconnection of the process signals is integrated in the system.
- Redundant signal processing of the sensors and actuators at a module level increases the availability of the system.

The following applies if an I/O module or a channel of one of the two I/O modules fails:

- Error-free inputs remain available in the system.
- Error-free outputs continue to be controlled in the system.

One of the following functions is possible for an I/O module in a module pair in error-free operation:

- Firmware update
- Replacing a module

© Siemens 2019

Overview



IM 155-6 PN HA

IM 155-6 PN HA interface module

The IM 155 6 PN HA together with the subrack and the BusAdapter forms the interface of the ET 200SP HA. The interface is used for communication between the CPU and the connected ET 200SP HA I/O modules over PROFINET.

Function

Properties of the ET 200SP HA interface

The ET 200SP HA interface has the following technical features:

- 1L+ 24 V DC supply voltage (SELV/PELV). The supply voltage is provided through the carrier module. The connector is included in the scope of delivery of the interface module.
- PROFINET connection over BusAdapter

The interface supports the following functions:

- Firmware update
- I&M identification data
- Adding/removing modules in RUN
- Value status QI
- I/O redundancy
- Time stamping
- Multi hot swap (removing/plugging in multiple I/O modules during operation)
- Save service data
- Recording the value status of the I/O modules
- Reference temperature distribution

The interface can be configured with HW Config.

PROFINET functions

The ET 200SP HA interface supports the following PROFINET functions:

- Integrated BusAdapter with 2 ports
- Ethernet services supported: ping, arp, network diagnostics (SNMP)/MIB-2, LLDP-MIB and MRP-MIB
- Port diagnostics
- Disabling ports
- Minimum update time 250 µs
- Device replacement without programming device
- Reset to factory settings using PROFINET IO
- System redundancy S2
- System redundancy R1
- Media redundancy (MRP)
- Support for submodules on suitable I/O modules

© Siemens 2019

Technical specifications

Article number	**6DL1155-6AU00-0PM0** ET 200SP HA, IM155-6 PN
General information	
Product type designation	IM 155-6 PN
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• PCS 7 configurable/integrated as of version	V9.0
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
Reverse polarity protection	Yes
Short-circuit protection	Yes
Mains buffering	
• Mains/voltage failure stored energy time	10 ms
Hardware configuration	
Integrated power supply	Yes; 24 V DC
Rack	
• Modules per rack, max.	56; 56 slots for I/O modules + server module (width without IM ≤ 1.3 m)
Time stamping	
Accuracy	1 ms; In compliance with the supplementary conditions described in the Equipment Manual
Interfaces	
Number of PROFINET interfaces	1; 2 ports (switch)
1. Interface	
Interface types	
• Number of ports	2; via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; Compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x LC
Functionality	
• PROFINET IO Device	Yes
• Open IE communication	Yes
• Media redundancy	Yes; as MRP client
Interface types	
RJ 45 (Ethernet)	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Autonegotiation	Yes
• Autocrossing	Yes
PROFINET IO Device	
Services	
- Open IE communication	Yes
- MRP	Yes
- PROFINET system redundancy	Yes; S2, R1
Open IE communication	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes

Article number	**6DL1155-6AU00-0PM0** ET 200SP HA, IM155-6 PN
Interrupts/diagnostics/status information	
Status indicator	Yes
Alarms	Yes
Diagnostic functions	Yes
Diagnostics indication LED	
• RUN LED	Yes; Green LED
• ERROR LED	Yes; Red LED
• MAINT LED	Yes; yellow LED
• ACTIVE-LED (active IM in redundant configuration)	Yes; Green LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter
Isolation	
Isolation tested with	1 500 V DC/1 min, type test
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
Dimensions	
Width	50 mm
Height	138 mm
Depth	89 mm
Weights	
Weight, approx.	192 g; without BusAdapter

Ordering data

	Article No.
Interface module	
PROFINET IM 155-6 PN interface module Max. 56 I/O modules, multi hot swap, no server module	**6DL1155-6AU00-0PM0**
Accessories	
IM cover Slot cover for interface module slots, to protect vacant slots Width 50 mm, 5 units	**6DL1133-6CV50-0AM0**

© Siemens 2019

Overview



- DI 16×24 V DC HA digital input module
  Sixteen 24 V DC digital inputs
- DI 32×24 V DC HA digital input module
  Thirty-two 24 V DC digital inputs
- DI 16×NAMUR HA digital input module
  Sixteen NAMUR digital inputs
- DI 8×24 to 125 V DC HA digital input module
  Eight 24 to 125 V DC digital inputs
- DI 8×230 V AC HA digital input module
  Eight 230 V AC digital inputs
- DQ 16×24 V DC/0.5A HA digital output module
  Sixteen 24 V DC digital outputs, 0.5 A
- DQ 32×24 V DC/0.5A HA digital output module
  Thirty-two 24 V DC digital outputs, 0.5 A
- RQ 4×120 V DC-230 V AC/5 A CO HA digital output module
  Four 24 to 120 V DC, 24 to 230 V AC relay outputs, 5 A

Design

The ET 200SP HA digital I/O modules have the following technical features:

Digital input modules				
DI 16×24 V DC HA	**DI 32×24 V DC HA**	**DI 16×NAMUR HA**	**DI 8×24 to 125 V DC HA**	**DI 8×230 V AC HA**
				
• 16 digital inputs with the following features configurable per channel: - Pulse stretching - Diagnostics - Input delay - Hardware interrupts for positive and negative edges • Sink input (PNP, P-reading) • Diagnostics configurable per module: no supply voltage L+ • Suitable for connecting switches and 2-wire sensors in accordance with IEC 61131-2, type 1 and 3	• Thirty-two digital inputs with the following features configurable per channel: - Pulse stretching - Diagnostics - Input delay - Hardware interrupts for positive and negative edges • Sink input (PNP, P-reading) • Diagnostics configurable per module: no supply voltage L+ • Suitable for connecting switches and 2-wire sensors in accordance with IEC 61131-2, type 1 and 3	• 16 digital inputs with the following features configurable per channel: - Pulse stretching - Hardware interrupts for positive and negative edges - Flutter monitoring • Diagnostics for changeover contact sensor types • Diagnostics configurable per channel, even in changeover contact operation • Diagnostics configurable per module: no supply voltage L+	• Eight digital inputs isolated from the backplane bus and supply voltage L+/ M grouping 8 • Rated input voltage range 24 V to 125 V DC • Diagnostics configurable per module: no supply voltage L+ • Suitable for connecting switches and 2-/3-/4-wire sensors in accordance with IEC 61131, type 1 and 3 • Digital inputs with the following features configurable per channel: - Diagnostics - Input delay - Hardware interrupts for positive and negative edges • Rated input voltage range 24 V to 125 V DC • Diagnostics configurable per module: no supply voltage L+ • Suitable for connecting switches and 2-/3-/4-wire sensors in accordance with IEC 61131, type 1 and 3	• 8 isolated digital inputs in four groups (A to D) of two channels • Suitable for connecting switches and 2-wire sensors in accordance with IEC 61131, type 3

© Siemens 2019

Design (continued)

Digital output modules

DQ 16×24 V DC/0.5 A HA	DQ 32×24 V DC/0.5 A HA	RQ 4×120 V DC-230 V AC/5 A CO HA
		
• 16 digital outputs with the following features configurable per channel: - Configurable diagnostics - Programmable substitute values • Source output (PNP, P-switching) • Diagnostics configurable per module: no supply voltage L+ • Output current per channel 0.5 A • Suitable for solenoid valves, DC contactors and indicator lights	• Thirty-two digital outputs with the following features configurable per channel: - Configurable diagnostics - Programmable substitute values • Source output (PNP, P-switching) • Diagnostics configurable per module: no supply voltage L+ • Output current per channel 0.5 A • Suitable for solenoid valves, DC contactors and indicator lights	• 4 isolated relay outputs • Changeover contact (CO: changeover) • Suitable for solenoid valves, DC contactors and indicator lights • Substitute value configurable per channel • Diagnostics configurable per module: no supply voltage L+ • Output current per output 5 A

Technical specifications

Article number	6DL1131-6BH00-0PH1	6DL1131-6BL00-0PH1	6DL1131-6TH00-0PH1	6DL1131-6DF00-0PK0	6DL1131-6GF00-0PK0
	ET 200SP HA, DI 16X24VDC	ET 200SP HA, DI 32X24VDC	ET 200SP HA, DI 16XNAMUR	ET 200SP HA, DI 8X24 ... 125VDC	ET 200SP HA, DI 8X230VAC
General information					
Product type designation	DI 16x24VDC HA	DI 32x24VDC HA	DI 16xNAMUR HA	DI 8x24 ... 125 V DC HA	DI 8x230VAC HA
Engineering with					
• PCS 7 configurable/integrated as of version	V9.0	V9.0	V9.0	V9.0	V9.0
Operating mode					
• DI	Yes	Yes	Yes	Yes	Yes
• Counter	No	No	No	No	
• Oversampling	No	No		No	
• MSI	No	No		No	
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	
Rated value (AC)					230 V
Reverse polarity protection	Yes	Yes	Yes	Yes	
Encoder supply					
Number of outputs	16	32; When terminal block with encoder supply is used (type P0)	16		
Short-circuit protection	Yes; Electronic (response threshold 0.7 A to 1.3 A; for IO redundancy up to 2.6 A) Ensure sufficient low-resistance cable routing to the sensor/actuator in order to attain the response threshold. Depending on the cable cross-section used, there may be constraints regarding the usable length of cable.	Yes; When using TB type P0	Yes		

© Siemens 2019

Technical specifications (continued)

Article number	6DL1131-6BH00-0PH1	6DL1131-6BL00-0PH1	6DL1131-6TH00-0PH1	6DL1131-6DF00-0PK0	6DL1131-6GF00-0PK0
	ET 200SP HA, DI 16X24VDC	ET 200SP HA, DI 32X24VDC	ET 200SP HA, DI 16XNAMUR	ET 200SP HA, DI 8X24 ... 125VDC	ET 200SP HA, DI 8X230VAC
Output current					
• up to 60 °C, max.	2 A; 1 A when mounted vertically; see derating information in Equipment Manual				
• up to 70 °C, max.	1 A; See derating information in Equipment Manual				
24 V encoder supply					
• 24 V	Yes				
• Short-circuit protection	Yes; Electronic (response threshold 0.7 A to 1.3 A; for IO redundancy up to 2.6 A) Ensure sufficient low-resistance cable routing to the sensor/actuator in order to attain the response threshold. Depending on the cable cross-section used, there may be constraints regarding the usable length of cable.				
• Output current per channel, max.	0.5 A				
• Output current per module, max.	2 A				
Digital inputs					
Number of digital inputs	16	32	16; NAMUR	8	8; Isolated
Digital inputs, parameterizable	Yes	Yes	Yes		
Source/sink input	Yes; P-reading	Yes; P-reading		Yes; P-reading	
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes		Yes	
Input characteristic curve in accordance with IEC 61131, type 2	No	No			
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes		Yes	Yes
Pulse extension	Yes	No	Yes; 0.5 s, 1 s, 2 s		
• Length	Off, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s				
Time stamping	Yes; Resolution 10 ms		Yes	Yes; Resolution 10 ms	
Time stamp (with precision of 1 ms)	Yes; Resolution 1ms		No	Yes; Resolution 1ms	
Edge evaluation	Yes; rising edge, falling edge, edge change	Yes; rising edge, falling edge, edge change	Yes; rising edge, falling edge, edge change		
Signal change flutter			Yes; 2 to 32 signal changes		
Flutter observation window			Yes; 0.5 s, 1 s to 100 s in 1-s steps		
Input voltage					
• Rated value (DC)	24 V	24 V	8.2 V		
• Rated value (AC)					230 V
• for signal "0"	-30 to +5V	-30 to +5V		-125 ... +5 V	0V AC to 40V AC
• for signal "1"	+11 to +30V	+11 to +30V		+11 ... +125 V	74 V AC to 264 V AC
Input current					
• for signal "1", typ.	2.5 mA	2.5 mA		3.1 mA	10.8 mA
for 10 k switched contact					
- for signal "0"			0.35 to 1.2 mA		
- for signal "1"			2.1 ... 6.4 mA		
for unswitched contact					
- for signal "0", max. (permissible quiescent current)			0.5 mA		
- for signal "1"			typ. 8 mA		

© Siemens 2019

Technical specifications (continued)

Article number	6DL1131-6BH00-0PH1	6DL1131-6BL00-0PH1	6DL1131-6TH00-0PH1	6DL1131-6DF00-0PK0	6DL1131-6GF00-0PK0
	ET 200SP HA, DI 16X24VDC	ET 200SP HA, DI 32X24VDC	ET 200SP HA, DI 16XNAMUR	ET 200SP HA, DI 8X24 ... 125VDC	ET 200SP HA, DI 8X230VAC
for NAMUR encoders					
- for signal "0"			0.35 to 1.2 mA		
- for signal "1"			2.1 ... 6.4 mA		
Input delay (for rated value of input voltage)					
• tolerated changeover time for changeover contacts			300 ms		
for standard inputs					
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms	No		Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	
Encoder					
Connectable encoders					
• NAMUR encoder/changeover contact according to EN 60947			Yes		
• Single contact / changeover contact unconnected			Yes		
• Single contact / changeover contact connected with 10 kΩ			Yes		
• 2-wire sensor	Yes	Yes	Yes; Acc. to NAMUR	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	1.2 mA	1.5 mA	
Interrupts/diagnostics/ status information					
Diagnostics function	Yes	Yes			
Alarms					
• Diagnostic alarm	Yes; channel by channel	Yes; channel by channel	Yes; channel by channel	Yes	Yes
• Hardware interrupt	Yes; channel by channel	Yes; channel by channel	Yes; Parameterizable, channels 0 to 15, rising/falling edge	Yes; Parameterizable, channels 0 to 7, rising/falling edge	
Diagnostic messages					
• Diagnostic information readable	Yes	Yes	Yes	Yes	Yes
• Monitoring the supply voltage	Yes; Module-wise	Yes; Module-wise	Yes	Yes	
- parameterizable	Yes	Yes	Yes		
• Monitoring of encoder power supply	Yes		Yes		
• Wire-break	Yes; Channel-by-channel, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 15 kOhm to 18 kOhm	Yes; Channel-by-channel, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 15 kOhm to 18 kOhm	Yes	Yes; channel by channel	
• Short-circuit		No	Yes		
• Short-circuit to M	Yes; Encoder supply to M, channel by channel				
• Group error			Yes	Yes	
• Changeover contact error			Yes		
Diagnostics indication LED					
• MAINT LED	Yes; yellow LED	Yes; yellow LED	Yes; yellow LED	Yes; yellow LED	Yes; yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	
• Channel status display	Yes; Green LED	Yes; Green LED	Yes; Green LED	Yes; Green LED	Yes; Green LED
• for channel diagnostics	Yes; Red LED	No	Yes; Red LED	Yes; Red LED	
• for module diagnostics	Yes; Green/red LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation					
Potential separation channels					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
• Between the channels and load voltage L+			Yes		

© Siemens 2019

Technical specifications (continued)

Article number	**6DL1131-6BH00-0PH1**	**6DL1131-6BL00-0PH1**	**6DL1131-6TH00-0PH1**	**6DL1131-6DF00-0PK0**	**6DL1131-6GF00-0PK0**
	ET 200SP HA, DI 16X24VDC	ET 200SP HA, DI 32X24VDC	ET 200SP HA, DI 16XNAMUR	ET 200SP HA, DI 8X24 ... 125VDC	ET 200SP HA, DI 8X230VAC
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C	70 °C	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
Dimensions					
Width	22.5 mm	22.5 mm	22.5 mm	22.5 mm	22.5 mm
Height	115 mm	115 mm	115 mm	115 mm	115 mm
Depth	138 mm	138 mm	138 mm	138 mm	138 mm
Weights					
Weight, approx.	135 g	150 g	153 g	165 g	148 g

Article number	**6DL1132-6BH00-0PH1**	**6DL1132-6BL00-0PH1**	**6DL1132-6HD50-0PK0**
	ET 200SP HA, DQ 16X24VDC/0,5A	ET 200SP HA, DQ 32X24VDC/0,5A	ET 200SP HA, RQ 4X120VDC-230VAC/5A CO
General information			
Product type designation	DQ 16x24VDC/0.5A HA	DQ 32x24VDC/0.5A HA	RQ 4x120 V UC ... 230 V AC/5 A CO HA
Engineering with			
• PCS 7 configurable/integrated as of version	V9.0	V9.0	V9.0
Operating mode			
• DQ	Yes	Yes	
• DQ with energy-saving function	No	No	
• PWM	No	No	
• Oversampling	No	No	
• MSO	No		
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes
Digital outputs			
Number of digital outputs	16	32	4
Current-sinking	No	No	
Current-sourcing	Yes	Yes	
Digital outputs, parameterizable	Yes	Yes	
Short-circuit protection	Yes; Ensure sufficient low-resistance cable routing to the sensor/actuator in order to attain the response threshold. Depending on the cable cross-section used, there may be constraints regarding the usable length of cable.	Yes; Clocked electronically	
Open-circuit detection	Yes; 0.7 mA test current for wire-break diagnostics; this value is doubled in the case of IO redundancy	No	
Overload protection	Yes	Yes	
Limitation of inductive shutdown voltage to	L+ -(37 to 41V)	Typ. L+ (-53 V)	
Controlling a digital input	Yes	Yes	
Switching capacity of the outputs			
• with resistive load, max.	0.5 A	0.5 A	
• on lamp load, max.	5 W	5 W	
Load resistance range			
• lower limit	48 Ω	48 Ω	
• upper limit	12 kΩ	4 kΩ	
Output current			
• for signal "1" rated value	0.5 A	0.5 A	
• for signal "0" residual current, max.	0.7 mA; Test current for wire-break diagnostics; this value is doubled in the case of IO redundancy	0.1 mA	

© Siemens 2019

Technical specifications (continued)

Article number	**6DL1132-6BH00-0PH1** ET 200SP HA, DQ 16X24VDC/0,5A	**6DL1132-6BL00-0PH1** ET 200SP HA, DQ 32X24VDC/0,5A	**6DL1132-6HD50-0PK0** ET 200SP HA, RQ 4X120VDC-230VAC/5A CO
Output delay with resistive load			
• "0" to "1", typ.	50 µs	54 µs	
• "1" to "0", typ.	100 µs	48 µs	
Parallel switching of two outputs			
• for uprating	No	No	
• for redundant control of a load	Yes	Yes; only outputs of the same group	
Switching frequency			
• with resistive load, max.	100 Hz	100 Hz	2 Hz
• with inductive load, max.	2 Hz	2 Hz	0.5 Hz
• on lamp load, max.	10 Hz	10 Hz	2 Hz
Total current of the outputs			
• Current per channel, max.	0.5 A	0.5 A	5 A
• Current per module, max.	8 A	10 A	20 A
Total current of the outputs (per module)			
horizontal installation			
- up to 30 °C, max.	8 A		
- up to 40 °C, max.	8 A		
- up to 50 °C, max.	8 A		
- up to 60 °C, max.	5.5 A		
- up to 70 °C, max.	3 A	10 A	20 A
vertical installation			
- up to 30 °C, max.	8 A		
- up to 40 °C, max.	6.33 A		
- up to 50 °C, max.	4.67 A		
- up to 60 °C, max.	3 A	10 A	20 A
Relay outputs			
• Number of relay outputs			4
• external protection for relay outputs			yes; 6 A, see data in manual
Switching capacity of contacts			
- with inductive load, max.			2 A; 2 A (24 V DC), 0.5 A (60 V DC), 0.1 A (120 V DC)
- with resistive load, max.			5 A; 5 A (30 V DC), 5 A (230 V AC)
- Switching current, min.			8 mA
- Rated switching voltage (DC)			24 V; 24 V DC to 120 V DC
- Rated switching voltage (AC)			230 V; 24V AC to 230V AC
Cable length			
• shielded, max.	1 000 m	1 000 m	1 000 m
• unshielded, max.	600 m	600 m	200 m
Interrupts/diagnostics/ status information			
Diagnostics function	Yes	Yes	Yes
Substitute values connectable	Yes	Yes	Yes
Alarms			
• Diagnostic alarm	Yes	Yes	Yes
Diagnostic messages			
• Monitoring the supply voltage	Yes	Yes	Yes
- parameterizable		Yes	Yes
• Wire-break	Yes; channel by channel	No	
• Short-circuit		Yes	
• Short-circuit to M	Yes; channel by channel	Yes; channel by channel	
• Short-circuit to L+	Yes; channel by channel	No	
• Group error	Yes	Yes	
Diagnostics indication LED			
• MAINT LED	Yes; yellow LED	Yes; yellow LED	Yes; yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; Green LED	Yes; Green LED	Yes; Green LED
• for channel diagnostics	Yes; Red LED	No	
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED

© Siemens 2019

Technical specifications (continued)

Article number	**6DL1132-6BH00-0PH1** ET 200SP HA, DQ 16X24VDC/0,5A	**6DL1132-6BL00-0PH1** ET 200SP HA, DQ 32X24VDC/0,5A	**6DL1132-6HD50-0PK0** ET 200SP HA, RQ 4X120VDC-230VAC/5A CO
Potential separation			
Potential separation channels			
• between the channels and back-plane bus	Yes	Yes	Yes
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	-40 °C	-40 °C	-40 °C; No icing
• horizontal installation, max.	70 °C	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C	-40 °C; No icing
• vertical installation, max.	60 °C	60 °C	60 °C
Altitude during operation relating to sea level			
• Ambient air temperature-barometric pressure-altitude			3 000 m due to converter type used
Dimensions			
Width	22.5 mm	22.5 mm	22.5 mm
Height	115 mm	115 mm	115 mm
Depth	138 mm	138 mm	138 mm
Weights			
Weight, approx.	137 g	150 g	162 g

© Siemens 2019

Ordering data	Article No.
DI 16×24 V DC HA **digital input module** Sixteen 24 V DC digital inputs, color code CC01, for terminal block type H1 and M1, channel diagnostics	**6DL1131-6BH00-0PH1**
Digital input module **DI 32×24 V DC HA** Thirty-two 24 V DC digital inputs, color code CC00, for terminal block type P0 and H1, channel diagnostics	**6DL1131-6BL00-0PH1**
DI 16×NAMUR HA **digital input module** Sixteen NAMUR digital inputs, color code CC01, for terminal block type H1 and M1, channel diagnostics	**6DL1131-6TH00-0PH1**
DI 8×24 to 125 V DC HA **digital input module** Eight 24 to 125 V DC digital inputs, color code CC42, for terminal block type K0, channel diagnostics	**6DL1131-6DF00-0PK0**
DI 8×230 V AC HA **digital input module** Eight 230 V AC digital inputs, color code CC42, for terminal block type K0, module diagnostics	**6DL1131-6GF00-0PK0**
DQ 16×24 V DC/0.5A HA **digital output module** Sixteen 24 V DC digital outputs, 0.5 A, color code CC02, for terminal block type H1 and M1, channel diagnostics	**6DL1132-6BH00-0PH1**
Digital output module **DQ 32×24 V DC/0.5 A HA** Thirty-two 24 V DC digital outputs, 0.5 A, color code CC00, for terminal block type N0 and H1, channel diagnostics	**6DL1132-6BL00-0PH1**
RQ 4×120 V DC **230 V AC/5A CO HA** **digital output module** Four 24 to 120 V DC, 24 to 230 V AC relay outputs, 5 A, color code CC40, for terminal block type K0, module diagnostics	**6DL1132-6HD50-0PK0**
Accessories	
Labeling strips For labeling the I/O modules	
• Roll, light gray (with a total of 500 labeling strips), 1 unit	**6DL1193-6LR00-0AA0**
• A4 sheets, light gray (with a total of 1 000 labeling strips), 10 units	**6DL1193-6LA00-0AA0**
Color-coding labels For push-in terminals	
• Color code CC01, 10 units gray (terminals 1 to 16), red (terminals 17 to 32)	**6DL1193-6CP01-2HH1**
• Color code CC02, 10 units gray (terminals 1 to 16), blue (terminals 17 to 32)	**6DL1193-6CP02-2HH1**
• Color code CC40, 10 units gray (terminals 1 to 16)	**6DL1193-6CP40-2HK0**
• Color code CC42, 10 units gray (terminals 1 to 8), blue (terminals 9 to 16)	**6DL1193-6CP42-2HK0**
Equipment labeling plates 10 sheets with 16 plates each	**6ES7193-6LF30-0AW0**
PM cover Slot cover for I/O modules, to protect vacant I/O slots Width 22.5 mm, 5 units	**6DL1133-6CV22-0AM0**

Accessories

Slot cover, labeling strips

A slot cover is inserted in a terminal block:

- When slots do not contain I/O modules
- If slots are reserved for future expansion (empty)

You can insert a labeling strip for the planned I/O module in the front of the slot cover. The labeling strips can be ordered as accessories:

- For thermal transfer printers on a roll
- For laser printers as A4 sheets

Color-coding system

Color-coded labels facilitate cable assignment and identification of the potentials of an I/O module. A color code (for example CC01) is printed on each color coding label and I/O module. The color code can be read straight off the I/O module to determine which color-coded label you need for the terminal block.

The reference identification labels in accordance with EN 81346 can be attached to interface modules, BusAdapters and I/O modules. With the standard markings for printing, the reference identification label is suitable for automatic labeling with E-CAD systems.

© Siemens 2019

Overview



- AI 16×I 2-wire HART HA analog input module
  16 analog inputs
  Measuring range 0 to 20 mA, 0 to 10 mA, 4 to 20 mA, 4 to 20 mA with HART
- AI 16×TC/8×RTD 2-/3-/4-wire HA analog input module
  16 analog inputs for thermocouples; alternatively 8 analog inputs for thermistors
- AQ 8×I HART HA analog output module
  8 analog outputs
  Power output in the output ranges 0 to 10 mA, 0 to 20 mA, 4 to 20 mA and 4 to 20 mA HART

Design

The ET 200SP HA analog I/O modules have the following technical features:

Analog input modules

AI 16×I 2-wire HART HA



- 16 analog inputs
- 16 outputs as encoder supply for 2-wire measuring transducer
- Diagnostics configurable per channel
- Diagnostics configurable per module: no supply voltage L+
- Hardware interrupt
- The digital inputs have the following features, configurable per channel:
  - Current measurement type for 2-wire HART measuring transducer
  - Measuring range 0 to 20 mA, 0 to 10 mA, 4 to 20 mA and 4 to 20 mA with HART
  - Resolution depends on measuring range and interference frequency suppression; minimum of 15 bits including sign, maximum of 16 bits including sign
  - Smoothing
  - Interference frequency suppression 10 Hz, 50 Hz and 60 Hz
- Diagnostics configurable per channel
- Diagnostics configurable per module: no supply voltage L+
- Hardware interrupt

AI 16×TC/8×RTD 2-/3-/4-wire HA



- 16 analog inputs for connecting thermocouples (TC)
- Alternatively 8 analog inputs for connecting thermistors (RTD)
- Diagnostics configurable per channel
- Diagnostics configurable per module: no supply voltage L+
- Permissible common-mode voltage between channels: 75 V DC / 60 V AC
- The digital inputs have the following features, configurable per channel:
- Temperature compensation:
  - Resolution: 16 bits including sign
  - "Voltage" measurement type
  - "Resistance" measurement type, 2-/3-/4-wire connection
  - "Thermistor" (RTD) measurement type, 2-/3-/4-wire connection
  - "Thermocouple" (TC) measurement type can be set per channel
  - Smoothing
  - Interference frequency suppression 16.6 Hz, 50 Hz or 60 Hz
- Diagnostics configurable per channel
- Diagnostics configurable per module: no supply voltage L+
- Permissible common-mode voltage between channels: 75 V DC / 60 V AC
- Temperature compensation:
  - Reference channel of the module
  - Internal reference junction
  - Fixed temperature (0 °C)
- Conversion time depends on interference frequency suppression of 16.6/50/60 Hz at 180/60/50 ms that can be set by channel. (With 3-wire measuring transducers, the time is twice as long as 2 measurements are required per channel).
- Max. cable length RTD, TC: 600 m
- Hardware interrupt upon limit violation per channel (two high and two low limits per channel)
- Automatic compensation of line resistances with 3-wire connections

© Siemens 2019

Design (continued)

Analog output modules

AQ 8xI HART HA



- Analog output module with 8 outputs (8 D/A converters operating in parallel)
- Current output in output ranges 0 to 10 mA, 0 to 20 mA, 4 to 20 mA and 4 to 20 mA HART
- Resolution 16 bits including sign
- Rated supply voltage 24 V DC
- Load max. 750 Ω, max. 10 mH
- Diagnostics configurable per channel
- Diagnostics configurable per module: no supply voltage L+

Technical specifications

Article number	**6DL1134-6JH00-0PH1** ET 200SP HA, AI 16XTC/8XRTD 2-/3-/4-WIRE	**6DL1134-6TH00-0PH1** ET 200SP HA, AI 16XI 2-WIRE HART
General information		
Product type designation	AI 16 x TC/8 x RTD 2/3/4-wire HA	AI 16 x I 2-wire mA HART
Product function		
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
Engineering with		
• PCS 7 configurable/integrated as of version	V9.0	V9.0
CiR – Configuration in RUN		
Reparameterization possible in RUN	Yes	Yes
Supply voltage		
Type of supply voltage	DC	DC
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
Analog inputs		
Number of analog inputs		16
• For voltage measurement	16	
• For resistance/resistance thermometer measurement	8	
• For thermocouple measurement	16	
permissible input voltage for voltage input (destruction limit), max.	5 V	
permissible input current for current input (destruction limit), max.		30 mA
Constant measurement current for resistance-type transmitter, typ.	2 mA	
Cycle time (all channels), min.	125 ms; Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels); for line compensation in case of a three-wire connection, an additional cycle is necessary	
Technical unit for temperature measurement adjustable	Yes; °C/°F/K	
Input ranges (rated values), voltages		
• -1 V to +1 V	Yes; 16 bit incl. sign	
• -250 mV to +250 mV	Yes; 16 bit incl. sign	
• -50 mV to +50 mV	Yes; 16 bit incl. sign	
• -80 mV to +80 mV	Yes; 16 bit incl. sign	
Input ranges (rated values), currents		
• 0 to 20 mA		Yes; 16 bit incl. sign
• 4 mA to 20 mA		Yes; 16 bit incl. sign

© Siemens 2019

Technical specifications (continued)

Article number	6DL1134-6JH00-0PH1 ET 200SP HA, AI 16XTC/8XRTD 2-/3-/4-WIRE	6DL1134-6TH00-0PH1 ET 200SP HA, AI 16XI 2-WIRE HART
Input ranges (rated values), thermocouples		
• Type B	Yes; 16 bit incl. sign	
• Type C	Yes; 16 bit incl. sign	
• Type E	Yes; 16 bit incl. sign	
• Type J	Yes; 16 bit incl. sign	
• Type K	Yes; 16 bit incl. sign	
• Type L	Yes; 16 bit incl. sign	
• Type N	Yes; 16 bit incl. sign	
• Type R	Yes; 16 bit incl. sign	
• Type S	Yes; 16 bit incl. sign	
• Type T	Yes; 16 bit incl. sign	
• Type U	Yes; 16 bit incl. sign	
• Type TXK/TXK(L) to GOST	Yes; 16 bit incl. sign	
Input ranges (rated values), resistance thermometer		
• Cu 10	Yes; 16 bit incl. sign	
• Ni 100	Yes; 16 bit incl. sign	
• Ni 1000	Yes; 16 bit incl. sign	
• LG-Ni 1000	Yes; 16 bit incl. sign	
• Ni 120	Yes; 16 bit incl. sign	
• Ni 200	Yes; 16 bit incl. sign	
• Ni 500	Yes; 16 bit incl. sign	
• Pt 100	Yes; 16 bit incl. sign	
• Pt 1000	Yes; 16 bit incl. sign	
• Pt 200	Yes; 16 bit incl. sign	
• Pt 500	Yes; 16 bit incl. sign	
Input ranges (rated values), resistors		
• 0 to 150 ohms	Yes; 15 bit	
• 0 to 300 ohms	Yes; 15 bit	
• 0 to 600 ohms	Yes; 15 bit	
• 0 to 3000 ohms	Yes; 15 bit	
• 0 to 6000 ohms	Yes; 15 bit	
• PTC	Yes; 15 bit	
Thermocouple (TC)		
Temperature compensation		
- parameterizable	Yes	
Cable length		
• shielded, max.	200 m; Measurement ranges for thermocouples / voltages: shielded cable length max. 600 m, loop resistance max 8 kOhm; measuring ranges RTD: shielded cable length max. 600 m, cable resistance (single) max. 75 ohms	800 m; Shielded
Analog value generation for the inputs		
Integration and conversion time/ resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit	16 bit; 14 bit at 60 Hz (0 ... 10 mA), 16 bit at 10 Hz, 15 bit at 50 Hz and 15 bit at 60 Hz interference suppression
• Integration time, parameterizable	Yes; Channel-by-channel, results from the selected interference frequency suppression	Yes; channel by channel
• Basic conversion time, including integration time (ms)		
- additional processing time for wire-break check	2 ms; In the ranges resistance thermometers, resistors and thermocouples	
- additional power line wire-break check	2 ms; for 3/4 wire transducer (resistance thermometer and resistor)	
• Interference voltage suppression for interference frequency f1 in Hz	16.6 / 50 / 60 Hz, channel-by-channel	
• Conversion time (per channel)	60 ms; 180 / 50 ms, results from the selected interference frequency suppression	
Smoothing of measured values		
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel	Yes; none, weak, medium, strong, channel-by-channel

© Siemens 2019

Technical specifications (continued)

Article number	6DL1134-6JH00-0PH1 ET 200SP HA, AI 16XTC/8XRTD 2-/3-/4-WIRE	6DL1134-6TH00-0PH1 ET 200SP HA, AI 16XI 2-WIRE HART
Encoder		
Connection of signal encoders		
• for current measurement as 2-wire transducer		Yes
Errors/accuracies		
Basic error limit (operational limit at 25 °C)		
• Voltage, relative to input range, (±)	0.05 %	
• Current, relative to input range, (±)		0.1 %
• Resistance, relative to input range, (±)	0.05 %	
Interference voltage suppression for f = n x (f1 ± 1 %), f1 = interference frequency		
• Series mode interference (peak value of interference < rated value of input range), min.	70 dB	
• Common mode voltage, max.	60 V	
• Common mode interference, min.	90 dB	
Interrupts/diagnostics/ status information		
Diagnostics function	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case
Diagnostic messages		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	Yes; channel by channel	Yes; channel by channel
• Short-circuit		Yes; Channel-by-channel, short-circuit of the encoder supply to ground or of an input to the encoder supply
• Overflow/underflow	Yes; channel by channel	Yes; channel by channel
Diagnostics indication LED		
• MAINT LED	Yes; yellow LED	Yes; yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; Green LED	Yes; Green LED
• for channel diagnostics	Yes; Red LED	Yes; Red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Isolation		
Isolation tested with	1 500 V DC/1 min, type test	1 500 V DC/1 min, type test
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C; Observe derating
• vertical installation, min.	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C; Observe derating
Dimensions		
Width	22.5 mm	22.5 mm
Height	115 mm	115 mm
Depth	138 mm	138 mm
Weights		
Weight, approx.	150 g	148 g

© Siemens 2019

Technical specifications (continued)

Article number	**6DL1135-6TF00-0PH1**
	ET 200SP HA, AQ 8XI HART
General information	
Product type designation	AQ 8 x I HART HA
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• PCS 7 configurable/integrated as of version	V9.0
CiR – Configuration in RUN	
Reparameterization possible in RUN	Yes
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
Reverse polarity protection	Yes
Analog outputs	
Number of analog outputs	8
Output ranges, current	
• 0 to 10 mA	Yes; 14 bit
• 0 to 20 mA	Yes; 15 bit
• -20 mA to +20 mA	No
• 4 mA to 20 mA	Yes; 16 bit incl. sign
Connection of actuators	
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with current outputs, max.	750 Ω
• with current outputs, inductive load, max.	10 mH
Cable length	
• shielded, max.	1 000 m
Settling time	
• for resistive load	1.2 ms; 750 ohm
• for inductive load	1.2 ms
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to output range, (±)	0.1 %

Article number	**6DL1135-6TF00-0PH1**
	ET 200SP HA, AQ 8XI HART
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostic messages	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel by channel
• Short-circuit	Yes; channel by channel
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; Green LED
• for channel diagnostics	Yes; Red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Isolation	
Isolation tested with	1 500 V DC/1 min, type test
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	160 g

© Siemens 2019

Ordering data	Article No.
AI 16×I 2-wire HART HA analog input module 16 analog inputs Measuring range 0 to 20 mA, 0 to 10 mA, 4 to 20 mA, 4 to 20 mA with HART Color code CC01, for terminal block type H1 and M1, channel diagnostics, 16-bit	**6DL1134-6TH00-0PH1**
AI 16×TC/8×RTD 2-/3-/4-wire HA analog input module 16 analog inputs for thermocouples; alternatively 8 analog inputs for thermistors Color code CC00, for terminal block type H1 and M1, channel diagnostics, 16-bit	**6DL1134-6JH00-0PH1**
AQ 8×I HART HA analog output module 8 analog outputs Power output in the output ranges 0 to 10 mA, 0 to 20 mA, 4 to 20 mA and 4 to 20 mA HART Color code CC00, for terminal block type H1 and M1, channel diagnostics, 16-bit	**6DL1135-6TF00-0PH1**

Accessories	Article No.
Labeling strips For labeling the I/O modules	
• Roll, light gray (with a total of 500 labeling strips), 1 unit	**6DL1193-6LR00-0AA0**
• A4 sheets, light gray (with a total of 1 000 labeling strips), 10 units	**6DL1193-6LA00-0AA0**
Color-coding labels For push-in terminals	
• Color code CC00, 10 units gray (terminals 1 to 32)	**6DL1193-6CP00-2HH1**
• Color code CC01, 10 units gray (terminals 1 to 16), red (terminals 17 to 32)	**6DL1193-6CP01-2HH1**
Reference identification labels 10 sheets with 16 strips each	**6ES7193-6LF30-0AW0**
PM cover Slot cover for I/O modules, to protect vacant I/O slots Width 22.5 mm, 5 units	**6DL1133-6CV22-0AM0**

© Siemens 2019

Overview



The I/O module AI-DI 16/DQ16×24VDC HART HA is available in the following versions:

- DI 16/DQ16x24VDC HA in digital-only mode
- AI-DI 16/DQ 16x24VDC HART HA as digital/analog module in mixed mode

Time stamping is available with configuration in mixed mode. High-precision time stamping (SoE: Sequence of Events) with a precision of 1 ms is available with configuration in digital-only mode.

In mixed mode, the 16 inputs can also be set channel by channel as either digital inputs or analog inputs with or without HART. HART is only available in mixed mode and with configuration in a measuring range of 4 to 20 mA.

Design

The AI-DI 16/DQ16×24 V DC HART HA analog/digital module has the following technical features:

- 16 inputs configurable as digital or analog inputs
- Digital inputs with the following features configurable per channel:
  - Pulse stretching
  - Time stamping in mixed mode
  - Time stamping with a precision of 1 ms in digital-only mode
  - Hardware interrupts for positive and negative edges
  - Input delay
- Analog inputs with the following features configurable per channel:
  - Current measurement type for 2-wire measuring transducer
  - Measuring ranges 0 to 20 mA, 0 to 10 mA, 4 to 20 mA or 4 to 20 mA with HART
  - Resolution depends on measuring range and interference frequency suppression; minimum of 15 bits, maximum of 16 bits including sign
  - Hardware interrupts for monitoring configurable limits
  - Smoothing
  - Interference frequency suppression 10 Hz, 50 Hz or 60 Hz
  - Configurable wire break limit
- 16 outputs configurable as digital outputs or as sensor supplies for analog current measurement
  - Substitute value configurable per channel for the digital outputs
- Diagnostics configurable per channel
- Diagnostics configurable per module: no supply voltage L+

Technical specifications

Article number	**6DL1133-6EW00-0PH1** ET 200SP HA, AI-DI16/DQ16X24VDC HART
General information	
Product type designation	AI-DI 16/DQ 16x24VDC HART HA
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• PCS 7 configurable/integrated as of version	V9.0
Operating mode	
• DI	Yes
• Counter	No
• DQ	Yes
• DQ with energy-saving function	No
• PWM	No
• Oversampling	No
• MSI	No
• MSO	No
CiR – Configuration in RUN	
Reparameterization possible in RUN	Yes
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
Reverse polarity protection	Yes

Article number	**6DL1133-6EW00-0PH1** ET 200SP HA, AI-DI16/DQ16X24VDC HART
Encoder supply	
Number of outputs	16
Output voltage encoder supply, min.	18.2 V
Short-circuit protection	Yes; per channel, electronic
24 V encoder supply	
• 24 V	Yes
• Short-circuit protection	Yes; Electronic (response threshold 0.7 A to 1.5 A)
Digital inputs	
Number of digital inputs	16
Digital inputs, parameterizable	Yes
Source/sink input	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes
Input characteristic curve in accordance with IEC 61131, type 2	No
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Pulse extension	Yes
• Length	Off, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s
Time stamping	Yes; Resolution 10 ms
Time stamp (with precision of 1 ms)	Yes; Resolution 1ms
Edge evaluation	Yes; rising edge, falling edge, edge change

© Siemens 2019

Technical specifications (continued)

Article number	**6DL1133-6EW00-0PH1** ET 200SP HA, AI-DI16/DQ16X24VDC HART
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-30 to +5V
• for signal "1"	+11 to +30V
Input current	
• for signal "1", typ.	2.5 mA
Input delay (for rated value of input voltage)	
for standard inputs	
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)
Cable length	
• shielded, max.	1 000 m
• unshielded, max.	600 m
Digital outputs	
Number of digital outputs	16
Current-sinking	No
Current-sourcing	Yes
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes
Open-circuit detection	Yes
Overload protection	Yes
Limitation of inductive shutdown voltage to	L+ -(37 to 41V)
Controlling a digital input	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	12 kΩ
Output current	
• for signal "1" rated value	0.5 A
• for signal "0" residual current, max.	0.7 mA
Output delay with resistive load	
• "0" to "1", typ.	50 µs
• "1" to "0", typ.	100 µs
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	Yes
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	2 Hz
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per channel, max.	0.5 A
• Current per module, max.	2 A
Cable length	
• shielded, max.	1 000 m
• unshielded, max.	600 m

Article number	**6DL1133-6EW00-0PH1** ET 200SP HA, AI-DI16/DQ16X24VDC HART
Analog inputs	
Number of analog inputs	16
permissible input current for current input (destruction limit), max.	30 mA
Input ranges (rated values), currents	
• 0 to 20 mA	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 16 bit incl. sign
Analog value generation for the inputs	
Integration and conversion time/ resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit; Resolution with overrange (bit including sign), max. 16 bits, exception: 15 bits at 60 Hz interference suppression and 0 to 10 mA
• Integration time, parameterizable	Yes; channel by channel
Smoothing of measured values	
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
Connectable encoders	
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (±)	0.1 %
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
Diagnostic messages	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel by channel
• Short-circuit to M	Yes; Encoder supply to M, channel by channel
• Group error	Yes
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	No
• for channel diagnostics	No
• for module diagnostics	Yes; green/red DIAG LED

© Siemens 2019

Technical specifications (continued)

Article number	**6DL1133-6EW00-0PH1** ET 200SP HA, AI-DI16/DQ16X24VDC HART
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Isolation	
Isolation tested with	1 500 V DC/1 min, type test
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C; Observe derating
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C; Observe derating
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	150 g

Ordering data

	Article No.
AI-DI 16/DQ16×24VDC HART HA input/output module 16 channels, each with digital output and digital/analog input Color code CC01, for terminal block type H1 and M1	**6DL1133-6EW00-0PH1**
Accessories	
Labeling strips For labeling the I/O modules	
• Roll, light gray (with a total of 500 labeling strips), 1 unit	**6DL1193-6LR00-0AA0**
• A4 sheets, light gray (with a total of 1 000 labeling strips), 10 units	**6DL1193-6LA00-0AA0**
Color-coding labels For push-in terminals	
• Color code CC01, 10 units gray (terminals 1 to 16), red (terminals 17 to 32)	**6DL1193-6CP01-2HH1**
Reference identification labels 10 sheets with 16 strips each	**6ES7193-6LF30-0AW0**
Slot cover for I/O modules 22.5 mm wide	**6DL1133-6CV22-0AM0**

© Siemens 2019

Overview

Mounting rails

The mounting rail is required for fitting an ET 200SP HA station in the control cabinet. The carrier modules for interface modules, the carrier modules for the I/O modules, and the server module are attached to the mounting rail.

The mounting rails are available in lengths of 482 mm (for installation in a 19-inch rack) and 1 500 mm (for maximum configuration and vertical installation in a cabinet).



IM single carrier module



IM redundant carrier module

Carrier modules for IM interface module

Two versions of the carrier modules for IM interface modules are available:

- IM single carrier module for 1 interface module, for single connection to PROFINET
- IM redundant carrier module for 2 interface modules, for redundant connection to PROFINET

The carrier modules connect the interface module to the backplane bus. They enable data exchange with the I/O modules.



Carrier modules for I/O modules, 8-slot



Carrier modules for I/O modules, 2-slot

Carrier modules for I/O modules


The slots for the I/O modules are created by the connection of these carrier modules to the terminal blocks.

Carrier modules for I/O modules are available in the following versions:

- Carrier module, 2-slot, with 2 slots for I/O modules
- Carrier module, 8-slot, with 8 slots for I/O modules

© Siemens 2019

Overview (continued)

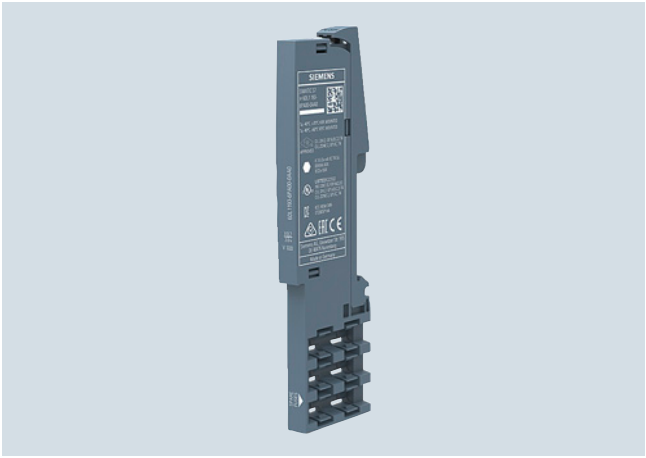

ET 200SP HA, server module

Server module

Server module and power bus cover complete configuration of the ET200SP HA. A server module and a power bus cover are supplied with each carrier module for the interface module.

Technical specifications

Article number	**6DL1193-6BH00-0SM0** CARRIER MODULE IM SINGLE	**6DL1193-6BH00-0RM0** CARRIER MODULE IM REDUNDANT
General information		
Product type designation	Carrier module IM single	Carrier module IM redundant
Product function		
• I&M data	Yes; Asset data	Yes; Asset data
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C
Dimensions		
Width	100 mm	100 mm
Height	204 mm	204 mm
Depth	52 mm	52 mm
Weights		
Weight, approx.	250 g	224 g

Article number	**6DL1193-6GA00-0NN0** CARRIER MODULE TWOFOLD	**6DL1193-6GC00-0NN0** CARRIER MODULE EIGHTFOLD
General information		
Product type designation	Carrier module 2 times	Carrier module 8 times
Product function		
• I&M data	Yes; Asset data	Yes; Asset data
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C
Dimensions		
Width	52.5 mm; 45 mm when installed	187.5 mm; 180 mm when installed
Height	203 mm	203 mm
Depth	79 mm	79 mm
Weights		
Weight, approx.	111 g	450 g

© Siemens 2019

Carrier Modules

Ordering data	Article No.
Mounting rails for ET 200SP HA	
482 mm (ca. 19 inch) mounting rail Including grounding screw and integrated standard mounting rail for fitting small components such as clamps, fuses and relays	**6DL1193-6MC00-0AA0**
1500 mm (ca. 59 inch) mounting rail Including grounding screw and integrated standard mounting rail for fitting small components such as clamps, fuses and relays	**6DL1193-6MD00-0AA0**
Grounding screw For connecting PE to the mounting rail; essential for 1 500 mm mounting rail 20 units per packing unit	**6ES7590-5AA00-0AA0**
IM carrier modules for interface modules Note: A server module and a power bus cover are supplied with each carrier module for the interface module.	
IM single carrier module Rack for 1 SIMATIC ET 200SP HA interface module for single connection to PROFINET	**6DL1193-6BH00-0SM0**
IM redundant carrier module Rack for 2 SIMATIC ET 200SP HA interface modules for redundant connection to PROFINET	**6DL1193-6BH00-0RM0**

	Article No.
Carrier modules for I/O modules	
Carrier module, 2 slots Rack for 2 SIMATIC ET 200SP HA I/O modules	**6DL1193-6GA00-0NN0**
Carrier module 8x Rack for 8 SIMATIC ET 200SP HA I/O modules	**6DL1193-6GC00-0NN0**
Spare parts	
Server module (spare part) for ET 200SP HA	**6DL1193-6PA00-0AA0**

© Siemens 2019

Overview

The slots for the I/O modules are created by connecting carrier modules and terminal blocks. The terminal blocks contain the process terminals for connecting sensors, actuators and other devices.

Overview of terminal blocks

24 V standard TB		24 V I/O redundancy TB		24 V load distribution TB		24 V M distributor TB		Insulated TB	
									
H1 light	H1 dark	M1 light	M1 dark	P0 light	P0 dark	N0 light	N0 dark	K0 light	K0 dark

Select the terminal block for the slot of an I/O module based on the following dependencies:

- Definition of I/O modules associated with a potential group
- Requirement for design with redundant I/O modules (redundant partner in adjacent slot)
- Requirement for design with potential distributors (e.g. when using 32-channel I/O modules)

The following table illustrates the terminal block / I/O module assignment (x = standard):

Terminal block / I/O module	24 V standard TB (H1)	24 V I/O redundancy TB (M1)	24 V load distribution TB (P0)	24 V M distributor TB (N0)	Insulated TB (K0)
DI 16x24VDC	x	Optional		Optional[1)]	
DI 32x24VDC	Optional		x		
DI 16xNAMUR	x	Optional		Optional[1)]	
DI 8x125VDC					x
DI 8x230VAC					x
DQ 16x24V/0,5A	x	Optional		Optional[1)]	
DQ 32x24V/0.5A	Optional			x	
RQ 4x230/5A CO					x
DI-AI 16x / DQ16x	x	Optional		Optional[1)]	
AI 16xI HART	x	Optional		Optional[1)]	
AI 16xTC 8xRTD	x	Optional			
AQ 8xI HART	x	Optional		Optional[1)]	

[1)] Offers additional ground points for field connection

Potential groups/color type of the terminal blocks

To help you distinguish between potential groups on ET 200SP HA stations they come in both a light and a dark version:

- Each light-colored terminal block that is fitted in the station starts a new potential group. The first terminal block fitted (on the first carrier module immediately to the right of the interface module) is therefore light-colored.
- Each dark terminal block forms a contact with the supply voltage of the terminal block to its left, thus extending the potential group.

Note the maximum permissible load current depending on the number of I/O modules:

Number of terminal blocks	Permissible load current in amperes
4	10 A
5	8 A
6	7 A
7	6 A
8	5 A
10	4 A
15	3 A
20	2 A

© Siemens 2019

Technical specifications

Article number	6DL1193-6TP00-0DH1	6DL1193-6TP00-0BH1	6DL1193-6TP00-0DM1	6DL1193-6TP00-0BM1	6DL1193-6TP00-0DP0	6DL1193-6TP00-0BP0
	Terminal Block, Type H1, light-colored	Terminal Block, Type H1, dark-colored	Terminal Block, Type M1, light-colored	Terminal Block, TYPE M1, dark-colored	Terminal Block, Type P0, light-colored	Terminal Block, Type P0, dark-colored
General information						
Product type designation	Type H1	Type H1	Type M1	Type M1	Type P0	Type P0
Product function						
• I&M data	Yes; Asset data	Yes; Asset data	Yes; Asset data	Yes; Asset data	Yes	Yes
Input current						
Current consumption, max.	-	-	-	-	640 mA; With one 20 mA encoder supply per channel	640 mA; With one 20 mA encoder supply per channel
Ambient conditions						
Ambient temperature during operation						
• horizontal installation, min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C	70 °C	70 °C	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C	60 °C
Dimensions						
Width	22.5 mm	22.5 mm	45 mm	45 mm	45 mm	45 mm
Height	175 mm	175 mm	175 mm	175 mm	175 mm	175 mm
Depth	77 mm	77 mm	77 mm	77 mm	77 mm	77 mm
Weights						
Weight, approx.	80 g	80 g	155 g	155 g	155 g	155 g

Article number	6DL1193-6TP00-0DN0	6DL1193-6TP00-0BN0	6DL1193-6TP00-0DK0	6DL1193-6TP00-0BK0
	Terminal Block, Type N0, light-colored	Terminal Block, Type N0, dark-colored	Terminal Block, Type K0, light-colored	Terminal Block, Type K0, dark-colored
General information				
Product type designation	Type N0	Type N0	Type K0	Type K0
Product function				
• I&M data	Yes	Yes	Yes; Asset data	Yes; Asset data
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C	-40 °C	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C	60 °C	60 °C
Dimensions				
Width	45 mm	45 mm	22.5 mm	22.5 mm
Height	175 mm	175 mm	175 mm	175 mm
Depth	77 mm	77 mm	77 mm	77 mm
Weights				
Weight, approx.	155 g	155 g	78 g	78 g

© Siemens 2019

Ordering data

	Article No.
Terminal blocks 24 V DC	
Terminal block type H1 light For starting a new potential group, with 32 push-in terminals, width 22.5 mm, with temperature compensation	**6DL1193-6TP00-0DH1**
Terminal block type M1 light For starting a new potential group, with 32 push-in terminals, width 45 mm, for redundant configurations, with temperature compensation	**6DL1193-6TP00-0DM1**
Terminal block type P0 light For starting a new potential group, with 32 push-in terminals, additional 32 push-in terminals with encoder supply, width 45 mm, specially for use with DI 32x24 V DC (6DL1131-6BL00-0PH1)	**6DL1193-6TP00-0DP0**
Terminal block type N0 light For starting a new potential group, with 32 push-in terminals, additional 32 push-in terminals for ground connection, width 45 mm, for use with DQ 32x 24 V DC (6DL1132-6BL00-0PH1) and other modules	**6DL1193-6TP00-0DN0**
Terminal block type H1 dark For forwarding a potential group, with 32 push-in terminals, width 22.5 mm, with temperature compensation	**6DL1193-6TP00-0BH1**
Terminal block type M1 dark For forwarding a potential group, with 32 push-in terminals, width 45 mm, for redundant configurations, with temperature compensation	**6DL1193-6TP00-0BM1**
Terminal block type P0 dark For forwarding a potential group, with 32 push-in terminals, additional 32 push-in terminals with encoder supply, width 45 mm, specially for use with DI 32x24 V DC (6DL1131-6BL00-0PH1)	**6DL1193-6TP00-0BP0**
Terminal block type N0 dark For starting a new potential group, with 32 push-in terminals, additional 32 push-in terminals for ground connection, width 45 mm, for use with DQ 32x 24 V DC (6DL1132-6BL00-0PH1) and other modules	**6DL1193-6TP00-0BN0**

	Article No.
Terminal blocks insulated (24 V DC / 125 V DC / 230 V AC)	
Terminal block type K0 light For starting a new potential group, with 16 push-in terminals, width 22.5 mm	**6DL1193-6TP00-0DK0**
Terminal block type K0 dark For forwarding a potential group, with 16 push-in terminals, width 22.5 mm	**6DL1193-6TP00-0BK0**
Accessories	
Shield connection for terminal block 5 shield supports and 5 shield terminals, for direct connection	**6ES7193-6SC00-1AM0**

© Siemens 2019

BusAdapter

Overview



BusAdapter BA 2×RJ45, 2×FC and 2×LC

BusAdapter

A BusAdapter as a separate component allows a free choice of connection technology:

- BA 2×RJ45: 2 electrical connections for bus cable with standard RJ45 connector
- BA 2×FC: 2 electrical connections for direct connection of FastConnect bus cable
- BA 2×LC: 2 optical ports for fiber-optic cables

Technical specifications

Article number	**6DL1193-6AR00-0AA0** ET 200SP HA, BUSADAPTER BA 2XRJ45	**6DL1193-6AF00-0AA0** ET 200SP HA, BUSADAPTER BA 2XFC	**6DL1193-6AG00-0AA0** ET 200SP HA, BUSADAPTER BA 2XLC
General information			
Product type designation	SIMATIC BusAdapter BA 2x RJ45	SIMATIC BusAdapter BA 2x FC	SIMATIC BusAdapter BA 2x LC
Interfaces			
Number of PROFINET interfaces	1; 2 ports (switch) RJ45	1; 2 ports (switch) FC	1; 2 ports (switch) LC Multimode Glass Fibre
PROFINET IO			
• RJ 45	Yes; 2x RJ45		
• FC (FastConnect)		Yes; 2 x	
• Number of LC ports			2
Cable length			
- Cu conductors	100 m	100 m	
- Multimode graded-index fiber 50/125 µm			3 km
- Multimode graded-index fiber 62.5/125 µm			3 km
Ambient conditions			
Ambient temperature during operation			
• min.	-40 °C	-40 °C	-40 °C
• max.	70 °C	70 °C	65 °C; Redundant design (2x 6DL1155-6AU00-0PM0): max. 60 °C horizontal, max. 50 °C vertical. When using different I/O devices, the derating specified there must be observed.
Dimensions			
Width	20 mm	20 mm	20 mm
Height	69.5 mm	69.5 mm	75 mm; Without protective caps (approx. 8 mm)
Depth	59 mm	59 mm	59 mm
Weights			
Weight, approx.	46 g	53 g	60 g

Ordering data

	Article No.
BusAdapter	
BusAdapter 2×RJ45 2 × RJ45 sockets for PROFINET (standard Ethernet socket)	**6DL1193-6AR00-0AA0**
BusAdapter 2×FC 2 × FastConnect (FC) connections for PROFINET	**6DL1193-6AF00-0AA0**
BusAdapter 2×LC 2 × glass fiber-optic connections for PROFINET	**6DL1193-6AG00-0AA0**

© Siemens 2019

Overview



The ET 200iSP is a modular, intrinsically-safe I/O system with IP30 degree of protection which can be operated in gas and dust atmospheres at ambient temperatures from -20 to +70 °C. It is optimized for use with SIMATIC PCS 7 and SIMATIC S7, but can also be integrated in other systems such as SIMATIC S5 per GSD file.


In accordance with ATEX directive 2014/34/EU, the ET 200iSP remote I/Os stations can be installed directly in the Ex zones 1, 2, 21 or 22 as well as in non-hazardous areas. The intrinsically-safe sensors, actuators and HART field devices can also be located in zone 0 or 20 if necessary.

The modular design of the ET 200iSP makes it possible to optimally adapt the remote I/O stations to the respective automation task through individual configuration and flexible expansion. To increase plant availability, the pressure-encapsulated power supply and the intrinsically-safe PROFIBUS DP connection (RS 485-iS) of the stations can also be of redundant design.

The modern architecture with hardwiring and automatic slot coding supports prewiring without the electronics modules, simple and reliable hot swapping of individual modules without a fire certificate as well as configuration in run (CiR).

In addition to analog and digital I/O modules for the automation of the technological functions of the process (Basic Process Control), the range of electronics modules also includes fail-safe I/O modules for implementing safety applications. The various types of electronics module can be arranged mixed within a station. Comprehensive diagnostic options facilitate commissioning and troubleshooting.

Design

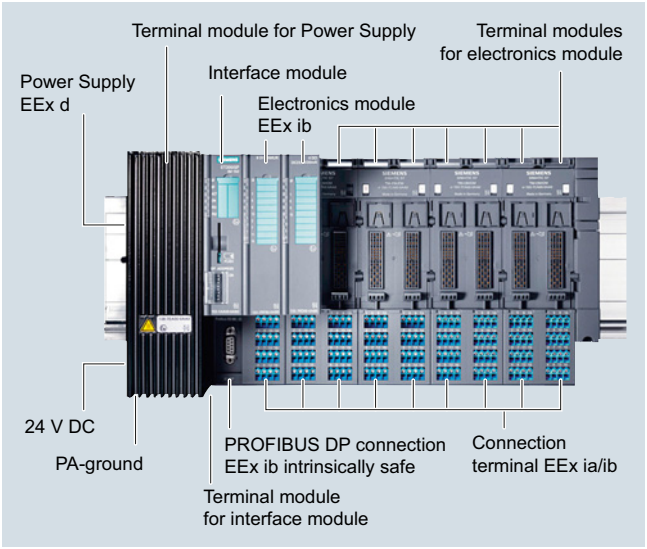

Main components of the ET 200iSP distributed I/O system:

- Terminal modules
  mounted on an S7-300 rail; for connecting power supply, interface, electronics, watchdog and reserve modules and for prewiring
  - with blue screw-type or spring-loaded terminals for hazardous environments
  - with black screw-type terminals for non-hazardous environments
- Power supply unit
  1 or 2 (redundant) power supply modules PS with pressurized enclosure for feeding 24 V DC or 120/230 V AC
- Interface module
  1 or 2 (redundant) IM 152 interface modules for connecting the station to the PROFIBUS DP
- Electronics modules (2/4/8 channels): Up to 32 in any combination
  - Digital electronics modules (DI, DO)
  - Analog electronics modules (AI, AO)
  - Safety-related electronics modules (F-DI, F-DO and F-AI)
  - Watchdog module
- Accessories
  - Reserve module for reserving a slot for any electronics module
  - Terminating module (included in scope of delivery of terminal modules for the PROFIBUS interface)
  - Labeling sheets with printable labeling strips
  - Inscription labels for slot numbering

Assembly

Assembly is quick and easy:

- Latching of terminal modules onto the S7-300 rail
- Prewiring of process signal cables on the terminal modules using spring-loaded or screw-type connections
- Plugging-in of power supply, interface and electronics modules without the need for additional tools

© Siemens 2019

Design (continued)

Expansion limits

The station width is 107 cm in the maximum configuration with 32 electronic modules.

The maximum number of electronics modules which can be used per station may be limited depending on the current consumption of the modules required to solve the automation task. However, up to 16 electronics modules can be used without limitation.

Stainless steel wall enclosure

If the ET 200iSP is used in a hazardous area, it must be installed in an appropriate Ex housing which at least corresponds to the IP54 degree of protection. Appropriate versions of an IP65 housing are offered in the Section "Stainless steel wall housings".

Outstanding design features

- Installation and testing of the wiring is possible in advance without the electronics module (independent wiring).
- Isolation of the mechanical and electronic systems, in conjunction with the independent process wiring, permits fast and easy replacement of the electronics modules
- Mechanical coding which is carried out when an electronics module is plugged onto a terminal module for the first time prevents the connection of incorrect replacement modules
- Hot swapping of the power supply modules and electronics modules is possible without a fire certificate.

Integration

Distributed ET 200iSP remote I/O stations are connected to the automation systems (controllers) via the PROFIBUS DP, which can be routed intrinsically-safe into Ex-zone 1 using an isolating transformer (RS 485-iS coupler) as barrier. Data transfer rates of up to 1.5 Mbps are possible. The ET 200iSP remote I/O stations can be connected to the controller as DP V0 slave or DP V1 slave.

The ET 200iSP remote I/O stations are integrated into the SIMATIC PCS 7 process control system using standard driver blocks.

The existing standard diagnostics drivers process the diagnostics messages generated by internal or external faults (e.g. wire breakage or short-circuit) as well as status messages of the connected HART field devices for the host operator system and the SIMATIC PCS 7 maintenance station.

Vendor-specific information and maintenance data are saved powerfail-proof on the electronics modules.

Configuration

The ET 200iSP stations can be configured and parameterized per HW Config in a SIMATIC S7/SIMATIC PCS 7 environment. Parameters of the ET 200iSP stations and the HART field devices can also be set using the process device manager, SIMATIC PDM. Routing via PROFIBUS DP enables direct access to the HART field devices on the ET 200iSP with SIMATIC PDM.

The system function CiR (Configuration in Run) is also supported for the configuration of SIMATIC PCS 7 and permits the following changes to be made to the configuration during runtime:

- Adding of ET 200iSP stations
- Adding modules to the ET 200iSP station
- Re-configuration of modules
- Parameterization of connected HART field devices with SIMATIC PDM

Software minimum requirements

- SIMATIC PCS 7 environment: SIMATIC PCS 7 Version 6.1
- SIMATIC S7 environment: SIMATIC STEP 7 Version 5.3+SP1 including Hardware Support Package (HSP) or SIMATIC STEP 7 (TIA Portal)
- The latest SIMATIC PDM version is used to configure the HART field devices.

Configuration with third-party systems and old SIMATIC PCS 7/STEP 7 versions

The station design (configuration) should be published over the PROFIBUS DP network per GSD file.

Process Device Manager SIMATIC PDM is required for the configuration. It can be used to define, for example, alarm limits for analog modules, signal encoders for digital modules as well as settings for outputting analog values and HART commands for analog HART modules.

Technical specifications

ET 200iSP – general		
Degree of protection	IP30	
Ambient temperature		
• Horizontal mounting position	-20 … +70 °C	
• Other mounting positions	-20 … +50 °C	
Loading of media	According to ISA-S71.04 severity level G1; G2; G3 (except for NH3, only level G2 in this case)	
EMC	Electromagnetic compatibility according to NE21	
Vibration resistance	0.5 g continuously, 1 g periodically	
Approvals, standards		
• ATEX	II 2 G (1) GD I M2	Ex de [ia/ib] IIC T4 Ex de [ia/ib] I
• IECEx	Zone 1	Ex de [ia/ib] IIC T4
• INMETRO	Zone 1	BR-Ex de [ia/ib] IIC T4
• cFMus	Class I, II, III	NI Division 2, Groups A, B, C, D, E, F, G T4 AIS Division 1, Groups A, B, C, D, E, F, G
	Class I	Zone 1, AEx de [ia/ib] IIC T4
• cULus	Class I, II, III	Division 2, Groups A, B, C, D, E, F, G T4 providing int. safe circuits for Division 1, Groups A, B, C, D, E, F, G
	Class I	Zone 1, AEx de [ia/ib] IIC T4
• NEPSI	Ex de ib[ia] IIC T4 Ex de [ia/ib] IIC T4	
• PROFIBUS	EN 50170, Volume 2	
• IEC	IEC 61131, Part 2	
• CE	According to 2014/34/EC, 2014/30/EC and 2014/35/EC	
• KCC	Korea Certification	
• Marine approval	Classification companies • ABS (American Bureau of Shipping) • BV (Bureau Veritas) • DNV (Det Norske Veritas) • GL (Germanischer Lloyd) • LRS (Lloyds Register of Shipping) • Class NK (Nippon Kaiji Kyokai)	

© Siemens 2019

Overview



An ET 200iSP power supply unit consists of a TM-PS terminal module (A or B) and a PS power supply module which is plugged onto this. Terminal modules and power supply modules can be ordered separately.

The power supply modules are suitable for both individual operation (standard) and redundant operation. Depending on the operating mode, they must be combined with the terminal modules as follows:

- Standard: 1 × PS on TM-PS-A UC
- Redundancy: 1 × PS on TM-PS-A UC (left) plus 1 × PS on TM-PS-B UC (right)

Power supply modules are available for supplies of 24 V DC and 120/230 V AC.

The operating state of the power supply modules is indicated by two LEDs on the IM 152 interface module (one for each module).

Application

Functions of the power supply modules

- Supply of ET 200iSP with safely isolated operating voltages for
  - Powerbus (for supplying the electronics modules)
  - Backplane bus (logic)
  - Interface module (IM 152-1)
- Safety-related limiting of output voltages

Design

Depending on the operating mode (standard or redundant), one or two power supply modules are plugged onto the corresponding terminal modules. In standard mode, a PS power supply module is combined with a TM-PS-A terminal module. In redundant mode, a second power supply unit is provided on the right of the first one. This consists of a PS power supply module and a TM-PS-B terminal module.

The power supply modules can also be used in hazardous areas. The explosion protection is guaranteed by an explosion-proof metal enclosure (explosion protection EEx d).

The power source (24 V DC or 120/230 V AC) must be installed in the safe area. It is connected to the terminal module of the power supply unit via EEX e terminals. The power source may only be connected or disconnected in a safe operating environment and not in hazardous areas.

The power supply module is moved into its working position by means of a slide system, and manually fixed there by means of a mechanical lock. Replacement through disconnection of the existing power supply module and insertion of a new module is also permissible in the hazardous area. To replace the module, the mechanical lock must first be released to remove the module from its working position using the slide.

Technical specifications

Article number	**6ES7138-7EA01-0AA0** ET200ISP, POWER SUPPLY MODULE	**6ES7138-7EC00-0AA0** ET200ISP, POWER SUPPLY MOD. AC120/230V
Supply voltage		
Rated value (DC)	24 V	
Rated value (AC)		230 V; 120/230V AC
Reverse polarity protection	Yes	
Line frequency		
• permissible range, lower limit		47 Hz
• permissible range, upper limit		63 Hz
Input current		
from supply voltage L+, max.	4 A	
from supply voltage L1, max.		1.04 A; at rated voltage 230 VAC:0.45A at rated voltage 120 VAC:0.75A
Power loss		
Power loss, typ.	20 W	5 W; 5 W + 1.2 x total power loss of the electronics modules
Power loss, max.		21.3 W
Interrupts/diagnostics/ status information		
Status indicator	Yes	Yes
Alarms	No	No
Diagnostic messages		
• Diagnostic information readable	Yes; via IM 152	Yes; via IM 152
Diagnostics indication LED		
• Group error SF (red)	No	No

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7138-7EA01-0AA0** ET200ISP, POWER SUPPLY MODULE	**6ES7138-7EC00-0AA0** ET200ISP, POWER SUPPLY MOD. AC120/230V
Ex(i) characteristics		
Maximum values of input circuits (per channel)		
• Um (fault voltage), max.	250 V; DC	264 V; AC/DC
Potential separation		
primary/secondary	Yes	Yes
between supply voltage and electronics	Yes	No
Standards, approvals, certificates		
CE mark	Yes	Yes
Use in hazardous areas		
• Type of protection acc. to EN 50020 (CENELEC)	Ex de [ib]IIC T4	Ex de [ib]IIC T4
• Type of protection acc. to KEMA	04 ATEX 2263	09 ATEX 0156
Dimensions		
Width	60 mm	60 mm
Height	190 mm	190 mm
Depth	136.5 mm	136.5 mm
Weights		
Weight, approx.	2 700 g	2 700 g

Article number	**6ES7193-7DA20-0AA0** ET200ISP, TERM.-MOD. TM-PS-A UC	**6ES7193-7DB20-0AA0** ET200ISP, TERM.-MOD. TM-PS-B UC
Standards, approvals, certificates		
CE mark	Yes	Yes
Use in hazardous areas		
• Type of protection acc. to EN 50020 (CENELEC)	see ET200iSP system	see ET200iSP system
• Test number KEMA	04 ATEX 2242	04 ATEX 2242
Dimensions		
Width	60 mm	60 mm
Height	190 mm	190 mm
Depth	52 mm	52 mm
Weights		
Weight, approx.	230 g	230 g

Ordering data

	Article No.
PS 24 V DC power supply module for ET 200iSP	**6ES7138-7EA01-0AA0**
PS 120/230 V AC power supply module for ET 200iSP	**6ES7138-7EC00-0AA0**
TM-PS-A UC terminal module For standard operation	**6ES7193-7DA20-0AA0**
TM-PS-B UC terminal module Additional terminal module for redundant operation	**6ES7193-7DB20-0AA0**

© Siemens 2019

Overview



The IM 152 interface module connects the ET 200iSP to the PROFIBUS DP with intrinsically-safe RS 485-iS transmission technology with transmission rates of up to 1.5 Mbps. A redundant connection is also possible. In this case the ET 200iSP is connected via two interface modules to two redundant PROFIBUS DP segments of a fault-tolerant automation system.

The IM 152 is plugged onto a special terminal module (to be ordered separately). The following terminal modules are available:

- TM-IM/IM terminal module for two interface modules (for redundant PROFIBUS DP connection)
- TM-IM/EM60 terminal module for one interface module and one watchdog, reserve or electronics module (except 2 DO relay)
  - with blue screw-type or spring-loaded terminals for hazardous environments
  - with black screw-type terminals for non-hazardous environments

Tasks of the IM 152 interface module

- Connection of ET 200iSP to the intrinsically-safe PROFIBUS DP
- Autonomous communication with the host automation system
- Preparation of data for the fitted electronic modules
- Saving of parameters of the electronics modules
- Time stamping of digital process signals with an accuracy of 20 ms

The maximum address space of the interface module is 244 bytes for inputs, and 244 bytes for outputs.

Design

The terminal module of the IM 152 (TM-IM/EM or TM-IM/IM) is connected directly next to the power supply unit on the DIN rail. The PROFIBUS DP connection of the IM 152 is made using the standard Sub-D socket on the terminal module. The matching connection element we provide is a special terminating plug with selectable terminating resistance. The terminating resistance must be activated on the last ET 200iSP station of each PROFIBUS DP segment.

Hot swapping of the IM 152 and the PROFIBUS connector is permissible under hazardous conditions.

A terminating module is provided together with the IM 152, and must be fitted at the right end of each ET 200iSP station following the last electronics module.

The IM 152 has a slot for micro memory cards (MMC). The firmware can therefore be updated either via the PROFIBUS DP or using MMCs.

The PROFIBUS addresses can be set using DIL switches at the front which are protected by a cover.

LEDs on the front of the IM 152 signal the supply voltage, group faults, bus faults, the active IM with redundant operation, and the operating state of the fitted power supply modules.

© Siemens 2019

Technical specifications

Article number	**6ES7152-1AA00-0AB0** ET200ISP, IM152-1 INTERFACE MODULE
Input current	
from supply voltage L+, max.	30 mA
Power loss	
Power loss, typ.	0.5 W
Time stamping	
Description	for each digital input, digital input module, total ET 200iS
Accuracy	20 ms
Number of stampable digital inputs, max.	64; for accuracy class 20 ms
Time format	RFC 1119 Internet (ISP)
Time resolution	1 ms
Time interval for transmitting the message buffer if a message is present	1 000 ms
Time stamp on signal change	rising / falling edge as signal entering or exiting
Interfaces	
Interface physics, RS 485	Yes; intrinsically safe
PROFIBUS DP	
• Transmission rate, max.	1.5 Mbit/s; 9,6 / 19,2 / 45,45 / 93,75 / 187,5 / 500 kbit/s
• SYNC capability	Yes
• FREEZE capability	Yes
• Direct data exchange (slave-to-slave communication)	Yes; Slave to slave as publisher
Protocols	
PROFIBUS DP	Yes
Protocols (Ethernet)	
• TCP/IP	No

Article number	**6ES7152-1AA00-0AB0** ET200ISP, IM152-1 INTERFACE MODULE
Isochronous mode	
Isochronous operation (application synchronized up to terminal)	No
Interrupts/diagnostics/ status information	
Alarms	Yes
Diagnostic functions	Yes
Alarms	
• acyclic function, interrupts	Yes
• acyclic function, parameters	Yes
Diagnostics indication LED	
• Bus fault BF (red)	Yes
• Group error SF (red)	Yes
• Monitoring 24 V voltage supply ON (green)	Yes
Potential separation	
between supply voltage and electronics	Yes
Standards, approvals, certificates	
CE mark	Yes
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II2 G Ex ib IIC T4 and I M2 Ex ib I
• Type of protection acc. to KEMA	04 ATEX 1243
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	245 g

Article number	**6ES7193-7AA00-0AA0** ET200ISP, TERM.-MOD. TM-IM/EM60S, SCREW	**6ES7193-7AA10-0AA0** ET200ISP, TERM.-MOD. TM-IM/EM60C ,SPRING	**6ES7193-7AA20-0AA0** ET200ISP, TERM.-MOD. TM-IM/EM60S	**6ES7193-7AB00-0AA0** ET200ISP, TERM.-MOD. TM-IM/IM F. TWO IM
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
Use in hazardous areas				
• Type of protection acc. to EN 50020 (CENELEC)	see ET200iSP system	see ET200iSP system	No	see ET200iSP system
• Test number KEMA	04 ATEX 2242	04 ATEX 2242		04 ATEX 2242
Dimensions				
Width	60 mm	60 mm	60 mm	60 mm
Height	190 mm	190 mm	190 mm	190 mm
Depth	52 mm	52 mm	52 mm	52 mm
Weights				
Weight, approx.	235 g	235 g	235 g	195 g

© Siemens 2019

Ordering data

	Article No.
ET 200iSP interface module IM 152-1	**6ES7152-1AA00-0AB0**
ET 200iSP terminal module TM-IM/EM60 For an IM 152 and a watchdog, reserve or electronics module (except 2 DO relay), including terminating module	
• For hazardous environments	
- TM-IM/EM60S (blue screw-type terminals)	**6ES7193-7AA00-0AA0**
- TM-IM/EM60C (blue spring-loaded terminals)	**6ES7193-7AA10-0AA0**
• For non-hazardous environments	
- TM-IM/EM60S (black screw-type terminals)	**6ES7193-7AA20-0AA0**
ET 200iSP terminal module TM-IM/IM For two IM 152 modules (redundant operation), including terminating module	**6ES7193-7AB00-0AA0**

	Article No.
Accessories	
PROFIBUS connector with selectable terminating resistor For connection of IM 152 to PROFIBUS DP with RS 485-iS transmission technology	**6ES7972-0DA60-0XA0**
RS 485-iS coupler Isolating transformer for connection of PROFIBUS DP segments with RS 485 and RS 485-iS transmission technologies	**6ES7972-0AC80-0XA0**
Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronics modules and 20 strips each for IM 152	
• petrol	**6ES7193-7BH00-0AA0**
• yellow	**6ES7193-7BB00-0AA0**
Labels, inscribed For slot numbering, label size H × W (in mm): 5 × 7	
• 204 labels, for slots 1 to 20	**8WA8361-0AB**
• 204 labels, for slots 1 to 40	**8WA8361-0AC**
• 136 labels, inscription in plain text	**8WA8348-0XA**
Labels, blank 136 labels for slot numbering, label size H × W (in mm): 5 × 7	**8WA8348-2AY**
S7-300 mounting rails	
• 585 mm long, suitable for assembly of ET 200iSP in a 650 mm wide wall box	**6ES7390-1AF85-0AA0**
• 885 mm long, suitable for assembly of ET 200iSP in a 950 mm wide wall box	**6ES7390-1AJ85-0AA0**

© Siemens 2019

Overview



Digital input modules

- 8-channel digital input module DI NAMUR EEx i, for evaluation of NAMUR sensors, connected and non-connected contacts, as well as for use as counter or frequency meter
  Parameterizable connections:
  - NAMUR sensor on/off
  - NAMUR changeover contact
  - Single contact connected (mechanical NO contact)
  - Changeover contact connected (mechanical changeover contact)
  - Single contact non-connected (mechanical NO contact with single contact)
  - Changeover contact non-connected (mechanical changeover contact)
  - Counting function: optional use of 2 channels for recording counter pulses or for frequency measurement
  - Short-circuit and wire break monitoring

Digital output modules

- 4-channel digital output modules DO EEx i, 23.1 V DC/20 mA, 17.4 V DC/27 mA , 17.4 V DC/40 mA or 25.5 V DC/22 mA, with external actuator switch-off via High or Low signal (H/L switch-off)
  - Load-free switching of outputs via external intrinsically-safe signal
  - Power boosting through parallel connection of two outputs for one actuator with 4 DO 17.4 V DC/27 mA or 4 DO 17.4 V DC/40 mA
  - Short-circuit and wire break monitoring
- 2-channel digital output module DO Relay EEx e, e.g. for switching solenoid valves, DC contactors or signaling lamps
  - Can be plugged onto TM-RM/RM terminal module
  - Output current up to 2 A with 60 V UC for each of the two relay outputs
  - Installation up to Ex zone 1
  - Intrinsically-safe and non-intrinsically-safe signals can be mixed in a station

Extra functions

Actuator shutdown function of the 4 DO EEx i modules

The 4 DO EEx i modules are equipped with a shutdown function. This permits implementation of an external switch-off independent of the automation system (controller).

As soon as the intrinsically-safe switch-off signal (High or Low) is present at the actuator switch-off input of the electronics module, its outputs are deactivated.

You can also combine several DO modules into a switch-off group. The intrinsically-safe power supply for the switch-off device is either via the watchdog module or a separate intrinsically-safe source.

Design

- The digital electronics modules are installed on terminal modules which must be ordered separately.
  - TM-IM/EM60 terminal modules for one interface module and one watchdog, reserve or electronics module (for versions, see section Interface module)
  - TM-EM/EM60 terminal modules with two slots for watchdog module, reserve module or electronics module (except 2 DO relay), with blue screw-type or spring-loaded terminals for hazardous environments or with black screw-type terminals for non-hazardous environments
  - TM-RM/RM 60 terminal modules with two slots for relay or reserve modules
- The digital electronics module 2 DO Relays must be plugged onto the terminal module TM-RM/RM 60S (screw-type connection system). All other digital electronics modules are plugged as planned onto terminal modules using screw-type systems (TM-EM/EM60S) or spring-loaded systems (TM-EM/EM60C).
- Using a spare module plugged onto a terminal module TM-EM/EM60S, TM-EM/EM60C or TM-RM/RM 60S, you can reserve a slot for a digital electronics module or close a gap resulting from the design. The spare module can be simply replaced by the envisaged electronics module at a later point in time.
- The mechanical coding of the terminal module which is carried out when an electronics module is plugged on for the first time prevents the connection of incorrect replacement modules.
- Hot swapping of individual modules is possible under hazardous conditions.
- The process signals are connected to the terminals of the terminal modules assigned according to the plan, using either conventional screw-type or spring-loaded systems (conductor cross-sections 0.14 mm^2 to max. 2.5 mm^2) depending on the type of module.

© Siemens 2019

Technical specifications

Article number	**6ES7131-7RF00-0AB0** ET200ISP, EL-MOD., 8DI, NAMUR
Digital inputs	
Number of digital inputs	8
Number of NAMUR inputs	8
Input voltage	
• Type of input voltage	DC
Input delay (for rated value of input voltage)	
for standard inputs	
- at "0" to "1", min.	2.8 ms
- at "0" to "1", max.	3.5 ms
- at "1" to "0", min.	2.8 ms
- at "1" to "0", max.	3.5 ms
Cable length	
• shielded, max.	500 m
Encoder	
Number of connectable encoders, max.	8
Connectable encoders	
• NAMUR encoder	Yes
NAMUR encoder	
• Input current for signal "0", max.	1.2 mA
• Input current for signal "1", min.	2.1 mA
Interrupts/diagnostics/ status information	
Diagnostic functions	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Hardware interrupt	No
Diagnostic messages	
• Diagnostic information readable	Yes
• Short-circuit	Yes; R load < 150 ohms with NAMUR sensor/sensor and NAMUR changeover contact/sensor to DIN 19234

Article number	**6ES7131-7RF00-0AB0** ET200ISP, EL-MOD., 8DI, NAMUR
Diagnostics indication LED	
• Group error SF (red)	Yes
• Status indicator digital input (green)	Yes
Integrated Functions	
Frequency measurement	Yes; (Gate time) 50 ms; 200 ms; 1 s
Number of frequency meters	2
Counter	
Number of counter inputs	2; normal and periodic count function
Input frequency, max.	5 kHz; with a cable length of 20 m: 5 kHz; with a cable length of 100 m: 1 kHz; with a cable length of 200 m: 500 Hz
Potential separation	
Potential separation digital inputs	
• between the channels	No
• between the channels and backplane bus	Yes
Permissible potential difference	
between different circuits	60 V DC/30 V AC
Standards, approvals, certificates	
CE mark	Yes
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I
• Type of protection acc. to KEMA	04 ATEX 1248
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	255 g

Article number	**6ES7132-7RD01-0AB0** ET200ISP, EL-MOD., 4DO, DC 23,1V, 20MA	**6ES7132-7RD11-0AB0** ET200ISP, EL-MOD., 4DO, DC 17,4V, 27MA	**6ES7132-7RD22-0AB0** ET200ISP, EL-MOD., 4DO, DC 17.4V, 40MA
Input current			
from load voltage L+ (without load), max.	340 mA; with actuator supply	300 mA	400 mA
from backplane bus 3.3 V DC, max.	10 mA	10 mA	
Power loss			
Power loss, typ.	2.5 W	2.1 W	2.8 W
Address area			
Address space per module			
• without packing	2 byte	2 byte	2 byte
Digital outputs			
Number of digital outputs	4; additionally 1 intrinsically-safe input for H shutdown	4; additionally 1 intrinsically-safe input for H shutdown	4; additionally 1 intrinsically-safe input for H shutdown
Short-circuit protection	Yes	Yes	Yes
No-load voltage Uao (DC)	23.1 V	17.4 V	17.4 V
Internal resistor Ri	275 Ω	150 Ω	167 Ω
Trend key points E			
• Voltage Ue (DC)	17.6 V	13.3 V	10.7 V
• Current Ie	20 mA	27 mA	40 mA; 80 mA when outputs connected in parallel

© Siemens 2019

Technical specifications (continued)

Article number	6ES7132-7RD01-0AB0 ET200ISP, EL-MOD., 4DO, DC 23,1V, 20MA	6ES7132-7RD11-0AB0 ET200ISP, EL-MOD., 4DO, DC 17,4V, 27MA	6ES7132-7RD22-0AB0 ET200ISP, EL-MOD., 4DO, DC 17.4V, 40MA
Output current			
• for signal "1" rated value	0.02 A	0.027 A	0.04 A
Output delay with resistive load			
• "0" to "1", max.	2 ms	2 ms	2 ms
• "1" to "0", max.	1.5 ms	1.5 ms	1.5 ms
Parallel switching of two outputs			
• for uprating	No; for Ex reasons not possible; nor for predecessor	Yes	Yes
Switching frequency			
• with resistive load, max.	100 Hz	100 Hz	100 Hz
• with inductive load, max.	2 Hz	2 Hz	2 Hz
Cable length			
• shielded, max.	500 m	500 m	500 m
• unshielded, max.	500 m	500 m	500 m
Interrupts/diagnostics/ status information			
Status indicator	Yes	Yes	Yes
Alarms		No	
Diagnostic functions	Yes	Yes	
Alarms			
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Diagnostic messages			
• Diagnostic information readable	Yes	Yes	Yes
• Wire-break	Yes; R > 10 kohms, I < 100 µA	Yes	Yes; R > 10 kohms, I < 100 µA
• Short-circuit	Yes; R< 800 ohms (one output), R< 40 ohms (outputs connected in parallel)	Yes	Yes; R< 80 Ohm (one output), R< 40 Ohm (outputs connected in parallel)
Diagnostics indication LED			
• Group error SF (red)	Yes	Yes	Yes
• Status indicator digital output (green)	Yes	Yes	Yes; Per channel
Parameter			
Remark		14 byte	
Diagnostics wire break	Yes	Yes	Yes
Diagnostics short-circuit	Yes	Yes	Yes
Response to CPU/master STOP	Substitute a value/keep last value	Substitute a value/keep last value	Substitute a value/keep last value
Ex(i) characteristics			
Maximum values of output circuits (per channel)			
• Co (permissible external capacity), max.			241 nF; For IIC, 1507 nF for IIB
• Io (short-circuit current), max.			118 mA
• Lo (permissible external inductivity), max.			1.7 mH; For IIC, 10.4 mH for IIB
• Po (power of load), max.			572 mW
• Uo (output no-load voltage), max.			19.4 V
• Ta (permissible ambient temperature), max.	70 °C	70 °C	
Potential separation			
Potential separation digital outputs			
• between the channels	No	No	No
• between the channels and backplane bus	Yes	Yes	Yes
• Between the channels and load voltage L+	Yes	Yes	Yes

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7132-7RD01-0AB0** ET200ISP, EL-MOD., 4DO, DC 23,1V, 20MA	**6ES7132-7RD11-0AB0** ET200ISP, EL-MOD., 4DO, DC 17,4V, 27MA	**6ES7132-7RD22-0AB0** ET200ISP, EL-MOD., 4DO, DC 17.4V, 40MA
Permissible potential difference			
between different circuits			60 V DC/30 V AC
Standards, approvals, certificates			
CE mark			Yes
Highest safety class achievable in safety mode			
• SIL acc. to IEC 61508	No		No
Use in hazardous areas			
• Type of protection acc. to EN 50020 (CENELEC)	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I
• Type of protection acc. to KEMA	04 ATEX 1249	04 ATEX 1249	04 ATEX 1249
Dimensions			
Width	30 mm	30 mm	30 mm
Height	129 mm	129 mm	129 mm
Depth	136.5 mm	136.5 mm	136.5 mm
Weights			
Weight, approx.	255 g	255 g	255 g

Article number	**6ES7132-7GD00-0AB0** ET200ISP, EL-MOD., 4DO, DC 23,1V, 20MA	**6ES7132-7GD10-0AB0** ET200ISP, EL-MOD., 4DO, DC 17,4V, 27MA	**6ES7132-7GD21-0AB0** ET200ISP, EL-MOD., 4DO, DC 17,4V, 40MA	**6ES7132-7GD30-0AB0** ET200ISP, EL-MOD., 4DO, DC 25.5V, 22MA
Input current				
from load voltage L+ (without load), max.	340 mA; with actuator supply	300 mA; with actuator supply	400 mA	400 mA
from backplane bus 3.3 V DC, max.	10 mA	10 mA		
Power loss				
Power loss, typ.	2.5 W	2.1 W	2.8 W	2.8 W
Address area				
Address space per module				
• without packing	2 byte	2 byte	2 byte	2 byte
Digital outputs				
Number of digital outputs	4; additionally 1 intrinsically-safe input for L shutdown	4; additionally 1 intrinsically-safe input for L shutdown	4; additionally 1 intrinsically-safe input for L shutdown	4; additionally 1 intrinsically-safe input for L shutdown
Short-circuit protection	Yes	Yes	Yes	Yes
No-load voltage Uao (DC)	23.1 V	17.4 V	17.4 V	25.5 V
Internal resistor Ri	275 Ω	150 Ω	167 Ω	260 Ω
Trend key points E				
• Voltage Ue (DC)	17.6 V	13.3 V	10.7 V	19.8 V
• Current Ie	20 mA	27 mA; 54 mA when outputs connected in parallel	40 mA	22 mA
Output current				
• for signal "1" rated value	0.02 A	0.027 A	0.04 A	0.022 A
Output delay with resistive load				
• "0" to "1", max.	2 ms	2 ms	2 ms	2 ms
• "1" to "0", max.	1.5 ms	1.5 ms	1.5 ms	1.5 ms
Parallel switching of two outputs				
• for uprating	No; for Ex reasons not possible; nor for predecessor	Yes	Yes	No
Switching frequency				
• with resistive load, max.	100 Hz	100 Hz	100 Hz	100 Hz
• with inductive load, max.	2 Hz	2 Hz	2 Hz	2 Hz
Cable length				
• shielded, max.	500 m	500 m	500 m	500 m
• unshielded, max.	500 m	500 m	500 m	500 m

© Siemens 2019

Technical specifications (continued)

Article number	6ES7132-7GD00-0AB0	6ES7132-7GD10-0AB0	6ES7132-7GD21-0AB0	6ES7132-7GD30-0AB0
	ET200ISP, EL-MOD., 4DO, DC 23,1V, 20MA	ET200ISP, EL-MOD., 4DO, DC 17,4V, 27MA	ET200ISP, EL-MOD., 4DO, DC 17,4V, 40MA	ET200ISP, EL-MOD., 4DO, DC 25.5V, 22MA
Interrupts/diagnostics/ status information				
Status indicator	Yes	Yes	Yes	Yes
Diagnostic functions	Yes	Yes	Yes	Yes
Alarms				
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Diagnostic messages				
• Diagnostic information readable	Yes	Yes	Yes	Yes
• Wire-break	Yes; R > 10 kohms, I < 100 µA	Yes; R > 10 kohms, I < 100 µA	Yes; R > 10 kohms, I < 100 µA	Yes; R > 10 kohms, I < 100 µA
• Short-circuit	Yes; R< 80 Ohm (one output), R< 40 Ohm (outputs connected in parallel)	Yes; R< 800 ohms (one output), R< 40 ohms (outputs connected in parallel)	Yes; R< 80 Ohm (one output), R< 40 Ohm (outputs connected in parallel)	Yes; R < 80 ohms
Diagnostics indication LED				
• Group error SF (red)	Yes	Yes	Yes	Yes
• Status indicator digital output (green)	Yes	Yes	Yes; Per channel	Yes; Per channel
Parameter				
Remark	14 byte	14 byte		
Diagnostics wire break	Yes	Yes	Yes	Yes
Diagnostics short-circuit	Yes	Yes	Yes	Yes
Response to CPU/master STOP	Substitute a value/keep last value	Substitute a value/keep last value	Substitute a value/keep last value	Substitute a value/keep last value
Ex(i) characteristics				
Maximum values of output circuits (per channel)				
• Co (permissible external capacity), max.			241 nF; For IIC, 1507 nF for IIB	81 nF; For IIC, 651 nF for IIB
• Io (short-circuit current), max.			118 mA	110 mA
• Lo (permissible external inductivity), max.			1.7 mH; For IIC, 10.4 mH for IIB	1.7 mH; For IIC, 11.5 mH for IIB
• Po (power of load), max.			572 mW	764 mW
• Uo (output no-load voltage), max.			19.4 V	27.9 V
• Ta (permissible ambient temperature), max.	70 °C	70 °C		
Potential separation				
Potential separation digital outputs				
• between the channels	No	No	No	No
• between the channels and backplane bus	Yes	Yes	Yes	Yes
• Between the channels and load voltage L+	Yes	Yes	Yes	Yes
Permissible potential difference				
between different circuits			60 V DC/30 V AC	60 V DC/30 V AC
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
Highest safety class achievable in safety mode				
• SIL acc. to IEC 61508	No	No	No	No
Use in hazardous areas				
• Type of protection acc. to EN 50020 (CENELEC)	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I	II 2 G (1) GD and I M2 Ex ib[ia][iaD] IIC T4; Ex ib [ia] I	II 2 G (1) GD and I M2 Ex ib[ia][iaD] IIC T4; Ex ib [ia] I
• Type of protection acc. to KEMA	04 ATEX 1249	04 ATEX 1249	04 ATEX 1249	04 ATEX 1249
Dimensions				
Width	30 mm	30 mm	30 mm	30 mm
Height	129 mm	129 mm	129 mm	129 mm
Depth	136.5 mm	136.5 mm	136.5 mm	136.5 mm
Weights				
Weight, approx.	255 g	255 g	255 g	255 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7132-7HB00-0AB0** ET200ISP, RELAY-MOD., 2DO, UC60V, 2A
Input current	
from load voltage L+ (without load), max.	120 mA
Power loss	
Power loss, typ.	1.1 W
Digital outputs	
Number of digital outputs	2
Short-circuit protection	No
Output current	
• for signal "1" rated value	2 A
Output delay with resistive load	
• "0" to "1", max.	8 ms
• "1" to "0", max.	3 ms
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	No
Switching frequency	
• with resistive load, max.	0.5 Hz; See data in manual
• with inductive load, max.	0.2 Hz; See data in manual
Relay outputs	
Switching capacity of contacts	
- with resistive load, up to 60 °C, max.	2 A; See data in manual
- Thermal continuous current, max.	2 A; See data in manual
Cable length	
• shielded, max.	500 m
• unshielded, max.	500 m

Article number	**6ES7132-7HB00-0AB0** ET200ISP, RELAY-MOD., 2DO, UC60V, 2A
Interrupts/diagnostics/ status information	
Status indicator	Yes
Alarms	No
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	No
Diagnostic messages	
• Diagnostic information readable	Yes
• Wire-break	No; Cannot be determined in contact power circuit
• Short-circuit	No; Cannot be determined in contact power circuit
Diagnostics indication LED	
• Group error SF (red)	Yes
• Status indicator digital output (green)	Yes; Per channel
Ex(i) characteristics	
Maximum values of output circuits (per channel)	
• Uo (output no-load voltage), max.	60 V
• Um (fault voltage), max.	250 V
• Ta (permissible ambient temperature), max.	70 °C
Potential separation	
Potential separation digital outputs	
• between the channels	Yes
• between the channels and backplane bus	Yes
• Between the channels and load voltage L+	Yes; Channels and power bus
Standards, approvals, certificates	
CE mark	Yes
Highest safety class achievable in safety mode	
• SIL acc. to IEC 61508	No
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II 2 G and I M2 Ex eibmb IIC T4; Ex eibmb I
• Type of protection acc. to KEMA	07 ATEX 0180
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	255 g

© Siemens 2019

Technical specifications (continued)

Article number	6ES7193-7CA00-0AA0	6ES7193-7CA10-0AA0	6ES7193-7CA20-0AA0	6ES7193-7CB00-0AA0
	ET200ISP, TERM.-MOD. TM-EM/EM60S F. EM	ET200ISP, TERM.-MOD. TM-EM/EM60C F. EM	ET200ISP, TERM.-MOD. TM-EM/EM60S F. EM	ET200ISP, TERM.-MOD. TM-RM/RM
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
Use in hazardous areas				
• Type of protection acc. to EN 50020 (CENELEC)	see ET200iSP system	see ET200iSP system	No	see ET200iSP system
• Test number KEMA	04 ATEX 2242	04 ATEX 2242		07 ATEX 0205
Dimensions				
Width	60 mm	60 mm	60 mm	60 mm
Height	190 mm	190 mm	190 mm	190 mm
Depth	52 mm	52 mm	52 mm	52 mm
Weights				
Weight, approx.	275 g	275 g	235 g	340 g

Article number	6ES7138-7AA00-0AA0
	ET200ISP, RESERVE MODULE
Digital inputs	
Number of digital inputs	0
Standards, approvals, certificates	
CE mark	Yes
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II2 G EEx ib IIC T4
• Test number KEMA	04 ATEX 1251
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	180 g

11

Ordering data

	Article No.
Digital input modules	
Digital input modules EEx i	
8 DI NAMUR For evaluation of NAMUR sensors, connected/non-connected contacts, as well as for recording counter pulses or measuring frequencies • 8 × NAMUR (NAMUR sensor on/off, NAMUR changeover contact) or connected/non-connected inputs (single/changeover contact) • 2 channels optionally usable as counters (max. 5 kHz) or frequency meters (1 Hz ... 5 kHz) • Time tagging 20 ms, rising or falling edge • Wire break monitoring • Short-circuit monitoring • Sensor power supply monitoring • Flutter monitoring	**6ES7131-7RF00-0AB0**

	Article No.
Digital output modules	
Digital output modules EEx i with H-switch-off (external actuator switch-off via H-signal); for switching of solenoid valves, DC relays, signal lamps, actuators	
4 DO DC 23.1 V/20 mA • 4 channels with 20 mA each • Short-circuit monitoring • Wire break monitoring • Configurable connection of substitute value in the event of CPU failure • Load-free switching of outputs via external intrinsically-safe signal	**6ES7132-7RD01-0AB0**
4 DO DC 17.4 V/27 mA • 4 channels with 27 mA each or • 2 outputs connected in parallel with 54 mA each • Short-circuit monitoring • Wire break monitoring • Configurable connection of substitute value in the event of CPU failure • Load-free switching of outputs via external intrinsically-safe signal	**6ES7132-7RD11-0AB0**

© Siemens 2019

Ordering data	Article No.
4 DO DC 17.4 V/40 mA • 4 channels with 40 mA each or • 2 outputs connected in parallel with 80 mA each • Short-circuit monitoring • Wire break monitoring • Configurable connection of substitute value in the event of CPU failure • Load-free switching of outputs via external intrinsically-safe signal Digital output modules EEx i with L-switch-off (external actuator switch-off via L-signal); for switching of solenoid valves, DC relays, signal lamps, actuators	**6ES7132-7RD22-0AB0**
4 DO DC 23.1 V/20 mA • 4 channels with 20 mA each • Short-circuit monitoring • Wire break monitoring • Configurable connection of substitute value in the event of CPU failure • Load-free switching of outputs via external intrinsically-safe signal	**6ES7132-7GD00-0AB0**
4 DO DC 17.4 V/27 mA • 4 channels with 27 mA each or • 2 outputs connected in parallel with 54 mA each • Short-circuit monitoring • Wire break monitoring • Configurable connection of substitute value in the event of CPU failure • Load-free switching of outputs via external intrinsically-safe signal	**6ES7132-7GD10-0AB0**
4 DO DC 17.4 V/40 mA • 4 channels with 40 mA each or • 2 outputs connected in parallel with 80 mA each • Short-circuit monitoring • Wire break monitoring • Configurable connection of substitute value in the event of CPU failure • Load-free switching of outputs via external intrinsically-safe signal	**6ES7132-7GD21-0AB0**
4 DO DC 25.5 V/22 mA[1)] • 4 channels with 22 mA each • Short-circuit monitoring • Wire break monitoring • Configurable connection of substitute value in the event of CPU failure • Load-free switching of outputs via external intrinsically-safe signal Digital output modules EEx e For switching of solenoid valves, DC contactors or indicator lights	**6ES7132-7GD30-0AB0**
2 DO Relay, 60 V UC, 2 A • Can be plugged onto TM-RM/RM terminal module • Output current up to 2 A with 60 V UC for each of the two relay outputs • Installation up to Ex zone 1 • Configurable connection of substitute value in the event of CPU failure	**6ES7132-7HB00-0AB0**

	Article No.
Terminal modules	
ET 200iSP terminal module TM-EM/EM60 For two modules (reserve module, watchdog module and all electronics modules except 2 DO Relay can be plugged in) • For hazardous environments	
- TM-EM/EM60S (blue screw-type terminals)	**6ES7193-7CA00-0AA0**
- TM-EM/EM60C (blue spring-loaded terminals)	**6ES7193-7CA10-0AA0**
• For non-hazardous environments	
- TM-EM/EM60S (black screw-type terminals)	**6ES7193-7CA20-0AA0**
ET 200iSP terminal module TM-RM/RM 60 For two modules (electronics module 2 DO Relay and reserve module can be plugged-in) • TM-RM/RM60S (screw-type terminals)	**6ES7193-7CB00-0AA0**
Accessories	
Reserve module For any electronics module	**6ES7138-7AA00-0AA0**
Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronics modules and 20 strips each for IM 151	
• petrol	**6ES7193-7BH00-0AA0**
• yellow	**6ES7193-7BB00-0AA0**
Labels, inscribed For slot numbering, label size H × W (in mm): 5 × 7	
• 204 labels, for slots 1 to 20	**8WA8361-0AB**
• 204 labels, for slots 1 to 40	**8WA8361-0AC**
Labels, blank 136 labels for slot numbering, label size H × W (in mm): 5 × 7	**8WA8348-2AY**
S7-300 rails	
• 585 mm long, suitable for assembly of ET 200iSP in a 650 mm wide wall box	**6ES7390-1AF85-0AA0**
• 885 mm long, suitable for assembly of ET 200iSP in a 950 mm wide wall box	**6ES7390-1AJ85-0AA0**

[1)] Can be used with SIMATIC PCS 7 V7.1+SP2 or higher

11

© Siemens 2019

Overview



Analog input modules

- 4-channel analog input module AI 2 WIRE HART EEx i for current measurement in the range 4 to 20 mA, suitable for connection of two-wire transmitters (with/without HART functionality)
  - Resolution 12 bit + sign
  - Max. load of transmitter 750 Ω
  - Short-circuit and wire break monitoring
- 4-channel analog input module AI 4 WIRE HART EEx i for current measurement in the range 0/4 to 20 mA, suitable for connection of 4-wire transmitters (with/without HART functionality)
  - Resolution 12 bit + sign
  - Max. load of transmitter 750 Ω
  - Wire break monitoring
- 4-channel analog input module AI RTD EEx i for resistance measurement and for temperature measurement per Pt100/Ni100 resistance thermometer
  - Resolution 15 bit + sign
  - 2, 3, or 4-wire connection possible
  - Resistance measurements 600 Ω absolute and 1 000 Ω absolute
  - Wire break monitoring
- 4-channel analog input module AI TC EEx i for thermoelectric EMF measurements and for temperature measurement per thermocouple, type B, E, N, J, K, L, S, R, T, U
  - Resolution 15 bit + sign
  - Internal temperature compensation possible using TC sensor module (included in scope of delivery of module)
  - External temperature compensation by means of a temperature value acquired at an analog module of the same ET 200iSP station
  - Wire break monitoring

Analog output modules

- 4-channel analog output module AO I HART EEx i for output of current signals in the range 0/4 to 20 mA to field devices (with/without HART functionality)
  - Resolution 14 bit
  - Parameterizable substitute value in case of CPU failure
  - Short-circuit and wire break monitoring

Extra functions

Temperature compensation

A TC sensor module for internal temperature compensation is provided with the 4 AI TC module, and is fitted on the corresponding terminals of the associated terminal module.

External temperature compensation is possible via a Pt100 on a 4 AI RTD module.

Design

- The analog electronics modules are installed on terminal modules which must be ordered separately:
  - TM-IM/EM60 terminal modules for one interface module and one watchdog, reserve or electronics module (for versions, see section Interface module)
  - TM-EM/EM60 terminal modules with two slots for watchdog module, reserve module or electronics module (except 2 DO relay), with blue screw-type or spring-loaded terminals for hazardous environments or with black screw-type terminals for non-hazardous environments
- The analog electronics modules are plugged as planned onto terminal modules using screw-type systems (TM-EM/EM60S) or spring-loaded systems (TM-EM/EM60C).
- Using a spare module plugged onto a terminal module TM-EM/EM60S or TM-EM/EM60C, you can reserve a slot for an analog electronics module or close a gap resulting from how the modules were placed. The spare module can be simply replaced by the envisaged electronics module at a later point in time.
- The mechanical coding of the terminal module which is carried out when an electronics module is plugged on for the first time prevents the connection of incorrect replacement modules.
- Hot swapping of individual modules is possible under hazardous conditions.
- The process signals are connected to the terminals of the terminal modules assigned according to the plan, using either conventional screw-type or spring-loaded systems (conductor cross-sections 0.14 mm^2 to max. 2.5 mm^2) depending on the type of module.

© Siemens 2019

Technical specifications

Article number	**6ES7134-7SD00-0AB0** ET200ISP, EL-MOD., 4 AI TC	**6ES7134-7SD51-0AB0** ET200ISP, EL-MOD., 4 AI RTD, PT100/NI100	**6ES7134-7TD00-0AB0** ET200ISP, EL-MOD., 4 AI, HART, 2-WIRE	**6ES7134-7TD50-0AB0** ET200ISP, EL-MOD., 4 AI, HART, 4-WIRE
Input current				
from supply voltage L+, max.	30 mA	22 mA	320 mA	30 mA
Output voltage				
Power supply to the transmitters				
• short-circuit proof			Yes	
• Supply current, max.			23 mA; per channel	
Power loss				
Power loss, typ.	0.4 W	0.4 W	2.7 W	0.4 W
Analog inputs				
Number of analog inputs	4	4	4	4
permissible input current for current input (destruction limit), max.			90 mA	50 mA
Cycle time (all channels) max.	320 ms; 66 ms basic conversion time x 4 channels with interference frequency suppression 60 Hz, 80 ms basic conversion time x 4 channels with interference frequency suppression 50 Hz	320 ms; 66 ms basic conversion time x 4 channels with interference frequency suppression 60 Hz, 80 ms basic conversion time x 4 channels with interference frequency suppression 50 Hz	120 ms; 30 ms basic conversion time x 4 channels with 60 Hz, 50 Hz interference frequency suppression	120 ms; 30 ms basic conversion time x 4 channels with 60 Hz, 50 Hz interference frequency suppression
Technical unit for temperature measurement adjustable	Yes	Yes	Yes	Yes
Input ranges				
• Voltage	Yes	No	No	No
• Current	No	No	Yes	Yes
• Thermocouple	Yes	No	No	No
• Resistance thermometer	No	Yes	No	No
• Resistance	No	Yes	No	No
Input ranges (rated values), voltages				
• -80 mV to +80 mV	Yes			
• Input resistance (-80 mV to +80 mV)	1 000 kΩ			
Input ranges (rated values), currents				
• 4 mA to 20 mA			Yes	Yes
• Input resistance (4 mA to 20 mA)				295 Ω
Input ranges (rated values), thermocouples				
• Type B	Yes			
• Input resistance (Type B)	1 000 kΩ			
• Type C	Yes			
• Input resistance (Type C)	1 000 kΩ			
• Type E	Yes			
• Input resistance (Type E)	1 000 kΩ			
• Type J	Yes			
• Input resistance (type J)	1 000 kΩ			
• Type K	Yes			
• Input resistance (Type K)	1 000 kΩ			
• Type L	Yes			
• Input resistance (Type L)	1 000 kΩ			
• Type N	Yes			
• Input resistance (Type N)	1 000 kΩ			
• Type R	Yes			
• Input resistance (Type R)	1 000 kΩ			
• Type S	Yes			
• Input resistance (Type S)	1 000 kΩ			
• Type T	Yes			
• Input resistance (Type T)	1 000 kΩ			
• Type U	Yes			
• Input resistance (Type U)	1 000 kΩ			

© Siemens 2019

Technical specifications (continued)

Article number	6ES7134-7SD00-0AB0 ET200ISP, EL-MOD., 4 AI TC	6ES7134-7SD51-0AB0 ET200ISP, EL-MOD., 4 AI RTD, PT100/NI100	6ES7134-7TD00-0AB0 ET200ISP, EL-MOD., 4 AI, HART, 2-WIRE	6ES7134-7TD50-0AB0 ET200ISP, EL-MOD., 4 AI, HART, 4-WIRE
Input ranges (rated values), resistance thermometer				
• Ni 100		Yes		
• Input resistance (Ni 100)		2 000 kΩ		
• Pt 100		Yes		
• Input resistance (Pt 100)		2 000 kΩ		
Input ranges (rated values), resistors				
• 0 to 600 ohms		Yes; Also 1000 ohms		
• Input resistance (0 to 600 ohms)		1 000 kΩ		
Thermocouple (TC)				
Temperature compensation				
- internal temperature compensation	Yes; via supplied TC sensor module			
- external temperature compensation with compensations socket	Yes; via temperature value, acquired by an analog module of the same ET 200iSP station			
Characteristic linearization				
• parameterizable	Yes	Yes		
- for thermocouples	Yes			
- for resistance thermometer		Yes		
Cable length				
• shielded, max.	50 m	500 m	500 m	500 m
Analog value generation for the inputs				
Measurement principle	integrating (Sigma-Delta)	integrating (Sigma-Delta)	integrating (Sigma-Delta)	integrating (Sigma-Delta)
Integration and conversion time/ resolution per channel				
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	13 bit	12 bit; + sign
• Integration time, parameterizable	Yes	Yes	No	Yes
• Basic conversion time, including integration time (ms)	80 ms at 50 Hz; 66 ms at 60 Hz	80 ms at 50 Hz; 66 ms at 60 Hz		30 ms
- additional conversion time for wire-break monitoring	5 ms	5 ms		
• Interference voltage suppression for interference frequency f1 in Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Smoothing of measured values				
• parameterizable	Yes; in 4 stages	Yes; in 4 stages	Yes; in 4 stages	Yes; in 4 stages
• Step: None	Yes; 1 x cycle time	Yes; 1 x cycle time	Yes; 1 x cycle time	Yes; 1 x cycle time
• Step: low	Yes; 4 x cycle time	Yes; 4 x cycle time	Yes; 4 x cycle time	Yes; 4 x cycle time
• Step: Medium	Yes; 32 x cycle time	Yes; 32 x cycle time	Yes; 32 x cycle time	Yes; 32 x cycle time
• Step: High	Yes; 64 x cycle time	Yes; 64 x cycle time	Yes; 64 x cycle time	Yes; 64 x cycle time
Encoder				
Connection of signal encoders				
• for current measurement as 2-wire transducer			Yes	
- Burden of 2-wire transmitter, max.			750 Ω	
• for current measurement as 4-wire transducer				Yes
• for resistance measurement with two-wire connection		Yes		
• for resistance measurement with three-wire connection		Yes		
• for resistance measurement with four-wire connection		Yes		

© Siemens 2019

Technical specifications (continued)

Article number	6ES7134-7SD00-0AB0 ET200ISP, EL-MOD., 4 AI TC	6ES7134-7SD51-0AB0 ET200ISP, EL-MOD., 4 AI RTD, PT100/NI100	6ES7134-7TD00-0AB0 ET200ISP, EL-MOD., 4 AI, HART, 2-WIRE	6ES7134-7TD50-0AB0 ET200ISP, EL-MOD., 4 AI, HART, 4-WIRE
Errors/accuracies				
Linearity error (relative to input range), (±)	0.015 %	0.015 %	0.015 %	0.015 %
Temperature error (relative to input range), (±)	0.02 %/K	0.02 %/K	0.005 %/K	0.005 %/K
Crosstalk between the inputs, min.	-50 dB	-50 dB	-50 dB	-50 dB
Repeat accuracy in steady state at 25 °C (relative to input range), (±)	0.01 %	0.01 %	0.01 %	0.01 %
Operational error limit in overall temperature range				
• Voltage, relative to input range, (±)	0.15 %			
• Current, relative to input range, (±)			0.15 %	0.15 %
• Resistance thermometer, relative to input range, (±)		0.15 %; Applies to resistances standard ±0.8 K, climatic ±0.3 K		
Basic error limit (operational limit at 25 °C)				
• Voltage, relative to input range, (±)	0.1 %			
• Current, relative to input range, (±)			0.1 %	0.1 %
• Resistance thermometer, relative to input range, (±)		0.1 %; Applies to resistances standard ±0.5 K, climatic ±0.2 K		
Interference voltage suppression for f = n x (f1 ± 1 %), f1 = interference frequency				
• Series mode interference (peak value of interference < rated value of input range), min.	70 dB	70 dB	70 dB	70 dB
• Common mode interference, min.	90 dB	90 dB		
Interrupts/diagnostics/ status information				
Alarms				
• Diagnostic alarm	Yes; Parameterizable	Yes	Yes; Parameterizable	Yes; Parameterizable
• Limit value alarm	Yes; Parameterizable	Yes	Yes; Parameterizable	Yes; Parameterizable
Diagnostic messages				
• Diagnostic information readable	Yes	Yes	Yes	Yes
• Wire-break		Yes	Yes	Yes
• Short-circuit		Yes	Yes	
• Group error		Yes		
Diagnostics indication LED				
• Group error SF (red)	Yes	Yes	Yes	Yes
Potential separation				
Potential separation analog inputs				
• between the channels	Yes; Functional	No	No	No
• between the channels and backplane bus	Yes	Yes	Yes	Yes
• Between the channels and load voltage L+		Yes; Channels and power bus		

© Siemens 2019

Technical specifications (continued)

Article number	6ES7134-7SD00-0AB0 ET200ISP, EL-MOD., 4 AI TC	6ES7134-7SD51-0AB0 ET200ISP, EL-MOD., 4 AI RTD, PT100/NI100	6ES7134-7TD00-0AB0 ET200ISP, EL-MOD., 4 AI, HART, 2-WIRE	6ES7134-7TD50-0AB0 ET200ISP, EL-MOD., 4 AI, HART, 4-WIRE
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
Highest safety class achievable in safety mode				
• Performance level according to ISO 13849-1	none	none	none	none
• SIL acc. to IEC 61508	No	No	No	No
Use in hazardous areas				
• Type of protection acc. to EN 50020 (CENELEC)	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I
• Type of protection acc. to KEMA	04 ATEX 1246	04 ATEX 1247	04 ATEX 1244	04 ATEX 1245
Dimensions				
Width	30 mm	30 mm	30 mm	30 mm
Height	129 mm	129 mm	129 mm	129 mm
Depth	136.5 mm	136.5 mm	136.5 mm	136.5 mm
Weights				
Weight, approx.	230 g	230 g	230 g	230 g

Article number	6ES7135-7TD00-0AB0 ET200ISP, EL-MOD., 4 AO, 4-20MA, HART
Input current	
from load voltage L+ (without load), max.	330 mA
Power loss	
Power loss, typ.	2.7 W
Analog outputs	
Number of analog outputs	4
Cycle time (all channels) max.	3.6 ms
Output ranges, current	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Connection of actuators	
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with current outputs, max.	750 Ω
Cable length	
• shielded, max.	500 m
Analog value generation for the outputs	
Integration and conversion time/ resolution per channel	
• Resolution with overrange (bit including sign), max.	14 bit
Settling time	
• for resistive load	4 ms
• for capacitive load	40 ms
• for inductive load	40 ms
Errors/accuracies	
Linearity error (relative to output range), (±)	0.015 %
Temperature error (relative to output range), (±)	0.005 %/K
Crosstalk between the outputs, min.	-50 dB
Repeat accuracy in steady state at 25 °C (relative to output range), (±)	0.01 %

Article number	6ES7135-7TD00-0AB0 ET200ISP, EL-MOD., 4 AO, 4-20MA, HART
Operational error limit in overall temperature range	
• Current, relative to output range, (±)	0.15 %
Basic error limit (operational limit at 25 °C)	
• Current, relative to output range, (±	0.1 %
Interrupts/diagnostics/ status information	
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostic messages	
• Diagnostic information readable	Yes
• Wire-break	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Group error SF (red)	Yes
Potential separation	
Potential separation analog outputs	
• between the channels	No
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
CE mark	Yes
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I
• Type of protection acc. to KEMA	04 ATEX 1250
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	265 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7193-7CA00-0AA0** ET200ISP, TERM.-MOD. TM-EM/EM60S F. EM	**6ES7193-7CA10-0AA0** ET200ISP, TERM.-MOD. TM-EM/EM60C F. EM	**6ES7193-7CA20-0AA0** ET200ISP, TERM.-MOD. TM-EM/EM60S F. EM	**6ES7193-7CB00-0AA0** ET200ISP, TERM.-MOD. TM-RM/RM
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
Use in hazardous areas				
• Type of protection acc. to EN 50020 (CENELEC)	see ET200iSP system	see ET200iSP system	No	see ET200iSP system
• Test number KEMA	04 ATEX 2242	04 ATEX 2242		07 ATEX 0205
Dimensions				
Width	60 mm	60 mm	60 mm	60 mm
Height	190 mm	190 mm	190 mm	190 mm
Depth	52 mm	52 mm	52 mm	52 mm
Weights				
Weight, approx.	275 g	275 g	235 g	340 g

Article number	**6ES7138-7AA00-0AA0** ET200ISP, RESERVE MODULE
Digital inputs	
Number of digital inputs	0
Standards, approvals, certificates	
CE mark	Yes
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II2 G EEx ib IIC T4
• Test number KEMA	04 ATEX 1251
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	180 g

© Siemens 2019

Ordering data	Article No.
Analog input modules	
Analog input modules EEx i	
4 AI I 2 WIRE HART For measuring currents with 2-wire transmitters with/without HART functionality • 4 × 4 ... 20 mA, HART, 2-wire transmitter • Transmitter load: max. 750 Ω • Resolution 12 bit + sign • Short-circuit monitoring • Wire break monitoring	**6ES7134-7TD00-0AB0**
4 AI I 4 WIRE HART For measuring currents with 4-wire transmitters with/without HART functionality • 4 × 0/4 ... 20 mA, HART, 4-wire transmitter • Transmitter load: max. 750 Ω • Resolution 12 bit + sign • Wire break monitoring	**6ES7134-7TD50-0AB0**
4 AI RTD For measuring resistances as well as for temperature measurements with resistance thermometers • 4 × RTD, resistance thermometer Pt100/Ni100 • 2, 3, 4-wire • Resolution 15 bit + sign • Short-circuit monitoring • Wire break monitoring	**6ES7134-7SD51-0AB0**
4 AI TC For measuring thermal e.m.f. as well as for temperature measurements with thermocouples • 4 × TC (thermocouples) • Type B [PtRh-PtRh] • Type N [NiCrSi-NiSi] • Type E [NiCr-CuNi] • Type R [PtRh-Pt] • Type S [PtPh-Pt] • Type J [Fe-CuNi] • Type L [Fe-CuNi] • Type T [Cu-CuNi] • Type K [NiCr-Ni] • Type U [Cu-CuNi] • Resolution 15 bit + sign • Internal compensation of cold junction temperature possible using TC sensor module (included in scope of delivery of module) • External temperature compensation via Pt100, connected to RTD module of same ET 200iSP station • Wire break monitoring	**6ES7134-7SD00-0AB0**

Ordering data	Article No.
Analog output modules	
Analog output modules EEx i	
4 AO I HART For output of currents to field devices with/without HART functionality • 4 × 0/4 ... 20 mA, HART (max. load 750 Ω) • Resolution 14-bit • Short-circuit monitoring • Wire break monitoring • Parameterizable substitute value in case of CPU failure	**6ES7135-7TD00-0AB0**
Terminal modules	
ET 200iSP terminal module TM-EM/EM60 For two modules (reserve module, watchdog module and all electronics modules except 2 DO Relay can be plugged in)	
• For hazardous environments	
- TM-EM/EM60S (blue screw-type terminals)	**6ES7193-7CA00-0AA0**
- TM-EM/EM60C (blue spring-loaded terminals)	**6ES7193-7CA10-0AA0**
• For non-hazardous environments	
- TM-EM/EM60S (black screw-type terminals)	**6ES7193-7CA20-0AA0**
Accessories	
Reserve module For any electronics module	**6ES7138-7AA00-0AA0**
Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronics modules and 20 strips each for IM 151	
• petrol	**6ES7193-7BH00-0AA0**
• yellow	**6ES7193-7BB00-0AA0**
Labels, inscribed For slot numbering, label size H × W (in mm): 5 × 7	
• 204 labels, for slots 1 to 20	**8WA8361-0AB**
• 204 labels, for slots 1 to 40	**8WA8361-0AC**
Labels, blank 136 labels for slot numbering, label size H × W (in mm): 5 × 7	**8WA8348-2AY**
S7-300 mounting rails	
• 585 mm long, suitable for assembly of ET 200iSP in a 650 mm wide wall box	**6ES7390-1AF85-0AA0**
• 885 mm long, suitable for assembly of ET 200iSP in a 950 mm wide wall box	**6ES7390-1AJ85-0AA0**

© Siemens 2019

Overview



The electronics modules of the SIMATIC ET 200iSP distributed I/O-system equipped with safety functions can be used together with the safety-related automation systems (controllers) for the implementation of safety applications. The input modules record the process signals, evaluate them, and prepare them for additional processing by the automation system. The output modules convert the safety-related signals output by the automation systems so that they are suitable for controlling the connected actuators.

F digital input modules

- 8 F-DI Ex NAMUR
  Safety-related digital input module for evaluating the signals from IEC 60947-5-6/NAMUR sensors and connected/non-connected mechanical contacts in hazardous and non-hazardous areas
  - SIL3/Cat.3/PLe with 8 inputs (1-channel/1oo1 evaluation) or 4 inputs (2-channel/1oo2 evaluation)
  - 8 short-circuit-proof sensor supplies (8 V DC) for 1 channel each
  - Inputs and sensor supplies electrically isolated from power bus and backplane bus
  - Diagnostics evaluation (deactivated for non-connected mechanical contacts)
  - Internal diagnostics buffer
  - Programmable diagnostics interrupt
  - Supports time stamping
  - Channel-selective passivation
  - Firmware update using HW Config possible
  - Exclusively for safety mode
  - LED displays for safety mode, group errors and channel status/fault

F digital output modules

- 4 F-DO Ex DC 17.4 V/40 mA
  Safety-related digital output module for controlling actuators in hazardous and non-hazardous areas, e.g. solenoid valves, DC current relays or indicator lamps
  - SIL3/Cat.3/PLe with 4 outputs, P/P-switching
  - Electrical isolation from power bus and backplane bus
  - Rated load voltage 17.4 V DC
  - Max. output current 40 mA
  - Performance enhancement through parallel connection of two digital outputs for one actuator
  - Short-circuit, overload and wire-break monitoring
  - Configurable diagnostics
  - Internal diagnostics buffer
  - Programmable diagnostics interrupt
  - Channel-selective passivation
  - Firmware update using HW Config possible
  - Exclusively for safety mode
  - LED displays for safety mode, group errors and channel status/fault

F analog input modules

- 4 F-AI Ex HART (0 ... 20 mA or 4 ... 20 mA)
  Safety-related digital input module for evaluating the signals from current sensors in hazardous and non-hazardous areas, e.g. 2-wire transmitters and HART field devices
  - SIL3/Cat.3/PLe with 4 inputs of one module (1-channel/1oo1 evaluation) or 4 inputs of two modules (2-channel/1oo2 evaluation)
  - Measuring ranges: 0 ... 20 mA or 4 ... 20 mA
  - Resolution 15 bit + sign
  - HART communication in measuring range 4 ... 20 mA
  - 4 short-circuit-proof sensor supplies (min. 12 V DC; max. 26 V DC) for 1 channel each
  - Inputs and sensor supplies electrically isolated from backplane bus
  - Configurable diagnostics
  - Programmable diagnostics interrupt
  - Internal diagnostics buffer
  - Firmware update using HW Config possible
  - Exclusively for safety mode
  - LED displays for safety mode, group errors, channel faults and HART status per channel

Design

- The safety-related electronics modules are mounted on terminal modules that are ordered separately:
  - TM-IM/EM60 terminal modules for one interface module and one watchdog, reserve or electronics module (for versions, see section "Interface module")
  - TM-EM/EM60 terminal modules with two slots for watchdog module, reserve module or electronics module (except 2 DO relay), with blue screw-type or spring-loaded terminals for hazardous environments or with black screw-type terminals for non-hazardous environments
- The safety-related electronics modules are plugged as planned onto terminal modules using screw-type systems (TM-EM/EM60S) or spring-loaded systems (TM-EM/EM60C).
- Using a spare module plugged onto a terminal module TM-EM/EM60S or TM-EM/EM60C, you can reserve a slot for an safety-related electronics module or close a gap resulting from the design. The spare module can be simply replaced by the envisaged electronics module at a later point in time.
- The mechanical coding of the terminal module which is carried out when an electronics module is plugged on for the first time prevents the connection of incorrect replacement modules.
- Hot swapping of individual modules is possible under hazardous conditions.
- The process signals are connected to the terminals of the terminal modules assigned according to the plan, using either conventional screw-type or spring-loaded systems (conductor cross-sections 0.14 mm^2 to max. 2.5 mm^2) depending on the type of module.

© Siemens 2019

Technical specifications

Article number	**6ES7138-7FN00-0AB0** ET200ISP, 8F-DI NAMUR EX, FAILSAFE
Input current	
from supply voltage L+, max.	150 mA; int. Powerbus
Encoder supply	
Number of outputs	8
Type of output voltage	8 V DC
Power loss	
Power loss, typ.	1.4 W
Address area	
Occupied address area	
• Inputs	6 byte
• Outputs	4 byte
Digital inputs	
Number of digital inputs	8
Number of NAMUR inputs	8
Input voltage	
• Type of input voltage	DC
Input current	
• for signal "1", typ.	9.5 mA
Input delay (for rated value of input voltage)	
for standard inputs	
- at "0" to "1", min.	0.7 ms
- at "0" to "1", max.	16 ms; Parameterizable
- at "1" to "0", min.	0.7 ms
- at "1" to "0", max.	16 ms; Parameterizable
Cable length	
• shielded, max.	500 m
• unshielded, max.	200 m
Encoder	
Number of connectable encoders, max.	8
Connectable encoders	
• NAMUR encoder	Yes
NAMUR encoder	
• Input current for signal "0", max.	1.2 mA
• Input current for signal "1", min.	2.1 mA
Interrupts/diagnostics/ status information	
Status indicator	Yes
Diagnostic functions	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Hardware interrupt	No
Diagnostic messages	
• Diagnostic information readable	Yes
• Wire-break	Yes; NAMUR encoders or single contact with 10 kOhm parallel resistor
• Short-circuit	Yes; R load < 150 ohms with NAMUR sensor/sensor and NAMUR changeover contact/sensor to DIN 19234
Diagnostics indication LED	
• Group error SF (red)	Yes

Article number	**6ES7138-7FN00-0AB0** ET200ISP, 8F-DI NAMUR EX, FAILSAFE
Parameter	
Diagnostics wire break	channel by channel
Diagnostics short-circuit	channel by channel
Potential separation	
Potential separation digital inputs	
• between the channels	No
• between the channels and backplane bus	Yes
Permissible potential difference	
between different circuits	60 V DC/30 V AC
Isolation	
Isolation tested with	350 V AC/1 min between the shield and backplane bus connection 350 V AC/1 min between the shield and I/O 2830 V AC/1 min between backplane bus connection and I/O
Standards, approvals, certificates	
CE mark	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II 2 G (1) GD Ex ib[ia Ga][ia IIIC Da] IIC T4 GB and I M2 Ex ib[ia Ma] I Mb
• Type of protection acc. to KEMA	10 ATEX 0056
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	288 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7138-7FD00-0AB0** ET200ISP, 4F-DO 40MA EX, FAILSAFE
Input current	
from load voltage L+ (without load), max.	510 mA; int. Powerbus
Power loss	
Power loss, typ.	5.3 W; max.
Digital outputs	
Number of digital outputs	4
Short-circuit protection	Yes
• Response threshold, typ.	Depending on the "short-circuit level" parameter
Controlling a digital input	No
No-load voltage Uao (DC)	17.4 V
Internal resistor Ri	167 Ω
Load resistance range	
• lower limit	270 Ω
• upper limit	18 kΩ
Trend key points E	
• Voltage Ue (DC)	10.7 V
• Current Ie	40 mA
Output voltage	
• for signal "1", min.	max. 17.4 V
Output current	
• for signal "0" residual current, max.	10 µA
Parallel switching of two outputs	
• for uprating	Yes
• for redundant control of a load	No
Switching frequency	
• with resistive load, max.	30 Hz
• with inductive load, max.	2 Hz
Cable length	
• shielded, max.	500 m
• unshielded, max.	500 m
Interrupts/diagnostics/ status information	
Status indicator	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnostic messages	
• Diagnostic information readable	Yes
• Wire-break	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Group error SF (red)	Yes
• Status indicator digital output (green)	Yes

Article number	**6ES7138-7FD00-0AB0** ET200ISP, 4F-DO 40MA EX, FAILSAFE
Parameter	
Diagnostics wire break	Yes
Diagnostics short-circuit	Yes
Potential separation	
Potential separation digital outputs	
• between the channels	No
• between the channels and backplane bus	Yes
• Between the channels and load voltage L+	Yes
Permissible potential difference	
between different circuits	60 V DC/30 V AC
Standards, approvals, certificates	
CE mark	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II 2 G (1) GD Ex ib[ia Ga][ia IIIC Da] IIC T4 GB and I M2 Ex ib[ia Ma] I Mb
• Type of protection acc. to KEMA	10 ATEX 0057
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	285 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7138-7FA00-0AB0**
	ET200ISP, 4F-AI HART EX, FAILSAFE
Input current	
from supply voltage L+, max.	490 mA; int. Powerbus
Output voltage	
Power supply to the transmitters	
• short-circuit proof	Yes
• Supply current, max.	25 mA; Plus 4 mA per channel
Power loss	
Power loss, max.	5.4 W
Address area	
Address space per module	
• Address space per module, max.	16 byte; 12 bytes in the I area / 4 bytes in the O area
Analog inputs	
Number of analog inputs	4
Cycle time (all channels) max.	See data in manual
Input ranges	
• Voltage	No
• Current	Yes
• Thermocouple	No
• Resistance thermometer	No
• Resistance	No
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Cable length	
• shielded, max.	500 m
Analog value generation for the inputs	
Measurement principle	integrating (Sigma-Delta)
Integration and conversion time/ resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Integration time, parameterizable	Yes
• Interference voltage suppression for interference frequency f1 in Hz	50 / 60 Hz
Smoothing of measured values	
• parameterizable	Yes; in 4 stages
• Step: None	Yes; 1 x cycle time
• Step: low	Yes; 4 x cycle time
• Step: Medium	Yes; 16 x cycle time
• Step: High	Yes; 64 x cycle time
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
- Burden of 2-wire transmitter, max.	750 Ω
Errors/accuracies	
Linearity error (relative to input range), (±)	0.015 %
Temperature error (relative to input range), (±)	0.005 %/K
Crosstalk between the inputs, min.	-50 dB
Repeat accuracy in steady state at 25 °C (relative to input range), (±)	0.015 %

Article number	**6ES7138-7FA00-0AB0**
	ET200ISP, 4F-AI HART EX, FAILSAFE
Operational error limit in overall temperature range	
• Current, relative to input range, (±)	0.35 %
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (±)	0.1 %
Interference voltage suppression for f = n x (f1 ± 1 %), f1 = interference frequency	
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB
• Common mode interference, min.	50 dB
Interrupts/diagnostics/ status information	
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnostic messages	
• Diagnostic information readable	Yes
• Wire-break	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Group error SF (red)	Yes
Potential separation	
Potential separation analog inputs	
• between the channels	No
• between the channels and backplane bus	Yes
• Between the channels and load voltage L+	Yes; Power bus
Permissible potential difference	
between different circuits	60 V DC/30 V AC
Standards, approvals, certificates	
CE mark	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II 2 G (1) GD Ex ib[ia Ga][ia IIIC Da] IIC T4 GB and I M2 Ex ib[ia Ma] I Mb
• Type of protection acc. to KEMA	10 ATEX 0058
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	299 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7138-7AA00-0AA0** ET200ISP, RESERVE MODULE
Digital inputs	
Number of digital inputs	0
Standards, approvals, certificates	
CE mark	Yes
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	II2 G EEx ib IIC T4
• Test number KEMA	04 ATEX 1251
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	180 g

Ordering data

	Article No.
Safety-related electronics modules	
F digital input modules	
8 F-DI Ex NAMUR For evaluating the signals from IEC 60947-5-6/NAMUR sensors and connected/non-connected mechanical contacts in hazardous and non-hazardous areas • SIL3/Cat.3/PLe with 8 inputs (1-channel/1oo1 evaluation) or 4 inputs (2-channel/1oo2 evaluation)	**6ES7138-7FN00-0AB0**
F digital output modules	
4 F-DO Ex 17.4 V DC/40 mA For controlling actuators in hazardous and non-hazardous areas, e.g. solenoid valves, DC current relays or indicator lamps • SIL3/Cat.3/PLe with 4 outputs, P/P-switching	**6ES7138-7FD00-0AB0**
F analog input modules	
4 F-AI Ex HART (0 ... 20 mA or 4 ... 20 mA) For evaluating the signals from current sensors in hazardous and non-hazardous areas, e.g. 2-wire transmitters and HART field devices • SIL3/Cat.3/PLe with 4 inputs of one module (1-channel/1oo1 evaluation) or 4 inputs of two modules (2-channel/1oo2 evaluation) • Resolution 15 bit + sign • HART communication in measuring range 4 ... 20 mA	**6ES7138-7FA00-0AB0**

	Article No.
Terminal modules	
ET 200iSP terminal module TM-EM/EM60 For two modules (reserve module, watchdog module and all electronics modules except 2 DO Relay can be plugged in)	
• For hazardous environments	
- TM-EM/EM60S (blue screw-type terminals)	**6ES7193-7CA00-0AA0**
- TM-EM/EM60C (blue spring-loaded terminals)	**6ES7193-7CA10-0AA0**
• For non-hazardous environments	
- TM-EM/EM60S (black screw-type terminals)	**6ES7193-7CA20-0AA0**
Accessories	
Reserve module For any electronics module	**6ES7138-7AA00-0AA0**
Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronics modules and 20 strips each for IM 151	
• petrol	**6ES7193-7BH00-0AA0**
• yellow	**6ES7193-7BB00-0AA0**
Labels, inscribed For slot numbering, label size H × W (in mm): 5 × 7	
• 204 labels, for slots 1 to 20	**8WA8361-0AB**
• 204 labels, for slots 1 to 40	**8WA8361-0AC**
Labels, blank 136 labels for slot numbering, label size H × W (in mm): 5 × 7	**8WA8348-2AY**
S7-300 mounting rails	
• 585 mm long, suitable for assembly of ET 200iSP in a 650 mm wide wall box	**6ES7390-1AF85-0AA0**
• 885 mm long, suitable for assembly of ET 200iSP in a 950 mm wide wall box	**6ES7390-1AJ85-0AA0**

© Siemens 2019

Watchdog module

Overview



The watchdog module has two fundamental functions:

- Monitoring of the ET 200iSP remote I/O station for hardware failures (hardware lifebeat); external, applicative failure monitoring is also possible via an I/O address area of the module
- Intrinsically-safe power supply for external actuator switch-off

The watchdog module must be plugged onto a terminal module (order separately). The following terminal modules are suitable for this:

- TM-IM/EM60 terminal modules for one interface module and one watchdog, reserve or electronics module (for versions, see Interface module section)
- TM-EM/EM60 terminal modules with two slots for watchdog module, reserve module or electronics modules (except 2 DO relay):
  - with blue screw-type or spring-loaded terminals for hazardous environments
  - with black screw-type terminals for non-hazardous environments

The first slot directly next to the interface module is provided for the watchdog module.

Technical specifications

Article number	**6ES7138-7BB00-0AB0** ET 200ISP, WATCHDOG MOD.
Digital inputs	
Number of digital inputs	0
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm

Ordering data

	Article No.
Watchdog module	
Watchdog module For failure monitoring and for the intrinsically-safe power supply of an external actuator switch-off	**6ES7138-7BB00-0AB0**
Terminal modules	
ET 200iSP terminal module TM-EM/EM60 For two modules (reserve module, watchdog module and all electronics modules except 2 DO Relay can be plugged in)	
• For hazardous environments	
- TM-EM/EM60S (blue screw-type terminals)	**6ES7193-7CA00-0AA0**
- TM-EM/EM60C (blue spring-loaded terminals)	**6ES7193-7CA10-0AA0**
• For non-hazardous environments	
- TM-EM/EM60S (black screw-type terminals)	**6ES7193-7CA20-0AA0**
Accessories	
Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronics modules and 20 strips each for IM 151	
• petrol	**6ES7193-7BH00-0AA0**
• yellow	**6ES7193-7BB00-0AA0**
Labels, inscribed for slot numbering, label size H × W (in mm): 5 × 7	
• 204 labels, for slots 1 to 20	**8WA8361-0AB**
• 204 labels, for slots 1 to 40	**8WA8361-0AC**
Labels, blank 136 labels for slot numbering, label size H × W (in mm): 5 × 7	**8WA8348-2AY**

© Siemens 2019

Overview



Tasks of the RS 485-iS coupler

- Conversion of the electrical PROFIBUS DP RS 485 transmission technology into the intrinsically-safe RS 485-iS transmission technology with a transmission rate of 1.5 Mbps
- Required to connect intrinsically-safe PROFIBUS DP stations, e.g. ET 200iSP or devices from other vendors with Ex i DP connection
- Acts as a safety barrier
- Additional use as a repeater in the hazardous area
- Passive bus station (no configuration necessary)
- Certified according to ATEX 100a

Design

- The RS 485-iS coupler is an open unit; assembly is only permissible in enclosures, cabinets or rooms for electrical equipment.
- The RS 485-iS coupler is approved for use in Zone 2 hazardous areas. For this purpose, it must be fitted in an enclosure complying at least with degree of protection IP54. A manufacturer's declaration for zone 2 (according to EN 50021) is required for the enclosure and the necessary cable glands.
- The RS 485-iS coupler can be used in a horizontal or vertical position.
- Installation is on a SIMATIC S7-300 rail.
- Diagnostics LEDs on the front panel signal the operating status.

Connection to PROFIBUS DP

- Connection to standard PROFIBUS DP via standard Sub-D socket (at the bottom on the RS 485-iS coupler, behind the right front door).

Integrated bus connection for PROFIBUS DP with RS 485-iS transmission technology

- Connection of PROFIBUS DP with RS 485-iS transmission technology via screw terminals (at the top of the RS 485-iS coupler, behind the right front door)
- The last bus node on the intrinsically safe PROFIBUS DP segment (not further RS 485-iS couplers) must be terminated by a selectable terminating resistor using the connector, article number 6ES7972-0DA60-0XA0.

Technical specifications

Technical data RS 485-IS coupler	
Dimensions and weight	
Dimensions W x H x D (mm)	80 x 125 x 130
Weight	Approx. 500 g
Technical data - General	
Degree of protection	IP20
Ambient temperature	- 20 °C to + 60 °C
Standards and approvals	
• PROFIBUS	IEC 61784-1:2002 Ed1 CP 3/1
• EU directive	94/9/EG (ATEX 100a)
• CENELEC	II 3 (2) G EEx nA[ib] IIC T4
• UL and CSA	Class I, Division2, Group A, B, C, D T4 Class I Zone 2, Group IIC T4 AIS Class I, Divison 1, Group A, B, C, D [Aexib] IIC, Class I, Zone1, 2, Group IIC
• FM	Class I, Division2, Group A, B, C, D T4 Class I Zone 2, Group IIC T4 AIS Class I, Divison 1, Group A, B, C, D [Aexib] IIC, Class I, Zone1, 2, Group IIC
• IEC	IEC61131-2, Part 2
• CE	Conforming with 89/336/EWG Conforming with 73/23/EWG
• Ship-building certification	Classification companies • ABS (American Bureau of Shipping) • BV (Bureau Veritas) • DNV (Det Norske Veritas) • GL (Germanischer Lloyd) • LRD (Lloyds Register of Shipping) • Class NK (Nippon Kaiji Kyokai)

Technical data RS 485-IS coupler	
Module-Specific Specifications	
Transfer rate on PROFIBUS DP, PROFIBUS RS 485-IS	9.6; 19.2; 45.45; 93.75; 187.5; 500 kbit/s 1.5 Mbps
Bus-Protocol	PROFIBUS DP
Voltages, Currents, Potentials	
Nominal supply voltage for RS 485-IS coupler	24 V DC (20.4 to 28.8 V)
• Polarity reversal protection	Yes
• Voltage drop bypass	Min. 5 ms
Potential isolation for 24 V power supply	
• to PROFIBUS DP	Yes
- tested with	500 V DC
• to PROFIBUS RS 485-IS	Yes
- tested with	AC 500 V
Current consumption RS 485-IS coupler (24 V DC), max.	150 mA
Power loss of the module, typically	3 Watts

© Siemens 2019

Technical specifications (continued)


Technical data RS 485-IS coupler		
Status, alarms, diagnostics		
Status display	no	
Alarms	None	
Diagnostic functions	Yes	
• Bus monitoring PROFIBUS DP (primary)	Yellow LED "DP1"	
• Bus monitoring PROFIBUS RS 485-IS (secondary)	Yellow LED "DP2"	
• Monitoring 24 V power supply	Green LED "ON"	
Technical safety notice		
V_{DC}	±4.2 V	
I_{SC}	±93 mA	
P_0	0.1 Watts	
V_{max}	±4.2 V	
L_I	0	
C_i	0	
U_m	AC 250 V	
T_a	–25 ... +60 °C	
RS 485-IS segment		
permitted cable length on a single line	RS 485–IS	DP Ex i
• 9.6 to 187.5 Kbps	1,000 m	200 m
• 500 kbit/s	400 m	200 m
• 1.5 Mbps	200 m	200 m
Number of PROFIBUS DP nodes that can be connected, max.	31	16
PROFIBUS RS 485-IS bus termination switch	integrated, can be added	

Ordering data

	Article No.
RS 485-iS coupler Isolating transformer for connection of PROFIBUS DP segments with RS 485 and RS 485-iS transmission systems	**6ES7972-0AC80-0XA0**
Accessories	
PROFIBUS connector with selectable terminating resistor For connection of IM 152 to PROFIBUS DP with RS 485-iS transmission technology	**6ES7972-0DA60-0XA0**
S7-300 rails	
Lengths:	
• 160 mm	**6ES7390-1AB60-0AA0**
• 482 mm	**6ES7390-1AE80-0AA0**
• 530 mm	**6ES7390-1AF30-0AA0**
• 830 mm	**6ES7390-1AJ30-0AA0**
• 2 000 mm	**6ES7390-1BC00-0AA0**
PROFIBUS FastConnect Standard Cable, violet Standard type with special design for fast mounting, 2-wire, shielded, cut-to-length Specify length in m Max. delivery unit 1 000 m, minimum order quantity 20 m	**6XV1830-0EH10**
Preferred lengths	
- 20 m	**6XV1830-0EN20**
- 50 m	**6XV1830-0EN50**
- 100 m	**6XV1830-0ET10**
- 200 m	**6XV1830-0ET20**
- 500 m	**6XV1830-0ET50**
- 1 000 m	**6XV1830-0EU10**
PROFIBUS FastConnect Standard Cable IS GP, blue Cable type for use in potentially explosive atmospheres, with special design for fast mounting, 2-wire, shielded, cut-to-length Specify length in m Max. delivery unit 1 000 m, minimum order quantity 20 m	**6XV1831-2A**

© Siemens 2019

Design

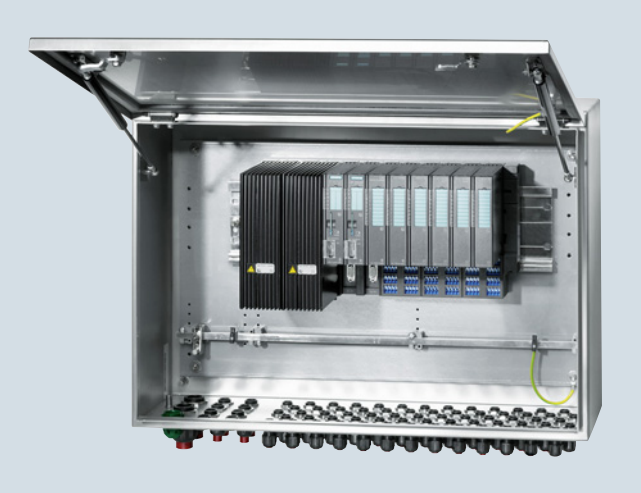

ET 200iSP modules can also be installed in stainless steel wall enclosures designed to meet more exacting protection requirements. The enclosures are available in various sizes. They comply with degree of protection IP65 and can be used in Ex zones 1 and 21.

Delivery is possible as an empty enclosure or including components, depending on the order.

Send your request to:

Siemens AG
PD PA AE SO
(please insert project name here)
Östl. Rheinbrückenstr. 50
76187 Karlsruhe, Germany

E-mail: cabinets.industry@siemens.com

© Siemens 2019

Ordering data

	Article no.
Stainless steel enclosure IP65 for SIMATIC ET 200iSP	6DL2804-
	■■ ■ ■ ■
I/O enclosure	
Surface casing in stainless steel, max. IP66, with mounting plate and equipotential bonding rail, empty enclosure for installation of ET 200iSP components[1]	0
I/O device consisting of surface casing with installed ET 200iSP components[2]	1
I/O device consisting of surface casing with installed ET 200iSP and pneumatic components[2]	2
I/O device consisting of surface casing with installed ET 200iSP and additional components for zone 2[3]	3
I/O device consisting of surface casing with installed ET 200iSP with pneumatic and additional components for zone 2[3]	4
Device group	
Device group II, up to zone 1 (including zone 2)	A
Device group II, up to zone 2 (not zone 1 and not zone 21)	B
Device group II, up to zone 21 (including zone 22)	D
Device group I M2 (max. degree of protection IP55), for use in mining	M
Enclosure dimensions W × H × D (in mm)	
650 × 450 × 230, for 15 ET 200iSP modules in non-redundant configuration	D
950 × 450 × 230, for 25 ET 200iSP modules in non-redundant configuration	E
800 × 800 × 300, for 2 rows with max. 30 ET 200iSP modules	K
800 × 1000 × 300, for 2 rows with max. 30 ET 200iSP modules	M
1000 × 1000 × 300, for 2 rows with max. 42 ET 200iSP modules	U
1000 × 1200 × 300, for 2 rows with max. 42 ET 200iSP modules	V
Cable entries/number	
6 × M25 for infeed, 6 or 9 × M32 (1 row) for signal lines[9]	1
6 × M25 for infeed, 12 or 18 × M32 (2 rows) for signal lines[9]	2
M16 cable entries for signals, 3 rows, 39 or 66 pcs.[4], 2 × M32 for power supply, 4 × M20 for bus cables[5]	3
M20 cable entries for signals, 3 rows, 36 or 57 pcs.[4], 2 × M32 for power supply, 4 × M20 for bus cables[5]	4
M16 cable entries for signals, 5 rows, 65 or 110 pcs.[4], 2 × M32 for power supply, 4 × M20 for bus cables[5]	5
M20 cable entries for signals, 3 rows, 60 or 95 pcs.[4], 2 × M32 for power supply, 4 × M20 for bus cables[5]	6
Icotek cable entry strip IP65, for up to 45 or 90 signals[4], 2 × M32 for power supply, 4 × M20 for bus cables[6]	7

	Article no.
Stainless steel enclosure IP65 for SIMATIC ET 200iSP	6DL2804-
	■■ ■ ■ ■
Cable entries/material	
Cable entry in **plastic, black** Ambient operating temperatures: • Surface casing -40…+70 °C • I/O device -40 … +xx °C[5][7][8]	0
Cable entry in **metal (nickel-plated brass)** Ambient operating temperatures: • Surface casing -40…+70 °C • I/O device -40 … +xx °C[5][7][8]	1
Cable entry in **plastic, blue** Ambient operating temperatures: • Surface casing -40…+70 °C • I/O device -40 … +xx °C[5][7][8]	2
Icotek cable entry in plastic, gray HN-24 frame Ambient operating temperatures: • Surface casing -40…+70 °C • I/O device -40 … +xx °C[5][7][8]	3
Cable glands for use in mining	6

1) The supplied certificate it only valid for the empty enclosure.

2) The included certificate is valid for the supplied enclosure including the installed components.

3) The included manufacturer's declaration is valid for the supplied enclosure including the installed components.

4) Number of cable entries / signals depending on the enclosure dimensions

5) Not for device group I M2

6) Installing these components reduces the degree of protection for the enclosure to IP65

7) The maximum temperature depends on the installed components.

8) Only in conjunction with an installed heater. This takes up 2 slots for ET 200iSP modules. The heater (6DL9910-8AA) must be ordered separately.

9) Only for device group I M2, number of signal lines depends on enclosure dimensions

Note:

Depending on the cables used, other types and sizes of cable entries can be fitted (on request).

Options

Special configurations

For special configurations which differ from the standard configurations we will be pleased to provide you with a customized offer to suit your individual needs.

Please send your requests to
cabinets.industry@siemens.com

© Siemens 2019

Overview



Within the SIMATIC ET 200 range, ET 200M represents one of the main series of distributed I/O systems for process control applications with SIMATIC PCS 7.

The ET 200M I/O system offers a comprehensive range of I/O modules of S7-300 design, including ones with special I&C functions:

- Standard analog and digital modules
- Redundant I/O modules
- I/O modules with enhanced diagnostics capability
- Ex I/O modules
- Controller and counter modules
- HART modules
- F-modules for safety-related applications

When using active bus modules, faulty I/O modules can be replaced while the plant is in operation (RUN) without influencing adjacent modules (hot swapping function).

The following actions are possible with the automation system in RUN:

- Adding new modules to the station
- Re-configuration of modules
- Addition of ET 200M stations
- Configuration of connected HART field devices with SIMATIC PDM

Note:

Apart from these selected modules, it is also possible to use - with limitations in functions - all other I/O modules from the current range of S7-300 signal modules.

Design

An ET 200M remote I/O station comprises:

- 1 or 2 (redundant) power supply modules (can be omitted in the case of a central 24 V DC supply for the plant)
- Up to 2 interface modules:
  - 1 or 2 (redundant) IM 153-2 High Feature for PROFIBUS DP connection or
  - 1 IM 153-4 PN High Feature for PROFINET connection
- Up to 12 I/O modules for connection of sensors/actuators

All I/O modules have optical electrical isolation from the backplane bus. Up to 12 I/O modules can connected to an IM 153-2 High Feature or IM 153-4 PN High Feature interface module. The IM 153-2 High Feature interface modules can also be configured redundantly.

In addition to the standard SIMATIC S7 I/O modules, special I/O modules with diagnostics capability offer the following functions, among others:

- Channel-based diagnostics, e.g. open-circuit, short-circuit, limit violations
- Internal module monitoring, e.g. configuration error, RAM error, tripped fuse
- Flatter monitoring for sensors
- Pulse stretching
- Output of a selectable substitute value on failure of the central processing unit

In the event of a fault, the modules with diagnostics capability automatically pass on the corresponding message to the operator station, permitting fast and simple troubleshooting.

The ET 200M stations can be used in standard environments and also in Ex zone 2/22. The actuators/sensors can be positioned in Ex zone 1/21 when suitable Ex input/output modules are used. Hot swapping of I/O modules within Ex zone 2 is allowed with the right permit (e.g. fire certificate).

Technical specifications

You can find detailed technical data on the ET 200M and S7-300 I/O modules in the following places:

- Catalog ST 70, Chapter "IO Systems" or
- Industry Mall/CA 01 under "Automation technology - Automation systems - SIMATIC industrial automation systems - IO systems - SIMATIC ET 200 systems for control cabinets" – SIMATIC ET 200M"

Options

SIPLUS extreme range for extended temperature ranges and corrosive environments

The "standard" properties of an individual device or system are often insufficient for harsh environmental conditions, applications in corrosive environments or extreme temperature ranges. Depending on the location of use, the result could be limitations in functionality or operational safety or even total failure of the plant.

The SIPLUS extreme range offers individually adapted standard products which permit retention of the functionality of your plant or process even under extreme conditions of use. These include:

- Ambient temperature range from -25 to +60/+70 °C
- Condensation, high humidity
- Increased mechanical stress
- Extreme loading by media, e.g. toxic atmospheres
- Voltage ranges deviating from the standard
- Increased degree of protection (dust, water)

You can find a summary of the available range of products classified according to their special properties on the Internet. The corresponding SIPLUS product is assigned there to the standard product:

www.siemens.com/siplus

Note:

SIPLUS products are also included in the ST 70 Catalog.

© Siemens 2019

Overview



You can use the PS 307 or PS 305 load power supplies as the power supply module for the ET 200M. You can select different input voltages and output currents (120/230 V AC with 2 A, 5 A or 10 A or 24 to 110 V DC with 2 A) depending on the application.


With a redundant ET 200M configuration, it is also recommendable to have a redundant 24 V DC supply, e.g. with two PS 307 / PS 305 load power supplies.

Ordering data

	Article No.
PS 307 load power supply	
with power connector	
• 120/230 V AC; 24 V DC	
- 2 A; 40 mm wide	**6ES7307-1BA01-0AA0**
- 5 A; 60 mm wide	**6ES7307-1EA01-0AA0**
- 5 A, extended temperature range; 80 mm wide	**6ES7307-1EA80-0AA0**
- 10 A, 80 mm wide	**6ES7307-1KA02-0AA0**
PS 305 load power supply	
with power connector	
• 24/48/60/110 V DC; 24 V DC	
- 2 A, extended temperature range; 80 mm wide	**6ES7305-1BA80-0AA0**

© Siemens 2019

Overview

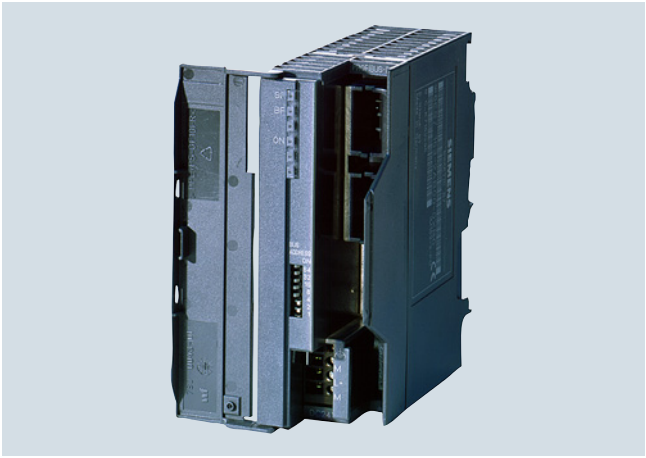

Interface module IM 153-2 High Feature Outdoor for PROFIBUS connection

Interface module for the PROFIBUS connection

The IM 153-2 High Feature and IM 153-2 High Feature Outdoor (electrical PROFIBUS DP transmission mode) interface modules are available for connecting the ET 200M remote I/O station to the PROFIBUS DP fieldbus. Depending on the fieldbus configuration (single/redundant), the ET 200M remote I/O station can be connected via one single or two redundant interface modules.



IM 153-4 High Feature interface module for PROFINET connection

Interface module for PROFINET connection

The IM 153-4 PN High Feature interface module is used to connect the ET 200M remote I/O station to PROFINET via copper cables (RJ45). It autonomously handles communication between the I/O modules and the higher-level PROFINET I/O controller.

Function

IM 153-2 High Feature and IM 153-2 High Feature Outdoor

The IM 153-2 High Feature and IM 153-2 High Feature Outdoor support the following functions:

- HART configuring of intelligent field devices
- Configuration of ET 200M I/Os in RUN mode of the automation system
- Connection to redundant automation systems
- Use of ET 200M function modules (controller and counter modules)
- Operation of up to 12 I/O modules per remote I/O station
- Time stamping (SOE) with the safety-related SM 326F digital input module (F-DI24)
- Transmission of additional values with HART secondary variables of the HART SM 331 and SM 332 analog modules (up to 4 per channel or up to 8 per module)

IM 153-4 PN High Feature

- Integrated 2-port switch
- Baud rate 10 Mbps / 100 Mbps (Autonegotiation/Full Duplex)
- Operation of up to 12 I/O modules per remote I/O station
- I&M functions in accordance with PROFIBUS International Guidelines, order no. 3.502, version V1.1

Note:

In order to be able to use the hot swap function, use of the active bus module and the mounting rail for hot swap is necessary (see under the following section "Accessories").

Ordering data

	Article No.
Interface module for the PROFIBUS connection	
IM 153-2 High Feature Outdoor Interface module for PROFIBUS DP for ET 200M, PA Link and Y Link; redundancy capable; conformal coating, IP20 degree of protection; permissible operating temperature -25 … +60 °C	**6ES7153-2BA70-0XB0**
IM 153-2 High Feature Interface module for PROFIBUS DP for ET 200M; redundancy capable; permissible operating temperature 0 … +60 °C	**6ES7153-2BA10-0XB0**
Interface module for the PROFINET connection	
IM 153-4 PN High Feature Interface for connecting an ET 200M station to PROFINET	**6ES7153-4BA00-0XB0**

© Siemens 2019

Overview

Following components are available as accessories for the ET 200M:

- Bus modules for connection/disconnection of modules during operation (hot swapping)
- DIN rail for connection and disconnection of modules during operation
- Covers for backplane bus and bus modules
- Front connectors
- Ex partition for ET 200M
- DM 370 dummy module
- LK 393 cable guide



Ex partition for ET 200M

Ex partition

A mechanical isolation is required between the IM 153 interface module and the first Ex I/O module. For the hot swapping function, an Ex partition is installed which guarantees the prescribed isolation distance between non-intrinsically-safe and intrinsically-safe areas of an ET 200M remote I/O station.

Note:


The Ex partition must be used in connection with bus modules with active backplane bus. If no bus modules with active backplane bus are being used, the DM 370 dummy module can be used instead.



DM 370 dummy module

DM 370 dummy module

- Reservation of slots for unconfigured I/O modules
- Retention of design and address assignment when replacing by I/O module

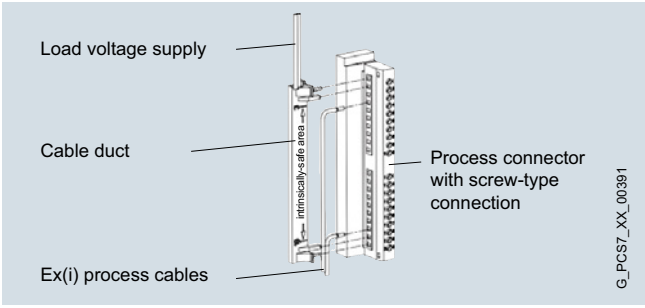


LK 393 cable guide

LK 393 cable guide

The LK 393 cable duct provides the prescribed isolation between the load voltage input and the intrinsically safe inputs/outputs. The cable duct is easy to fit following insertion of the load voltage inputs L+.

Design

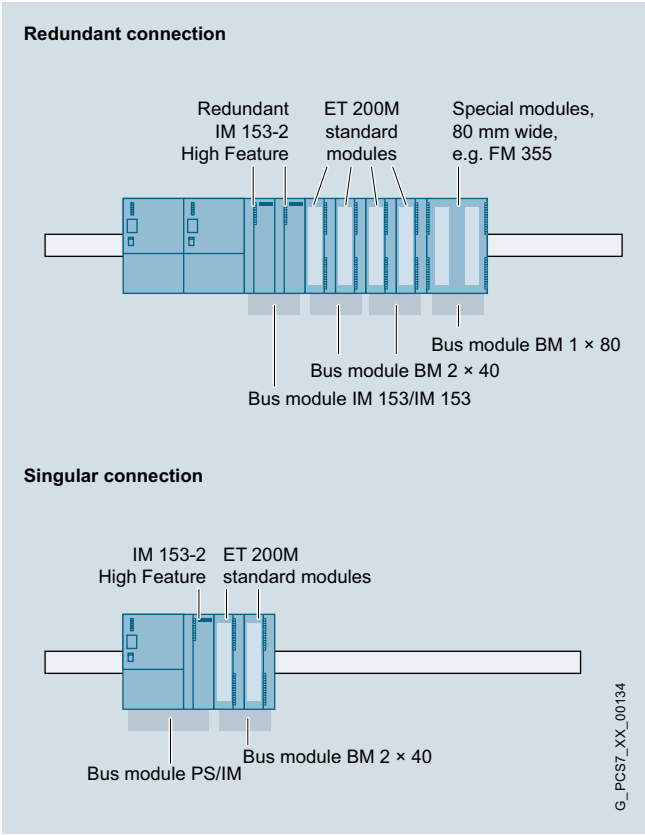

The figure shows the use of the various bus modules for hot swapping modules - at the top for a redundant connection, at the bottom for a non-redundant connection.

© Siemens 2019


Ordering data	Article No.
Bus modules for hot swapping	
• BM PS/IM for load current supply and IM 153, including 1 bus module cover	**6ES7195-7HA00-0XA0**
• BM 2 × 40 for 2 modules, width 40 mm	**6ES7195-7HB00-0XA0**
• BM 1 × 80 for 1 module, width 80 mm	**6ES7195-7HC00-0XA0**
• BM IM/IM Outdoor for 2 IM 153-2 for configuring redundant systems	**6ES7195-7HD80-0XA0**
• BM IM/IM for 2 IM 153-2/-2 FO for configuring redundant systems	**6ES7195-7HD10-0XA0**
DIN rail for hot swapping	
• 482 mm long (19 inches)	**6ES7195-1GA00-0XA0**
• 530 mm long	**6ES7195-1GF30-0XA0**
• 620 mm long	**6ES7195-1GG30-0XA0**
• 2 000 mm long, for vertical installation	**6ES7195-1GC00-0XA0**
Covers Package with 4 backplane bus covers and 1 bus module cover	**6ES7195-1JA00-0XA0**

	Article No.
Front connector (1 unit)	
• 20-pin, with screw contacts	**6ES7392-1AJ00-0AA0**
• 20-pin, with spring contacts	**6ES7392-1BJ00-0AA0**
• 40-pin, with screw contacts	**6ES7392-1AM00-0AA0**
• 40-pin, with spring contacts	**6ES7392-1BM01-0AA0**
Front connector for Ex analog input module 6ES7331-7SF00-0AB0 (1 unit) • 20-pin, with screw contacts Enables an accuracy of ±1.5 °K for the internal cold junction temperature when taking thermocouple temperature measurements in the "internal compensation" measuring mode at ambient temperatures of 0 to 60 °C	**6ES7392-1AJ20-0AA0**
Ex partition for ET 200M[1)] • Separation of IM 153 and downstream Ex modules within an ET 200M line • Mixed operation of non-Ex and Ex modules within an ET 200M line • For supporting the hot swapping function in connection with IM 153-2	**6ES7195-1KA00-0XA0**
DM 370 dummy module[1)] Including bus connector, labeling strips	**6ES7370-0AA01-0AA0**
LK 393 cable duct [EEx ib] IIC-conform routing of load voltage cable in front plug, 5 units	**6ES7393-4AA00-0AA0**

1) The Ex partition must be used in connection with bus modules with active backplane bus. If no bus modules with active backplane bus are being used, the DM 370 dummy module can be used instead.

© Siemens 2019

Overview

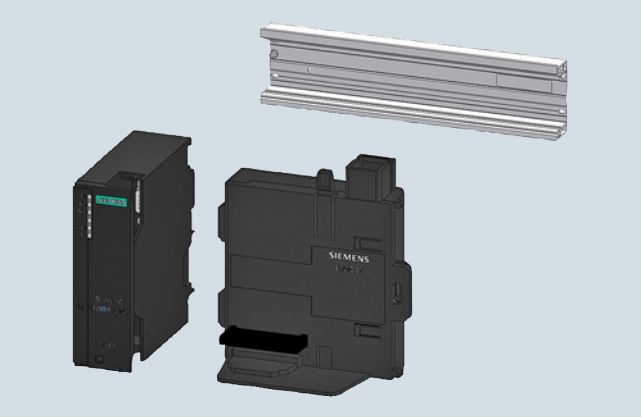

I/O subsystem for ET 200M

The following bundles are available for ET 200M:

- I/O subsystem for PA Link or ET 200M stations with up to 8 I/O modules suitable for hot swapping, consisting of:
  - DIN rail for active bus modules, 482 mm long (19 inches)
  - PS/IM bus module
  - PROFIBUS DP interface IM 153-2 High Feature Outdoor
- I/O subsystem extended for PA Link or ET 200M stations with up to 12 I/O modules suitable for hot swapping, consisting of:
  - DIN rail for active bus modules, 620 mm long
  - PS/IM bus module
  - PROFIBUS DP interface IM 153-2 High Feature Outdoor
- RED I/O subsystem for operation of a PA Link or an ET 200M station on a redundant automation system of the S7-400 series, suitable for hot swapping, consisting of:
  - 2 PROFIBUS DP interface modules IM 153-2 High Feature Outdoor
  - 1 active bus module IM/IM Outdoor

Ordering data

	Article No.
I/O subsystem for PA Link or ET 200M For PA Link or for ET 200M stations with up to 8 I/O modules, suitable for hot swapping, consisting of: • DIN rail for active bus modules, 482 mm long (19 inches) • PS/IM bus module • PROFIBUS DP interface IM 153-2 High Feature Outdoor	**6ES7654-0XX10-1XA0**
I/O subsystem extended for PA Link or ET 200M For PA Link or for ET 200M stations with up to12 I/O modules, suitable for hot swapping, consisting of: • DIN rail for active bus modules, 620 mm long • PS/IM bus module • PROFIBUS DP interface IM 153-2 High Feature Outdoor	**6ES7654-0XX10-1XB0**
RED I/O subsystem for PA Link or ET 200M For operation of a PA Link or an ET 200M station on a redundant automation system of the S7-400 series, suitable for hot swapping, consisting of: • 2 PROFIBUS DP interfaces IM 153-2 High Feature Outdoor • 1 active bus module IM/IM Outdoor	**6ES7654-0XX20-0XA0**

© Siemens 2019

Overview



Digital input modules

- Simple signal modules for DC and AC voltage
- Modules with diagnostics capability that automatically output a corresponding message to the operator system in the event of a fault

Digital output modules

- Simple signal modules for DC and AC voltage with different output currents per channel, where various relay modules are available for larger output currents and voltages
- Modules with diagnostics capability which provide information for fault diagnosis and also permit parameterizable reactions to failure of the automation system

Digital input/output modules

- Standard signal module for DC voltage (24 V DC) with 8 digital inputs and 8 digital outputs
- For connection of switches, 2-wire proximity switches (BERO), solenoid valves, contactors, signal lamps

Technical specifications

Article number	**6ES7321-7TH00-0AB0** SM321, 16 DI, 24V DC, DIAGNOSTICS	**6ES7321-7EH00-0AB0** SM 321; 16DI, DC 24/125 V
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from load voltage L+ (without load), max.	100 mA	
from backplane bus 5 V DC, max.	100 mA	90 mA
Power loss		
Power loss, typ.	11 W	2 W; V_in = 24 V DC
Time stamping		
Accuracy	1 ms	0.1 ms; Use shielded cables and parameterize an input delay of 0.1 ms.
Digital inputs		
Number of digital inputs	16	16
Input characteristic curve in accordance with IEC 61131, type 1	No	Yes
Input characteristic curve in accordance with IEC 61131, type 2	Yes	
Number of simultaneously controllable inputs		
horizontal installation		
- up to 60 °C, max.	16	16; V_in = 100 V DC
vertical installation		
- up to 40 °C, max.	16	16; V_in = 100 V DC
Input voltage		
• Type of input voltage	DC	
• Rated value (DC)	8.2 V; 8.2V/18V	24 V; 24 V DC to 125 V DC
• for signal "0"		-146 to 5V
• for signal "1"		15 to 146V
Input current		
• for signal "1", typ.	10 mA; for NAMUR: 2.1 to 7 mA, for 10k ohm/47k ohm contact: typical 10mA, for 4 wire BEROs: typical 10 mA	3.5 mA
Input delay (for rated value of input voltage)		
for standard inputs		
- parameterizable		Yes; 0.1 / 0.5 / 3 / 15 / 20 ms
- at "0" to "1", min.	2.5 ms	
- at "0" to "1", max.	3.5 ms	
Cable length		
• shielded, max.	400 m; max. 200m with 8.2 V sensor, max. 400m with 18 V sensor	1 000 m
• unshielded, max.	Not permitted	600 m

© Siemens 2019

Technical specifications (continued)

Article number	6ES7321-7TH00-0AB0 SM321, 16 DI, 24V DC, DIAGNOSTICS	6ES7321-7EH00-0AB0 SM 321; 16DI, DC 24/125 V
Encoder		
Connectable encoders		
• 2-wire sensor		Yes
- permissible quiescent current (2-wire sensor), max.		1 mA
Isochronous mode		
Isochronous operation (application synchronized up to terminal)		No
Interrupts/diagnostics/status information		
Diagnostic functions	Yes	Yes; Parameterizable
Alarms		
• Diagnostic alarm	Yes	Yes; Parameterizable
• Hardware interrupt	Yes	Yes; Parameterizable
Potential separation		
Potential separation digital inputs		
• between the channels	Yes	No
• between the channels, in groups of	8	16
• between the channels and backplane bus	Yes	Yes; Optocoupler
Isolation		
Isolation tested with	600 V DC	3 500 V DC
Ambient conditions		
Ambient temperature during operation		
• min.	0 °C	0 °C
• max.	60 °C	60 °C
Extended ambient conditions		
• At cold restart, min.	0 °C	
Connection method		
required front connector	1x 40-pin	1x 40-pin
Dimensions		
Width	40 mm	40 mm
Height	125 mm	125 mm
Depth	120 mm	120 mm
Weights		
Weight, approx.		200 g

© Siemens 2019

Technical specifications (continued)

Article number	6ES7322-8BH10-0AB0 SM322, 16DO, 24V DC, 0,5A
General information	
Product type designation	SM 322, DO 16x24 V DC / 0.5 A
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	100 mA
from backplane bus 5 V DC, max.	100 mA
Power loss	
Power loss, typ.	6 W
Digital outputs	
Number of digital outputs	16
Limitation of inductive shutdown voltage to	L+ (-68 V)
Switching capacity of the outputs	
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	4 kΩ
Output voltage	
• for signal "1", min.	L+ (-0.7 V)
Output current	
• for signal "1" rated value	0.5 A
• for signal "1" permissible range, min.	5 mA
• for signal "1" permissible range, max.	0.6 A
• for signal "0" residual current, max.	0.7 mA
Switching frequency	
• with resistive load, max.	100 Hz
• on lamp load, max.	10 Hz

Article number	6ES7322-8BH10-0AB0 SM322, 16DO, 24V DC, 0,5A
Total current of the outputs (per group)	
horizontal installation	
- up to 60 °C, max.	2 A
vertical installation	
- up to 40 °C, max.	2 A
Cable length	
• shielded, max.	1 000 m
• unshielded, max.	600 m
Interrupts/diagnostics/ status information	
Diagnostic functions	Yes
Alarms	
• Diagnostic alarm	Yes
Potential separation	
Potential separation digital outputs	
• between the channels	No
• between the channels, in groups of	4
• between the channels and backplane bus	Yes
Isolation	
Isolation tested with	500 V DC
Connection method	
required front connector	1x 40-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	350 g

11

Ordering data — Article No.

Digital input modules

SM 321 for floating contacts (supply with DC voltage)	
16 inputs, 24 V DC **Redundancy optional** (module-granular redundancy) • Isolated in groups of 16 • Front connector required: 20-pin	**6ES7321-1BH02-0AA0**
16 inputs, 24 V DC • Isolated in groups of 16; active low • Front connector required: 20-pin	**6ES7321-1BH50-0AA0**
16 inputs, 24 V DC, high-speed • Isolated in groups of 16 • 0.05 ms input delay • Front connector required: 20-pin	**6ES7321-1BH10-0AA0**
32 inputs, 24 V DC **Redundancy optional** (module-granular redundancy) • Isolated in groups of 16 • Front connector required: 40-pin	**6ES7321-1BL00-0AA0**
16 inputs, 48 ... 125 V DC • Isolated in groups of 8 • Front connector required: 20-pin	**6ES7321-1CH20-0AA0**
64 inputs, 24 V DC • Isolated in groups of 16; active high/low Note: 2 connection cables 6ES7392-4B..0-0AA0 and 2 terminal blocks 6ES7392-1.N00-0AA0 required per module.	**6ES7321-1BP00-0AA0**
S7-300 cable for 64-channel modules; 2 units	
• 1 m	**6ES7392-4BB00-0AA0**
• 2.5 m	**6ES7392-4BC50-0AA0**
• 5 m	**6ES7392-4BF00-0AA0**
Terminal block for 64-channel modules; 2 units	
• With screw contacts	**6ES7392-1AN00-0AA0**
• With spring-loaded contacts	**6ES7392-1BN00-0AA0**
SM 321 for floating contacts (supply with DC/AC voltage)	
16 inputs, 24...48 V AC/DC • Isolated in groups of 1 • Front connector required: 40-pin	**6ES7321-1CH00-0AA0**

© Siemens 2019

Ordering data	Article No.
SM 321 for floating contacts (supply with AC voltage)	
32 inputs, 120 V AC • Isolated in groups of 8 • Front connector required: 40-pin	**6ES7321-1EL00-0AA0**
8 inputs, 120/230 V AC **Redundancy optional** (module-granular redundancy) • Isolated in groups of 2 • Front connector required: 20-pin	**6ES7321-1FF01-0AA0**
16 inputs, 120/230 V AC • Isolated in groups of 4 • Front connector required: 20-pin	**6ES7321-1FH00-0AA0**
SM 321 for non-floating contacts (supply with AC voltage)	
8 inputs, 120/230 V AC • Isolated in groups of 1 • Front connector required: 40-pin	**6ES7321-1FF10-0AA0**
SM 321 modules with diagnostics capability (IM 153-2 High Feature interface module required) for isolated contacts (supplied with DC voltage)	
16 inputs, 24 V DC **Redundancy optional** (channel-granular redundancy) • Isolated in groups of 16 • Time stamping in association with IM 153-2 High Feature, accuracy 1 ms, rising or falling edge, can be configured channel-granular • Two short-circuit-proof sensor supplies for 8 channels each • Sensor supply by the module, additional external redundant sensor supply possible • Diagnostics of missing sensor supply for channel group (8 channels) • Diagnostics inside module • Channel-granular wire break monitoring • Front connector required: 20-pin	**6ES7321-7BH01-0AB0**
16 inputs, NAMUR **Redundancy optional** (channel-granular redundancy) • Isolated in groups of 8 • Time stamping in association with IM 153-2 High Feature, accuracy 10 ms, rising or falling edge, can be configured channel-granular • Two sensor supplies (8.2 V DC or 18 V DC each) • Connection of NAMUR sensors or contacts with resistor circuit • Pulse stretching • Channel-granular diagnostics (short-circuit, open-circuit, chatter monitoring, discrepancy with changeover contacts) • Diagnostics inside module • Front connector required: 40-pin	**6ES7321-7TH00-0AB0**
16 inputs, 24 to 125 V DC • Isolated in groups of 16 • Time stamping in association with IM 153-2 High Feature, accuracy 1 ms, rising or falling edge, can be configured channel-granular • Diagnostics inside module • Channel-granular wire break monitoring • Front connector required: 40-pin	**6ES7321-7EH00-0AB0**

	Article No.
Digital output modules	
SM 322 for DC voltage Suitable for solenoid valves, contactors, indicator lights, etc.	
8 outputs, 24 V DC / 2 A **Redundancy optional** (channel-granular redundancy) • Isolated in groups of 4 • Front connector required: 20-pin	**6ES7322-1BF01-0AA0**
16 outputs, 24 V DC, 0.5 A • Isolated in groups of 8 • Front connector required: 20-pin	**6ES7322-1BH01-0AA0**
16 outputs, 24 V DC / 0.5 A, high speed • Isolated in groups of 8 • Output delay max. 0.2 ms • Front connector required: 20-pin	**6ES7322-1BH10-0AA0**
32 outputs, 24 V DC / 0.5 A **Redundancy optional** (module-granular redundancy) • Isolated in groups of 8 • Front connector required: 40-pin	**6ES7322-1BL00-0AA0**
8 outputs, 48 ... 125 V DC / 1.5 A • Isolated in groups of 4 • Front connector required: 20-pin	**6ES7322-1CF00-0AA0**
64 outputs, 24 V DC, 0.3 A, source output • Isolated in groups of 16 Note: 2 connection cables 6ES7392-4B..0-0AA0 and 2 terminal blocks 6ES7392-1.N00-0AA0 required per module.	**6ES7322-1BP00-0AA0**
64 outputs, 24 V DC, 0.3 A, sink output • Isolated in groups of 16 Note: 2 connection cables 6ES7392-4..0-0AA0 and 2 terminal blocks 6ES7392-1.N00-0AA0 required per module.	**6ES7322-1BP50-0AA0**
S7-300 cable for 64-channel modules; 2 units	
• 1 m	**6ES7392-4BB00-0AA0**
• 2.5 m	**6ES7392-4BC50-0AA0**
• 5 m	**6ES7392-4BF00-0AA0**
Terminal block for 64-channel modules; 2 units	
• With screw contacts	**6ES7392-1AN00-0AA0**
• With spring-loaded contacts	**6ES7392-1BN00-0AA0**
SM 322 for AC voltage Suitable for AC solenoid valves, contactors, motor starters, small-power motors and indicator lights	
8 outputs, 120/230 V AC / 2 A **Redundancy optional** (module-granular redundancy) • Isolated in groups of 4 • Front connector required: 20-pin	**6ES7322-1FF01-0AA0**
16 outputs, 120/230 V AC, 1 A • Isolated in groups of 8 • Front connector required: 20-pin	**6ES7322-1FH00-0AA0**
32 outputs, 120/230 V AC, 1 A • Isolated in groups of 8 • Front connector required: 2 x 20-pin	**6ES7322-1FL00-0AA0**

© Siemens 2019

Ordering data	Article No.
SM 322 for relay output Suitable for AC/DC solenoid valves, contactors, motor starters, small-power motors, and indicator lights	
8 outputs, 24 ... 120 V DC, 48 ... 230 V AC, max. 2 A • Isolated in groups of 2 • Front connector required: 20-pin	**6ES7322-1HF01-0AA0**
8 outputs, 24 ... 120 V DC, 48 ... 230 V AC, max. 5 A • Isolated in groups of 1 • Front connector required: 40-pin	**6ES7322-1HF10-0AA0**
16 outputs, 24 ... 120 V DC, 48 ... 230 V AC, max. 2 A • Isolated in groups of 8 • Front connector required: 20-pin	**6ES7322-1HH01-0AA0**
SM 322 modules with diagnostics capability (with channel and module diagnostics) for DC voltage Suitable for solenoid valves, DC contactors and indicator lights	
8 outputs, 24 V DC / 0.5 A Redundancy optional (module-granular redundancy) • Isolated in groups of 8 • 2 connections per output (with and without series diode) • Connection of a default value per channel in the event of CPU stop (configurable) • Wire break monitoring per channel • Load voltage monitoring per channel • Short-circuit monitoring to M/L+ per channel • Module-internal diagnostics functions • Front connector required: 20-pin	**6ES7322-8BF00-0AB0**
16 outputs, 24 V DC / 0.5 A Redundancy optional (module-granular redundancy) • Isolated in groups of 4 • Connection of a default value per channel in the event of CPU stop (configurable) • Wire break monitoring per channel (with 0 and 1 signals) • Signaling of output overload • Discrepancy error monitoring • Load voltage monitoring or ground monitoring per channel group • Short-circuit monitoring to M/L+ per channel group • Module-internal diagnostics functions • Front connector required: 40-pin	**6ES7322-8BH10-0AB0**

	Article No.
For AC voltage Suitable for AC solenoid valves, contactors, motor starters, small-power motors and indicator lights	
8 outputs, 120/230 V AC, 2 A • Isolated in groups of 1 • Connection of a default value per channel in the event of CPU stop (configurable) • Module-internal diagnostics functions • Front connector required: 40-pin	**6ES7322-5FF00-0AB0**
16 outputs, 24/48 V DC, 0.5 A • Isolated in groups of 1 • Connection of a default value per channel in the event of CPU stop (configurable) • Module-internal diagnostics functions • Front connector required: 40-pin	**6ES7322-5GH00-0AB0**
For relay output Suitable for AC/DC solenoid valves, contactors, motor starters, small-power motors and indicator lights	
8 outputs, 24...120 V DC, 24...230 V AC / max. 5 A • Isolated in groups of 1 • With RC suppressor element for protection of contacts per channel • Connection of a default value per channel in the event of CPU stop (configurable) • Module-internal diagnostics functions • Front connector required: 40-pin	**6ES7322-5HF00-0AB0**
Digital input/output modules	
SM 323 for DC voltage Suitable for switches, BERO proximity switches, solenoid valves, contactors, indicator lights, etc. • 8 inputs 24 V DC - Suitable for connection of 2-wire proximity switches (BERO) as sensors • 8 outputs, 24 V DC, 0.5 A • Inputs and outputs electrically isolated in groups of 8 • Front connector required: 20-pin	**6ES7323-1BH01-0AA0**

© Siemens 2019

Overview



Analog input modules

- Multi-function modules for current, voltage and temperature measurements
- Special, highly accurate modules for current and voltage measurements or temperature measurements

All modules automatically supply channel-specific and module-internal diagnostics data, except module 6ES7 331-1KF02-0AB0. With this module, a channel failure is detected by the SIMATIC PCS 7 analog driver block.

The channels of the analog input modules can be parameterized in groups independent of each other.

Analog output modules

- Modules with 12-bit resolution and different numbers of channels
- Highly accurate module with 15-bit resolution

The analog output modules can be parameterized in groups independent of each other, and automatically provide all channel-specific and module-internal diagnostics information.

Ordering data

Analog input modules

	Article No.
SM 331 modules for current, voltage and temperature measurements	
8 inputs, individually configurable • Resolution 12 bit + sign • Current measurement (8 channels) 0/4 ... 20 mA, ±20 mA (2 wires with external supply or 4 wires) • Voltage measurement (8 channels) 1 ... 5 V, 0 ... 10 V, ±50 mV, ±500 mV, ±1 V, ±5 V, ±10 V • Resistance thermometer Pt100, Ni100, Ni1000, LG-Ni1000 (8 channels; 2, 3 or 4 wires) • Front connector required: 40-pin	**6ES7331-1KF02-0AB0**
8 inputs in 4 channel groups Redundancy optional (module-granular redundancy) • Changeover of measurement type by range module per channel group • Resolution 14 bit + sign • Current measurement (8 channels) 0 ... 20 mA, ±3.2 mA, ±10 mA, ±20 mA (4 wires) or 4 ... 20 mA (2 or 4 wires) • Voltage measurement (8 channels) 1 ... 5 V, 0 ... 10 V, ±50 mV, ±500 mV, ±1 V, ±5 V, ±10 V • Resistance thermometer Pt100, Ni100 (4 channels; 2, 3 or 4 wires) • Thermocouples type E, N, J, K, L (8 channels), internal compensation or external compensation with compensating box or 0 °C cold junction • Wire break monitoring • Internal module diagnostics • Front connector required: 20-pin	**6ES7331-7KF02-0AB0**
2 inputs in 1 channel group • Changeover of measurement type by range module • Adjustable resolution per channel group: 9/12/14 bits + sign • Current measurement (2 channels) 0 ... 20 mA, ±3.2 mA, ±10 mA, ±20 mA (4 wires) or 4 ... 20 mA (2 or 4 wires) • Voltage measurement (2 channels) 1 ... 5 V, ±80 mV, ±250 mV, ±500 mV, ±1 V, ±2.5 V, ±5 V, ±10 V • Resistance thermometer Pt100, Ni100 (1 channel, 2 or 4 wires) • Thermocouples type E, N, J, K, L (2 channels), internal compensation or external compensation with compensating box or 0 °C cold junction • Wire break monitoring • Internal module diagnostics • Front connector required: 20-pin	**6ES7331-7KB02-0AB0**

© Siemens 2019

Ordering data	Article No.
SM 331 modules for current and voltage measurements	
8 inputs in 4 channel groups, high speed • Resolution 13 bit + sign • Measurement type and range selection adjustable per channel group • Current measurement 0 ... 20 mA, ±20 mA (4 wires) or 4 ... 20 mA (2 or 4 wires) • Voltage measurement 1 ... 5 V, ±1 V, ±5 V, ±10 V • Limit monitoring adjustable for 2 channels • Fast updating of measured value • Supporting of isochronous mode • Internal module diagnostics • Front connector required: 20-pin	**6ES7331-7HF01-0AB0**
8 inputs in 4 channel groups Redundancy optional (channel-granular redundancy) • Resolution 15 bit + sign • Current measurement 0/ 4 ... 20 mA, ±20 mA (8 channels; 2 or 4 wires) • Voltage measurement 1 ... 5 V, ±5 V, ±10 V (8 channels) • Wire break monitoring with 4 ... 20 mA and 1 ... 5 V • Internal module diagnostics • Front connector required: 40-pin	**6ES7331-7NF00-0AB0**
8 inputs in 4 channel groups Redundancy optional (channel-granular redundancy) • Resolution 15 bit + sign • Fast module cycle (min. 10 ms for 4 channels) • Current measurement 0/ 4 ... 20 mA, ±20 mA (8 channels, 2 wires with external supply or 4 wires) • Voltage measurement 1 ... 5 V, ±5 V, ±10 V (8 channels) • Wire break monitoring with 4 ... 20 mA and 1 ... 5 V, ±5 V, ±10 V • Short-circuit-proof • Electrical isolation between channel groups • Internal module diagnostics • Front connector required: 40-pin	**6ES7331-7NF10-0AB0**

Ordering data	Article No.
SM 331 modules for temperature measurement	
8 inputs in 4 channel groups • Resolution 15 bit + sign • Resistance thermometer Pt100 ... 1000, Ni100 ... 1000, Cu10 (8 channels; 2, 3 or 4 wires) • Resistance measurement 150 Ω, 300 Ω, 600 Ω • Measuring mode (temperature or resistance) and measuring range adjustable per channel group • Short-circuit-proof • Wire break monitoring • Internal module diagnostics • Front connector required: 40-pin	**6ES7331-7PF01-0AB0**
8 inputs in 4 channel groups • Resolution 15 bit + sign • Thermocouples type B, C, N, E, R, S, J, L, T, K, U (8 channels), internal compensation; external compensation with Pt100 through separate inputs possible • Measuring range adjustable per channel group • Fast module cycle (10 ms for 4 channels) • Short-circuit-proof • Wire break monitoring • Internal module diagnostics • Front connector required: 40-pin	**6ES7331-7PF11-0AB0**
6 inputs in 6 channel groups Redundancy optional (channel-granular redundancy) • Resolution 15 bit + sign • Electrical isolation up to 250V AC between the channels • Measuring mode (temperature or voltage) and measuring range adjustable per channel • Temperature measurement with thermocouple type B, C, N, E, R, S, J, L, T, K, U, TxK/ XK (L); internal compensation; external compensation possible with Pt100 • Voltage measurement 25 mV, ±50 mV, ±80 mV, ±250 mV, ±500 mV, ±1 V • Input impedance 10 MΩ each • Programmable diagnostics and diagnostics alarm • Programmable process alarm on limit violation • Calibration possible using SIMATIC PDM • Front connector required: 40-pin	**6ES7331-7PE10-0AB0**

© Siemens 2019

Ordering data

Analog output modules

	Article No.
SM 332 modules for current and voltage outputs	
2 outputs in 2 channel groups • Resolution 12 bit/11 bit + sign • Voltage 1 ... 5 V, 0 ... 10 V; ±10 V (2 channels; 2 or 4 wires) • Current 0/4 ... 20 mA; ±20 mA (2 channels; 2 wires) • Configurable substitute value output in case of CPU stop • Wire break monitoring (only for current) • Short circuit monitoring (only for voltage) • Internal module diagnostics • Front connector required: 20-pin	**6ES7332-5HB01-0AB0**
4 outputs in 4 channel groups **Redundancy optional** (channel-granular redundancy) • Resolution 12 bit/11 bit + sign • Voltage 1 ... 5 V, 0 ... 10 V; ±10 V (4 channels; 4 wires) • Current 0/4 ... 20 mA; ±20 mA (4 channels; 2 wires) • Configurable substitute value output in case of CPU stop • Wire break monitoring (only for current) • Short circuit monitoring (only for voltage) • Internal module diagnostics • Front connector required: 20-pin	**6ES7332-5HD01-0AB0**
8 outputs trin 8 channel groups **Redundancy optional** (channel-granular redundancy) • Resolution 12 bit/11 bit + sign • Voltage 1 ... 5 V, 0 ... 10 V; ±10 V (8 channels; 4 wires) • Current 0/4 ... 20 mA; ±20 mA (8 channels; 2 wires) • Configurable substitute value output in case of CPU stop • Wire break monitoring (only for current) • Short circuit monitoring (only for voltage) • Internal module diagnostics • Front connector required: 40-pin	**6ES7332-5HF00-0AB0**
4 outputs in 4 channel groups • Resolution 14/15/16 bit • Voltage 1 ... 5 V, 0 ... 10 V; ±10 V (4 channels; 4 wires) • Current 0/4 ... 20 mA; ±20 mA (4 channels; 2 wires) • Configurable substitute value output in case of CPU stop • Isolated by channel • Internal module diagnostics • Front connector required: 20-pin	**6ES7332-7ND02-0AB0**

© Siemens 2019

Overview



The modules with HART (Highway Addressable Remote Transducer) which can be used in ET 200M remote I/O stations (with IM 153-2 High Feature interface module) permit connection of HART devices to the SIMATIC PCS 7 automation system.

Transmitters and HART actuators that are certified for digital communication with the HART protocol can be connected through these modules.

With 0/4 to 20 mA technology, conventional transmitters/actuators without HART protocol can also be connected.

All modules with HART come with diagnostics capability (channel and module diagnostics). The diagnostics and monitoring functions are directly available in SIMATIC PCS 7. They require no additional engineering. Plain text messages output on the operator station provide information on faults or changes in the HART parameter settings.

Homogenous integration in the SIMATIC Process Device Manager (PDM) and the PCS 7 Asset Management permit intuitive online diagnostics and parameterization of all connected field devices from a central position.

Function

HART is a serial transmission procedure with which additional parameter data such as measuring ranges, attenuation etc. can be sent to transmitters and actuators over a 4 to 20-mA current loop. The HART jobs for each channel can be remotely initiated over the PROFIBUS DP. This usually takes place from the central engineering system of the SIMATIC PCS 7 process control system per SIMATIC PDM.

The modules with HART have the following features:

- Connections compatible with the conventional analog modules of the ET 200M
- Additional communications possibility over the current loop
- Up to 8 analog channels per module (2 analog channels with Ex modules; 6 analog channels with safety-related SM 336 F-AI HART module)
- Each channel is a primary master of the HART protocol
- Selectable input range per channel (AI):
  - 0 to 20 mA (without HART function)
  - ± 20 mA (without HART function, not with Ex module or SM 336 F-AI HART module)
  - 4 to 20 mA (with/without HART function)
- Selectable output range per channel (AO):
  - 0 to 20 mA (with/without HART function; in the case of Ex module, only without HART function)
  - 4 to 20 mA (with/without HART function)

Additional functions of the 6ES7331-7TF01-0AB0 and 6ES7332-8TF01-0AB0 HART analog modules:

- Supplementary HART variables (up to 4 per channel, up to 8 per module) allow the transmission of additional values from/to the HART devices
- Modules can be used redundant (channel-granular redundancy)

Additional functions of the SM 336 F-AI HART module:

- Modules can be used redundant (channel-granular redundancy)
- HART communication can be activated safety-related in online mode, or switched off

Parameterization

- For the analog input modules (AI), it is possible to parameterize e.g. conversion time, input range, limits, alarms, smoothing of measured values
- For the analog output modules (AO), it is possible to parameterize e.g. output range, response on stoppage of AS (CPU), diagnostics
- Remote parameterization (per PROFIBUS DP) of the HART transmitters and actuators with SIMATIC PDM
- It is still possible to parameterize the HART devices using an operator terminal (handheld).

© Siemens 2019

Technical specifications

Article number	**6ES7331-7TF01-0AB0** SM331, 8AI, 0/4-20MA HART	**6ES7331-7TB10-0AB0** SIMATIC DP, HART ANALOG INPUT M
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes	Yes
Input current		
from load voltage L+ (without load), max.	20 mA	180 mA
from backplane bus 5 V DC, max.	120 mA	100 mA
Output voltage		
Power supply to the transmitters		
• present	Yes	Yes
• Rated value (DC)	24 V	15 V; at 22 mA
• short-circuit proof	Yes	Yes; approx. 30 mA
• No-load voltage (DC)		29.6 V
Power loss		
Power loss, typ.	1.5 W	4.5 W
Analog inputs		
Number of analog inputs	8	2
permissible input current for current input (destruction limit), max.	40 mA	40 mA
Input ranges		
• Current	Yes	Yes
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	Yes
• Input resistance (0 to 20 mA)	140 Ω	50 Ω
• Input resistance (-20 mA to +20 mA)	140 Ω	
• 4 mA to 20 mA		Yes
• Input resistance (4 mA to 20 mA)	140 Ω	50 Ω
Cable length		
• shielded, max.	800 m	400 m
Analog value generation for the inputs		
Measurement principle	Sigma Delta	Sigma Delta
Integration and conversion time/ resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit	16 bit; 10 bit to 15 bit + sign
• Integration time, parameterizable	Yes	Yes
• Integration time (ms)	20 ms at 50 Hz; 16.6 ms at 60 Hz; 100 ms at 100 Hz	2,5 / 16,67 / 20 / 100 ms
• Basic conversion time, including integration time (ms)	55 ms @ 60 Hz, 65 ms @ 50 Hz, 305 ms @ 100 Hz	2.5 / 16.67 / 20 / 100 (1 channel enabled); 7.5 / 50 / 60 / 300 (2 channels enabled)
• Interference voltage suppression for interference frequency f1 in Hz	10 / 50 / 60 Hz	10 / 50 / 60 / 400 Hz
Encoder		
Connection of signal encoders		
• for current measurement as 2-wire transducer	Yes	Yes
• for current measurement as 4-wire transducer	Yes	Yes

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7331-7TF01-0AB0** SM331, 8AI, 0/4-20MA HART	**6ES7331-7TB10-0AB0** SIMATIC DP, HART ANALOG INPUT M
Errors/accuracies		
Linearity error (relative to input range), (±)	0.01 %	0.01 %
Temperature error (relative to input range), (±)	0.001 %/K	0.01 %/K
Crosstalk between the inputs, min.	70 dB	130 dB
Repeat accuracy in steady state at 25 °C (relative to input range), (±)	0.1 %	0.05 %
Operational error limit in overall temperature range		
• Current, relative to input range, (±)	0.15 %	0.45 %; From 0/4 to 20 mA
Basic error limit (operational limit at 25 °C)		
• Current, relative to input range, (±)	0.1 %	0.1 %; From 0/4 to 20 mA
Interference voltage suppression for f = n x (f1 ± 1 %), f1 = interference frequency		
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB	60 dB
• Common mode interference, min.	100 dB	130 dB
Isochronous mode		
Isochronous operation (application synchronized up to terminal)	No	
Interrupts/diagnostics/ status information		
Diagnostic functions	Yes	Yes; Parameterizable
Alarms		
• Diagnostic alarm	Yes	Yes; Parameterizable
• Limit value alarm	Yes	Yes; Parameterizable, channels 0 and 1
Diagnostic messages		
• Diagnostic information readable	Yes	Yes; possible
• Overrange		Yes; Red LED, signal
• Wire-break in signal transmitter cable		Yes; Red LED, signal
• Short-circuit of the signal encoder cable		Yes; Red LED, signal
• HART communication active		Yes; green LED (H)
Diagnostics indication LED		
• Group error SF (red)	Yes	Yes
• Channel fault indicator F (red)	Yes	Yes
Ex(i) characteristics		
Module for Ex(i) protection		Yes
Maximum values of input circuits (per channel)		
• Co (permissible external capacity), max.		62 nF
• Io (short-circuit current), max.		96.1 mA
• Lo (permissible external inductivity), max.		3 mH
• Po (power of load), max.		511 mW
• Uo (output no-load voltage), max.		26 V
• Um (fault voltage), max.		250 V; DC
• Ta (permissible ambient temperature), max.		60 °C

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7331-7TF01-0AB0** SM331, 8AI, 0/4-20MA HART	**6ES7331-7TB10-0AB0** SIMATIC DP, HART ANALOG INPUT M
Potential separation		
Potential separation analog inputs		
• between the channels	No	Yes
• between the channels and backplane bus	Yes	Yes
Permissible potential difference		
between the inputs (UCM)		60 V DC/30 V AC permitted potential difference (Viso) of signals from hazardous areas
Isolation		
Isolation tested with	500 V DC	
tested with		
• Channels against backplane bus and load voltage L+		2500 V DC
• Channels among one another		2500 V DC
• Load voltage L+ against backplane bus		500 V DC
Standards, approvals, certificates		
CE mark		Yes
UL approval		Yes
FM approval		Yes
RCM (formerly C-TICK)		Yes
KC approval		Yes
EAC (formerly Gost-R)		Yes
Use in hazardous areas		
• Type of protection acc. to FM		Class I, Division 2, Group A, B, C, D T4; Class I, Zone 2, Group IIC T4
• Type of protection acc. to KEMA		II 3 G (2) GD Ex nA [ib Gb] [ib IIIC Db] IIC T4 Gc
• Test number KEMA		DEKRA 14 ATEX 0052X
Ambient conditions		
Ambient temperature during operation		
• min.		0 °C
• max.		60 °C
Connection method		
required front connector	20-pin	1x 20-pin
Dimensions		
Width	40 mm	40 mm
Height	125 mm	125 mm
Depth	117 mm	120 mm
Weights		
Weight, approx.	205 g	260 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7332-8TF01-0AB0** SM332, 8AO, 0/4 - 20MA HART	**6ES7332-5TB10-0AB0** SIMATIC DP, HART ANALOG OUTPUT
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes	Yes
Input current		
from load voltage L+ (without load), max.	350 mA	150 mA
from backplane bus 5 V DC, max.	110 mA	100 mA
Power loss		
Power loss, typ.	6 W	3.5 W
Analog outputs		
Number of analog outputs	8	2
Current output, no-load voltage, max.	24 V	19 V
Cycle time (all channels) max.		5 ms
Output ranges, current		
• 0 to 20 mA	Yes	Yes
• -20 mA to +20 mA	No	No
• 4 mA to 20 mA	Yes	Yes
Connection of actuators		
• for current output two-wire connection	Yes	Yes
Load impedance (in rated range of output)		
• with current outputs, max.	750 Ω	650 Ω
• with current outputs, inductive load, max.	10 mH	7.5 mH
Destruction limits against externally applied voltages and currents		
• Voltages at the outputs towards MANA	+60/-0.5 V	max. 17 V / -0.5 V
• Current, max.		60 mA / -1 A
Cable length		
• shielded, max.	800 m	400 m
Analog value generation for the outputs		
Integration and conversion time/ resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit	12 bit; + sign
• Conversion time (per channel)		40 ms
Settling time		
• for resistive load	0.1 ms	2.5 ms
• for capacitive load		4 ms
• for inductive load	0.5 ms	2.5 ms
Errors/accuracies		
Output ripple (relative to output range, bandwidth 0 to 50 kHz), (±)	0.02 %	0.02 %
Linearity error (relative to output range), (±)	0.01 %	0.03 %
Temperature error (relative to output range), (±)	0.002 %/K	0.01 %/K
Crosstalk between the outputs, min.	70 dB	130 dB
Repeat accuracy in steady state at 25 °C (relative to output range), (±)	0.05 %	0.005 %
Operational error limit in overall temperature range		
• Current, relative to output range, (±)	0.2 %	0.55 %
Basic error limit (operational limit at 25 °C)		
• Current, relative to output range, (±)	0.1 %	0.15 %

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7332-8TF01-0AB0** SM332, 8AO, 0/4 - 20MA HART	**6ES7332-5TB10-0AB0** SIMATIC DP, HART ANALOG OUTPUT
Isochronous mode		
Isochronous operation (application synchronized up to terminal)	No	
Interrupts/diagnostics/ status information		
Diagnostic functions	Yes	Yes; Parameterizable
Substitute values connectable	Yes	Yes; Parameterizable
Alarms		
• Diagnostic alarm	Yes	Yes; Parameterizable
Diagnostic messages		
• Diagnostic information readable	Yes	Yes; possible
• Overrange		Yes
• Wire-break		Yes; as of output value > 0.5 mA
• HART communication active		Yes; green LED (H)
Diagnostics indication LED		
• Group error SF (red)	Yes	Yes; Red LED
• Channel fault indicator F (red)		Yes; per channel
Ex(i) characteristics		
Module for Ex(i) protection		Yes
Maximum values of output circuits (per channel)		
• Co (permissible external capacity), max.		230 nF
• Io (short-circuit current), max.		66 mA
• Lo (permissible external inductivity), max.		7.5 mH
• Po (power of load), max.		506 mW
• Uo (output no-load voltage), max.		19 V
• Um (fault voltage), max.		60 V; DC
• Ta (permissible ambient temperature), max.		60 °C
Potential separation		
Potential separation analog outputs		
• between the channels	No	Yes
• between the channels and backplane bus	Yes	Yes
• Between the channels and load voltage L+	Yes	Yes
Permissible potential difference		
between the outputs (UCM)		60 V DC/30 V AC permitted potential difference (Viso) of signals from hazardous areas
Isolation		
Isolation tested with	500 V DC	
tested with		
• Channels against backplane bus and load voltage L+		2500 V DC
• Channels among one another		2500 V DC
• Load voltage L+ against backplane bus		500 V DC

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7332-8TF01-0AB0**	**6ES7332-5TB10-0AB0**
	SM332, 8AO, 0/4 - 20MA HART	SIMATIC DP, HART ANALOG OUTPUT
Standards, approvals, certificates		
FM approval		Yes
Use in hazardous areas		
• Type of protection acc. to FM		Class I, Division 2, Group A, B, C, D T4; Class I, Zone 2, Group IIC T4
• Type of protection acc. to KEMA		II 3 G (2) GD Ex nA [ib Gb] [ib IIIC Db] IIC T4 Gc
• Test number KEMA		DEKRA 14 ATEX 0053X
Connection method		
required front connector	20-pin	20-pin
Dimensions		
Width	40 mm	40 mm
Height	125 mm	125 mm
Depth	117 mm	120 mm
Weights		
Weight, approx.	220 g	290 g

Ordering data

	Article No.
Analog input module SM 331 HART Redundancy optional (channel-granular redundancy) 8 inputs, 0/4 … 20 mA or ±20 mA • Resolution: 15 bit + sign • Connection of 2-wire or 4-wire transmitters possible • HART (2-wire or 4-wire) • Wire break monitoring • Short-circuit-proof • Front connector required: 20-pin	**6ES7331-7TF01-0AB0**
Analog output module SM 332 HART Redundancy optional (channel-granular redundancy) 8 outputs, 0/4 … 20 mA • Resolution: 15 bit + sign • For 2-wire actuators • HART (2-wire) • Wire break monitoring • Front connector required: 20-pin	**6ES7332-8TF01-0AB0**
SM 331 HART Ex analog input module [EEx ib] 2 inputs, 0/4 … 20 mA in 2 channel groups, as of HART revision 5.0 • Individual electrically isolated channels • Resolution: 15 bit + sign • Connection of 2-wire or 4-wire transmitters possible • Wire break monitoring • Short-circuit-proof • HART (2-wire or 4-wire) • Front connector required: 20-pin	**6ES7331-7TB10-0AB0**
SM 332 HART Ex analog output module [EEx ib] 2 outputs, 0/4 … 20 mA in 2 channel groups, as of HART revision 5.0 • Individual electrically isolated channels • Resolution: 12 bit + sign • For 2-wire actuators • Wire break monitoring • HART • Front connector required: 20-pin	**6ES7332-5TB10-0AB0**
SM 336 F-AI HART safety-related analog input module Redundancy optional (channel-granular redundancy) 6 inputs, 0/4 … 20 mA	For detailed Ordering data , see the section "F digital/analog modules"

© Siemens 2019

Overview



The following analog and digital input and output modules are suitable for use in hazardous plants. They separate the non-intrinsically safe electrical circuits of the automation system and the intrinsically safe electrical circuits of the process. Sensors and actuators suitable for placing in zone 1 or 21 and 2 or 22 hazardous areas as well as intrinsically safe equipment compliant with DIN 50020 and [EEx ib] IIC can be operated on these modules.

All Ex modules come with diagnostics capability (channel and module diagnostics).

Ex modules identified by "redundant design possible" (6ES7 321-7RD00-0AB0, 6ES7 322-5SD00-0AB0, 6ES7 331-7RD00-0AB0, 6ES7 332-5RD00-0AB0) can also be configured redundant when used in non-hazardous plants.

Technical specifications

Article number	**6ES7321-7RD00-0AB0** SM321, 4DI, DC24V, HAZARDOUS AREAS
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	50 mA
from backplane bus 5 V DC, max.	80 mA
Encoder supply	
Type of output voltage	via the inputs
Power loss	
Power loss, typ.	1.1 W
Digital inputs	
Number of NAMUR inputs	4
Input voltage	
• Rated value (DC)	8.2 V; from internal power circuit supply
Input current	
• on wire-break, max.	0.1 mA
• on short-circuit, max.	8.5 mA
for NAMUR encoders	
- for signal "0"	0.35 to 1.2 mA
- for signal "1"	2.1 to 7 mA
Input delay (for rated value of input voltage)	
• Input frequency (with a time delay of 0.1 ms), max.	2 kHz
for NAMUR inputs	
- Parameterizable	Yes; 0.1 / 0.5 / 3 / 15 / 20 ms (plus 0.25 ms preparation time)
Cable length	
• unshielded, max.	200 m
Encoder	
Connectable encoders	
• NAMUR encoder	Yes; Two-wire connection

Article number	**6ES7321-7RD00-0AB0** SM321, 4DI, DC24V, HAZARDOUS AREAS
Interrupts/diagnostics/ status information	
Diagnostic messages	
• Diagnostic information readable	Yes
Ex(i) characteristics	
Maximum values of input circuits (per channel)	
• Co (permissible external capacity), max.	3 µF
• Io (short-circuit current), max.	14.1 mA
• Lo (permissible external inductivity), max.	100 mH
• Po (power of load), max.	33.7 mW
• Uo (output no-load voltage), max.	10 V
Potential separation	
Potential separation digital inputs	
• Potential separation digital inputs	Yes
• between the channels, in groups of	1
Standards, approvals, certificates	
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	[EEx ib] IIC
• Type of protection acc. to FM	Class II, Division 2, Group A, B, C, D T4
• Test number PTB	Ex-96.D.2094X
Ambient conditions	
Ambient temperature during operation	
• max.	60 °C
Connection method	
required front connector	20-pin
Weights	
Weight, approx.	230 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7322-5SD00-0AB0** SM322, 4DO, 15V DC,10MA, HAZARDOUS AREAS	**6ES7322-5RD00-0AB0** SM322, 4DO, 15V DC,20MA, HAZARDOUS AREAS
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from load voltage L+ (without load), max.	160 mA	160 mA
from backplane bus 5 V DC, max.	85 mA	85 mA
Power loss		
Power loss, typ.	3 W	3 W
Digital outputs		
Number of digital outputs	4	4
Short-circuit protection	Yes; Electronic	Yes; Electronic
• Response threshold, typ.	Output current with short-circuit protection, min. 10 mA + 10 %	Output current with short-circuit protection, min. 20.5 mA + 10 %
Load resistance range		
• upper limit	390 Ω; Two-wire connection	200 Ω; Two-wire connection
Output voltage		
• Rated value (DC)	24 V	15 V
Output current		
• for signal "1" permissible range for 0 to 60 °C, max.	10 mA; +/-10 %	20 mA; +/-10 %
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
Cable length		
• unshielded, max.	200 m	200 m
Interrupts/diagnostics/ status information		
Diagnostic messages		
• Diagnostic information readable	Yes	Yes
• Short-circuit	Yes	Yes
Ex(i) characteristics		
Maximum values of output circuits (per channel)		
• Co (permissible external capacity), max.	90 nF	500 nF
• Io (short-circuit current), max.	70 mA	85 mA
• Lo (permissible external inductivity), max.	6.7 mH	5 mH
• Po (power of load), max.	440 mW	335 mW
• Uo (output no-load voltage), max.	25.2 V	15.75 V
Potential separation		
Potential separation digital outputs		
• Potential separation digital outputs	Yes	Yes
• between the channels, in groups of	1	1
Standards, approvals, certificates		
Use in hazardous areas		
• Type of protection acc. to EN 50020 (CENELEC)	[EEx ib] IIC	[EEx ib] IIC
• Type of protection acc. to FM	Class I, Division 2, Group A, B, C, D T4	AIS CL.1, DIV 1, GP A, B, C, D; CL.I, DIV 2, GP A, B, C, D T4
• Test number PTB	Ex-96.D.2093X	Ex-96.D.2102X
Ambient conditions		
Ambient temperature during operation		
• max.	60 °C	60 °C
Connection method		
required front connector	20-pin	20-pin
Weights		
Weight, approx.	230 g	230 g

© Siemens 2019

Technical specifications (continued)

Article number	6ES7331-7RD00-0AB0 SIMATIC S7, SM 331 ANALOG INPUT	6ES7331-7SF00-0AB0 SIMATIC S7, SM 331 ANALOG INPUT
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from load voltage L+ (without load), max.	250 mA	
from backplane bus 5 V DC, max.	60 mA	120 mA
Output voltage		
Power supply to the transmitters		
• Rated value (DC)	13 V; at 22 mA	
• No-load voltage (DC)	25.2 V	
Power loss		
Power loss, typ.	3 W	0.6 W
Analog inputs		
Number of analog inputs	4	8; 8x thermocouples; 4x RTD thermoresistors
permissible input current for current input (destruction limit), max.	40 mA	
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes	
Input ranges (rated values), thermocouples		
• Type B		Yes
• Type E		Yes
• Type J		Yes
• Type K		Yes
• Type L		Yes
• Type N		Yes
• Type R		Yes
• Type S		Yes
• Type T		Yes
• Type U		Yes
Input ranges (rated values), resistance thermometer		
• Ni 100		Yes
• Pt 100		Yes
• Pt 200		Yes
Cable length		
• shielded, max.	200 m	200 m; TC: 50 m
Analog value generation for the inputs		
Measurement principle	Sigma Delta	Sigma Delta
Integration and conversion time/ resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit; 10 bit to 15 bit + sign	16 bit; 10 bit to 15 bit + sign
• Integration time, parameterizable	Yes; 2.5 to 100 ms	Yes; 2.5 to 100 ms
• Interference voltage suppression for interference frequency f1 in Hz	10 to 400 Hz	10 to 400 Hz
Encoder		
Connection of signal encoders		
• for current measurement as 2-wire transducer	Yes	Yes
• for current measurement as 4-wire transducer	Yes	Yes

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7331-7RD00-0AB0** SIMATIC S7, SM 331 ANALOG INPUT	**6ES7331-7SF00-0AB0** SIMATIC S7, SM 331 ANALOG INPUT
Errors/accuracies		
Temperature error (relative to input range), (±)		0.001 %/K; Temperature error: 0.001 to 0.002 %/K
Operational error limit in overall temperature range		
• Current, relative to input range, (±)	0.45 %	
• Resistance thermometer, relative to input range, (±)		0.04 %; 0.09 to 0.04%
Basic error limit (operational limit at 25 °C)		
• Current, relative to input range, (±)	0.1 %	
• Resistance thermometer, relative to input range, (±)		0.008 %; 0.018 ... 0.008%
Interference voltage suppression for f = n x (f1 ± 1 %), f1 = interference frequency		
• Series mode interference (peak value of interference < rated value of input range), min.	60 dB	60 dB
• Common mode interference, min.	130 dB	130 dB
Interrupts/diagnostics/ status information		
Diagnostic messages		
• Diagnostic information readable	Yes	Yes
• Overrange	Yes	Yes
• Wire-break in signal transmitter cable	Yes	Yes
• Short-circuit of the signal encoder cable	Yes	Yes
Ex(i) characteristics		
Maximum values of input circuits (per channel)		
• Co (permissible external capacity), max.	90 nF	43 µF
• Io (short-circuit current), max.	68.5 mA	28.8 mA
• Lo (permissible external inductivity), max.	7.5 mH	40 mH
• Po (power of load), max.	431 mW	41.4 mW
• Ri, max.	50 Ω	
• Uo (output no-load voltage), max.	25.2 V	5.9 V
Potential separation		
Potential separation analog inputs		
• Potential separation analog inputs	Yes	Yes
Permissible potential difference		
between the inputs (UCM)	60 V DC/30 V AC when used in the hazardous area; 400 V DC/250 V AC when used in NON-hazardous area	60 V DC/30 V AC when used in the hazardous area; 400 V DC/250 V AC when used in NON-hazardous area
Between the inputs and MANA (UCM)	60 V DC/30 V AC when used in the hazardous area; 400 V DC/250 V AC when used in NON-hazardous area	60 V DC/30 V AC when used in the hazardous area; 400 V DC/250 V AC when used in NON-hazardous area
Use in hazardous areas		
• Type of protection acc. to EN 50020 (CENELEC)	[EEx ib] IIC	[EEx ib] IIC
• Type of protection acc. to FM	Class I, Division 2, Group A, B, C, D T4	Class I, Division 2, Group A, B, C, D T4
• Test number PTB	Ex-96.D.2092X	Ex-96.D.2108X
Ambient conditions		
Ambient temperature during operation		
• max.	60 °C	60 °C
Connection method		
required front connector	20-pin	20-pin
Weights		
Weight, approx.	290 g	210 g

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7332-5RD00-0AB0** SIMATIC S7, SM 332 ANALOG OUTPUT
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	200 mA
from backplane bus 5 V DC, max.	80 mA
Power loss	
Power loss, typ.	4 W
Analog outputs	
Number of analog outputs	4
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	70 mA
Current output, no-load voltage, max.	14 V
Output ranges, current	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Connection of actuators	
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with current outputs, max.	500 Ω
Cable length	
• shielded, max.	200 m
Analog value generation for the outputs	
Integration and conversion time/ resolution per channel	
• Resolution with overrange (bit including sign), max.	15 bit
• Basic conversion time (ms)	2.5 ms
Errors/accuracies	
Operational error limit in overall temperature range	
• Current, relative to output range, (±)	0.55 %
Basic error limit (operational limit at 25 °C)	
• Current, relative to output range, (±)	0.2 %
Interrupts/diagnostics/ status information	
Diagnostic messages	
• Diagnostic information readable	Yes
• Overrange	Yes
• Wire-break in actuator cable	Yes
Ex(i) characteristics	
Maximum values of output circuits (per channel)	
• Co (permissible external capacity), max.	850 nF
• Io (short-circuit current), max.	70 mA
• Lo (permissible external inductivity), max.	6.6 mH
• Po (power of load), max.	440 mW
• Uo (output no-load voltage), max.	14 V

Article number	**6ES7332-5RD00-0AB0** SIMATIC S7, SM 332 ANALOG OUTPUT
Potential separation	
Potential separation analog outputs	
• Potential separation analog outputs	Yes
Permissible potential difference	
between the outputs (UCM)	60 V DC/30 V AC when used in the hazardous area; 400 V DC/250 V AC when used in NON-hazardous area
Between the outputs and MANA (UCM)	60 V DC/30 V AC when used in the hazardous area; 400 V DC/250 V AC when used in NON-hazardous area
Standards, approvals, certificates	
Use in hazardous areas	
• Type of protection acc. to EN 50020 (CENELEC)	[EEx ib] IIC
• Type of protection acc. to FM	Class I, Division 2, Group A, B, C, D T4
• Test number PTB	Ex-96.D.2026X
Ambient conditions	
Ambient temperature during operation	
• max.	60 °C
Connection method	
required front connector	20-pin
Weights	
Weight, approx.	280 g

© Siemens 2019

Ordering data

	Article No.
Ex digital input modules	
4 NAMUR inputs in 4 channel groups **Redundancy optional** (channel-granular redundancy) • Voltage supply to sensors 8.2 V • Individual electrically isolated channels • Time stamping in association with IM 153-2 High Feature, accuracy 10 ms, rising or falling edge, can be configured channel-granular • Wire break and short-circuit monitoring (directly at the contact for contacts with external resistor circuit) • Internal module diagnostics • Front connector required: 20-pin	**6ES7321-7RD00-0AB0**
Ex digital output modules	
4 outputs, 24 V DC, 10 mA in 4 channel groups **Redundancy optional** (channel-granular redundancy) • Individual electrically isolated channels • Wire break monitoring • Short-circuit monitoring • Internal module diagnostics • Front connector required: 20-pin	**6ES7322-5SD00-0AB0**
4 outputs, 15 V DC / 20 mA in 4 channel groups • Individual electrically isolated channels • Wire break monitoring • Short-circuit monitoring • Internal module diagnostics • Front connector required: 20-pin	**6ES7322-5RD00-0AB0**

	Article No.
Ex analog input modules	
4 inputs, 0/4 ... 20 mA in 4 channel groups **Redundancy optional** (channel-granular redundancy) • Individual electrically isolated channels • Resolution 15 bit + sign • Connection of 2-wire or 4-wire transmitters possible • Wire break monitoring • Measurement range monitoring • Short-circuit-proof • Internal module diagnostics • Front connector required: 20-pin	**6ES7331-7RD00-0AB0**
8 inputs in 4 channel groups • Resolution 15 bit + sign • Thermocouples type T, U, E, J, L, K, N, R, S, B (8 channels) Internal compensation; external compensation with Pt100 (2 channels), compensating box or 0/50 °C cold junction • Resistance thermometer Pt100, Pt200, Ni100 (4 channels; 2-wire or 4-wire, 3-wire Pt100 on request) • Wire break monitoring • Internal module diagnostics • Front connector required: 20-pin Note: A special front connector for the Ex analog input module 6ES7331-7SF00-0AB0 enables greater accuracy when making thermocouple temperature measurements in "Internal compensation" measuring mode (see the section "Accessories").	**6ES7331-7SF00-0AB0**
Ex analog output modules	
4 outputs, 0/4 ... 20 mA in 4 channel groups **Redundancy optional** (channel-granular redundancy) • Individual electrically isolated channels • Resolution 15 bit • For 2-wire transmitters • Wire break monitoring • Internal module diagnostics • Front connector required: 20-pin	**6ES7332-5RD00-0AB0**

For additional Ex modules, refer to the "Analog modules with HART" section.

© Siemens 2019

Overview



The safety functions of the safety-related automation systems are matched to the safety-related I/O modules (F-modules) of the ET 200M distributed I/O system. The F-signal modules (DI/DO/AI) in the ET 200M remote I/O stations comply with safety requirements up to SIL 3 (IEC 61508). They can diagnose both internal and external faults. To this end, they carry out self-tests, e.g. for short-circuit or open-circuit, and automatically monitor the discrepancy time defined in the parameter settings. They are able to guarantee plant safety even if there is a CPU failure in the automation system.

Depending on the version, the input modules support 1oo1 and 1oo2 evaluation on the module. 2oo3 evaluation of three sensors is possible using the corresponding voter block (component of the S7 F block library) within the safety program.

In the event of a faulty output, the digital output modules allow a safe shutdown via a second shutdown path.

Note:

The SM 326 F-DI NAMUR digital input module, Article No. 6ES7326-1RF01-0AB0, does not support PROFINET.

Design

SM 336 F-AI HART analog input module


The safety-related SM 336 F-AI HART analog input module has 6 inputs for current measurements in the range from 0 to 20 mA or 4 to 20 mA, all of which are designed for SIL 3. The compact width of 40 mm means that a relatively high packing density can be achieved for F modules, allowing a design which saves space and costs.

The module can also handle HART communication with appropriate HART field devices. HART communication can be activated safety-related in online mode, or switched off.

Digital output module SM 326 F-DO

The 40-mm wide safety-related SM 326 F-DO digital output module with 10 outputs (24 V DC, 2 A) and parameterizable redundancy extends the range of compact F-modules commenced with the SM 336 F-AI HART. The module features short response times, and can be used in SIL 3 applications even without an isolating module. It supports the "Keep last valid value" function as well as channel-selective passivation.

Options

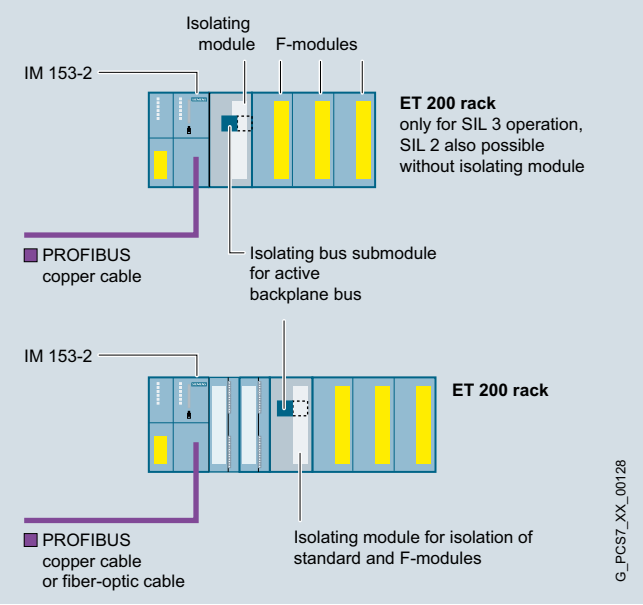

Isolating module

The following components are available as accessories for the F modules:

- Isolating module
  - Isolation of F and standard modules in an ET 200M remote I/O station
  - Signal isolation when using a copper bus connection (only F modules in an ET 200M remote I/O station with IM 153-2)
- Isolating bus submodule for isolating module, when using an active backplane bus

The isolating module is required in SIL 3 applications with F signal modules SM 326; AI 6 x 13 bit, SM 326; DI 8 x NAMUR and SM 326; DO 10 x DC 24 V/2 A (width 80 mm) in the following cases:

- Design of PROFIBUS DP with copper cables
- Design of PROFIBUS DP with fiber-optic cables and joint operation of the mentioned F signal modules with standard modules in an ET 200M station

Note:

The isolating module for F modules and the isolating bus submodule can only be used together. The 40-mm wide gap cannot be used for other modules.

© Siemens 2019


Ordering data	Article No.
SM 326 F-DI safety-related digital input module for floating contacts	
24 inputs, 24 V DC 80 mm wide Isolated in groups of 12 **Redundancy optional** (channel-granular redundancy) • 4 short-circuit-proof sensor power supplies, each for 6 channels, isolated in groups of 3 • External sensor power supply possible • SIL 2: 1oo1 evaluation, 24 channels • SIL 3: 1oo2 evaluation on the module, 12 channels (adjustable discrepancy time) • SIL 3 achievable without isolating module • Short-circuit monitoring to L+ • Discrepancy monitoring • Supports 20 ms time stamping (SOE) • Module internal diagnostics • PROFIsafe telegram • Front connector required: 40-pin	**6ES7326-1BK02-0AB0**
8 inputs, NAMUR [EEx ib][1] 80 mm wide Isolated by channel **Redundancy optional** (channel-granular redundancy) • 8 short-circuit-resistant sensor power supplies, each for 1 channel, mutually isolated • SIL 2: 1oo1 evaluation, 8 channels • SIL 3: 1oo2 evaluation on the module, 4 channels (adjustable discrepancy time) • Wire break and short-circuit monitoring (for contacts with external resistor circuit) • Discrepancy monitoring • Module internal diagnostics • PROFIsafe telegram • Front connector required: 40-pin	**6ES7326-1RF01-0AB0**
Safety-related digital output module SM 326 F-DO Suitable for solenoid valves, DC contactors and indicator lights	
10 outputs, 24 V DC, 2 A 40 mm wide Isolated in groups of 5 (outputs with internal diode) **Redundancy optional** (channel-granular redundancy) • 10 outputs, isolated in groups of 5 • SIL 3 achievable without isolating module • P/P-switching (for non-floating loads; ground and earth connected together) • Wire break and short-circuit monitoring • Configurable diagnostics • "Keep last valid value" parameter • Channel-selective passivation • PROFIsafe telegram • Front connector required: 40-pin	**6ES7326-2BF10-0AB0**
8 outputs, 24 V DC, 2 A 80 mm wide Electrically isolated in groups of 4 • SIL 2, SIL 3 configurable (8 channels) • SIL 3 achievable without isolating module • P/M-switching (for floating loads; ground and earth separate) • Wire break and short-circuit monitoring • Module internal diagnostics • PROFIsafe telegram • Front connector required: 40-pin	**6ES7326-2BF41-0AB0**
SM 336 FA-I HART safety-related analog input module	
6 inputs, 0 ... 20 mA or 4 ... 20 mA 40 mm wide Electrically isolated in groups of 3 **Redundancy optional** (channel-granular redundancy) • Resolution: 15 bits + sign • 2-wire or 4-wire connection • 6 short-circuit-proof sensor supplies for 1 channel each • External sensor power supply possible • SIL 3: 1oo1 evaluation (6 channels) and 1oo2 evaluation (3 channels) on the module • SIL 3 achievable without isolating module • Discrepancy monitoring with 1oo2 evaluation (adjustable discrepancy time) • Wire break monitoring • Module and channel diagnostics • HART communication in measuring range 4 ... 20 mA (can be switched on/off online) • HART status display • PROFIsafe telegram • Front connector required: 20-pin	**6ES7336-4GE00-0AB0**
Options	
Isolating module For F modules, 40 mm wide • For isolation of F and standard modules in an ET 200M rack • For signal isolation when using a copper bus connection (only F modules in a rack with IM 153-2)	**6ES7195-7KF00-0XA0**
Isolating bus module 80 mm wide, for isolating module, when using an active backplane bus	**6ES7195-7HG00-0XA0**

[1] The SM 326 F-DI NAMUR module does not support PROFINET

11

© Siemens 2019

Overview

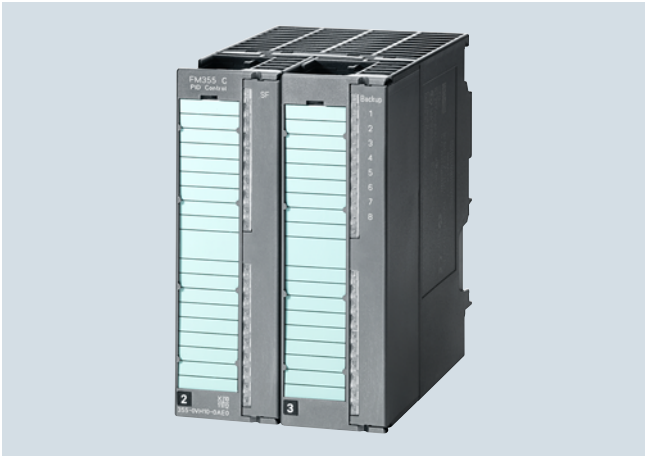

The FM 355 is an intelligent 4-channel controller module for universal control tasks. It can be used to control temperature, pressure and flow.

The following versions of the FM 355 are available:

- FM 355 C
  Continuous-action controller with 4 analog outputs for controlling analog actuators
- FM 355 S
  Step or pulse controller with 8 digital outputs for controlling motor-driven (integrating) actuators or binary controlled actuators (e.g. electrical heating strips and cartridges)
- FM 355-2 C/S
  Specially optimized for temperature controls with user-friendly online self-optimization integrated


Function

The FM 355 and FM 355-2 modules have four separate control channels. The controllers have the following features:

- Predefined controller structures for
  - Fixed setpoint control
  - Cascade controller
  - Ratio control
  - 3-component control
- Different operating modes
  - Automatic mode
  - Manual mode
  - Safety mode
  - Follow-up mode
  - Backup mode
- Sampling time (depending on the resolution of the analog inputs and the compensation input):
  - At 12 bits: 20 ms to 100 ms (FM 355-2 only)
  - At 14 bits: 100 ms to 500 ms (depending on the number of released analog inputs)
- 2 control algorithms:
  - Self-optimizing temperature control algorithm
  - PID algorithm
- Integrated online self-optimization without configuration (FM 355-2 only)
  - Faster adjustment to the operating point
- Convenient controller optimization
- Backup mode
  The controller can continue to control independently in the event of CPU failure or CPU stop. To this end, configurable safety setpoints or safety manipulated variables are set.
- Feed forward control
  The analog inputs can optionally be used for feed forward control in addition to actual value recording.

© Siemens 2019

Integration

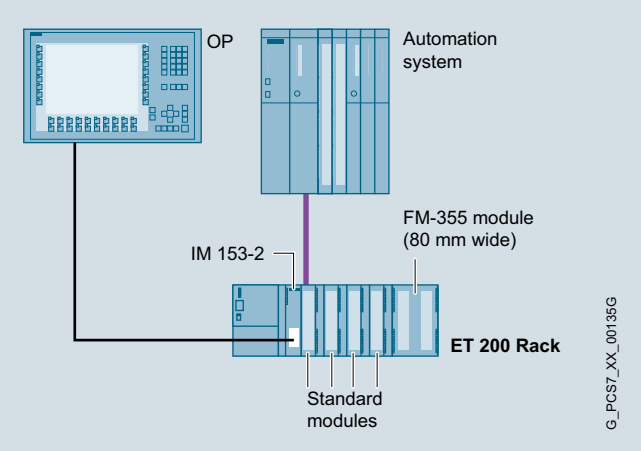

Use in SIMATIC PCS 7

The FM 355/FM 355-2 modules can be used to implement control tasks outside the SIMATIC PCS 7 automation system. The modules have not only controller structures but also analog and digital channels, thus eliminating the need for additional modules to detect the setpoint/actual value or to control the actuator.

On the one hand this reduces the work load for the CPU, on the other hand it enables backup mode with which the control system continues to work even if the CPU fails. In this case the FM 355 module can be operated further with an OP operator panel (does not apply to FM 355-2).

The operator panel is connected to the PROFIBUS DP fieldbus for this purpose. The CPU of the automation system can surrender input privilege to the operator panel in normal operation as well. The parameters that can be accessed with the operator panel are the setpoint and manipulated variable. If the FM 355 module is operated from the operator panel, the automation system reads back the values accessible from the operator panel after the input privilege is withdrawn or recovered again. Bumpless continuation of the operations is thus assured.

IM 153-2 High Feature interface modules are needed for the PROFIBUS DP connection when the FM 355/FM 355-2 controller modules are used in ET 200M.

SIMATIC PCS 7 blocks

CFC blocks with OS faceplates for all FM 355 modules are included in the scope of supply of the standard SIMATIC PCS 7 library (part of engineering software). These blocks are integrated into the SIMATIC PCS 7 driver concept. This guarantees homogenous system integration (including automatic diagnostics messages).

Parameterization in HW-Config

A configuration package containing all parameterization masks required for configuring, parameterizing and commissioning is included in the scope of supply of the FM 355 controller modules.

Ordering data

	Article No.
FM 355 C controller module With 4 analog outputs for 4 continuous-action controllers Front connector required: 2 x 20-pin Incl. multi-lingual configuration package, manual and Getting Started (English, German, French, Italian) on CD	**6ES7355-0VH10-0AE0**
FM 355 S controller module With 8 digital outputs for 4 step or pulse controllers Front connector required: 2 x 20-pin Incl. multi-lingual configuration package, manual and Getting Started (English, German, French, Italian) on CD	**6ES7355-1VH10-0AE0**
FM 355-2 C temperature controller module with 4 analog outputs for 4 continuous-action controllers Front connector required: 2 x 20-pin Incl. multi-lingual configuration package, manual and Getting Started (English, German, French, Italian) on CD	**6ES7355-2CH00-0AE0**
FM 355-2 S temperature controller module With 8 digital outputs for 4 step or pulse controllers Front connector required: 2 x 20-pin Incl. multi-lingual configuration package, manual and Getting Started (English, German, French, Italian) on CD	**6ES7355-2SH00-0AE0**

Note:

In the case of the FM 355 C and FM 355 S controller modules, the channels are not electrically isolated from one another

© Siemens 2019

Overview



The FM 350-1 counter module is a single-channel intelligent counter module for simple counting tasks, suitable for the direct connection of incremental encoders. It provides a comparison function with 2 preselectable reference values, as well as integrated digital outputs for outputting a reaction upon reaching the reference value.


The FM 350-2 counter module is an eight-channel intelligent counter module for universal counting and measuring tasks, as well as for simple positioning jobs (max. 4 axes).

Ordering data

	Article No.
FM 350-1 counter module Counting functions up to 500 kHz 1 channel for the connection of 5 V and 24 V incremental encoders Front connector required: 1 x 20-pin incl. configuration package on CD	**6ES7350-1AH03-0AE0**
FM 350-2 counter module 8 channels with maximum 20 kHz counting frequency; for 24 V encoders, for the following tasks: counting, frequency measurement, speed measurement, period measurement, dosing Front connector required: 1 x 40-pin incl. configuration package on CD	**6ES7350-2AH01-0AE0**

© Siemens 2019

Overview

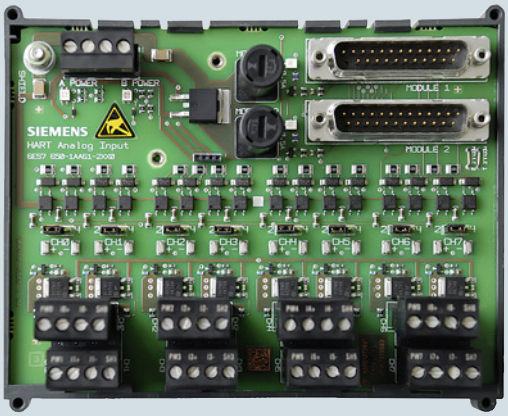

MTA AI HART terminal module, 8-channel


MTA terminal modules (Marshalled Termination Assemblies) can be used to connect field devices, sensors and actuators to the I/O modules of the ET 200M remote I/O stations simply, rapidly and reliably. They can be used to significantly reduce the costs and required work for cabling and commissioning, and prevent wiring errors.

The individual MTA terminal modules are each tailored to specific I/O modules from the ET 200M range (see design for assignment table). MTA versions are available for standard I/O modules as well as for redundant and safety-related I/O modules.

The MTA terminal modules are connected to the I/O modules using 3 m or 8 m long preassembled cables.

The MTA Power Supply 24 V DC terminal module comes with 16 24 V DC, 0.5 A outputs protected against short-circuit for redundant power supply of field devices that are no longer supplied by means of signal lines by some of the newer MTAS, for example, 4-wire transmitter. If 0.5 A is insufficient, you can also connect two or more outputs in parallel.

Design

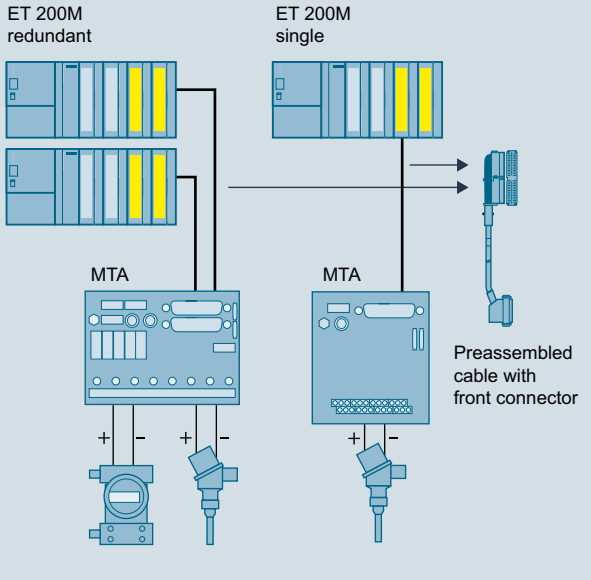

- MTA terminal modules in versions for standard, redundant and safety-related I/O modules of the ET 200M distributed I/O system
- Redundant 24 V DC supply
- Power Monitor Board for diagnostics of the redundant power supply (partially integrated or can be ordered as option)
- 3 or 8 m long preassembled cables for connecting MTA terminal module and ET 200M module, in each case with:
  - 50/25-contact Sub-D socket or 25-contact Sub-D plug, for connection to MTA terminal
  - 40/20-pole Siemens front connector, female version, for connection to ET 200M module
- Screw terminals for the 1:1 connection of field devices, sensors and actuators
- Protection of channels frequently by fuse or electronic current limitation, partially with LED display
- Test and release as SIMATIC PCS 7 system component with corresponding approvals (FM, UL, CE, ATEX, TÜV)

© Siemens 2019

Design (continued)

Product overview with information on combinable ET 200M modules and connection cables

MTA type	Input/output area	Order No. of MTA and accessories	Order No. of ET 200M module	Order No. of connecting cable	I/O redundancy
8 channels, AI	1 ... 5 V; ± 5 V; ± 10 V; 0 ... 20 mA; 4 ... 20 mA; ± 20 mA	6ES7 650-1AA52-2XX0[1)]	6ES7 331-7NF00-0AB0 (from product version 5)	6ES7 922-3BD00-0BA0 (3 m) 6ES7 922-3BJ00-0BA0 (8 m)	Yes
8 channels, AI	1 ... 5 V; ± 5 V; ± 10 V; 0 ... 20 mA; 4 ... 20 mA; ± 20 mA	6ES7 650-1AA52-2XX0[1)]	6ES7 331-7NF10-0AB0 (from product version 8)	6ES7 922-3BD00-0BB0 (3 m) 6ES7 922-3BJ00-0BB0 (8 m)	Yes
8 channels, AO	0 ... 20 mA; 4 ... 20 mA	6ES7 650-1AB51-2XX0	6ES7 332-5HF00-0AB0 (from product version 3)	6ES7 922-3BD00-0AS0 (3 m) 6ES7 922-3BJ00-0AS0 (8 m)	Yes
8 channels, AI HART	0 ... 20 mA (without use of HART) 4 ... 20 mA (with/without use of HART)	6ES7 650-1AA61-2XX0[1)]	6ES7 331-7TF01-0AB0	6ES7 922-3BD01-0AM0 (3 m) 6ES7 922-3BJ01-0AM0 (8 m)	Yes
8 channels, AO HART	0 ... 20 mA (with/without use of HART) 4 ... 20 mA (with/without use of HART)	6ES7 650-1AB61-2XX0	6ES7 332-8TF01-0AB0	6ES7 922-3BD01-0AM0 (3 m) 6ES7 922-3BJ01-0AM0 (8 m)	Yes
8 channels, AI TC	Thermocouple types B, C, N, E, R, S, J, L, T, K, U	6ES7 650-1AF51-2XX0	6ES7 331-7PF10-0AB0 (from product version 4) or 6ES7 331-7PF11-0AB0	6ES7 922-3BD00-0AS0 (3 m) 6ES7 922-3BJ00-0AS0 (8 m)	No
8 channels, AI RTD	Resistance thermometers Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Cu10	6ES7 650-1AG51-2XX0	6ES7 331-7PF00-0AB0 (from product version 8) or 6ES7 331-7PF01-0AB0	6ES7 922-3BD00-0AS0 (3 m) 6ES7 922-3BJ00-0AS0 (8 m)	No
16 channels, DO	24 V DC, 0.5 A	6ES7 650-1AD11-2XX0	6ES7 322-8BH10-0AB0	6ES7 922-3BD00-0AT0 (3 m) 6ES7 922-3BJ00-0AT0 (8 m)	Yes
6 channels F-AI HART (safety-related)	0 ... 20 mA (without use of HART); 4 ... 20 mA (with/without use of HART)	6ES7 650-1AH62-5XX0[1)]	6ES7 336-4GE00-0AB0	6ES7 922-3BD00-0AU0 (3 m) 6ES7 922-3BJ00-0AU0 (8 m)	Yes
16 channels, DI	24 V DC	6ES7 650-1AC11-3XX0	6ES7 321-7BH01-0AB0 (from product version 2)	6ES7 922-3BD01-0AM0 (3 m) 6ES7 922-3BJ01-0AM0 (8 m)	Yes
24 channels F-DI (safety-related)	24 V DC	6ES7 650-1AK11-7XX0	6ES7 326-1BK00-0AB0, 6ES7 326-1BK01-0AB0 or 6ES7 326-1BK02-0AB0	6ES7 922-3BD00-0AS0 (3 m) 6ES7 922-3BJ00-0AS0 (8 m)	Yes
10 channels F-DO (safety-related)	24 V DC, 2 A	6ES7 650-1AL11-6XX0	6ES7 326-2BF01-0AB0 (from product version 2) or 6ES7 326-2BF10-0AB0	6ES7 922-3BD00-0AN0 (3 m) 6ES7 922-3BJ00-0AN0 (8 m)	Yes
16 channels DO relay	120 … 230 V AC, 5 A; 24 V DC, 5 A	6ES7 650-1AM30-3XX0	6ES7 322-8BH01-0AB0 or 6ES7 322-8BH10-0AB0	6ES7 922-3BD00-0AS0 (3 m) 6ES7 922-3BJ00-0AS0 (8 m)	Yes
10 channels F DO relays (safety-related)	120 … 230 V AC, 5 A; 24 V DC, 5 A	6ES7 650-1AM31-6XX0	6ES7 326-2BF01-0AB0 (from product version 2) or 6ES7 326-2BF10-0AB0	6ES7 922-3BD00-0AS0 (3 m) 6ES7 922-3BJ00-0AS0 (8 m)	Yes

[1)] These new terminal modules can no longer deliver a 24 V DC current for feeding 4-wire transmitters. You require an additive terminal module MTA power supply 24 V DC (Order No. 6ES7 650-1BE10-3XX0) if you wish to continue supplying 4-wire transmitters centrally per MTA and redundant with 24 V DC.

© Siemens 2019

Ordering data	Article No.
MTA terminal modules for SIMATIC PCS 7	
MTA AI terminal module, 8-channel Terminal module for connection of field devices/sensors to a single or two redundant ET 200M analog input modules 6ES7331-7NF00-0AB0 or 6ES7331-7NF10-0AB0 Input range: 1 to 5 V; ± 5 V; ± 10 V und 0/4 ... 20 mA; ± 20 mA Note: 4-wire devices must be supplied separately with current.	**6ES7650-1AA52-2XX0**
MTA AO terminal module, 8-channel Terminal module for connection of field devices/actuators to a single or two redundant ET 200M analog output modules 6ES7332-5HF00-0AB0 Output range: 0/4 ... 20 mA	**6ES7650-1AB51-2XX0**
MTA AI HART terminal module, 8-channel Terminal module for connection of field devices/sensors to a single or two redundant ET 200M analog input modules 6ES7331-7TF01-0AB0 Input range: 0 ... 20 mA (without use of HART), 4 ... 20 mA (with/without use of HART) Note: 4-wire devices must be supplied separately with current.	**6ES7650-1AA61-2XX0**
MTA AO HART terminal module, 8-channel Terminal module for connection of field devices/actuators to a single or two redundant ET 200M analog output modules 6ES7332-8TF01-0AB0 Output range: 0 to 20 mA (with/without use of HART), 4 ... 20 mA (with/without use of HART)	**6ES7650-1AB61-2XX0**
MTA AI TC terminal module, 8-channel Terminal module for connection of field devices/sensors to a single ET 200M analog input module 6ES7331-7PF10-0AB0 or 6ES7331-7PF11-0AB0 Input range: Thermocouple types B, C, N, E, R, S, J, L, T, K, U	**6ES7650-1AF51-2XX0**
MTA AI RTD terminal module, 8-channel Terminal module for connection of field devices/sensors to a single ET 200M analog input module 6ES7331-7PF00-0AB0 or 6ES7331-7PF01-0AB0 Measuring range: Resistance thermometers Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Cu10	**6ES7650-1AG51-2XX0**
MTA DO terminal module, 16-channel Terminal module for connection of field devices/actuators to a single or two redundant ET 200M digital output modules 6ES7322-8BH10-0AB0 Output range: 24 V DC, 0.5 A	**6ES7650-1AD11-2XX0**

	Article No.
MTA F-AI HART terminal module, 6-channel Terminal module for connection of field devices/sensors to a single or two redundant safety-related ET 200M analog input modules 6ES7336-4GE00-0AB0 Input range: 0 ... 20 mA (without use of HART), 4 ... 20 mA (with/without use of HART) Note: 4-wire devices must be supplied separately with current.	**6ES7650-1AH62-5XX0**
MTA DI terminal module, 16-channel Terminal module for connection of field devices/sensors to a single or two redundant ET 200M digital input modules 6ES7321-7BH01-0AB0 Input range: 24 V DC	**6ES7650-1AC11-3XX0**
MTA F-DI terminal module, 24-channel Terminal module for connection of field devices/sensors to a single or two redundant safety-related ET 200M digital input modules 6ES7326-1BK00-0AB0, 6ES7326-1BK01-0AB0 or 6ES7326-1BK02-0AB0 Input range: 24 V DC	**6ES7650-1AK11-7XX0**
MTA F-DO terminal module, 10-channel Terminal module for connection of field devices/actuators to a single or two redundant safety-related ET 200M digital output modules 6ES7326-2BF01-0AB0 or 6ES7326-2BF10-0AB0 Output range: 24 V DC, 2 A	**6ES7650-1AL11-6XX0**
MTA DO Relay terminal module, 16-channel Terminal module for connection of field devices/actuators to a single or two redundant ET 200M digital output modules 6ES7322-8BH01-0AB0 or 6ES7322-8BH10-0AB0 Output range: 120 to 230 V AC, 5 A; 24 V DC, 5 A	**6ES7650-1AM30-3XX0**
MTA F-DO Relay terminal module, 10-channel Terminal module for connection of field devices/actuators to a single or two redundant safety-related ET 200M digital output modules 6ES7326-2BF01-0AB0 or 6ES7326-2BF10-0AB0 Output range: 120 to 230 V AC, 5 A; 24 V DC, 5 A	**6ES7650-1AM31-6XX0**

© Siemens 2019

MTA Terminal Modules

Ordering data

	Article No.
Separate power supply for field devices, for example 4-wire transmitter	
MTA terminal module 24 V DC power supply, 16-channel Terminal module for the redundant power supply of field devices separated from the signal transmission Output range: 24 V DC, 0.5 A	**6ES7650-1BE10-3XX0**
Pre-assembled cable for connection of ET 200 module and MTA terminal module	
Connecting cable with 40-pin front connector for ET 200M and 50-pin Sub-D socket for MTA Lengths:	
• 3 m	**6ES7922-3BD00-0AS0**
• 8 m	**6ES7922-3BJ00-0AS0**
Connecting cable with 40-pin front connector for ET 200M and 25-pin Sub-D socket for MTA Lengths:	
• 3 m	**6ES7922-3BD00-0BA0**
• 8 m	**6ES7922-3BJ00-0BA0**
Connecting cable with 40-pin front connector for ET 200M and 25-pin Sub-D socket for MTA Lengths:	
• 3 m	**6ES7922-3BD00-0BB0**
• 8 m	**6ES7922-3BJ00-0BB0**
Connecting cable with 40-pin front connector for ET 200M and 25-pin Sub-D plug for MTA Lengths:	
• 3 m	**6ES7922-3BD00-0AT0**
• 8 m	**6ES7922-3BJ00-0AT0**
Connecting cable with 40-pin front connector for ET 200M and 25-pin Sub-D socket for MTA Lengths:	
• 3 m	**6ES7922-3BD00-0AN0**
• 8 m	**6ES7922-3BJ00-0AN0**
Connecting cable with 20-pin front connector for ET 200M and 25-pin Sub-D socket for MTA Lengths:	
• 3 m	**6ES7922-3BD01-0AM0**
• 8 m	**6ES7922-3BJ01-0AM0**
Connecting cable with 20-pin front connector for ET 200M and 50-pin Sub-D socket for MTA Lengths:	
• 3 m	**6ES7922-3BD00-0AU0**
• 8 m	**6ES7922-3BJ00-0AU0**
Accessories	
Power monitor board (PMB) for display of status of redundant MTA power supply	**6ES7650-1BA02-0XX0**

More information

Detailed information on the MTA terminal modules can be found in the manual "ET 200M Marshalled Termination Assemblies Remote I/O Modules".

© Siemens 2019

Overview



SIMATIC ET 200SP is a highly flexible and scalable I/O system with IP20 protection which can communicate with SIMATIC PCS 7 automation systems (controllers) via PROFINET IO or PROFIBUS DP. Designed for installation in enclosures or control cabinets, it convinces with a particularly compact design, exceptional usability, and impressive performance.


The comprehensive, channel-specific and easy-to-program diagnostics with plain text messages means that faults can be located and eliminated in an extremely short time.

Summary of main features

- Remote I/O stations with IP20 protection, can be networked via PROFINET IO and PROFIBUS DP
- Free selection of PROFINET connection system and hardware using BusAdapter (BA 2×RJ45, BA 2×FC, BA 2×SCRJ, BA 2xLC, BA LC/FC, BA LC/RJ45, BA SCRJ/RJ45 or BA SCRJ/FC)
- System redundancy S2: ET 200SP station can establish communication to each of the two CPUs of an AS redundancy station via an interface module
- Up to 64 I/O modules (digital/analog); full data volume up to 1 440 bytes (with S2 system redundancy to 1 000 bytes)
- Compact, rugged, and easy-to-service design with permanent wiring:
  - Shielded backplane bus, designed as module rack using BaseUnits
  - Push-in terminals for quick, one-handed wiring without the use of tools
  - Excellent accessibility of terminals arranged in rows
  - I/O module and terminal box can be replaced during operation (hot swapping)
  - Automatic coding of the I/O modules prevents destruction of the electronics due to faulty equipping
  - Simple retrofitting of modules at the station end without reconfiguration
  - Unambiguous inscription and color concept helps avoid faults
  - Consistent shielding of conductor via terminal box and backplane bus to the PROFINET cable
  - Low space requirement allows high packing density in the control cabinet
- Significant system functions
  - Self-assembling potential groups without external wiring or jumpers
  - Individual load groups can be formed without extra power modules
  - Partial commissioning: Tolerating of gaps in the design through reservation of slots for further configuration
  - Electronic rating plate (I&M data 0...3)
  - Extensive diagnostics, channel-specific

© Siemens 2019

Design

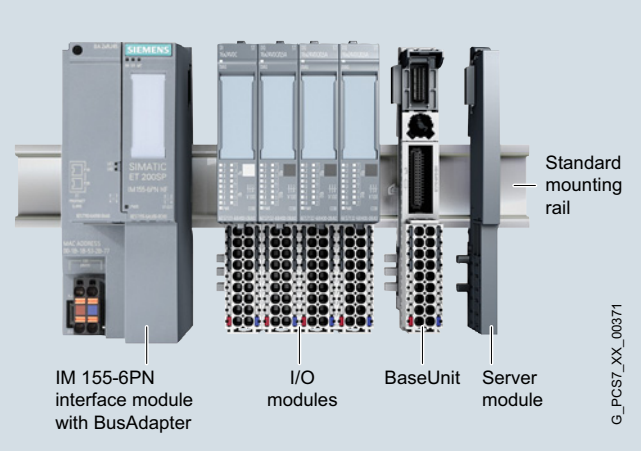

ET 200SP for SIMATIC PCS 7, design

Main components of the SIMATIC ET 200SP distributed I/O system

- PROFINET interface module IM 155-6PN High Feature with BusAdapter (separate component for establishing the connection system) for communication with the SIMATIC PCS 7 automation system (controller) via PROFINET IO
- PROFIBUS interface module IM 155-6DP High Feature is used as DP slave on the PROFIBUS DP and connects the ET 200SP with the DP master
- I/O modules
  4, 8 or 16 digital channels (DI, DQ, RQ) and 2, 4 or 8 analog channels (AI, AQ); up to 64 I/O modules can be plugged into passive BaseUnits in any combination
- BaseUnits
  Supports for the plug-in I/O modules and the terminal box; for construction of the backplane bus and for the mechanical/ electrical connections
- Server module
  for connection of ET 200SP station
- Standard mounting rail
  for latching-in of interface module, BaseUnits and server module; for installation of ET 200SP station in control cabinet

The extremely compact design allows a high packing density. With a depth of approx. 75 mm, the overall height is e.g.:

- 117 mm with 16 channels and 1-wire connection (without AUX terminals)
- 141 mm with 8 channels and 3-wire connection and AUX terminals

Replaceable bus adapters enable free selection of the PROFINET connection system.

The BaseUnits mounted on a standard rail can already be wired and tested prior to connection of the I/O modules (permanent wiring).

Hot swapping of the I/O modules and terminal boxes plugged onto the BaseUnits is possible. Mechanical coding prevents the use of an incorrect slot and the resulting destruction of the module electronics.

A BU cover is available for reserved, unequipped slots (BaseUnit without I/O module) as protection for the BaseUnit connectors. It can be provided with a reference ID label.

For the connection of cable shields that is both space-saving as well as optimized in terms of EMC, a shield connection is available that is quick and easy to mount. This consists of a shield connection element that can be plugged onto the BaseUnit and a shield terminal.

An inscription and color identification system with the following components facilitates orientation:

- Labeling strips for insertion in interface and I/O modules (foil on rolls for thermal transfer printers or pre-perforated A4 size paper for laser printers)
- Color-coded labels for cable assignment and identification of the potentials of an I/O module
- Reference identification labels for interface module, BusAdapter, BaseUnits and I/O modules for identifying system components

Installation

Installation of an ET 200SP station is quick and easy:

- Latching-in of interface module, BaseUnits and server module on a standard mounting rail (35 x 15 x 7.5 mm or 35 x 15 x 15 mm)
- Connection of the cables for the 24 V DC power supply on the interface module
- Plugging-on and screwing tight of the bus adapter
- Prewiring of the 24 V DC power supply and process signal cables on the BaseUnits
- Plugging-on of the I/O modules

The ET 200SP station can be installed in any orientation in an enclosure or control cabinet. The preferred position is horizontal.

Configuration limits and guidelines

- PROFINET IO: up to 64 I/O modules (digital/analog); full data volume up to 1 440 bytes (with S2 system redundancy to 1 000 bytes)
- PROFIBUS DP: up to 32 I/O modules; up to 244 bytes of user data
- The thermal continuous current for the load or encoder supply can be a maximum of 10 A per potential group.

© Siemens 2019

Technical specifications

Selected technical specifications of the ET 200SP in the context of SIMATIC PCS 7:

Design	
Degree of protection	IP20
Design	Discretely scalable
Installation	DIN rail (standard mounting rail)
Connection system for sensors/actuators	Single-conductor or multi-conductor connection; push-in terminals
Power supply	
Rated voltage	24 V DC; tolerance range: 19.2 ... 28.8 V DC (static); 18.5 ... 30.2 V DC (dynamic)
Relevant properties	
Safety engineering	No
For use in hazardous areas	Zones 2, 22
Increased availability	No (can be operated on the redundant automation system using system redundancy S2)
Temperature range	
• Horizontal installation	0 … +60 °C[1)]
• Vertical installation	0 ... +50 °C[1)]
Resistance to vibration	Up to 1 g with BA 2×RJ45; up to 5 g with BA 2×FC
System functions	
Permanent wiring	Yes
Hot swapping	Yes
Expansion/configuration during ongoing operation	No
Diagnostics (module-dependent)	Channel-discrete
Functions	
Digital channels	Yes
Analog channels	Yes
HART	Yes
Motor starters	No
Pneumatic interface	No
Technological functions	No

Approvals, standards	
• CE for industrial applications	According to 94/9/EC, 2004/108/EC and 2006/95/EC
• Interference emission	EN 61000-6-4:2007
• Noise immunity	EN 61000-6-2:2005
• ATEX in accordance with EN 60079-15 and EN 60079-0	II 3 G Ex nA IIC Tx Gc DEKRA 12ATEX0038X
• IECEx in accordance with EN 60079-15 and EN 60079-0	Ex nA IIC Tx Gc IECEx DEK 13.0011X
• AS/NZS for Australia and New Zealand	AS/NZS CISPR 16
• cULus in accordance with UL 508, CSA C22.2 No. 142 and No. 213, ANSI/ISA 12.12.01	Class I, Division 2, Groups A, B, C, D, Tx Class I, Zone 2, Group IIC Tx
• PROFIBUS	IEC 61784-1:2010 Ed3 CP 3/1
• IEC	IEC 61131-2
• CE	According to 94/9/EC, 2004/108/EC and 2006/95/EC
• KCC	Korean Certification KCC-REM-S49-ET200SP
• Shipbuilding approval	Classification companies • ABS (American Bureau of Shipping) • BV (Bureau Veritas) • DNV (Det Norske Veritas) • GL (Germanischer Lloyd) • LRS (Lloyds Register of Shipping) • Class NK (Nippon Kaiji Kyokai)

[1)] Also available in SIPLUS version for extended temperature range (-40 ... +70 °C) and corrosive atmosphere/condensation (for details, see www.siemens.com/siplus and Catalog ST 70).

For detailed technical specifications, especially on individual components such as interface modules, BaseUnits or I/O modules, see:

- Catalog ST 70, section "IO Systems"
- Industry Mall under "Automation technology – Automation systems - SIMATIC industrial automation systems – IO systems – SIMATIC ET 200 systems for control cabinets" – SIMATIC ET 200iSP"
- SIMATIC ET 200SP Manual Collection: https://support.industry.siemens.com/cs/ww/en/view/84133942

More information

General information

www.siemens.com/et200sp

TIA Selection Tool

Note:

When working with the TIA Selection Tool in the context of SIMATIC PCS 7, please note the specified limitations for the ET 200SP in the "SIMATIC ET 200SP for SIMATIC PCS 7" section with regard to area of application and product range.

www.siemens.com/tia-selection-tool

© Siemens 2019

Overview



IM 155-6PN High Feature PROFINET interface module, with reference ID label

IM 155-6PN High Feature PROFINET interface module

- Interface module for linking the ET 200SP station to PROFINET IO
- 24 V DC supply for interface module and backplane bus
- Integrated 2-port switch for line configuration
- Handling of complete data transfer with the controller
- Data exchange with the I/O modules via the backplane bus
- Support of identification data I&M0 to I&M3
- Delivery including server module
- BusAdapter with integrated 2-port switch for individual selection of the PROFINET IO connection system can be ordered separately

IM 155-6DP High Feature PROFIBUS interface module

- Max. 32 I/O modules, also PROFIsafe modules with complete diagnostic support
- Max. 244 bytes in each case for input and output data per module and per station
- Data update time: typ. 5 ms
- PROFIBUS connection via 9-pin sub D socket
- Bundle with interface module, server module and PROFIBUS plug



BusAdapter BA 2×RJ45

BusAdapter (BA)

A BusAdapter can be used to adapt the universal PROFINET IO interface of the interface module to the specific requirements of the environment of use. If a connection socket is faulty or when changing the connection system at a later stage, it is only necessary to replace the BusAdapter.

The following bus adapters are available:

- **BA 2×RJ45**
  With two sockets for commercially available RJ45 plugs; suitable for standard applications with moderate mechanical strength and EMI resistance
- **BA 2×FC**
  With two FastConnect terminals for direct connection of the bus cables; suitable for applications with higher mechanical strength and/or EMI resistance (5x higher resistance against vibrations and EMI)
- **BA 2×SCRJ**
  With two optical PROFINET interfaces for connection of optical-fiber cables via SC RJ connectors (5x higher resistance against vibrations and EMI; PROFINET cable lengths between two stations up to 300 m)
- **BA 2×LC**
  With two optical PROFINET interfaces for connecting fiber-optic cables LC multimode glass-fiber
- **BA LC/RJ45**
  With two PROFINET interfaces:
- 1 × optical, for connection of fiber-optic cables via LC multimode fiber-optic cable (port 1)
- 1 × electrical, for connection of bus cable with standard RJ45 connectors (port 2)
- **BA LC/FC**
  With two PROFINET interfaces:
  - 1 × optical, for connection of fiber-optic cables via LC multimode fiber-optic cable (port 1)
  - 1 × electrical, for direct connection of FastConnect bus cable (port 2)

© Siemens 2019

Overview (continued)

- **BA SCRJ/RJ45**
  With two PROFINET interfaces:
  - 1 × optical, for connection of fiber-optic cables via SC RJ connectors (port 1)
  - 1 × electric, for connection of bus cable with standard RJ45 connectors (port 2)
- **BA SCRJ/FC**
  With two PROFINET interfaces (5x higher resistance against vibrations and EMI):
  - 1 × optical, for connection of fiber-optic cables via SC RJ connectors (port 1)
  - 1 × electric, for direct placement of the FastConnect bus cable (port 2)

Design

The IM 155-6PN High Feature interface module is snapped directly onto the standard mounting rail.

Device features:

- Diagnostics displays for errors (ERROR), Maintenance (MAINT), operation (RUN) and power supply (PWR) as well as one link LED per port
- Optional inscription with labeling strips (light gray), available as:
  - Roll for thermal transfer continuous feed printer with 500 strips each
  - Paper sheets for laser printer, A4 format, with 100 strips each
- Optional equipping with a reference ID label

The selected bus adapter is simply plugged onto the interface module and secured with a screw. It can be equipped with a reference ID label.

Ordering data

	Article No.
IM 155-6PN High Feature PROFINET interface module Including server module, without BusAdapter	**6ES7155-6AU00-0CN0**
IM 155-6DP High Feature PROFIBUS interface module Bundle with interface module, server module and PROFIBUS plug	**6ES7155-6BA00-0CN0**
Accessories	
BusAdapter BA 2×RJ45 2 × RJ45 connection for PROFINET	**6ES7193-6AR00-0AA0**
BusAdapter BA 2×FC 2 × FastConnect (FC) connector for PROFINET	**6ES7193-6AF00-0AA0**
BusAdapter BA 2×SCRJ 2 × SCRJ FO connection for PROFINET	**6ES7193-6AP00-0AA0**
BusAdapter BA 2XLC 2 x glass fiber-optic cable connection for PROFINET	**6ES7193-6AG00-0AA0**
BusAdapter BA LC/RJ45 With media converter glass FOC - Cu; 1 x LC connection and 1 x RJ45 connection for PROFINET	**6ES7193-6AG20-0AA0**
BusAdapter BA LC/FC With media converter glass FOC - Cu; 1 x LC connection and 1 x FastConnect connection for PROFINET	**6ES7193-6AG40-0AA0**
BusAdapter BA SCRJ/RJ45 With media converter FOC-Cu; 1 × SCRJ FO and 1 × RJ45 connector for PROFINET	**6ES7193-6AP20-0AA0**
BusAdapter BA SCRJ/FC With media converter FOC-Cu; 1 × SCRJ FO and 1 × FastConnect connection for PROFINET	**6ES7193-6AP40-0AA0**
Reference ID labels 10 sheets of 16 labels	**6ES7193-6LF30-0AW0**
Labeling strips	
• 500 labeling strips on roll, light gray	**6ES7193-6LR10-0AA0**
• 1 000 labeling strips, A4 format, light gray	**6ES7193-6LA10-0AA0**
DIN rail 35 mm	
• Length: 483 mm for 19" cabinets	**6ES5710-8MA11**
• Length: 530 mm for 600 mm cabinets	**6ES5710-8MA21**
• Length: 830 mm for 900 mm cabinets	**6ES5710-8MA31**
• Length 2 m	**6ES5710-8MA41**
Spare parts	
Server module (spare part)	**6ES7193-6PA00-0AA0**
Power supply connector interface module (spare part) For 24 V DC supply	
• with push-in terminals (10 units)	**6ES7193-4JB00-0AA0**
• with screw-type terminals (10 units)	**6ES7193-4JB50-0AA0**

© Siemens 2019

Overview

BaseUnits

- Type A0 BaseUnits with 16 process terminals
  - Terminal box light
  - Terminal box light, with 10 additional AUX terminals (internally jumpered)
  - Terminal box dark
  - Terminal box dark, with 10 additional AUX terminals (internally jumpered)
- Type A1 BaseUnits for analog modules for temperature detection with 16 process terminals
  - Terminal box light
  - Terminal box light, with 2 × 5 internally jumpered add-on terminals
  - Terminal box dark
  - Terminal box dark, with 2 × 5 internally jumpered add-on terminals
- BaseUnit type B1 for digital input module, terminal box dark; 12 process terminals
- Type B0 BaseUnit for digital output module with relays, terminal box dark; 12 process terminals and 4 internally jumpered AUX terminals

I/O modules

- Digital I/O modules
  - Digital input modules, 4, 8 or 16 channels
  - Digital output modules, 4, 8 or 16 channels, including relay module
- Analog I/O modules
  - Analog input modules, 2, 4 or 8-channel
  - Analog output modules, 2 or 4-channel

Supplementary material

- BU cover
- Labeling strips
- Reference ID labels
- Color-coding labels
- Shield connection

11

Design



ET 200SP BaseUnit

BaseUnits

The I/O modules are plugged into BaseUnits (BU). BaseUnit versions suitable for this are those which correspond to the BU type (A0/A1/B0/B1/D0) of the selected I/O module.

The BaseUnits provide electrical and mechanical connections between the I/O modules. To this end, the BaseUnits are mounted on a standard rail and latched into each other from the side.

The module slot also has a position for a coding element. This automatically codes the I/O module type when it is inserted for the first time, and prevents any different type of module from being inserted.

Each BaseUnit has a replaceable terminal box. In addition to the process terminals, this has two terminals (L+ and M) for the 24 V DC supply for the I/O modules and sensors. The plug-in terminals are designed to be space-saving and easy to fit.

BaseUnits are available with light or dark terminal boxes. BaseUnits with a light terminal block (light BUs) separate the self-assembling voltage buses (P1, P2, and AUX) from the adjacent module on the left and thus open up a new load group. The 24 V DC supply for the I/O modules and sensors of this load group (max. thermal continuous load 10 A) is connected to P1 (+) and P2 (-) via the terminals at the bottom with red and blue spring NC contacts.

BaseUnits with dark terminal box (dark BUs) are connected onto the right of a light BU. Contrary to the light BUs, they link the voltage buses P1, P2 and AUX to the adjacent module on the left and thus extend the voltage group. A new power supply is therefore only necessary at the next light BU.

Certain BaseUnits additionally have internally jumpered AUX terminals. Potentials of up to 24 V DC or protective earth (PE) conductors can be connected to the AUX rails.

The BaseUnits of type A1 which can be connected to analog modules for temperature detection enable recording of the terminal temperature using an integrated sensor for automatic temperature compensation for thermocouples. These BaseUnits are also available with 2 × 5 add-on terminals (internally jumpered).

© Siemens 2019

Design (continued)

Supplementary material for I/O modules and BaseUnits

BU cover

Unequipped BaseUnit slots reserved for later use can be protected by a BU cover. A 15 or 20 mm wide BU cover must be selected depending on the type of BaseUnit. It can be provided with a reference ID label.

Labeling strips

Appropriate light gray labeling strips for insertion in I/O modules are available in two different materials:

- Roll for thermal transfer roll printer with 500 labeling strips each
- Paper sheets for laser printer, A4 format, with 100 labeling strips each

Reference ID labels

The reference ID labels delivered as a package comprising 10 sheets with 16 strips each are used to identify bus adapters and BaseUnits as well as interface and I/O modules. The labels suitable for printing with commercially available thermal transfer printers are easy to insert into the corresponding module.

Color-coding labels

To prevent wiring faults, the potentials at the terminals of the BaseUnits can be coded using color-coded labels. The color-coded labels are simply attached to the terminal box. The following versions are available:

- Module-specific color-coded labels for process terminals. Selection is made depending on the color code (CCxx) printed on the front of the I/O module. The color code CC00 means that a color-coded label is not available for the process terminals of this I/O module.
- Color-coded labels for the 10 AUX terminals of BaseUnit type A0 in red, blue, and yellow/green.
- Color-coded labels for the 2 × 5 add-on terminals of the BaseUnit type A1 in red/blue.
- Color-coded labels for the 4 AUX terminals of BaseUnits type B0 in red, blue, and yellow/green.

Shield connection

A shield connection that is quick and easy to mount, comprising a shield connection element (can be plugged into the BaseUnit) and a shield terminal, permit the connection of cable shields that is both space-saving as well as optimized in terms of EMC. The shielded cable is fixed to the shield connecting element by means of the shield terminal. The low-impedance connection to the functional ground (standard mounting rail) does not require any additional wiring by the user.

The shield connection is supplied as a package containing 5 shield connection elements and 5 shield terminals.

Ordering data

Refer to the I/O modules for Ordering data of the BaseUnits

© Siemens 2019

Overview



ET 200SP I/O module

- Can be plugged into type A0 and B1 BaseUnits (BU) with automatic coding
- LED display for error, operation, power, and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (article and serial number)
  - Connection diagram
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the BU terminals
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC

Design

Digital input modules

- 4, 8 or 16 channels
- Color coding of the module type DI: White
- Usable types:
  - DI 8x24VDC Standard for BU type A0, color code CC01
  - DI 8x24VDC High Feature for BU type A0, color code CC01
  - DI 16x24VDC Standard for BU type A0, color code CC00
  - DI 8x24VDC NAMUR High Feature for BU type A0, color code CC01
  - DI 4x 120...230VAC Standard for BU type B1, color code CC41

Digital output modules

- 4, 8 or 16 channels
- Color coding of module types DQ and RQ: Black
- Usable types:
  - DQ 4x24VDC/2A Standard for BU type A0, color code CC02
  - DQ 8x24VDC/0.5A Standard for BU type A0, color code CC02
  - DQ 8x24VDC/0.5A High Feature for BU type A0, color code CC02
  - DQ 16x24VDC/0.5A Standard for BU type A0, color code CC00
  - DQ 4x24...230VAC/2A Standard for BU type B0, B1, color code CC41
  - RQ NO 4x120VDC-230VAC/5A Standard, BU type B0, color code CC00

Ordering data

Digital input modules

Ordering data	Article No.
Digital input modules	
• DI 8x24VDC Standard, BU type A0, color code CC01	**6ES7131-6BF01-0BA0**
• DI 16x24VDC Standard, BU type A0, color code CC00	**6ES7131-6BH01-0BA0**
• DI 8x24VDC High Feature, BU type A0, color code CC01	**6ES7131-6BF00-0CA0**
• DI 8x24VDC NAMUR High Feature, for BU type A0, color code CC01	**6ES7131-6TF00-0CA0**
• DI 4x120...230VAC Standard, for BU type B1, color code CC41	**6ES7131-6FD01-0BB1**
Usable BaseUnits	
BU15-P16+A0+2D BU type A0; BaseUnit (light), 15 mm wide, with 16 process terminals to the module; for starting a new load group (max. 10 A)	**6ES7193-6BP00-0DA0**
BU15-P16+A0+2B BU type A0; BaseUnit (dark), 15 mm wide, with 16 process terminals to the module; for continuing the load group	**6ES7193-6BP00-0BA0**
BU15-P16+A10+2D BU type A0; BaseUnit (light), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1A to 10 A); for starting a new load group (max. 10 A)	**6ES7193-6BP20-0DA0**
BU15-P16+A10+2B BU type A0; BaseUnit (dark), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1A to 10 A); for continuing the load group	**6ES7193-6BP20-0BA0**
BU20-P12+A0+4B BU type B1; BaseUnit (dark), 20 mm wide, with 12 process terminals to the module; for continuing the load group	**6ES7193-6BP20-0BB1**
Accessories	
Equipment labeling plates 10 sheets with 16 plates each	**6ES7193-6LF30-0AW0**
Labeling strips	
• 500 labeling strips on roll, light gray	**6ES7193-6LR10-0AA0**
• 1 000 labeling strips on paper sheet in A4 format, light gray	**6ES7193-6LA10-0AA0**
BU cover For covering empty slots (gaps), 5 units	
• 15 mm wide	**6ES7133-6CV15-1AM0**
• 20 mm wide	**6ES7133-6CV20-1AM0**
Shield connection Pack with 5 shield supports and 5 shield terminals	**6ES7193-6SC00-1AM0**

© Siemens 2019

Ordering data	Article No.
Color-coded labels	
• 15 mm wide	
- Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; terminals 1 to 8 gray, terminals 9 to 16 red; 10 units	**6ES7193-6CP01-2MA0**
- Color code CC71, for 10 AUX terminals 1A to 10A, yellow/green; for BU type A0 with push-in terminals; 10 units	**6ES7193-6CP71-2AA0**
- Color code CC72, for 10 AUX terminals 1A to 10A, red; for BU type A0 with push-in terminals; 10 units	**6ES7193-6CP72-2AA0**
- Color code CC73, for 10 AUX terminals 1A to 10A, blue; for BU type A0 with push-in terminals; 10 units	**6ES7193-6CP73-2AA0**
• 20 mm wide	
- Color code CC41, for 16 process terminals, BU type B1, terminals 1 to 4 gray, terminals 5 to 8 rot, terminals 9 to 12 blue; 10 units	**6ES7193-6CP41-2MB0**

Digital output modules

Digital output modules	
• DQ 4x24VDC/2A Standard, BU type A0, color code CC02	**6ES7132-6BD20-0BA0**
• DQ 8x24VDC/0.5A Standard, BU type A0, color code CC02	**6ES7132-6BF01-0BA0**
• DQ 8x24VDC/0.5A High Feature, BU type A0, color code CC02	**6ES7132-6BF00-0CA0**
• DQ 16x24VDC/0.5A Standard, BU type A0, color code CC00	**6ES7132-6BH01-0BA0**
• DQ 4x24..230VAC/2A Standard, BU type B0, B1, color code CC41	**6ES7132-6FD00-0BB1**
• RQ NO 4x 120V DC...230VAC/5A Standard, normally open contact, for BU type B0 or B1, module diagnostics, color code CC00	**6ES7132-6HD01-0BB1**
Usable BaseUnits	
BU15-P16+A0+2D BU type A0; BaseUnit (light), 15 mm wide, with 16 process terminals to the module; for starting a new load group (max. 10 A)	**6ES7193-6BP00-0DA0**
BU15-P16+A0+2B BU type A0; BaseUnit (dark), 15 mm wide, with 16 process terminals to the module; for continuing the load group	**6ES7193-6BP00-0BA0**
BU15-P16+A10+2D BU type A0; BaseUnit (light), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1A to 10 A); for starting a new load group (max. 10 A)	**6ES7193-6BP20-0DA0**
BU15-P16+A10+2B BU type A0; BaseUnit (dark), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1A to 10 A); for continuing the load group	**6ES7193-6BP20-0BA0**
BU20-P12+A4+0B BU type B0; BaseUnit (dark), 20 mm wide, with 12 process terminals (1...12) to the module and an additional 4 internally jumpered AUX terminals (1A to 4A); for continuing the load group	**6ES7193-6BP20-0BB0**
BU20-P12+A0+4B BU type B1; BaseUnit (dark), 20 mm wide, with 12 process terminals to the module; for continuing the load group	**6ES7193-6BP20-0BB1**
Accessories	
Equipment labeling plates 10 sheets with 16 plates each	**6ES7193-6LF30-0AW0**
Labeling strips	
• 500 labeling strips on roll, light gray	**6ES7193-6LR10-0AA0**
• 1 000 labeling strips on paper sheet in A4 format, light gray	**6ES7193-6LA10-0AA0**
BU cover For covering empty slots (gaps); 5 units	
• 15 mm wide	**6ES7133-6CV15-1AM0**
• 20 mm wide	**6ES7133-6CV20-1AM0**
Shield connection Pack with 5 shield supports and 5 shield terminals	**6ES7193-6SC00-1AM0**
Color-coded labels	
• 15 mm wide	
- Color code CC02, for 16 push-in terminals; for BU type A0, A1; terminals 1 to 8 gray, terminals 9 to 16 blue, 10 units	**6ES7193-6CP02-2MA0**
- Color code CC71, for 10 AUX terminals 1A to 10A, yellow/green; for BU type A0 with push-in terminals; 10 units	**6ES7193-6CP71-2AA0**
- Color code CC72, for 10 AUX terminals 1A to 10A, red; for BU type A0 with push-in terminals; 10 units	**6ES7193-6CP72-2AA0**
- Color code CC73, for 10 AUX terminals 1A to 10A, blue; for BU type A0 with push-in terminals; 10 units	**6ES7193-6CP73-2AA0**
• 20 mm wide	
- Color code CC41, for 16 process terminals, BU type B1, gray (terminals 1 to 4), red (terminals 5 to 8), blue (terminals 9 to 12); 10 units	**6ES7193-6CP41-2MB0**
- Color code CC81, for 4 AUX terminals 1A to 4A, yellow/green, for BU type B0; 10 units	**6ES7193-6CP81-2AB0**
- Color code CC82, for 4 AUX terminals 1A to 4A, red, for BU type B0; 10 units	**6ES7193-6CP82-2AB0**
- Color code CC83, for 4 AUX terminals 1A to 4A, blue, for BU type B0; 10 units	**6ES7193-6CP83-2AB0**

© Siemens 2019

Overview



ET 200SP I/O module

- Can be plugged into type A0, D0 or A1 BaseUnits (BU) with automatic coding
- LED display for error, operation, power, and status
- Clear labeling on front of module
  - Plain text identification of the module type and function class
  - 2D matrix code (article and serial number)
  - Connection diagram
  - Hardware and firmware version
  - Color code CC for module-specific color coding of the potentials at the terminals of the BU
  - Complete Article No.
- Optional labeling accessories
  - Labeling strips
  - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC

Design

Analog input modules

- 2, 4 or 8-channels
- Color coding of the module type AI: Light blue
- Usable types:
  - AI 4xU/I 2-wire Standard for BU type A0 or A1, color code CC03
  - AI 4xI 2/4-wire Standard for BU type A0 or A1, color code CC03
  - AI 2xU/I 2/4-wire High Feature for BU type A0 or A1, color code CC05
  - AI 4xI 2-wire HART High Feature for BU type A0 or A1, color code CC03
  - AI 4xRTD/TC 2-, 3-, 4-wire High Feature for BU type A0 or A1, color code CC00
  - AI 8xRTD/TC 2-wire High Feature for BU type A0 or A1, color code CC00
  - AI Energy Meter Standard for BU type D0

Analog output modules

- 2 or 4 channels
- Color coding of the module type AQ: Dark blue
- Usable types:
  - AQ 4xU/I Standard for BU type A0 or A1, color code CC00
  - AQ 2xU/I High Feature for BU type A0 or A1, color code CC00
  - AQ 4xI HART High Feature for BU type A0 or A1, color code CC00

© Siemens 2019

Ordering data

Analog input modules

	Article No.
Analog input modules	
• AI 2xU/I 2/4-wire High Feature, BU type A0 or A1, color code CC05, 16-bit, ± 0.1 %	**6ES7134-6HB00-0CA1**
• AI 4xI 2-wire HART High Feature, BU type A0 or A1, color code CC03, 16-bit, ± 0.3 %	**6ES7134-6TD00-0CA1**
• AI 4xRTD/TC 2-, 3-, 4-wire High Feature BU type A0 or A1, color code CC00, 16-bit, ± 0.1 %	**6ES7134-6JD00-0CA1**
• AI 8xRTD/TC 2-wire High Feature BU type A0 or A1, color code CC00, 16-bit, ± 0.1 %	**6ES7134-6JF00-0CA1**
• AI 4 x I 2-/4-wire Standard, BU type A0 or A1, color code CC03, 16-bit, ± 0.3%	**6ES7134-6GD01-0BA1**
• AI 4XU/I 2-wire Standard, BU type A0 or A1, color code CC03, 16-bit, ± 0.3%	**6ES7134-6HD00-0BA1**
• AI Energy Meter Standard 480 V AC, BU type D0	**6ES7134-6PA20-0BD0**
Usable type A0 BaseUnits	
BU15-P16+A0+2D BU type A0; BaseUnit (light), 15 mm wide, with 16 process terminals to the module; for starting a new load group (max. 10 A)	**6ES7193-6BP00-0DA0**
BU15-P16+A0+2B BU type A0; BaseUnit (dark), 15 mm wide, with 16 process terminals to the module; for continuing the load group	**6ES7193-6BP00-0BA0**
BU15-P16+A10+2D BU type A0; BaseUnit (light), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1A to 10 A); for starting a new load group (max. 10 A)	**6ES7193-6BP20-0DA0**
BU15-P16+A10+2B BU type A0; BaseUnit (dark), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1A to 10 A); for continuing the load group	**6ES7193-6BP20-0BA0**
Usable type A1 BaseUnits (temperature detection)	
BU15-P16+A0+2D/T BU type A1; BaseUnit (light), 15 mm wide, with 16 process terminals to the module; for starting a new load group (max. 10 A)	**6ES7193-6BP00-0DA1**
BU15-P16+A0+2B/T BU type A1; BaseUnit (dark), 15 mm wide, with 16 process terminals to the module; for continuing the load group	**6ES7193-6BP00-0BA1**
BU15-P16+A0+12D/T BU type A1; BaseUnit (light), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 2 × 5 internally jumpered add-on terminals (1B to 5B and 1C to 5C); for starting a new load group (max. 10 A)	**6ES7193-6BP40-0DA1**
BU15-P16+A0+12B/T BU type A1; BaseUnit (dark), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 2 × 5 internally jumpered add-on terminals (1B to 5B and 1C to 5C); for continuing the load group	**6ES7193-6BP40-0BA1**
Usable type D0 BaseUnits	
BU20-P12+A0+0B BU type D0; BaseUnit with 12 push-in terminals, without AUX terminals, bridged to the left	**6ES7193-6BP00-0BD0**
Accessories	
Equipment labeling plates 10 sheets with 16 plates each	**6ES7193-6LF30-0AW0**
Labeling strips	
• 500 labeling strips on roll, light gray	**6ES7193-6LR10-0AA0**
• 1 000 labeling strips on paper sheet in A4 format, light gray	**6ES7193-6LA10-0AA0**
BU cover For covering empty slots (gaps); 5 units	
• 15 mm wide	**6ES7133-6CV15-1AM0**
• 20 mm wide	**6ES7133-6CV20-1AM0**
Shield connection Pack with 5 shield supports and 5 shield terminals	**6ES7193-6SC00-1AM0**
Color-coded labels, 15 mm wide	
• Color code CC00, for 16 push-in terminals; for BU type A0, A1; terminals 1 to 8 gray, terminals 9 to 16 red; 10 units	**6ES7193-6CP00-2MA0**
• Color code CC03, module-specific, for 16 push-in terminals; for BU type A0, A1; terminals 1 to 8 gray, terminals 9 to 12 red; terminals 13 to 16 gray; 10 units	**6ES7193-6CP03-2MA0**
• Color code CC05, module-specific, for 16 push-in terminals; for BU type A0, A1; terminals 1 to 12 gray, terminals 13 to 14 red, terminals 15 to 16 blue; 10 units	**6ES7193-6CP05-2MA0**
• Color code CC71, for 10 AUX terminals 1A to 10A, yellow/green; for BU-type A0 with push-in terminals; 10 units	**6ES7193-6CP71-2AA0**
• Color code CC72, for 10 AUX terminals 1A to 10A, red; for BU-type A0 with push-in terminals; 10 units	**6ES7193-6CP72-2AA0**
• Color code CC73, for 10 AUX terminals 1A to 10A, blue; for BU type A0 with push-in terminals; 10 units	**6ES7193-6CP73-2AA0**
• Color code CC74, for 2 × 5 add-on terminals, 5 × red, 5 × blue, for BU type A1, with push-in terminals; 10 units	**6ES7193-6CP74-2AA0**

© Siemens 2019

Ordering data


Analog output modules

	Article No.
Analog output modules	
• AQ 4xU/I Standard, BU type A0 or A1, color code CC00, 16-bit, ± 0.3 %	**6ES7135-6HD00-0BA1**
• AQ 2xU/I High Feature, BU type A0 or A1, color code CC00, 16-bit, ± 0.1 %	**6ES7135-6HB00-0CA1**
• AQ 4xI HART High Feature, BU type A0 or A1, color code CC00, 16-bit, ± 0.3 %	**6ES7135-6TD00-0CA1**
Usable type A0 BaseUnits	
BU15-P16+A0+2D BU type A0; BaseUnit (light), 15 mm wide, with 16 process terminals to the module; for starting a new load group (max. 10 A)	**6ES7193-6BP00-0DA0**
BU15-P16+A0+2B BU type A0; BaseUnit (dark), 15 mm wide, with 16 process terminals to the module; for continuing the load group	**6ES7193-6BP00-0BA0**
BU15-P16+A10+2D BU type A0; BaseUnit (light), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1A to 10 A); for starting a new load group (max. 10 A)	**6ES7193-6BP20-0DA0**
BU15-P16+A10+2B BU type A0; BaseUnit (dark), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1A to 10 A); for continuing the load group	**6ES7193-6BP20-0BA0**
Usable type A1 BaseUnits (temperature detection)	
BU15-P16+A0+2D/T BU type A1; BaseUnit (light), 15 mm wide, with 16 process terminals to the module; for starting a new load group (max. 10 A)	**6ES7193-6BP00-0DA1**
BU15-P16+A0+2B/T BU type A1; BaseUnit (dark), 15 mm wide, with 16 process terminals to the module; for continuing the load group	**6ES7193-6BP00-0BA1**
BU15-P16+A0+12D/T BU type A1; BaseUnit (light), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 2 × 5 internally jumpered add-on terminals (1B to 5B and 1C to 5C); for starting a new load group (max. 10 A)	**6ES7193-6BP40-0DA1**
BU15-P16+A0+12B/T BU type A1; BaseUnit (dark), 15 mm wide, with 16 process terminals (1...16) to the module and an additional 2 × 5 internally jumpered add-on terminals (1B to 5B and 1C to 5C); for continuing the load group	**6ES7193-6BP40-0BA1**

	Article No.
Accessories	
Equipment labeling plates 10 sheets with 16 plates each	**6ES7193-6LF30-0AW0**
Labeling strips	
• 500 labeling strips on roll, light gray	**6ES7193-6LR10-0AA0**
• 1 000 labeling strips on paper sheet in A4 format, light gray	**6ES7193-6LA10-0AA0**
BU cover For covering empty slots (gaps), 15 mm wide; 5 units	**6ES7133-6CV15-1AM0**
Shield connection Pack with 5 shield supports and 5 shield terminals	**6ES7193-6SC00-1AM0**
Color-coded labels, 15 mm wide	
• Color code CC00, for 16 push-in terminals; for BU type A0, A1; terminals 1 to 8 gray, terminals 9 to 16 red; 10 units	**6ES7193-6CP00-2MA0**
• Color code CC71, for 10 AUX terminals 1A to 10A, yellow/green; for BU-type A0 with push-in terminals; 10 units	**6ES7193-6CP71-2AA0**
• Color code CC72, for 10 AUX terminals 1A to 10A, red; for BU-type A0 with push-in terminals; 10 units	**6ES7193-6CP72-2AA0**
• Color code CC73, for 10 AUX terminals 1A to 10A, blue; for BU-type A0 with push-in terminals; 10 units	**6ES7193-6CP73-2AA0**
• Color code CC74, for 2 × 5 add-on terminals, 5 × red, 5 × blue; for BU-type A1, with push-in terminals; 10 units	**6ES7193-6CP74-2AA0**

© Siemens 2019

Overview

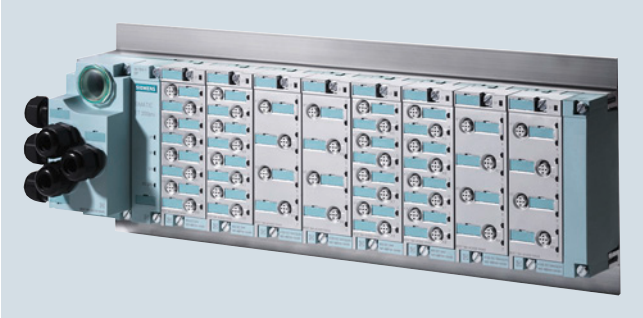

SIMATIC ET 200pro is a modular I/O system with high IP65/66/67 protection suitable for use at machine level outside the control cabinet. As a result of the innovative design, the ET 200pro has a relatively small size and can be flexibly adapted to the requirements of the respective automation task with regard to the connection system and I/Os. Summary of the most important features of the SIMATIC ET 200pro:

- Distributed I/O system with IP65/67 protection for use without a control cabinet at machine level
- Small, multi-functional complete solution: analog and digital I/O modules as well as safety-related digital I/O modules
- Communication over PROFIBUS DP, transmission rate up to 12 Mbit/s
- Mixed arrangement of safety-oriented and standard modules in the same station possible
- Free selection of connection system: direct, ECOFAST or M12 7/8"
- Power module for simple implementation of load groups
- Hot swapping of modules
- Simple assembly and independent wiring
- Comprehensive diagnostics: exact to the module or channel

Design

The architecture of the ET 200pro is based on the proven separation of modules from the bus/power supply connection system. This permits the T functionality for bus and 24 V DC power supply for the interface module, and prewiring of sensor/actuator connections for the electronics modules (independent wiring). When servicing, the independent wiring permits hot swapping of an electronics module without having to switch off the remaining station. This can continue without interruption during the replacement. When replacing an electronics module, the complete I/O wiring remains on the connection module, and need be neither labeled nor removed.

Up to 16 electronics modules can be arranged in any order between the interface module (left) and the terminating module (right limit).

Modules of an ET 200pro remote I/O station

The ET 200pro modules are usually designed in two or three parts. Interface and power modules as well as digital and analog electronics modules comprise:

- Bus module as mechanical and electrical connection element of the individual ET 200pro modules (they form the backplane bus of the system)
- Electronics or interface module
- Connection module

The ET 200pro modules are fitted when delivered on the associated bus module.

A ET 200pro remote I/O station consists of:

- Module support
- Interface module for PROFIBUS DP
- Connection module for the PROFIBUS DP interface module
  - CM IM DP direct with up to 6 M20 cable glands
  - CM IM DP ECOFAST Cu
  - CM IM DP M12 7/8"
- Max. 16 electronics modules with associated connection modules which may be assembled up to a station width of 1 m
- Terminating module (included in scope of delivery of interface module)

Expansion modules

The following expansion modules are available:

- Digital electronics modules
- Analog electronic modules
- Safety-related electronic modules
- I/O connection modules
  - CM IO 4 × M12 for digital or analog electronics modules
  - CM IO 8 × M12 for digital electronics modules
  - CM IO 12 × M12 for 4/8 F-DI/4 F-DO
  - CM IO 16 × M12 for 8/16 F-DI
- Power module electronics PM-E
- Connection modules for power module
  - CM PM-E direct with up to 2 M20 cable glands
  - CM PM-E ECOFAST Cu
  - CM PM-E 7/8"

© Siemens 2019

Design (continued)

Module support

Various module supports are available for mounting the ET 200pro:

- Narrow module support
  With two mounting flanges, the ET 200pro remote I/O station can be completely pre-installed on this module support on the workbench.



- Compact-narrow module support
  The compact-narrow module support permits the most space-saving design.



Expansion limits

- Number of electronics modules per station (between interface module and terminating module): up to 16
- Max. width (without module support): 1 m
- Electronics/sensor supply 1L+ max. 5 A per station
- Load voltage supply 2L+ max. 10 A per potential group
- Maximum address range of a station: 244 bytes for inputs and 244 bytes for outputs

ET 200pro configuration

The TIA Selection Tool can be used to assemble an ET 200pro remote I/O station quickly and easily. The tool is familiar with the configuration rules and supports users in the selection of all components and associated accessories in interactive mode.

www.siemens.com/tia-selection-tool

Note:

Please note when working with the TIA Selection Tool that the applications and product range of ET 200pro are limited in the context of SIMATIC PCS 7!

Integration

The distributed ET 200pro remote I/O stations are connected to SIMATIC PCS 7 automation systems (controllers) via PROFIBUS DP. Data transfer rates of up to 12 Mbit/s are possible.

The SIMATIC ET 200pro is integrated into SIMATIC PCS 7 using standard driver blocks. You can therefore configure and parameterize the ET 200pro remote I/O stations in the SIMATIC Manager of the engineering system very simply using HW Config.

Technical specifications

Technical specifications - General	
Electronics modules	• Digital inputs/outputs • Analog inputs/outputs • Safety-related digital inputs/outputs
Connection system for actuator/sensor	M12 round plug connection with standard assignments for actuator/sensor
Data transfer rate, max.	12 Mbit/s (PROFIBUS DP)
Supply voltage	24 V DC
Current consumption of an ET 200pro (internal and sensor supply, non-switched voltage), up to 55 °C, max.	≤ 5 A
Load current for ET 200pro per incoming supply (IM, PM, switched voltage), up to 55 °C, max.	10 A
For total configuration with looping through (several ET 200pro), up to 55 °C, max.	16 A (with direct connection module)
Degree of protection	IP65/66/IP67 for interface, digital and analog modules
Material	Thermoplast (glass-fiber reinforced)
Ambient conditions	
Temperature	0 … 55 °C (-25 °C on request)
Relative humidity	5 … 100 %
Atmospheric pressure	795 … 1 080 hPa
Mechanical stress	
Vibrations	Vibration test in accordance with IEC 60068 Part 2-6 (sine) • Constant acceleration 5 g, occasionally 10 g, for interface, digital and analog modules • 2 g for motor starters
Shock	• Shock test according to IEC 680068 Part 2-27, half-sine, 30 g, 18 ms duration for interface, digital and analog modules • 15 g, 11 ms duration for motor starters
Approvals	UL, CSA and cULus

For detailed technical specifications, especially for individual components such as interface modules, power modules and electronic modules, see Catalog ST 70, Chapter "IO systems" or Industry Mall under “Automation technology - Automation systems - SIMATIC industrial automation systems - IO systems - SIMATIC ET 200 systems without control cabinets" – SIMATIC ET 200pro".

© Siemens 2019

Overview



The IM 154-2 DP High Feature interface module is responsible for PROFIBUS communication between the ET 200pro station and the host automation system (controller) as PROFIBUS DP master. The scope of delivery of the interface module also includes a terminating module which is plugged in following the last electronics module of the station.

Function

Features of the IM 154-2 DP High Feature interface module

- Mounted on delivery on the bus module
- Connects the ET 200pro station to the PROFIBUS DP via the connection module
- Prepares the data for the connected electronics modules
- Max. 16 electronics modules can be operated on an interface module - also safety-related
- PROFIBUS DP address of the ET 200pro station can be set on the connection module
- Terminating resistor of the PROFIBUS DP can be switched on and off on the connection module
- Maximum address range: 244 bytes for inputs and 244 bytes for outputs
- Powers the ET 200pro station via the connection module with the sensor/electronics supply 1L+ and the load power supply 2L+
- Integral power module for the load power supply 2L+
- Can be operated as DP-V1 slave on Y link

Ordering data

Ordering data	Article No.
IM154-2 High Feature interface module for ET 200pro; for communication between ET 200pro and host masters over PROFIBUS DP; supports PROFIsafe	**6ES7154-2AA01-0AB0**
Connection modules for IM154-2 High Feature interface module	
• CM IM DP ECOFAST connection module for connection of PROFIBUS DP and 24 V DC power supply to PROFIBUS interface modules, 2 ECOFAST Cu connectors	**6ES7194-4AA00-0AA0**
• CM IM DP direct connection module for direct connection of PROFIBUS DP and 24 V DC power supply to PROFIBUS interface modules, up to six M20 cable glands	**6ES7194-4AC00-0AA0**
• CM IM DP M12 7/8" connection module for connection of PROFIBUS DP and 24 V DC power supply to PROFIBUS interface modules, 2 × M12 and 2 × 7/8"	**6ES7194-4AD00-0AA0**
Cables and further accessories For cables and further accessories for CM IM DP ECOFAST, CM IM DP direct and CM IM DP M12 7/8" connection modules, see Catalog ST 70, Chapter "IO systems" or Industry Mall under "Automation technology – Automation systems – SIMATIC industrial automation systems – IO systems – SIMATIC ET 200 systems without control cabinets – SIMATIC ET 200pro"	
General accessories	
ET 200pro module support	
• Narrow, for interface, electronics and power modules	
- 500 mm	**6ES7194-4GA00-0AA0**
- 1 000 mm	**6ES7194-4GA60-0AA0**
- 2 000 mm, can be cut to length	**6ES7194-4GA20-0AA0**
• Compact-narrow, for interface, electronics and power modules	
- 500 mm	**6ES7194-4GC70-0AA0**
- 1 000 mm	**6ES7194-4GC60-0AA0**
- 2 000 mm, can be cut to length	**6ES7194-4GC20-0AA0**
Spare fuse 12.5 A fast-blow, for interface and power modules, 10 units per pack	**6ES7194-4HB00-0AA0**

Accessories

Connection modules

The connection module for the IM 154-2 DP High Feature interface module (to be ordered separately) is available in three different connection versions:

- CM IM DP direct
- CM IM DP ECOFAST Cu
- CM IM DP M12 7/8"

The PROFIBUS address can be set on the connection module per DIL switch. The segmenting terminating resistor can be connected using a further DIL switch.

© Siemens 2019

Overview



The following digital electronics modules can be used for connecting actuators/sensors in the context of SIMATIC PCS 7:

Digital input modules

- EM 8 DI DC 24 V High Feature
  - Digital electronics module with eight inputs
  - Suitable for standard switches and proximity switches (BEROs)
  - Rated input voltage 24 V DC
  - Diagnostics "Short-circuit of sensor supply to ground" per channel
  - Diagnostics "Open-circuit" per channel
  - Process alarm
  - Parameterizable input delay

Digital output modules

- EM 4 DO DC 24 V; 2 High Feature
  - Digital electronics module with four outputs
  - Suitable for solenoid valves, DC contactors and indicator lights
  - Output current 2 A per output
  - Rated load voltage 24 V DC
  - Diagnostics "Short-circuit of outputs to ground" per channel
  - Diagnostics "Short-circuit of outputs to P" per channel
  - Diagnostics "Open-circuit in outputs" per channel
  - Diagnostics "Load voltage missing" per module
  - Parameterizable substitute value

Ordering data

Ordering data	Article No.
Digital electronic modules	
Digital input modules	
Digital input module 8 DI High Feature 24 V DC, with channel diagnostics, including bus module. Connection module must be ordered separately	**6ES7141-4BF00-0AB0**
Digital output modules	
Digital output module 4 DO High Feature 24 V DC, 2 A, with channel diagnostics, including bus module. Connection module must be ordered separately	**6ES7142-4BD00-0AB0**
Accessories	
Connection module CM IO 4 × M12 4 M12 sockets for connecting digital or analog sensors/actuators to ET 200pro	**6ES7194-4CA00-0AA0**
Connection module CM IO 8 × M12 8 M12 sockets for connecting digital sensors/actuators to ET 200pro	**6ES7194-4CB00-0AA0**
Module labels for color-coded identification of the CM IOs in white, red, blue and green; pack with 100 units of each color	**6ES7194-4HA00-0AA0**
Further accessories	
Connectors, cables and further accessories, see Catalog ST 70, section "IO systems" or Industry Mall under "Automation engineering – Automation systems – SIMATIC industrial automation systems – IO systems – SIMATIC ET 200 systems without control cabinets – SIMATIC ET 200pro"	

Accessories

Connection modules

Actuators and sensors are connected using commercially-available 5-contact M12 plugs on the connection module. The connection module is plugged onto the electronics module, and screwed to the latter. The following connection modules (to be ordered separately) are available for the above-mentioned electronics modules:

- CM IO 4x M12 (for EM DI and EM DO)
- CM IO 8x M12 (for EM DI)

Depending on the selected connection module, each plug for the 8-channel digital input module has one or two channels:

- 4 x M12 round plug connections with 2 channels per plug (double assignment)
- 8 x M12 round plug connections with 1 channel per plug (single assignment)

© Siemens 2019

Overview



The following analog electronics modules can be used for connecting actuators/sensors in the context of SIMATIC PCS 7:

Analog input modules

EM 4 AI U High Feature

- 4 inputs for voltage measurements
- Input ranges:
  - ± 10 V, resolution 15 bit + sign
  - ± 5 V, resolution 15 bit + sign
  - 0 to 10 V, resolution 15 bit
  - 1 to 5 V, resolution 15 bit
- Electrically isolated from load voltage 2L+
- Diagnostics "Short-circuit of sensor supply to M" per module
- Diagnostics "Short-circuit, open-circuit" per channel (depending on measuring range)
- Hardware interrupt with limit violation on channel 0
- Permissible common mode voltage 5 V AC pp

EM 4 AI I High Feature

- 4 inputs for current measurements
- Input ranges:
  - ± 20 mA, resolution 15 bit + sign
  - 0 to 20 mA, resolution 15 bit
  - 4 to 20 mA, resolution 15 bit
- Two-wire and four-wire transmitters can be connected
- Electrically isolated from load voltage 2L+
- Diagnostics "Short-circuit of sensor supply to M" per module
- Diagnostics "Short-circuit, open-circuit" per channel (depending on measuring range)
- Hardware interrupt with limit violation on channel 0
- Permissible common mode voltage 5 V AC pp

EM 4 AI RTD High Feature

- 4 inputs for isolated (floating) resistance measurements or resistance thermometers with 2-, 3- and 4-wire connections
- Input ranges:
  - Resistance measurement: 150 Ω; 300 Ω; 600 Ω; 3000 Ω; resolution 15 bit
  - Resistance thermometer: Pt100; Ni100; Ni120; Pt200; Ni200; Pt500; Ni500; Pt1000; Ni1000; resolution 15 bit + sign
- Automatic compensation of line resistances with 3-wire and 4-wire connections
- Parameterizable temperature coefficient with resistance-type sensors
- Electrically isolated from load voltage supply 1L+ and 2L+
- Linearization of sensor characteristics
- Diagnostics "Open-circuit" per channel (terminals 1 and 3 are monitored for open-circuit)
- Permissible common mode voltage 10 V AC pp

EM 4 AI TC High Feature

- 4 inputs for isolated/non-isolated thermocouples or voltage measurement; resolution 15 bits + sign
- Input ranges:
  - Voltage measurement ± 80 mV
  - Thermocouples: Type B, E, J, K, L, N, R, S, T
- Inputs are isolated from the encoder voltage supply 1L+ and load voltage supply 2L+
- Linearization of the voltage characteristic (conversion of the thermoelectric voltage to a temperature value)
- Smoothing
- Interference frequency suppression
- Various options to compensate for the reference temperature
- Overflow and underflow diagnostics

Analog output modules

EM 4 AO U High Feature

- 4 outputs for voltage output
- Output ranges:
  - ± 10 V, resolution 15 bits + sign
  - 1 to 5 V, resolution 14 bit
  - 0 to 10 V, resolution 15 bit
- Electrically isolated from sensor supply voltage 1L+
- Diagnostics "Short-circuit of sensor supply to M" per module
- Diagnostics "Open-circuit in outputs" per channel
- Substitute value output

EM 4 AO I High Feature

- 4 outputs for current output
- Output ranges:
  - ± 20 mA, resolution 15 bit + sign
  - 4 to 20 mA, resolution 14 bit
  - 0 to 20 mA, resolution 15 bit
- Electrically isolated from sensor supply voltage 1L+
- Diagnostics "Short-circuit of sensor supply to M" per module
- Diagnostics "Open-circuit" per channel
- Substitute value output

© Siemens 2019

Ordering data

	Article No.
Analog electronic modules	
Analog input modules	
Analog input module 4 AI U High Feature, ±10 V; ±5 V; 0 to 10 V; 1 to 5 V, channel diagnostics, including bus module. The connection module must be ordered separately.	**6ES7144-4FF01-0AB0**
Analog input module 4 AI I High Feature, ±20 mA; 0 to 20 mA; 4 to 20 mA, channel diagnostics, including bus module. The connection module must be ordered separately.	**6ES7144-4GF01-0AB0**
Analog input module 4 AI RTD High Feature; resistances: 150, 300, 600 and 3 000 Ohm; resistance thermometers: Pt100, 200, 500, 1000, Ni100, 120, 200, 500 and 1000; channel diagnostics, including bus module. The connection module must be ordered separately.	**6ES7144-4JF00-0AB0**
Analog input module 4 AI TC High Feature; thermocouples: Type B, E, J, K, L, N, R, S, T; voltage measurement ±80 mV; channel diagnostics, including bus module. The connection module must be ordered separately.	**6ES7144-4PF00-0AB0**
Analog output modules	
Analog output module 4 AO U High Feature, ±10 V; 0 to 10 V; 1 to 5 V, channel diagnostics, including bus module. The connection module must be ordered separately.	**6ES7145-4FF00-0AB0**
Analog output module 4 AO I High Feature, ±20 mA; 0 to 20 mA; 4 to 20 mA, channel diagnostics, including bus module. The connection module must be ordered separately.	**6ES7145-4GF00-0AB0**
Accessories	
Connection module CM IO 4 × M12 4 M12 sockets for connecting digital or analog sensors/actuators to ET 200pro	**6ES7194-4CA00-0AA0**
Module labels for color-coded identification of the CM IOs (white, red, blue, green); pack with 100 units of each color	**6ES7194-4HA00-0AA0**
Further accessories	
Connectors, cables and further accessories, see Catalog ST 70, section "IO systems" or Industry Mall under "Automation engineering – Automation systems – SIMATIC industrial automation systems – IO systems – SIMATIC ET 200 systems without control cabinets – SIMATIC ET 200pro"	


Accessories

Connection modules

Actuators and sensors are connected using commercially-available 5-contact M12 plugs on the connection module. The connection module is plugged onto the electronics module, and screwed to the latter. The connection module CM IO 4 x M12 (to be ordered separately) is available for the electronics modules.

© Siemens 2019

Overview

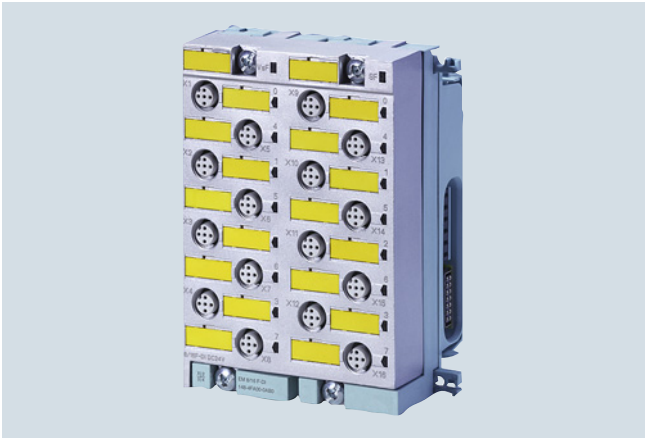

In combination with the safety-related automation systems of the SIMATIC PCS 7 process control system, the safety-related electronics modules of SIMATIC ET 200pro can be used to implement safety applications. The safety-related digital inputs record the signal statuses from safety-related sensors, and generate corresponding safety telegrams for the automation system. Depending on the safety telegrams of the automation system, the safety-related digital outputs trigger safe shut-down procedures. They are also responsible for monitoring short-circuits and cross-circuits up to the actuator. The safe communication with the automation systems is carried out over PROFIBUS with PROFIsafe.

All modules are certified up to SIL 3 (IEC 61508) and Cat. 4 (EN954-1).

Design

The following modules are available:

Safety-related digital input module EM 8/16 F-DI PROFIsafe

- 16 inputs (SIL2/Cat.3) or 8 inputs (SIL3/Cat.3 or Cat.4)
- Suitable for standard switches and 3/4-wire proximity switches (BEROs)
- Rated input voltage 24 V DC
- 4 short-circuit-proof sensor supplies for 4 inputs each
- External sensor power supply possible
- Group fault display (SF; red LED)
- Fault display for each sensor power supply (Vs1F to Vs4F) is output on the VsF LED and the associated channels
- Status and fault displays per input (dual-color green/red LED)
- Identification data
- Configurable diagnostics
- Can only be operated in safety mode

Safety-related digital input/output module EM 4/8 F-DI, 4 F-DO 2 A

- Inputs
  - 8 inputs (SIL 2/Cat. 3) or 4 inputs (SIL 3/Cat. 3 or Cat. 4)
  - Suitable for standard switches and 3/4-wire proximity switches (BEROs)
  - Rated input voltage 24 V DC
  - 2 short-circuit-proof sensor supplies for 4 inputs each
  - External sensor power supply possible
- Outputs
  - 4 outputs, current sourcing/sinking
  - Output current 2 A
  - Rated load voltage 24 V DC
  - Suitable for solenoid valves, DC contactors and indicator lights
- Group fault display (SF; red LED)
- Fault display for each sensor power supply (Vs1F to Vs2F) is output on the VsF LED and the associated channels
- Status and fault displays per input/output (dual-color green/red LED)
- Identification data
- Configurable diagnostics
- Achievable safety class SIL 3
- Can only be operated in safety mode

Ordering data

Ordering data	Article No.
Safety-related electronics modules	
Safety-related digital input module	
Safety-related digital input module 8/16 F-DI PROFIsafe 24 V DC, including bus module. Connection module must be ordered separately	**6ES7148-4FA00-0AB0**
Safety-related digital input/output module	
Safety-related digital input/output module 4/8 F-DI, 4 F-DO 2 A 24 V DC, including bus module. Connection module must be ordered separately	**6ES7148-4FC00-0AB0**
Accessories	
Connection module	
• CM IO 16 × M12 for the electronics module 8/16 F-DI, 24 V DC/2 A	**6ES7194-4DD00-0AA0**
• CM IO 12 × M12 for the electronics module 4/8 F-DI4 F-DO, 24 V DC/2 A	**6ES7194-4DC00-0AA0**
Further accessories	
Connectors, cables and further accessories, see Catalog ST 70, section "IO systems" or Industry Mall under "Automation engineering – Automation systems – SIMATIC industrial automation systems – IO systems – SIMATIC ET 200 systems without control cabinets – SIMATIC ET 200pro"	

Accessories

Connection modules

Actuators and sensors are connected using commercially available 5-pin M12 plugs on the connection module. The connection module is plugged onto the electronics module, and screwed to the latter. One of the following connection modules (to be ordered separately) is required for each of the above-mentioned electronics modules:

- Connection module CM IO 16 x M12 for the electronics module 8/16 F-DI, 24 V DC/2 A
- Connection module CM IO 12 x M12 for the electronics module 4/8 F-DI/4 F-DO, 24 V DC/2 A

© Siemens 2019

Overview



The power module PM-E DC 24 V is used within an ET 200pro station when generating 24 V DC load voltage groups for electronics modules.

You can position power modules in an ET 200pro station anywhere to the right of the interface module. The first power module is already integrated in the interface module.

Each power module installed in the ET 200pro remote I/O station interrupts the load voltage busbar and opens a new potential group (common potential) for the 2L+ load voltage supply. All subsequent load voltages of the electronics modules are fed from this power module. Each power module has a replaceable fuse for protecting the device. Only line protection according to DIN VDE 0100 need be provided externally in addition.

The electronics/sensor supply 1L+ is not interrupted by the power module, it is looped through.

The power module is fitted on the associated bus module when delivered.

Ordering data

	Article No.
Power module	
Power module PM-E DC 24 V For generating 24 V DC load voltage groups for electronic modules within an ET 200pro station	**6ES7148-4CA00-0AA0**
Accessories	
Connection modules for power module	
• Connection module CM PM-E ECOFAST for supply of 24 V DC load voltage, 1 ECOFAST Cu connector	**6ES7194-4BA00-0AA0**
• Connection module CM PM-E direct for supply of 24 V DC load voltage, one or two M20 cable glands	**6ES7194-4BC00-0AA0**
• Connection module CM PM-E 7/8" for supply of 24 V DC load voltage, 1 x 7/8"	**6ES7194-4BD00-0AA0**
Spare fuse 12.5 A fast-blow, for interface and power modules, 10 units per pack	**6ES7194-4HB00-0AA0**
Further accessories	
For connectors, cables and further accessories, see Catalog ST 70 or Industry Mall under "Automation technology – Automation systems – SIMATIC industrial automation systems – I/O systems – SIMATIC ET 200 systems without control cabinet – SIMATIC ET 200pro".	

Accessories

Connection module

The connection module for the power module PM-E is used to connect the load voltage 2L+. It is fitted on the power module.

The module must be ordered separately, and is available with the following types of connection:

- CM PM-E direct
- CM PM-E ECOFAST
- CM PM-E 7/8"

© Siemens 2019

Overview



SIMATIC ET 200pro PS, 24 V, 8 A

The SIMATIC ET 200pro PS is a power supply with IP67 degree of protection which features the same technology and design as the ET 200pro distributed I/O system.

It is suitable for single-line installation on the ET 200pro module rack, but can also be mounted directly on a mounting plate.

Locating the power supply away from the electronics cabinet/enclosure reduces the thermal load and the required size for the cabinet/enclosure.

The power is supplied at connector X1. The X2 connector allows the mains voltage to be looped to other modules.

The cable for the 24 V DC supply of the ET 200pro is connected via ECOFAST standard connectors to the SIMATIC ET 200pro PS. The other cable end is left open, enabling it to be fitted with an ECOFAST connector, 7/8" round connector or a programming device screw connector and individually adapted to the various connection systems of power module terminal modules of the ET 200pro.

SIMATIC ET 200pro PS reports its status via signaling contacts for "24 V DC OK" and "Overtemperature".

Ordering data

	Article No.
SIMATIC ET 200pro PS, 8 A Stabilized power supply in the technology and design of the ET 200pro distributed I/O system, permitting the loop-through of energy to further modules; with degree of protection IP67 Input: 3 400 ... 480 V AC Output: 24 V DC, 8 A	**6ES7148-4PC00-0HA0**
Accessories	
Cable connectors for power connection	
• For X1 (power input); Socket insert HAN Q4/2, angled, with screw; 5 contact sockets 6 mm², 2 auxiliary contacts 0.5 mm²	**3RK1911-2BE30**
• For X2 (looping mains voltage) Pin insert HAN Q4/2, angled, with screw; 4 contact pins 4 mm²	**3RK1911-2BF10**
Sealing cap For 9-pole power sockets	
• X2 (1 unit)	**3RK1902-0CJ00**
• X2 (10 units)	**3RK1902-0CK00**

More information

For more information and technical specifications of the SIMATIC ET 200pro PS power supply, see "SITOP Power Supplies in SIMATIC Design" in the Catalog KT 10.1.

Additional information is available via the Internet at:

- SITOP power supplies: www.siemens.de/sitop
- CAx data (2D, 3D, circuit diagram macros): www.siemens.com/sitop-cax
- Operating instructions: www.siemens.com/sitop/manuals
- SITOP Selection Tool for selecting power supplies: www.siemens.com/sitop-selection-tool

© Siemens 2019

Notes


© Siemens 2019



12/2 **SIMATIC BATCH**
12/5 SIMATIC BATCH Software

© Siemens 2019

Overview

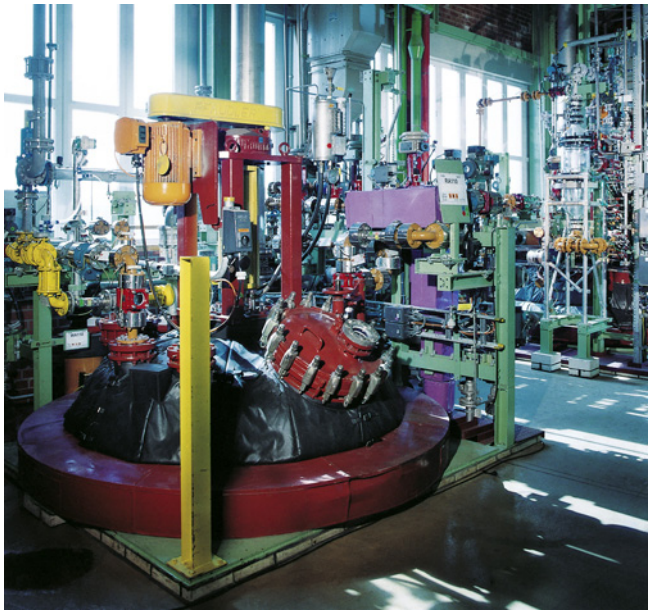


In the process industry, discontinuous processes – so-called batch processes – are of great significance. Permanently shorter product lifecycles as well as the versatility required by consumers are two of the reasons for this.

Product quality that stays the same even in the umpteenth batch, quick response to changed market conditions, traceability for production (FDA compliance), fulfillment of legal standards, as well as the economic and technical necessity to utilize production plants flexibly and optimally – all of this places high demands on plant automation.

The SIMATIC PCS 7 process control system with the SIMATIC BATCH software package offers the right solution for low-cost and effective automation of batch processes.

SIMATIC BATCH is completely integrated in SIMATIC PCS 7, both in the visualization and in the engineering system. Thanks to the modular design and the flexible scaling, it can be used in small test centers as well as in production plants of any size.

Design

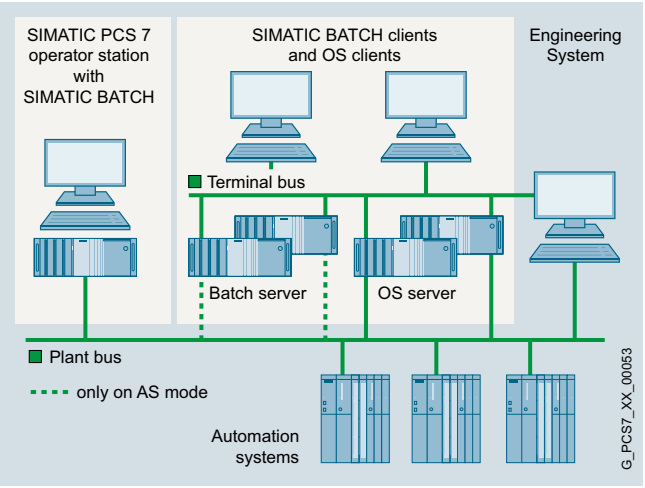

SIMATIC BATCH, scalable from single-user up to client/server system

Scalability

SIMATIC BATCH is configured as a single station system or as a client/server system and can be used in plants of any size due to its modular architecture and scalability in cumulative SIMATIC BATCH UNITs (sets of 1, 10 and 50 plant unit instances).

Single-user system for small applications

For small batch applications, SIMATIC BATCH can be installed together with the OS software on a single station system. Both the SIMATIC PCS 7 ES/OS Single Station and the SIMATIC PCS 7 BOX are suitable as a single station. Both can be combined with modular automation systems from the S7-400 series as well as with compact SIMATIC PCS 7 AS RTX.

Client/server configuration

However, a characteristic feature of the automation of batch processes using SIMATIC BATCH is client/server architectures in which one Batch server and multiple Batch clients together process a plant project. The Batch server in such a configuration can also be configured with redundancy in order to increase availability.

SIMATIC BATCH clients and OS clients can run on separate or common basic hardware. In addition to the SIMATIC PCS 7 Industrial Workstations, the more compact SIMATIC PCS 7 Box OS Clients 627D and SIMATIC PCS 7 OS Clients 427E/477E are also suitable as Batch clients.

The Batch server software provided for configuration of a Batch server (SIMATIC BATCH Basic or SIMATIC BATCH Server) usually runs on dedicated server hardware (Batch server). Depending on the load on the Operator System, the OS server and Batch server software can also be run on shared server hardware (OS/Batch server).

© Siemens 2019

Design (continued)

The hardware configuration of the Batch server depends on the SIMATIC BATCH operating mode:

- In **PC mode**, the complete recipe logic is executed in the batch server. If SIMATIC BATCH is only executed in PC mode, the Batch server does not require a connection to the plant bus. Communication with the automation system is via the operator system.
- In **AS mode**, the recipe unit logic is executed in the automation system. Mixed operation with PC operating mode is also possible within a batch where recipe units are run on both the batch server and on the automation system. In AS mode, the Batch server requires a connection to the plant bus for communication with the automation system.

System connection

Batch Single Station and Batch Server can be connected to the Industrial Ethernet plant bus via a CP 1623/CP 1628 communication module or via a simple FastEthernet network adapter with BCE (suitable for communication with up to 8 automation systems; not redundant systems).

The IE versions of the SIMATIC PCS 7 Workstation for single stations and servers are equipped with a CP 1623 communication module with the SIMATIC NET HARDNET-IE S7 communications software. When using redundant automation systems, the SIMATIC PCS 7 workstation requires SIMATIC NET HARDNET-IE S7-REDCONNECT communications software instead of the SIMATIC NET HARDNET-IE S7 communication software. SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack can be used to upgrade the communications software.
See "Communication", "Industrial Ethernet, system connection for PCS 7 systems", see page 10/59

The 10/100/1000 Mbps Ethernet RJ45 port is already onboard and can be used for connecting to the terminal bus.

Redundancy

SIMATIC BATCH supports Batch server redundancy. The two Batch servers in a redundant pair of servers have identical configurations. A separate redundant connection between these servers is used to optimize the internal communication. This must always be provided as an Ethernet connection. This also applies if SIMATIC BATCH software and SIMATIC PCS 7 OS software are installed together on the redundant pair of servers. The serial RS 232 connection described in the section "OS redundancy" is not possible in this case.

A redundant optical or electrical connection can be used depending on the environmental conditions and the distance between the two Batch servers, for example up to 100 m per crossover network cable (RJ45 connectors). For details, refer to the "High-availability process control systems" manual; for appropriate cable material and further accessories, refer to Catalog IK PI.

Note:

Licenses for the server, API and UNITs must be installed on both servers for the redundant version.

Basic hardware

The modularity and flexibility of SIMATIC BATCH are optimally supported by the hardware available. The basic hardware from the section "Industrial Workstation/IPC" as well as the SIMATIC PCS 7 BOX from the section "Compact systems" can be used for SIMATIC BATCH. Please note that the operating system and the ES/OS software of the SIMATIC PCS 7 process control system are pre-installed as standard on the SIMATIC PCS 7 Industrial Workstations of version Single Station, Server and Client. If these basic devices are used for SIMATIC BATCH, it is possible to extend or reject the existing SIMATIC PCS 7 installation, and restore it for the operating system using the Restore DVD set.

Expansion options


OS/batch single station and batch client can be optionally expanded for multi-monitor mode with up to 4 monitors. Using multi-monitor mode, the visualization of a plant/unit can be divided among 2 to 4 process monitors per operator station using different views. These plant sections can all be operated using just one keyboard and one mouse.

Note:

Since all messages from SIMATIC BATCH are processed in the operator system's message system, the use of a signal module is only recommendable with multi-function OS/batch stations (clients, single stations).

© Siemens 2019

Integration

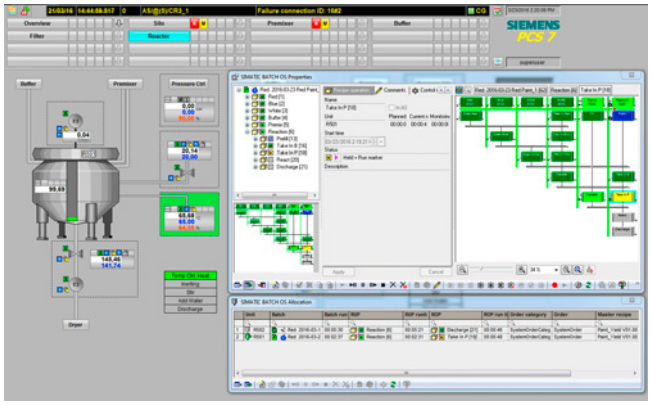

Process display with integrated OS Control

Integration in SIMATIC PCS 7

SIMATIC BATCH is completely integrated in SIMATIC PCS 7. The plant data can be configured entirely using the engineering system. The engineering system transfers all data required for creating recipes to the Batch server. It is therefore possible to edit recipes separate from the engineering system. Changes to the configuration which are made in the engineering system are available to the Batch server using an update function (online/offline).

SIMATIC BATCH supports the operation and monitoring of batch processes by means of standard faceplates (faceplates and OS controls integrated in the process picture). With SIMATIC PCS 7 V9.0, operation is also possible using OS controls configured on a Web client.

The SIMATIC Logon integrated in SIMATIC PCS 7 uses SIMATIC BATCH for the following functions:

- Central user administration with access control
- "Electronic Signature" function
  This means that actions cannot be performed until enabled by authorized users/user groups.

A smart card reader suitable as a logon device is offered in section "Industrial Workstation/IPC", under "Expansion components, smart card reader", see page 3/52.

Operating modes for recipe processing

- PC mode: Processing of the recipe logic in the batch server
- AS mode: Execution of recipe logic in the automation system
- Mixed operation: Parallel application of PC and AS modes in one batch (unit recipe-granular)

SIMATIC BATCH works as standard in PC mode. The complete control recipe is executed in the batch server. In the alternative AS operating mode, the control recipe logic can be executed in the automation system unit recipe-granular.

Advantages of AS mode are:

- Very fast step changing times
- Improved deterministics during execution of a batch
- Enhanced availability

Communication with the automation systems

Depending on the operating mode, SIMATIC BATCH communicates with the automation systems via the operator system or directly via S7-DOS.

SFC instances derived from a SFC type template are generally used as the interface to the subordinate automation level. The properties of the SFC type can be defined in a properties dialog, including:

- Control strategies
- Setpoint/actual value
- Instance parameters
- Timers

In addition to the SFC instances, individual unit parameters can be described by parameter steps of the recipe.

© Siemens 2019

Overview

The product structure of the SIMATIC BATCH software is optimized for configuration of client-server systems and single station systems. SIMATIC BATCH Basic and SIMATIC BATCH Server are two alternative software products for the server installation and differ in their functional scope.

Additional functions of SIMATIC BATCH Server compared to SIMATIC BATCH Basic are, for example:

- ROP Library
- Separation Procedures/Formulas
- Electronic signature
- MES High Level Synchronization
- Route Control Integration

In exceptional cases, the SIMATIC BATCH client software can also be operated on the Batch server. However, the preferred target system for the SIMATIC BATCH client software is the standalone Batch client.

The SIMATIC BATCH Single Station package is intended for the Batch single station. The SIMATIC BATCH recipe system already integrated in the SIMATIC BATCH Single Station package must be ordered separately for the stations of the client/server system. The SIMATIC BATCH API can be optionally used in both the Batch Single Station and in batch servers.

The SIMATIC BATCH project can be matched quantitatively to the plant size using SIMATIC BATCH UNITs (cumulative quantity options for instances of plant units).

SIMATIC BATCH Server Expansion Pack

With highly complex process cells that can process a high volume of batches, the total amount of main memory required by all batches together can exceed the level of 1.5 GB. No additional batches can be released or started. This can be avoided by additionally installing **Server Expansion Packs**, each of which provides an additional 500 MB of main memory.

Software products/licenses	Batch single station	Batch server	Redundant Batch server pair		Batch client
			Server A	Server B	
Basic software					
SIMATIC BATCH Single Station Package[1]	●	–	–	–	–
SIMATIC BATCH Basic[2]	–	●	●	●	–
SIMATIC BATCH Server[2]	–	●	●	●	–
SIMATIC BATCH Client[3]	–	o	o	o	●
SIMATIC BATCH Recipe System	–	o	o	o	o[4]
SIMATIC BATCH API	o	o	o	o	–
Quantity options: Cumulative objects					
• SIMATIC BATCH UNITs[5]					
- 1 UNIT	o	o	o	o	–
- 10 UNITs	o	o	o	o	–
- 50 UNITs	o	o	o	o	–
• SIMATIC BATCH OS Control Web Client[6]					
- 1 Web client	o	o	o	o	–
- 5 Web clients	o	o	o	o	–
• Server Expansion Pack					
- 500 MB	o	o	o	o	–

SIMATIC BATCH software products/licenses for Batch single station, Batch server and Batch client

1) SIMATIC BATCH Single Station Package License includes the functionalities Server, Client and Recipe System. However, these cannot be extracted as individual licenses and distributed over multiple computers.

2) Alternative Batch Server Software: SIMATIC BATCH Server with full functionality or SIMATIC BATCH Basic with reduced range of functions.

3) A SIMATIC BATCH Client license is needed for the Batch Control Center (BatchCC) and for the Batch OS Controls. If both BatchCC and the Batch OS Control are being used on a PC, only 1 SIMATIC BATCH Client license has to be installed.

4) A client/server system is required on at least one client.

5) Instances of units; at least one SIMATIC BATCH UNIT license is required per project.


6) In a redundant configuration, the licenses must be installed on both servers.

● Software product/license required
o Software product/license optional
– Software product/license not required or not available

© Siemens 2019

Function

Recipe editor

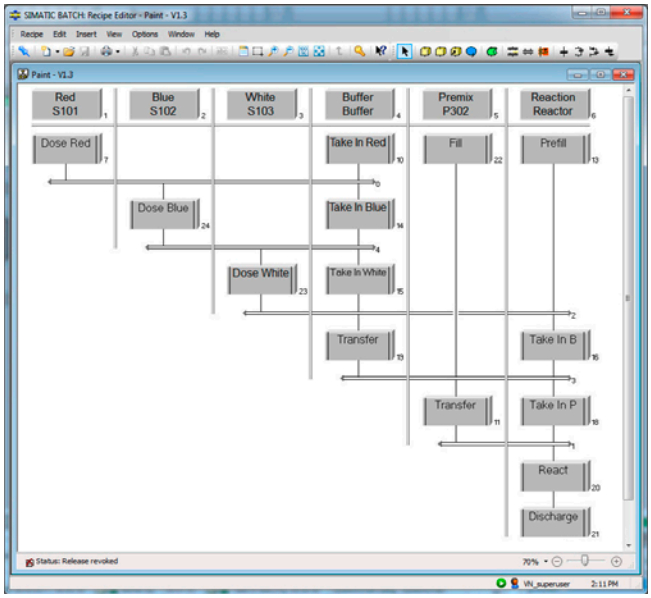

The recipe editor is integrated in the SIMATIC BATCH Single Station Package and can be installed as a functional expansion component of the SIMATIC BATCH Recipe System on a batch client and batch server.


It is used for easy, intuitive creation and modification of master recipes and library operations. The basis for recipe creation are the batch objects created from the plant configuration using the SIMATIC PCS 7 Engineering System, e.g. units and equipment phases.

The Batch Recipe Editor can be started individually, but can also be launched from the Batch Control Center (BatchCC). It possesses a GUI, processing functions typical to Microsoft Windows for individual and grouped objects, and a structural syntax check.

The recipe editor offers powerful functions for the following tasks:

- Creation of new master recipes and library operations
- Definition of user interface in the project settings
- Modification of existing master recipes and library operations (changes in structure or parameters)
- Querying the states of recipe objects and process values in transition conditions
- Assignment of route control locations as transfer parameters (source, target, via) to the transport phases, in order to direct products of one batch to other units (local or external)
- Configuration of arithmetic expressions for calculating setpoints for transitions and recipe parameters from recipe variables and constants
- Documentation of master recipes and library operations
- Validation under inclusion of user-specific plausibility checks
- Selection of unit candidates via a class-based view or limitation of the equipment properties
- Releasing master recipes and library operations for test or production

Hierarchical recipes according to ISA-88.01

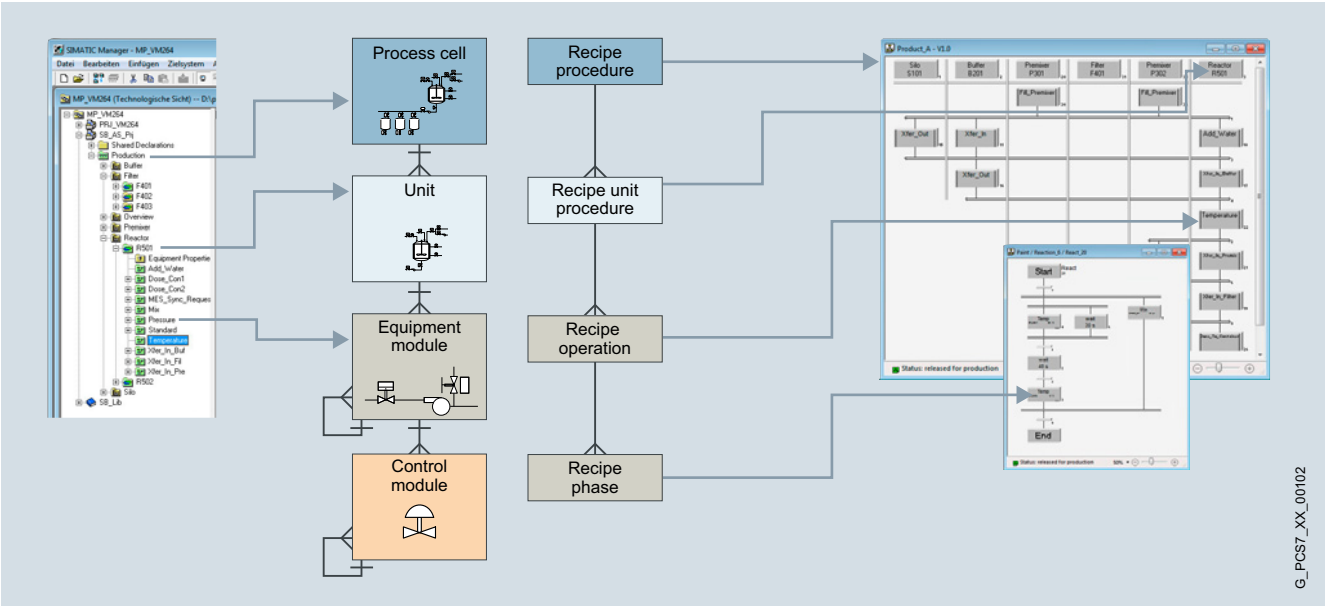

Hierarchical recipes according to ISA-88.01

© Siemens 2019

Function (continued)

SIMATIC BATCH supports hierarchical recipes in accordance with the ISA-88.01 standard. SIMATIC BATCH and SIMATIC PCS 7 form a functional unit that fully covers the models described in the standard.

The hierarchical recipe structure is mapped on the plant module as follows:

- Recipe procedure for controlling the process or the production in a plant
- Recipe unit procedure for controlling a process step in a plant unit
- Recipe operation/function for the process engineering task/ function in an equipment module

Recipe elements for handling of exceptions


Monitoring of process states is possible during runtime by marking freely selectable recipe sections. It is then possible to automatically react to evaluated events or faults using a command block or jump function in a special container.

ROP Library

Recipe operations managed in a user library (ROP library) can be installed in the recipe procedures of hierarchical recipes as a reference and thus modified centrally.


This reduces the effort for engineering and validation. If the reference link is broken, the recipe operation becomes a fixed component of the recipe procedure, and is thus independent of further central modifications.

Separation Procedures/Formulas

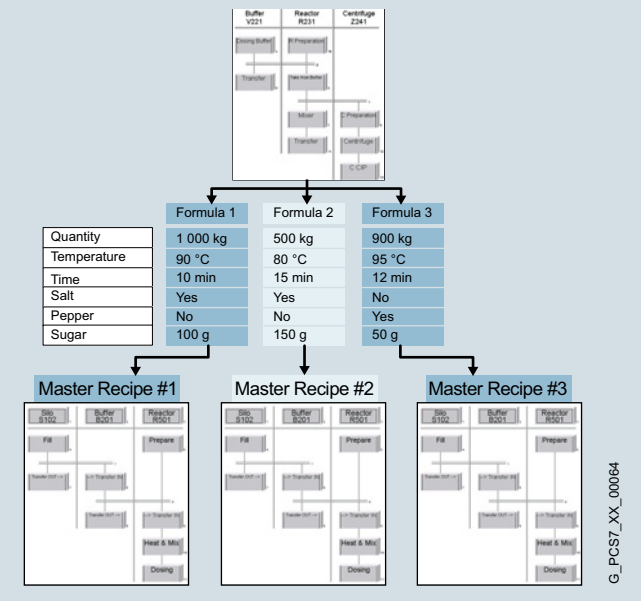

The flexibility achieved by recipes which are independent of specific units can be increased even further if the procedure and parameter sets (formulas) are separated from one another. Various master recipes can be created by linking several formulas using 1 recipe procedure. This enables central modification of procedures. The formula structure is determined by the formula category defined by the user.

Batch Control Center (BatchCC)

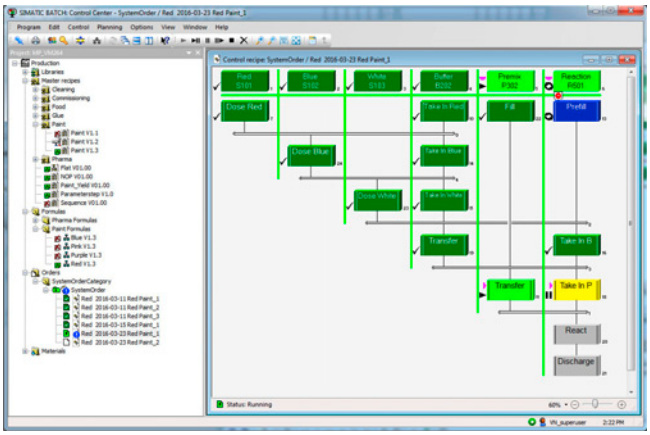

The SIMATIC BATCH Batch Control Center (BatchCC) is the "command center" for monitoring and controlling batch processes with SIMATIC BATCH. Using BatchCC you can manage all data relevant to SIMATIC BATCH through a graphical user interface.


BatchCC offers powerful functions for the following tasks:

- Import and update of basic automation plant data
- Definition of user privileges for all functions, for clients, or for plant units of SIMATIC BATCH
- Definition of material names and codes
- Management of master recipes
- Management of libraries with recipe elements (library operations)
- Editing of formula categories and management of associated formulas
- Creation of master recipes from control recipe
- Exporting and importing of master recipes, formulas and library objects
- Creation of batches with master recipes
- Starting of batch processing and controlling of batches
- Monitoring and diagnostics of batch processing
- Allocation strategy for recipe creation and unit allocation at batch runtime
- Online modification, deletion or insertion of objects (RPH, ROP, RUP) and structure elements (loops, transitions, etc.) of the recipe (special privileges and explicit authorization required)
- Recording and archiving of recipes and batch data
- Calling of SFC visualization directly from the control recipe

© Siemens 2019

Function (continued)

Batch OS Control

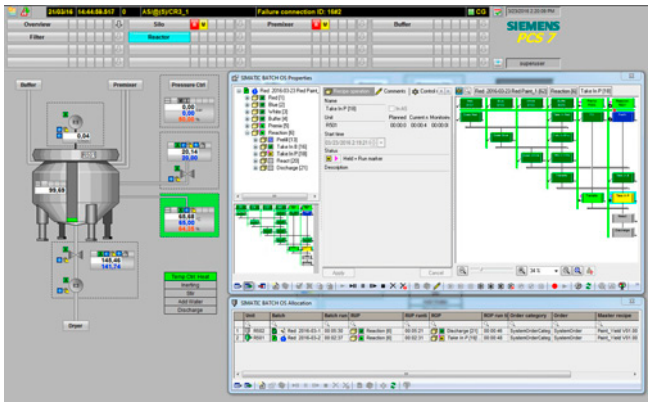


Batch OS Control

OS Controls which can be directly superimposed on the process display provide you with a practical alternative to BatchCC for the operation and monitoring of batch processes.

The following OS controls are available:

- Unit overview
- ROP overview
- Batch creation
- Job and batch overview
- Batch operation and monitoring

Batch planning

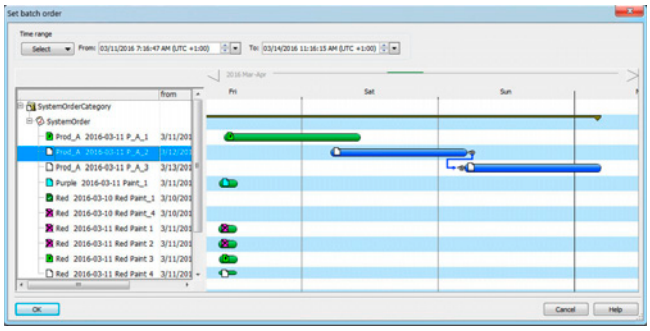

Batch Control Center enables the creation of individual production orders and batches. However, Batch Planning offers significantly more planning functions. The batches for a large number of production orders can then be planned in advance.

The functional scope not only includes planning, but also modification, cancellation, deletion and release of batches. Creation and distribution of the batches for a production order are possible manually, but can also be carried out automatically depending on the definition of the batch number or production quantity.

The following batch properties can be set and changed:

- Quantity
- Start mode (immediately, following operator input, or time-driven)
- Unit allocation
- Formula
- Run sequence (chaining to previous or subsequent batch)
- Displaying the runtime of a batch
- Definition of minimum time interval for batch chaining

Batch planning and control are supported in a user-friendly manner and simplified, thanks to special displays such as the order category list, production order list, batch planning list, batch status list, or batch results list.

All batches including their unit allocation can be clearly presented in a combination of Gantt diagram and table. Time conflicts or those resulting from multiple allocation of units are identified by symbols. Time conflicts can be eliminated simply by shifting the associated batches in the Gantt diagram.

SIMATIC Batch API

The SIMATIC BATCH API Application Programming Interface, which is offered as an expansion component, is an open interface for customer-specific extensions. It provides users with access to data and functions of SIMATIC BATCH and enables programming of special applications for specific sectors or projects.

© Siemens 2019

Ordering data

	Article No.
Basic software for Batch Single Station, Batch Server and Batch Client Runs with the following operating systems (see SIMATIC PCS 7 V9.0 Readme [1] for latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit	
SIMATIC BATCH Single Station Package V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, single license for 1 installation No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7657-0UX58-0YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-0UX58-0YH0**
SIMATIC BATCH Basic V9.0 Batch server software with reduced functionality 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, single license for 1 installation No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7657-0YX58-0YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-0YX58-0YH0**
SIMATIC BATCH Server V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, single license for 1 installation No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7657-0TX58-0YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-0TX58-0YH0**
SIMATIC BATCH Client V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, floating license for 1 user No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7657-0VX58-0YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-0VX58-0YH5**

	Article No.
Functional add-on components Runs with the following operating systems (see SIMATIC PCS 7 V9.0 Readme [1] for latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard 64-bit	
SIMATIC BATCH Recipe System V9.0 For recipe creation; installation on at least one client of a client/server system (alone or in combination with the SIMATIC BATCH client software) 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, floating license for 1 user No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7657-0AX58-0YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-0AX58-0YH5**
SIMATIC BATCH API V9.0 1 language (English), software class A, single license for 1 installation No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7657-0MX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-0MX58-2YH0**

© Siemens 2019

Ordering data	Article No.
Quantity options for Batch Single Station and Batch Server (cumulative)	
SIMATIC BATCH UNITs[2]	
For SIMATIC BATCH Single Station Package/SIMATIC BATCH Server software	
Language-neutral, software class A, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 1 UNIT	**6ES7657-0XA00-0YB0**
- 10 UNITs	**6ES7657-0XB00-0YB0**
- 50 UNITs	**6ES7657-0XC00-0YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 1 UNIT	**6ES7657-0XA00-0YH0**
- 10 UNITs	**6ES7657-0XB00-0YH0**
- 50 UNITs	**6ES7657-0XC00-0YH0**
SIMATIC BATCH OS Control Web Client	
For SIMATIC BATCH Single Station Package/SIMATIC BATCH Server software	
Language-neutral, software class A, single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	
- 1 Web client	**6ES7657-0XF00-0YB0**
- 5 Web clients	**6ES7657-0XG00-0YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 1 Web client	**6ES7657-0XF00-0YH0**
- 5 Web clients	**6ES7657-0XG00-0YH0**

	Article No.
SIMATIC BATCH Server Expansion Pack (500 MB) V9.0	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7657-0QX58-2YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-0QX58-2YH0**

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

[2] Instances of plant units

© Siemens 2019


Route control



13/2 **SIMATIC Route Control**
13/5 Route Control Runtime Software
13/7 Route Control Engineering Software

© Siemens 2019

Overview

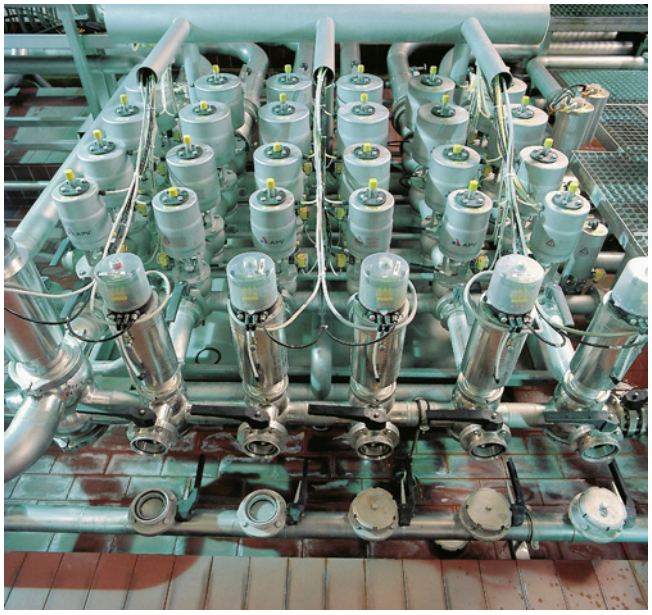

SIMATIC Route Control expands the SIMATIC PCS 7 process control system with a sector-independent tool for the configuration, control, monitoring and diagnostics of material transport in pipeline networks or on conveyor belts.

With this integrated route control, SIMATIC PCS 7 can also automate the connecting material transports in addition to the production processes and the associated stores. In this case SIMATIC Route Control can also be combined with SIMATIC BATCH.

In particular SIMATIC Route Control is perfect for plants with a multitude of complex route combinations or extensive tank farms such as are found above all in the chemical, petrochemical and food and drinks industries.

Application


The possible applications of SIMATIC Route Control extend from small plants with simple/static lines up to plants in the medium and upper performance range which have an extensive network of routes/pipes.

SIMATIC Route Control is particularly predestined for the following requirements:

- Frequent conversions and extensions of the transport network including actuators and sensors
- Transport routes with high flexibility, characterized by:
  - Regularly changing materials
  - Dynamic selection of the origin and destination of the material transport (including reversal of direction on bidirectional transport routes)
- Numerous simultaneous material transports
- Plant projects in combination with SIMATIC BATCH

When transporting solid materials on conveyor belts, the sequence for switching actuators on and off can be cascaded using WAIT elements.

Design

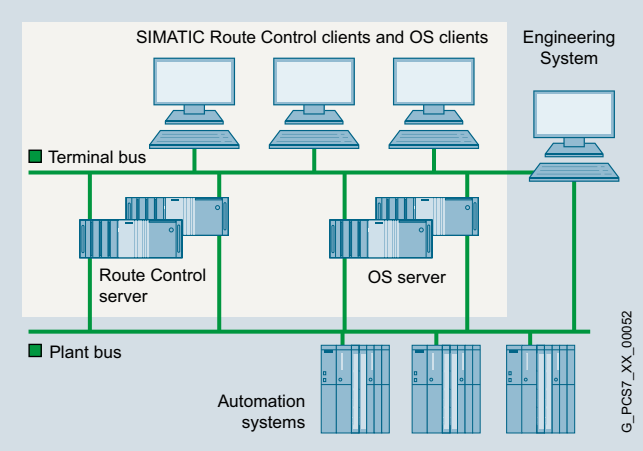

The modularity and flexibility of SIMATIC Route Control are optimally supported by the hardware available. The SIMATIC PCS 7 Industrial Workstations from the "Industrial Workstation/IPC" section can be used for SIMATIC Route Control.

Hardware for small plants

For small plants, SIMATIC Route Control can be installed either alone or together with the OS software on a single station system. You can select the hardware for this OS/RC single station from the section "Industrial Workstation/IPC", subsection "SIMATIC Rack PC".

Client/server configuration

Distributed multi-user systems with client-server architecture are typical for the automation of material transports with SIMATIC Route Control. Basically it is possible to operate an RC Server, Batch Server and OS Server on shared basic hardware. However, availability will be higher and performance better if each component has its own server hardware. The availability of the RC server can be increased further by a redundant design of the server hardware. SIMATIC PCS 7 supports a Route Control server or pair of Route Control servers for each multi-user system.

The Route Control client (RC Client) is represented by the Route Control Center (RCC). The RCC can be installed on an OS Client, a Batch Client or separate client hardware.

© Siemens 2019

Design (continued)

Redundancy

The SIMATIC Route Control Server software supports the RC server redundancy. Further software components or a separate connection between the two servers as is the case with the OS server redundancy or batch server redundancy are not required.

With the assistance of the SIMATIC Route Control Server software, the two redundant RC servers carry out mutual monitoring during operation. If the active RC server fails, the redundant partner immediately becomes the master and takes over operation. The RC clients are automatically switched over to the new master in this case. Following the return of the failed RC server, data matching is carried out with the active RC server with the latter remaining the master.

Expansion options

OS/RC single stations and RC clients can be optionally expanded for multi-monitor mode with up to 4 monitors. Using multi-monitor mode, the visualization of a plant/unit can be divided among 2 to 4 process monitors per operator station using different views. These plant sections can all be operated using just one keyboard and one mouse.

Requirements for selection of the automation systems

SIMATIC Route Control supports standard automation systems, fault-tolerant and safety-related automation systems of the S7-400 range based on to the following CPU types:

- CPU 416-3 (up to 30 simultaneous material transports)
- CPU 417-4 and CPU 417-4H (up to 300 simultaneous material transports)
- CPU 410-5H (up to 300 simultaneous material transports)

Configuration

SIMATIC Route Control, which is fully integrated in SIMATIC PCS 7, is modular and scalable. It can be flexibly adapted to various sizes of plants by cumulatively adding SIMATIC Route Control routes (in sets of 10 and 50 for the number of simultaneous material transports) up to a project limit of 300 routes. SIMATIC Route Control provides graded user privileges for engineering, operating and maintenance personnel who are integrated into the user administration with SIMATIC Logon. SIMATIC Logon is an integral component of SIMATIC PCS 7.

Route Control in the engineering system

The Route Control Engineering tool, the Route Control Library and the Route Control Wizard are concentrated together with the other engineering tools of the SIMATIC PCS 7 process control system in the central engineering system.

In SIMATIC PCS 7, blocks from a SIMATIC PCS 7 library are inserted into CFC plans and connected to plant control blocks in accordance with the technological requirements in order to control and monitor the elements of a plant. These individual connections are omitted with SIMATIC Route Control (RC). You adapt the standard blocks of the technological elements relevant to RC (RC elements) using standardized interface blocks from the RC library, and allow RC to control and monitor the elements during operation. This is of course also possible with existing plantswithout an increased overhead.

The blocks of the RC library support redundancy at the controller level, i.e. they can be used with standard automation systems or even with fault-tolerant automation systems or mixed configurations. The changes in the engineering system can be recorded (Change log), both in the SIMATIC PCS 7 project and in the RC project.

Route Control wizard

The Route Control Assistant functions as the interface between the PCS 7 basic configuration expanded by RC components and the RC engineering tool. It analyzes the hardware and software configuration of the SIMATIC PCS 7 (multi-)project, and generates a database which serves as the basis for further, RC-specific configuration with the RC engineering tool.

During the RC-specific configuration, the elements imported from the SIMATIC PCS 7 project by the Route Control Assistant must be inserted into a sub-route structure. These sub-routes - divide the plant. The complete routes will be subsequently "joined together" from them during the automatic route searching. The response of the sub-routes in a particular function are already defined when inserting the elements into them. Functions represent the technological requirements when operating the plant (e.g. "Open source", "Pumps" etc.).

As a rule: the more finely divided the sub-route structure, the more flexible the subsequent automatic route searching. With purely static routes, a sub-route can already be a complete route.

© Siemens 2019

Configuration (continued)

Route Control Server/Route Control Center

Following configuration of the route network and testing of the material transport versions, the Route Control configuration data is transferred to the Route Control server. There they can be activated via the Route Control Center at a suitable point in time from the process engineering viewpoint. From this time onwards, the new data are included in route searches.

If a material transport is pending during operation, a route (material transport) is requested by the controller (e.g. using an adapted RC SFC type) or by the operator on the Route Control Center. In addition to selection of the origin and destination as well as up to 10 intermediate plant points (*synonyms: nodes, locations*), this also includes the application of a start signal on the route control block RC_IF_ROUTE in the automation system (AS). The AS "informs" the RC Server which then starts searching for the route and – if possible – combines the statically defined sub-routes into a complete transport route. From this point onward, the Route Control takes over control and monitoring of all RC elements involved in the transport route. If faults occur, detailed diagnostics information is provided concerning the cause, e.g. why the search for a suitable transport route was unsuccessful. The plant control program only switches the individual technological functions, everything else is handled by the Route Control.

The Route Control Server (RC Server) supplies the Route Control Clients (Route Control Center) with the necessary data and transfers their operations to the automation systems.

For maintenance purposes, an automation system can be specifically set to "in maintenance" (out of service). The material transports being carried out by this automation system are still continued until finished. However, new material transports are no longer permitted.

RC block symbols and faceplates

In the process displays of the SIMATIC PCS 7 operator systems, each route block is represented by an RC block symbol and an RC faceplate. Through a route block's RC block symbol it is possible to select its RC faceplate, and through a route block's RC faceplate it is possible to select the Route Control Center.

© Siemens 2019

Overview

Software components (runtime)	RC single station	RC server single	RC server redundant		RC client
			Server A	Server B	
SIMATIC Route Control Server	●	●	●	●	–
SIMATIC Route Control Center	●	–	–	–	●
Quantity options: cumulative SIMATIC Route Control Routes[1)]					
• 10 routes[1)]	o	o	o	o	–
• 50 routes[1)]	o	o	o	o	–

SIMATIC Route Control software for RC single station, RC server, and RC client

[1)] Number of simultaneous material transports; at least one "SIMATIC Route Control Routes" license (for sets of 10/50) is required per project, total project limit: 300 routes

• Software product/license required
● Software product/license optional
– Software product/license not required or not available

The Route Control Software is structured such that SIMATIC Route Control can be flexibly adapted to different plant sizes and architectures (single/multi-user systems):

- Route Control Engineering (component of the SIMATIC PCS 7 Engineering System)
- Route Control Server
- Route Control Center (RCC)

SIMATIC Route Control works closely with the operator system, hence where small plants are concerned it is possible for the Route Control Center and Route Control Server to be installed not only on their own but also together with the OS software on a single station. The ordering data for the OS software can be found in the section "Operator system".

In the case of multi-user systems with small quantity frameworks it is also possible to operate the Route Control Server, Batch Server and OS Server on shared basic hardware. However, availability will be higher and performance better if they are installed on separate server hardware.


The Route Control Center (RCC) can be installed on an OS client, a batch client, or on separate RC client hardware.

In addition to the SIMATIC Route Control Server and SIMATIC Route Control Center runtime software, for a Route Control project you require separately available SIMATIC Route Control Routes (cumulative sets of 10 and 50 for the number of simultaneous material transports). Several sets of 10 and 50 SIMATIC Route Control Routes licenses can be combined up to a total project limit of 300 routes.

Function

Route Control Server

The Route Control Server supplies the RC Clients (Route Control Center) with the necessary data and transfers their operations to the automation systems. When a material transport is requested through the Route Control Center, it is the job of the RC Server to dynamically compile a suitable transport route from the partial routes which were configured using a map of the automation systems on the basis of the selected parameters (source, destination and intermediate locations) and with due consideration of other parameters (e.g. function catalogs, function IDs or material IDs). Configuration changes can be taken immediately into account in the determination of a suitable transport route after transfer from the Route Control Engineering Tool to the Route Control Server and subsequent activation through the Route Control Center (online loading).

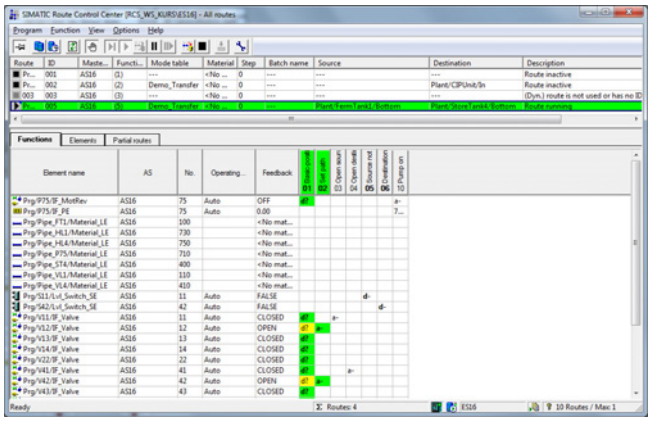

Route Control Center

Route Control Center (RCC)

The RCC can be called either from the faceplate of a route block or from the keyset on the operator station. It displays all of a material transport's relevant route data and error information in several coordinated views

Key functional features are:

- Overview of all RC elements, partial routes and request details
- Operation of the selected material transport:
  - Selection of operating mode: Manual/automatic
  - Request, start, stop, continue and terminate material transport in manual mode
  - Set/modify request parameters (origin, destination, intermediate points) as well as general properties (function catalog, function ID, material ID and "ignore fault") in manual mode
  - Enable/disable sequence functions in manual mode
- Diagnostics of material transport request errors caused by locked RC elements, locked partial routes, inconsistent actuations or prohibited sequential material
- Diagnostics of currently running material transports: color and text display of transport route status in the route view of the RCC; detailed analyses by evaluation of feedback signals from RC elements
- Server functions: select RC Server, display RC Server status, update view (read in data again from the RC Server)
- Display of the operator who has logged on
- Definition of route parameters (source, destination, material, function ID etc.), and saving and loading these settings with names
- Switchover between "AS in maintenance" and "AS in operation"

© Siemens 2019

Route Control Runtime Software

Ordering data	Article No.
SIMATIC Route Control Server V9.0 for single station or client/server configuration 6 languages (English, German, French, Italian, Spanish, Chinese), software class A Runs with the following operating systems (see SIMATIC PCS 7 V9.0 Readme for latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit Single license for 1 installation, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-7FX58-0YB0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-7FX58-0YH0**


Ordering data	Article No.
Quantity options for single station/ server (cumulative)	
SIMATIC Route Control Routes[2] For expansion of the SIMATIC Route Control Server software for single station or client/server configuration, cumulative Language-neutral, software class A, single license for 1 installation No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	
- 10 routes[2]	**6ES7658-7FF00-0XB0**
- 50 routes[2]	**6ES7658-7FG00-0XB0**
• Online delivery License key download, online certificate of license Note: Email address required!	
- 10 routes[2]	**6ES7658-7FF00-0XH0**
- 50 routes[2]	**6ES7658-7FG00-0XH0**
SIMATIC Route Control Center V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A Runs with the following operating systems (see SIMATIC PCS 7 V9.0 Readme for latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-7EX58-0YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-7EX58-0YH5**

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

[2] Number of simultaneous material transports; total project limit: 300 routes

© Siemens 2019

Overview

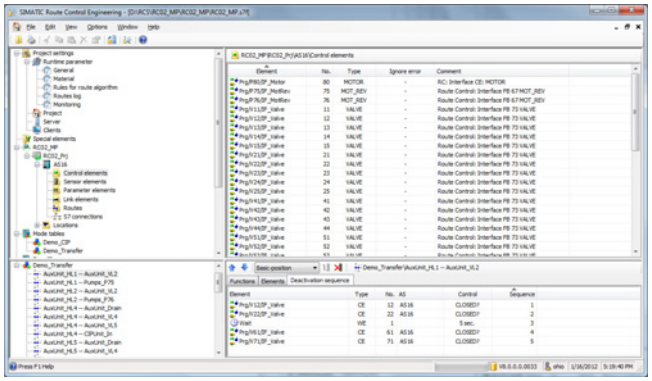

The Route Control (RC) configuration supplements the basic SIMATIC PCS 7 plant configuration with blocks from the PCS 7 standard library. Existing plants are then also easy to upgrade with SIMATIC Route Control. Technological elements of relevance for control of the material transport (RC elements) are adapted in the CFC Editor using uniform interface blocks from the Route Control Library. The RC elements include:

- Control elements (actuators)
- Sensor elements (sensors)
- Parameter elements (setpoints)
- Connection elements (material information related to partial route)
- WAIT elements

Function

Locations (synonym: nodes) of partial or complete routes are configured in the SIMATIC Manager as "Equipment properties of plant units" and transferred to the RC project together with the other RC-relevant basic data of the SIMATIC PCS 7 project. The configuration requirements caused by many repeated sequences can be minimized by exporting locations in CSV format, duplicating and modifying them using a spreadsheet program, and then importing them again.

Nodes are parameters for requesting a material transport (source, destination, intermediate locations/via) and which mark the start and end of each partial route, and thus also the source and destination of a material transport.

In addition to the basic tools (SIMATIC Manager, CFC, etc.) of the SIMATIC PCS 7 engineering system, the following configuration components of the SIMATIC Route Control Engineering program package are available for configuration of the route control applications:

Route Control library

The Route Control library contains blocks for RC and transport route configuration and interface blocks for RC elements. It is provided in the catalog of the CFC editor.

Route Control wizard

The Route Control wizard is the interface between the SIMATIC PCS 7 basic configuration supplemented with RC interface blocks and the actual RC configuration in the RC engineering tool. The wizard, which can be called up from the SIMATIC Manager menu, accepts the RC-specific configuration data of the SIMATIC PCS 7 project into the Route Control engineering. In doing so, it carries out plausibility checks, defines the AS-OS and AS-AS communication connections (NetPro and CFC), and configures the RC server signals.

Route Control Engineering tool

Following importing of the RC-relevant data of a SIMATIC PCS 7 project into an RC project, the RC-specific objects are configured using the Route Control Engineering tool:


- Partial routes:
  division of the transport paths into partial routes is used to increase the flexibility and minimize the configuring overhead by means of repeated application. Relevant partial route parameters: "bidirectional" and "priority" (lowest total of partial route priorities is decisive when searching for the overall route).
- Interconnections:
  Through inclusion in a partial route, the RC elements receive additional properties depending on the type, and these can be edited using configuration dialogs (e.g. in the basic setting: "close valve").
- Function catalogs:
  The partial routes can be assigned to function catalogs depending on technological and product-specific aspects, e.g. "cleaning" or "product transport". In the route search, function catalogs permit restriction of the resulting quantity to the type of material transport.
- Function steps/sequence functions:
  Function catalogs contain as many as 32 configurable technological sequence functions which define the sequence of material transport by means of the RC elements connected in the partial routes, e.g. base position of the control elements, open transport valves, open origin valve, switch on pump).

Configuration of the partial routes and assignment of the RC elements to the partial routes are performed in a matrix of the Route Control Engineering tool. With the aid of generic elements, objects or blocks generated on a user-specific basis can be integrated into the RC project and handled like RC elements.

© Siemens 2019

Function (continued)

Graphical offline route search

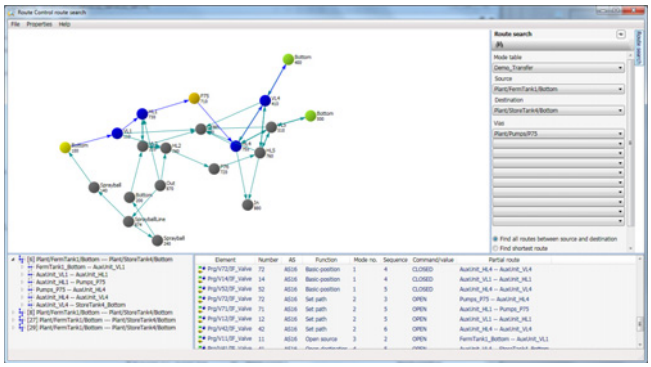

Graphical offline route search to determine all possible route combinations

Similarly to a navigation system, the graphically visualized offline route search determines all possible route combinations. Errors in the route network or undesired routes can be detected in advance. A preferred route can be selected from the results of the offline route search, and saved as a static route. An active route can also be saved for re-use via the Route Control Center. A saved route takes priority in a route request.

Special configuration functions

Special configuration functions make it easier to perform repetitive routine work and extend the range of options for controlling material transport, e.g.:

- Exporting configuration data in the form of CSV files to Microsoft Excel, copying and editing the data there, and then re-importing the files into Route Control
- Controlling the joint use of partial routes by configurable function IDs
- Checking material compatibilities and interlocking partial routes in case of incompatible material sequences based on the material ID saved in the connection element of the partial route
- Injection of dynamic (external) setpoints coming from the process at runtime into the route block (e.g. weighed quantity)

Ordering data

	Article No.
SIMATIC Route Control Engineering V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A Runs with the following operating systems (see SIMATIC PCS 7 V9.0 Readme [1] for latest information): • Windows 7 Ultimate 64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2012 R2 Standard Edition 64-bit • Windows Server 2016 Standard Edition 64-bit Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7658-7DX58-0YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-7DX58-0YH5**

[1] See chapter "Software Media and Logistics", section "System documentation", see page 1/7.

© Siemens 2019

Safety Integrated for Process Automation




14/2 Introduction

14/5 SIMATIC Safety Integrated
14/5 SIMATIC S7 F systems
14/7 SIMATIC S7 Safety Matrix
14/11 SIMATIC SIS compact

14/17 Functional Safety Services

© Siemens 2019

Overview

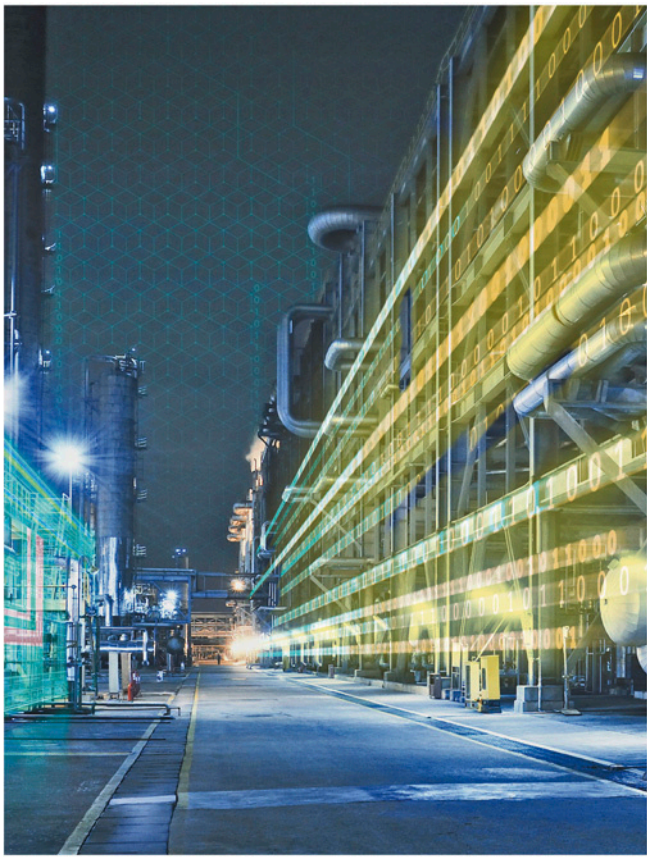

The process industry frequently features complex technological sequences with high safety demands, and faults and failures in the process automation could have fatal consequences for personnel, machines, plants and the environment. The safety technology used must reliably detect dangerous states in the process and also its own internal errors, and automatically set the plant/application to a safe state.

Safety Integrated for Process Automation is the comprehensive range of products and services from Siemens for safe, fault-tolerant applications in the process industry. This is characterized by:

- Safety-related F/FH automation systems of the S7-400 series (see "Automation Systems" chapter)
- Safe communication with the PROFIsafe profile via PROFIBUS (see "Industrial Communication" chapter, "PROFIBUS" section) or PROFINET (see "Industrial Communication" chapter, "PROFINET")
- Failsafe transmitters (SITRANS P DS III) on the PROFIBUS PA with PROFIsafe (see Catalog FI 01, Field devices for process automation)
- ET 200M, ET 200iSP, ET 200S and ET 200pro distributed I/O systems with safety-oriented F-I/O modules/submodules (see "Process I/O" chapter)
- Failsafe process instruments/devices for connection to ET 200 distributed I/O systems (see Catalog FI 01, Field Instruments for Process Automation)
- SIMATIC Safety Integrated software for implementation and operation of safety applications, with additional components for the engineering system and the operator systems: SIMATIC S7 F Systems, SIMATIC S7 Safety Matrix
- Special applications, for example, Partial Stroke Test
- Safety lifecycle management with support by highly qualified solution partners: services for all phases in the lifecycle of a safety instrumented system (analysis, implementation, and operation)

© Siemens 2019

Benefits

Safety Integrated for Process Automation enables full integration of safety technology in the SIMATIC PCS 7 process control system. The Basic Process Control System (BPCS) and Safety Instrumented System (SIS) combine seamlessly to form a uniform and innovative complete system. The advantages of this fusion are quite clear:

- One common controller platform
- One common engineering system
- No separate safety bus – standard and safety-related communication take place on the same fieldbus (PROFIBUS/PROFINET with PROFIsafe)
- Mixed operation of standard and safety-related I/O modules in remote SIMATIC ET 200M, SIMATIC ET 200iSP and SIMATIC ET 200pro I/O stations
- Integrated data management – no complex data exchange between BPCS and SIS
- Integration of safety-related applications into process visualization on the operator station
- Automatic integration of safety-related fault messages with time tagging into the process control system
- Integration of safety-related hardware into the asset management with the SIMATIC PCS 7 Maintenance Station for diagnostics and preventive maintenance

Design


The PROFIsafe profile allows safety-related communication between the automation system (controller) and the process I/O via either PROFIBUS or PROFINET. The decision for choosing either PROFINET IO or the PROFIBUS DP/PA fieldbuses has a significant influence on the architecture of the safety-related system.

Safety-related design versions with PROFIBUS

In the case of a safety-related system with PROFIBUS communication integrated into SIMATIC PCS 7, a distinction is made across all architecture levels between two design versions:

- Single-channel, non-redundant design
- Redundant, fault-tolerant design

Both design versions are extremely variable, and offer a large scope for different customer requirements. Standard automation (basic process control) and safety-related functions can be combined flexibly, not only in the area of distributed I/O. Even at the controller level, they can be combined in one system or separated. In addition, there are numerous possibilities arising from the use of flexible modular redundancy.

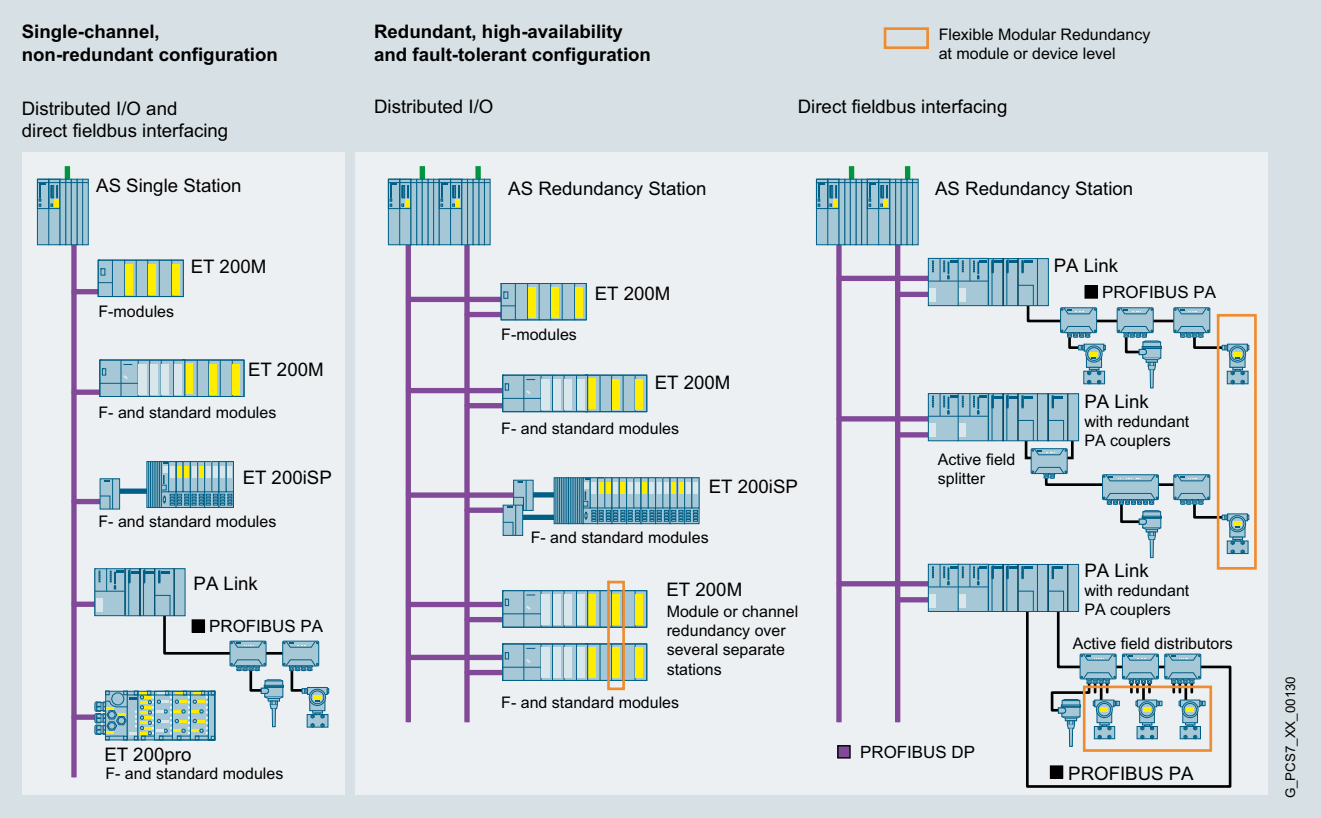

Safety-related design versions with PROFIBUS

© Siemens 2019


Design (continued)

At the individual architectural levels (controller, fieldbus, I/O), you have the configuration alternatives shown in the figure in line with the I/O used (ET 200M, ET 200iSP, ET 200pro remote I/O stations or PROFIBUS PA devices with PA profile 3.0 or higher).

Safety-related design versions with PROFINET


Safety-related AS single stations (F systems) and AS redundancy stations (FH systems) from the S7-400 range can be networked simply and effectively with ET 200M remote I/O stations via PROFINET IO. The PN/IE interface integrated in the CPU is available for this on the side of the automation systems, and the IM 153-4 PN High Feature interface module in the ET 200M remote I/O stations.

The availability of the I/O devices on an AS Single Station (F systems) can be increased by a ring topology with media redundancy. If the transmission link in the ring is interrupted at one point, for example, due to a break in the ring cable or the failure of a station, the redundancy manager then immediately activates the alternative communication path.

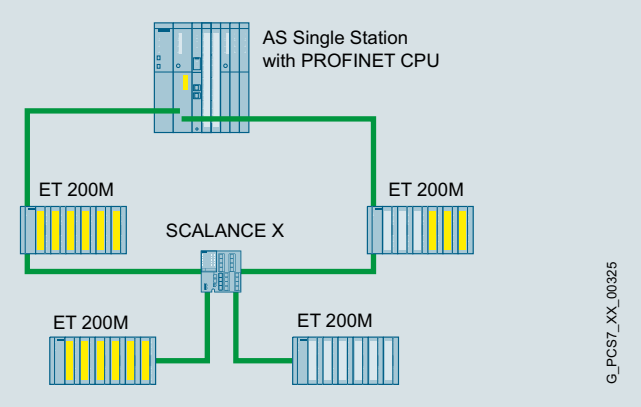

Safety-related PROFINET IO communication with media redundancy


The maximum availability with minimum error handling times is achieved by the AS Redundancy Station (FH system) in conjunction with the system redundancy of the I/O devices. System redundancy refers to a type of PROFINET IO communication where each I/O device establishes a communication connection to each of the two CPUs of an AS Redundancy Station over the topological network. In contrast to the single-sided I/O device connection to only one CPU, failure of a CPU in this case does not automatically lead to failure of the connected I/O devices.

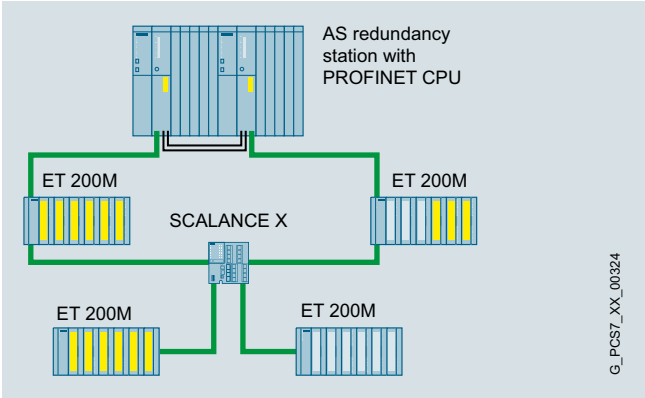

Safety-related PROFINET IO communication with system redundancy

© Siemens 2019

Overview

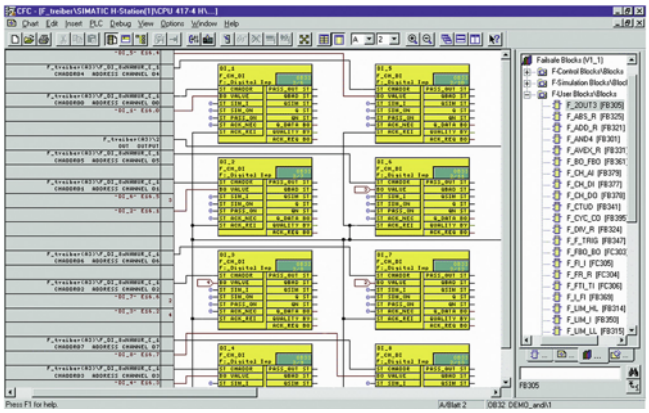

The SIMATIC S7 F Systems engineering tool for configuration of safety-related SIMATIC PCS 7 automation systems and safety-related F-modules from the ET 200 range is integrated in the SIMATIC Manager. SIMATIC S7 F Systems are based on pre-configured and German Technical Inspectorate certified blocks. The following functions are then available:

- Parameterization of CPU and F signal modules
- Creation of safety-related applications in the CFC

Design

Information on ordering and delivery

Installation software for the SIMATIC S7 F Systems is provided in the form of a software media package. Software media packages and product-specific software licenses are separate packages. They are not merged into a single delivery unit when supplied in package form.

The number of delivered software media packages can be determined by the number of ordered items. You can find additional information under "Delivery form package" in the "Software Media and Logistics", "PCS 7 Software Packages" section of the ST PCS 7 catalog.

Configuration

SIMATIC S7 F Systems supports configuration using functions for:

- Comparison of safety-related F-programs
- Recognition of changes in the F-program using the checksum
- Separation of safety-related and standard functions.

Access to the F functions can be password-protected.

The F-block library integrated in SIMATIC S7 F Systems contains pre-defined function blocks for generating safety-related applications with the CFC or the CFC-based SIMATIC S7 Safety Matrix. The certified F-blocks are extremely robust and intercept programming errors such as division by zero or out-of-range values. They avoid the need for diverse programming tasks for detecting and reacting to errors.

Notes:

- Depending on the software requirements of the SIMATIC PCS 7 version, SIMATIC S7 F Systems can be run under the following operating systems:
  - On the engineering station under Windows 7 SP1 64-bit (Professional, Enterprise, Ultimate) or Windows Server 2008 R2 SP1 Standard 64-bit
  - On the operator station (SIMATIC S7 F Systems HMI) under Windows 7 SP1 32-bit (Enterprise, Ultimate), Windows 7 SP1 64-bit (Professional, Enterprise, Ultimate), Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 SP1 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit
- The SIMATIC S7 F Systems RT license for processing safety-related user programs in the controller is already integrated in the "AS bundles" of the safety-related automation systems. The Article No. for ordering further licenses can be found in the section "Automation systems" under "Modular AS 410 systems", "Safety-related automation systems" and under "Complementary S7-400 systems".

© Siemens 2019

Ordering data

	Article No.
SIMATIC S7 F Systems	
SIMATIC S7 F Systems V6.2 Programming and configuration environment for creating and using safety-related STEP 7 programs 2 languages (English, German), software class A Runs with the following operating systems (see SIMATIC S7 F Systems V6.2 Readme for the latest information): • On the engineering station with Windows 7 SP1 64-bit (Professional, Enterprise, Ultimate) or Windows Server 2008 R2 SP1 Standard 64-bit • On the operator station also with Windows 7 SP1 32-bit (Enterprise, Ultimate), Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard 64-bit Floating license for 1 user, without SIMATIC PCS 7 Software Media Package	
• Package License key on USB flash drive and certificate of license, bundled with 1 × SIMATIC S7 F Systems Software Media Package per order item	**6ES7833-1CC26-0YA5**
• Online delivery License key download and online certificate of license combined with SIMATIC S7 F Systems Software Media Package (software download and online certificate of license) Note: Email address required	**6ES7833-1CC26-0YH5**

	Article No.
SIMATIC S7 F Systems Software Media Package	
SIMATIC S7 F Systems Software Media Package V6.2 Installation software without license 2 languages (English, German), software class A Runs with the following operating systems (see SIMATIC S7 F Systems V6.2 Readme for the latest information): • On the engineering station with Windows 7 SP1 64-bit (Professional, Enterprise, Ultimate) or Windows Server 2008 R2 SP1 Standard 64-bit • On the operator station also with Windows 7 SP1 32-bit (Enterprise, Ultimate), Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard 64-bit Without SIMATIC PCS 7 Software Media Package Note: Can only be used in conjunction with a valid license.	
• Goods delivery Software on DVD and certificate of license	**6ES7833-4CC26-0YT8**
• Online delivery Software download and online certificate of license Note: Email address required!	**6ES7833-4CC26-0YG8**
Upgrades for SIMATIC S7 F Systems See "Upgrades for Safety Integrated for Process Automation" in section "Update/upgrade packages", "Updates/upgrades asynchronous to the PCS 7 version". Note: With a SIMATIC S7 F Systems Upgrade from V5.x to V6.x, the type of SIMATIC S7 F Systems license changes from single license to floating license.	

Options


S7 F ConfigurationPack

An S7 F ConfigurationPack is required for engineering when using safety-related I/O modules of the ET 200 range. The pack is included in SIMATIC S7 F systems and is also available on the Internet for download:

https://support.industry.siemens.com/cs/ww/en/view/15208817

© Siemens 2019

Overview

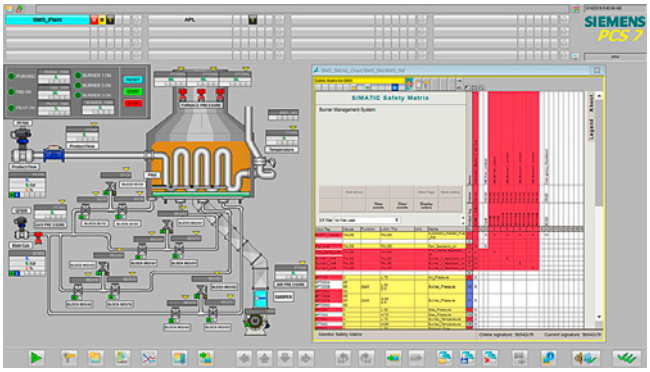

Process image of an operator station with the SIMATIC S7 Safety Matrix Viewer displayed

The SIMATIC S7 Safety Matrix, which can be used in addition to the CFC, is an innovative safety lifecycle tool from Siemens that can be used not only for user-friendly configuration of safety applications, but also for their operation and service. The tool, which is based on the proven principle of a cause & effect matrix, is ideally suited to processes where defined states require specific safety reactions.

The SIMATIC S7 Safety Matrix means that programming of the safety logic is not only significantly simpler and more convenient, but also much faster than conventional processes. During the risk analysis of a plant, the configuration engineer can assign precisely defined reactions (effects) to events (causes) which may occur during a process.

Benefits

Advantages of the SIMATIC S7 Safety Matrix in the implementation and operation phase

Implementation phase

- Direct further processing of safety specification possible
- Simple programming with the cause & effect method
- No programming knowledge required
- Preprocessing of input values
- Alarm generation and provision of diagnostic information for each individual cause & effect
- Prealarm for analog values
- Free color selection for alarms and messages
- Automatic generation of CFCs including driver blocks
- Matrix comparison on basis of created CFC charts
- Automatic version tracking
- integrated change tracking
- 1-to-1 expression of the cause & effect matrix

Operating phase

- Complete integration in SIMATIC PCS 7
- All relevant information can be seen at a glance in the template
- Cause & effect-dependent matrix and alarm display
- Tag display in the alarm
- Sequence of event display and saving
- First-up alarm display and saving
- Integral operating functions such as reset, override, and parameter modification
- Automatic saving of operating interventions for the safety life-cycle management
- Integral maintenance functions such as bypass and simulation
- Display of all relevant process values, also during maintenance
- Automatic version tracking
- Automatic documentation of modifications

Design

In the context of SIMATIC PCS 7, the following individual products are offered for the SIMATIC S7 Safety Matrix:

SIMATIC S7 Safety Matrix Tool

Designed for the SIMATIC PCS 7 Engineering System; for creating, configuring and compiling the SIMATIC S7 Safety Matrix, as well as for loading and operator control and monitoring of the safety-related CFC program.

The application covers the complete safety lifecycle, from analysis through implementation up to operation and maintenance.

SIMATIC S7 Safety Matrix Viewer

For the SIMATIC PCS 7 Operator System; for operator control and monitoring of the SIMATIC S7 Safety Matrix in the operating phase.

The SIMATIC S7 Safety Matrix Viewer can be installed on the SIMATIC PCS 7 Operator Station, single station or client version to allow simple and intuitive operation and monitoring of the safety application during operation.


Information on ordering and delivery

Installation software for the SIMATIC S7 Safety Matrix is provided in the form of a software media package. Software media packages and product-specific software licenses are separate packages, which are not merged into a single delivery unit for a goods delivery.

The number of delivered software media packages can be determined by the number of ordered items. You can find more information under "Delivery form package" in the "Software Media and Logistics" chapter, "PCS 7 Software Packages" section of the ST PCS 7 catalog see page see page 1/2

© Siemens 2019


Function

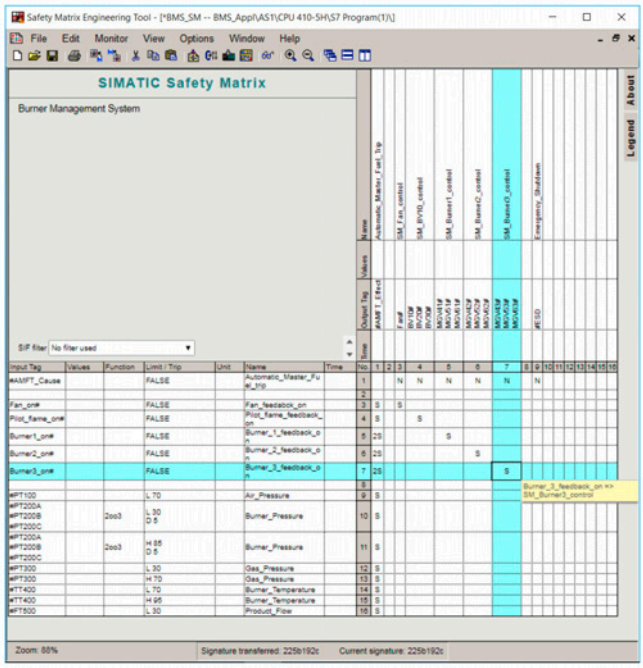

SIMATIC S7 Safety Matrix: intersections define the linking of causes and effects

The matrix table is comparable with a spreadsheet program, and the project engineer first enters the possible process events (inputs) in the horizontal lines, and then configures their type and number, logical links, possible delays and interlocks, and any tolerable faults. The reactions (outputs) to a particular event are then defined in the vertical columns.

The events and reactions are linked by simply clicking the cell at the intersection of the row and column. Using these data, the SIMATIC S7 Safety Matrix automatically generates complex, safety-related CFC programs. The project engineer requires no special programming skills and can completely concentrate on the safety requirements of the plant.

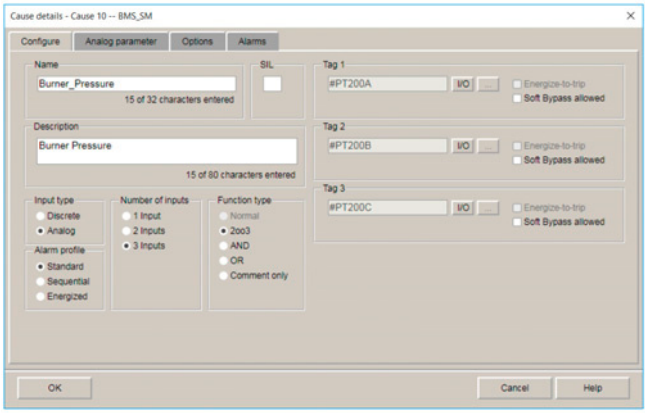

Input window for configuration of analog "causes" with process value preprocessing


Each input value can be combined with a freely configurable preprocessing if necessary without giving up the simulation option.

The alarm management is supported by collective alarms, alarm prioritization and individually adjustable acknowledgement.

In addition to the alarms derived from process values, alarms can also be generated and diagnostics information can be provided for each individual cause and effect. Priorities and response behavior can be defined in various profiles here. The color scheme for the alarms and messages can be adapted on a customer- or country-specific basis.

For the Safety Life-cycle Management, functions are integrated for the version management and for the documentation of program changes and operator interventions.

During plant operation, the operator has direct access to the relevant data with the viewer of the SIMATIC S7 Safety Matrix. From the overall view it can change directly to cause or effect related detailed views and return from there. In the detailed views, alarm indications corresponding with the respective cause or effect can be called up.

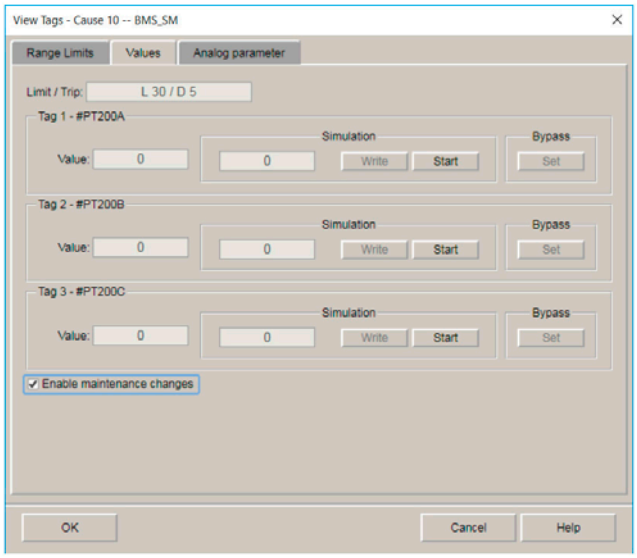

Tag display in online mode with process value, simulation value and active value

The signal status is indicated online in the Cause & Effect matrix. The process value, simulation value and active value are indicated on the tag display in each case.

The SIMATIC S7 Safety Matrix viewer enables the operator to display and save initial messages, as well as to record safety-relevant events. Changes in parameters are supported, as are bypass, reset and override functions.

© Siemens 2019

Technical specifications

	Safety lifecycle support	Operating modes	Hardware requirements	Software requirements
SIMATIC S7 Safety Matrix Tool V6.3	Complete lifecycle: • Analysis phase • Implementation phase • Operation and maintenance phase	Offline, online	SIMATIC PCS 7 with safety-related automation systems (SIMATIC S7 F Systems RT license integrated) Installation basis: SIMATIC PCS 7 Engineering Station	• Microsoft Windows operating system (in line with the software requirements of the SIMATIC PCS 7 version) • For offline testing: S7-PLCSIM or SIMIT • SIMATIC S7 F Systems as of V6.1 SP2
SIMATIC S7 Safety Matrix Viewer V6.3	Operating phase (control and monitoring)	Online	SIMATIC PCS 7 with safety-related automation systems (SIMATIC S7 F Systems RT license integrated) Installation basis: SIMATIC PCS 7 Operator Station, single station or client version	Microsoft Windows operating system (in line with the software requirements of the SIMATIC PCS 7 version)

System requirements for SIMATIC S7 Safety Matrix

© Siemens 2019

Ordering data	Article No.
SIMATIC S7 Safety Matrix Runs with the following operating systems (see SIMATIC S7 Safety Matrix V6.3 Readme for the latest information): • On engineering station under: - MS Windows 7 SP1 (64-bit) (Ultimate, Enterprise, Professional) - MS Windows 10 Enterprise 2015 LTSB - MS Windows Server 2008 R2 SP1 (64-bit) - MS Windows Server 2012 R2 Standard - MS Windows Server 2016 Standard • On operator station (for Safety Matrix Viewer) under: - MS Windows 7 Ultimate SP1 (32-bit) - MS Windows 7 SP1 (64-bit) (Ultimate, Enterprise, Professional) - MS Windows 10 Enterprise 2015 LTSB - MS Windows Server 2008 R2 SP1 (64-bit) - MS Windows Server 2012 R2 Standard - MS Windows Server 2016 Standard	
SIMATIC S7 Safety Matrix Tool V6.3 Creation, configuration, compilation and loading of the SIMATIC S7 Safety Matrix as well as operator control and monitoring in a SIMATIC PCS 7 environment 2 languages (German, English), software class A, floating license for 1 user Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and Certificate of License, bundled with 1 × SIMATIC S7 Safety Matrix Software Media Package per order item	**6ES7833-1SM03-0YA5**
• Online delivery License key download and online Certificate of License, combined with SIMATIC S7 Safety Matrix Software Media Package (software download and online Certificate of License) Note: Email address required; installation software also available separately as SIMATIC S7 Safety Matrix Software Media Package.	**6ES7833-1SM03-0YH5**
SIMATIC S7 Safety Matrix Viewer V6.3 For operator control and monitoring of the SIMATIC S7 Safety Matrix via OS single station/OS client Runtime software, 2 languages (German, English), software class A, floating license for 1 user Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and Certificate of License, bundled with 1 × SIMATIC S7 Safety Matrix Software Media Package per order item	**6ES7833-1SM63-0YA5**
• Online delivery License key download and online Certificate of License, combined with SIMATIC S7 Safety Matrix Software Media Package (software download and online Certificate of License) Note: Email address required; installation software also available separately as SIMATIC S7 Safety Matrix Software Media Package.	**6ES7833-1SM63-0YH5**
SIMATIC S7 Safety Matrix Software Media Package	
SIMATIC S7 Safety Matrix Software Media Package V6.3 (incl. SP) Installation software without license, 2 languages (German, English), software class A Without SIMATIC PCS 7 Software Media Package Note: Can only be used in conjunction with a valid license.	
• Goods delivery Software on DVD and Certificate of License	**6ES7833-4SM36-0YT8**
• Online delivery Software download and online Certificate of License Note: Email address required!	**6ES7833-4SM36-0YG8**
Upgrades for SIMATIC S7 Safety Matrix Tool and SIMATIC S7 Safety Matrix Viewer See "Upgrades for Safety Integrated for Process Automation", "Update/upgrade packages", "Updates/upgrades asynchronous to the PCS 7 version"	

© Siemens 2019

Overview

SIMATIC SIS compact has been designed as a dedicated safety controller for a Safety Instrumented System (SIS) based on the SIMATIC product portfolio.

The functionality and price structure of SIMATIC SIS compact has been adapted to the requirements of the market for small to medium-sized safety applications, e.g. for

- Burner Management Systems (BMS)
- Emergency Shutdown Systems (ESD)
- Fire&Gas (F&G) applications
- High Integrity Pressure Protection Systems (HIPPS)


Design

SIMATIC SIS compact Bundles

SIMATIC SIS compact is available in eight different bundles. The "Basic Package" versions are tailored to the controller level, including the Modbus integration in other automation systems. The "Extended Package" versions cover the controller and HMI level.

SIMATIC SIS compact Basic Package Single comprising:


- SIMATIC S7 AS 410SIS Single
- AS Engineering Package SIS (PO unlimited)
- SIMATIC S7 F Systems V6.2
- PCS 7 Runtime License AS (PO 100)
- SIMATIC Modbus/TCP PN-CPU

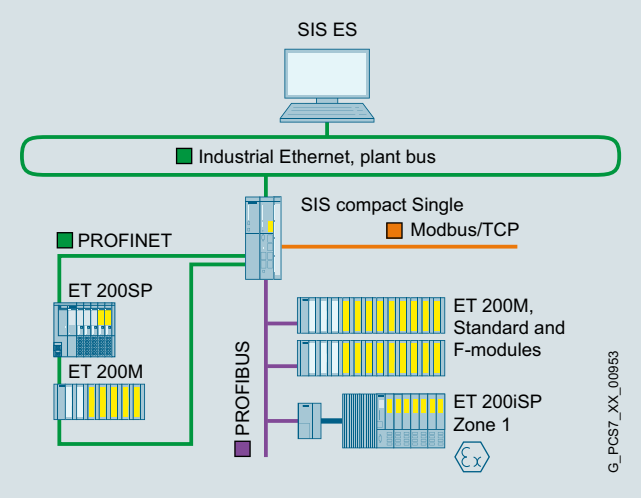

Configuration example: SIMATIC SIS compact Basic Package Single

SIMATIC SIS compact Basic Package Redundancy comprising:


- SIMATIC S7 AS 410SIS Redundant
- AS Engineering Package SIS (PO unlimited)
- SIMATIC S7 F Systems V6.2
- PCS 7 Runtime License AS (PO 100)
- SIMATIC Modbus/TCP PN Red for S7-400 PN-(H) systems

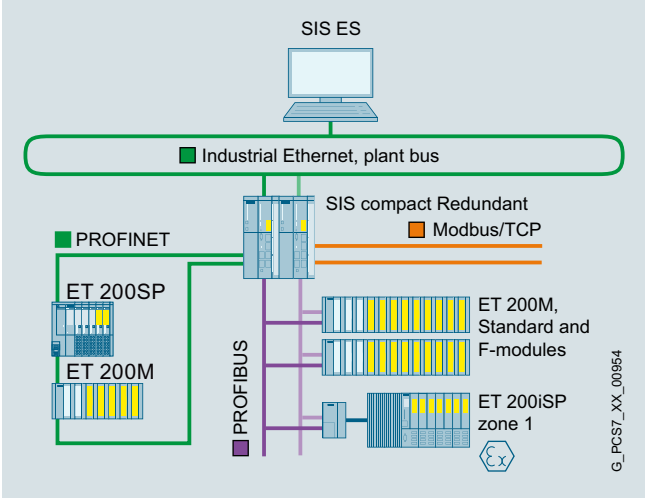

Configuration example:
SIMATIC SIS compact Basic Package Redundancy

SIMATIC SIS compact Extended Package Single and **SIMATIC SIS compact Extended Package Redundancy** comprising:


- SIMATIC S7 AS 410SIS Single or Redundant
- ES Single Station SIS V9.0 (AS/OS: 250 POs)
- SIMATIC S7 F Systems V6.2
- SIMATIC S7 Safety Matrix Tool V6.3 and SIMATIC S7 Safety Matrix Viewer
- Optional:
  - Extended Pack Single: SIS compact OS Software Single Station V9.0 (PO 250)
  - Extended Pack Redundant: SIS compact OS Software Single Station Redundancy V9.0 (PO 250)

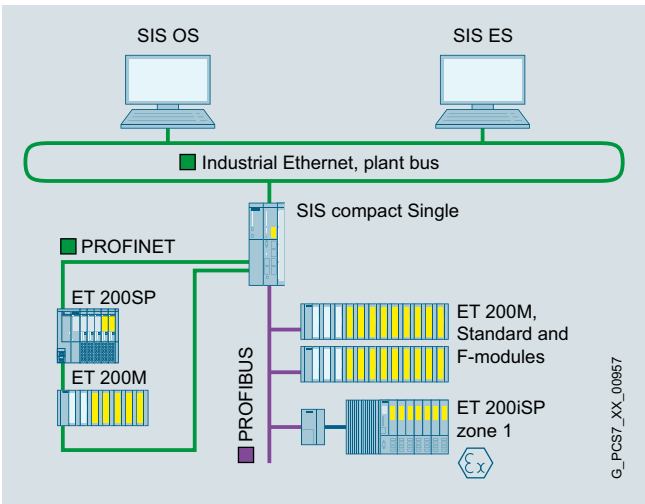

Configuration example: SIMATIC SIS compact Extended Package Single

© Siemens 2019

Design (continued)

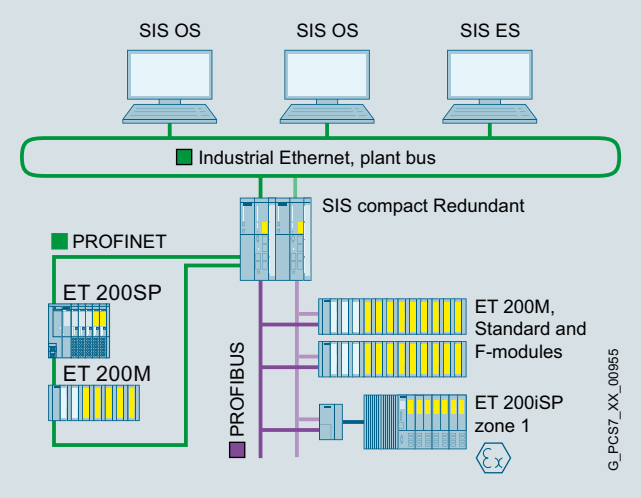

Configuration example:
SIMATIC SIS compact Extended Package Redundancy

CPU 410SIS



CPU 410SIS

The basic hardware for SIMATIC SIS compact is CPU 410SIS, which is based on CPU 410. It has 4 MB main memory and no limitation for the cycle times. CPU 410SIS can only be operated with a System Expansion Card SEC E4MB.

CPU 410SIS Bundles

CPU 410SIS Bundles can also be obtained separately to expand an existing SIS system. The bundles are available in the variants Single and Redundancy and in versions with 120/230 V and 24 V power supplies. They consist of the following components:

CPU 410SIS Bundle – Single (AC)	**6ES7654-6FD00-7AF0**
• 1 × CPU 410SIS	6ES7410-5FM08-0AB0
• 1 × aluminum rack CR3 XTR	6ES7401-1DA01-0AA1
• 1 × power supply module PS 407 4 A XTR	6ES7407-0DA02-0AA1
• 1 × system expansion card E4MB	Only available in bundles, cannot be ordered individually
• 1 × SIMATIC S7 F Systems Runtime License	6ES7833-1CC00-6YX0

CPU 410SIS Bundle – Redundancy (AC)	**6ES7656-6FD30-7AF0**
• 2 × CPU 410SIS	6ES7410-5FM08-0AB0
• 2 × aluminum rack CR3 XTR	6ES7401-1DA01-0AA1
• 2 × power supply module PS 407 4 A XTR	6ES7407-0DA02-0AA1
• 2 × system expansion card E4MB	Only available in bundles, cannot be ordered individually
• 4 × sync module V8 XTR	6ES7960-1AA08-0XA0
• 2 × sync cable, length 1 m	6ES7960-1AA04-5AA0
• 1 × SIMATIC S7 F Systems Runtime License	6ES7833-1CC00-6YX0

CPU 410SIS Bundle – Single (DC)	**6ES7654-6FD00-7FF0**
• 1 × CPU 410SIS	6ES7410-5FM08-0AB0
• 1 × aluminum rack CR3 XTR	6ES7401-1DA01-0AA1
• 1 × Power supply module PS 405 4 A XTR	6ES7407-0DA02-0AA1
• 1 × system expansion card E4MB	Only available in bundles, cannot be ordered individually
• 1 × SIMATIC S7 F Systems Runtime License	6ES7833-1CC00-6YX0

CPU 410SIS Bundle – Redundancy (DC)	**6ES7656-6FD30-7FF0**
• 2 × CPU 410SIS	6ES7410-5FM08-0AB0
• 2 × aluminum rack CR3 XTR	6ES7401-1DA01-0AA1
• 2 × Power supply module PS 405 4 A XTR	6ES7407-0DA02-0AA1
• 2 × system expansion card E4MB	Only available in bundles, cannot be ordered individually
• 4 × sync module V8 XTR	6ES7960-1AA08-0XA0
• 2 × sync cable, length 1 m	6ES7960-1AA04-5AA0
• 1 × SIMATIC S7 F Systems Runtime License	6ES7833-1CC00-6YX0

© Siemens 2019

Technical specifications

Article number	**6ES7410-5FM08-0AB0**
	S7 CPU 410SIS F. S7-400F/FH
General information	
Product type designation	CPU 410SIS
Design of PLC basic unit	With Conformal Coating (ISA-S71.04 severity level G1; G2; G3) and operating temperature to 70 °C
Product function	
• SysLog	Yes; via TCP; up to 4 receivers can be parameterized; buffer capacity max. 3 200 entries
• Field interface security	Yes
Engineering with	
• Programming package	SIMATIC SIS COMPACT V9.0 or higher
Power loss	
Power loss, typ.	10 W
Processor	
CPU speed	450 MHz; Multi-processor system
Memory	
Work memory	
• integrated	4 Mbyte
• integrated (for program)	2 Mbyte
• integrated (for data)	2 Mbyte
• expandable	No
CPU processing times	
Process tasks, max.	9; Individually adjustable from 10 ms to 5 s
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• present	Yes
S7 times	
• Number	2 048
IEC timer	
• present	Yes
Data areas and their retentivity	
retentive data area in total	Total working and load memory (with backup battery)
Flag	
• Number, max.	16 384 byte
Address area	
I/O address area	
• Inputs	2 048 byte
• Outputs	2 048 byte
Time of day	
Clock	
• Hardware clock (real-time)	Yes
Operating hours counter	
• Number	16

Article number	**6ES7410-5FM08-0AB0**
	S7 CPU 410SIS F. S7-400F/FH
Interfaces	
Number of industrial Ethernet interfaces	2
Number of PROFINET interfaces	0
Number of RS 485 interfaces	1; PROFIBUS DP
Number of other interfaces	2; 2x synchronization
1. Interface	
Interface type	Integrated
Physics	RS 485 / PROFIBUS
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	No
PROFIBUS DP master	
• Number of DP slaves, max.	96
• Number of slots per interface, max.	1 632
2. Interface	
Interface type	Integrated Ethernet interface
Physics	Ethernet RJ45
Interface types	
• Number of ports	2
Protocols	
• PROFINET IO Controller	No
• PROFINET IO Device	No
• PROFINET CBA	No
3. Interface	
Interface type	Integrated Ethernet interface
Physics	Ethernet RJ45
Protocols	
• PROFINET IO Controller	No
• PROFINET IO Device	No
• PROFINET CBA	No
4. Interface	
Interface type	Pluggable synchronization submodule (FO)
Plug-in interface modules	Synchronization module 6ES7960-1AA06-0XA0, 6ES7960-1AB06-0XA0 or 6ES7960-1AA08-0XA0
5. Interface	
Interface type	Pluggable synchronization submodule (FO)
Plug-in interface modules	Synchronization module 6ES7960-1AA06-0XA0, 6ES7960-1AB06-0XA0 or 6ES7960-1AA08-0XA0

© Siemens 2019

Technical specifications (continued)

Article number	**6ES7410-5FM08-0AB0**
	S7 CPU 410SIS F. S7-400F/FH
Protocols	
Supports protocol for PROFINET IO	No
PROFINET CBA	No
PROFIsafe	Yes
PROFIBUS	Yes
AS-Interface	Yes; Via add-on
Further protocols	
• MODBUS	Yes; Via add-on
Communication functions	
PG/OP communication	Yes
Data record routing	Yes
S7 communication	
• supported	Yes
Number of connections	
• overall	120
Standards, approvals, certificates	
Use in hazardous areas	
• ATEX	ATEX II 3G Ex nA IIC T4 Gc

Article number	**6ES7410-5FM08-0AB0**
	S7 CPU 410SIS F. S7-400F/FH
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
Configuration	
Know-how protection	
• User program protection/password protection	Yes
• Block encryption	Yes; With S7 block Privacy
Dimensions	
Width	50 mm
Height	290 mm
Depth	219 mm
Weights	
Weight, approx.	1.1 kg

© Siemens 2019

Ordering data	Article No.
SIMATIC SIS compact Bundles	
SIMATIC SIS compact Basic Package Single (AC) V9.0 Comprising: • SIMATIC SIS compact AS Engineering Package V9.0 • SIMATIC S7 F Systems V6.2 • SIMATIC S7 CPU 410SIS Bundle – Single (AC) • SIMATIC PCS 7 AS Runtime License 100 PO • License SIMATIC Modbus/TCP PN-CPU Single	**6ES7650-3AX58-0XX0**
SIMATIC SIS compact Basic Package Redundancy (AC) V9.0 Comprising: • SIMATIC SIS compact AS Engineering Package V9.0 • SIMATIC S7 F Systems V6.2 • SIMATIC S7 CPU 410SIS Bundle – Redundancy (AC) • SIMATIC PCS 7 AS Runtime License 100 PO • License SIMATIC Modbus/TCP PN Red for S7-400 PN H systems	**6ES7650-3AX58-0XX1**
SIMATIC SIS compact Extended Package Single (AC) V9.0 Comprising: • SIMATIC SIS compact ES Single Station V9.0 (AS/OS: 250 POs) • SIMATIC S7 F Systems V6.2 • SIMATIC S7 Safety Matrix Tool V6.3 • SIMATIC S7 Safety Matrix Viewer V6.3 • SIMATIC S7 CPU 410SIS Bundle – Single (AC)	**6ES7650-3BX58-0XX0**
SIMATIC SIS compact Extended Package Redundancy (AC) V9.0 Comprising: • SIMATIC SIS compact ES Single Station V9.0 (AS/OS: 250 POs) • SIMATIC S7 F Systems V6.2 • SIMATIC S7 Safety Matrix Tool V6.3 • SIMATIC S7 Safety Matrix Viewer V6.3 • SIMATIC S7 CPU 410SIS Bundle – Redundancy (AC)	**6ES7650-3BX58-0XX1**
SIMATIC SIS compact Basic Package Single (DC) V9.0 Comprising: • SIMATIC SIS compact AS Engineering Package V9.0 • SIMATIC S7 F Systems V6.2 • SIMATIC S7 CPU 410SIS Bundle – Single (DC) • SIMATIC PCS 7 AS Runtime License 100 PO • License SIMATIC Modbus/TCP PN-CPU Single	**6ES7650-3CX58-0XX0**
SIMATIC SIS compact Basic Package Redundancy (DC) V9.0 Comprising: • SIMATIC SIS compact AS Engineering Package V9.0 • SIMATIC S7 F Systems V6.2 • SIMATIC S7 CPU 410SIS Bundle – Redundancy (DC) • SIMATIC PCS 7 AS Runtime License 100 PO • License SIMATIC Modbus/TCP PN Red for S7-400 PN H systems	**6ES7650-3CX58-0XX1**
SIMATIC SIS compact Extended Package Single (DC) V9.0 Comprising: • SIMATIC SIS compact ES Single Station V9.0 (AS/OS: 250 POs) • SIMATIC S7 F Systems V6.2 • SIMATIC S7 Safety Matrix Tool V6.3 • SIMATIC S7 Safety Matrix Viewer V6.3 • SIMATIC S7 CPU 410SIS Bundle – Single (DC)	**6ES7650-3DX58-0XX0**
SIMATIC SIS compact Extended Package Redundancy (DC) V9.0 Comprising: • SIMATIC SIS compact ES Single Station V9.0 (AS/OS: 250 POs) • SIMATIC S7 F Systems V6.2 • SIMATIC S7 Safety Matrix Tool V6.3 • SIMATIC S7 Safety Matrix Viewer V6.3 • SIMATIC S7 CPU 410SIS Bundle – Redundancy (DC)	**6ES7650-3DX58-0XX1**
Individual components	
SIMATIC SIS compact V9.0 OS Software Single Station (PO 250) 2 languages (English, Chinese), software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit, single license for 1 installation Goods delivery, license key, USB flash drive	**6ES7658-2AA58-7YA0**
SIMATIC SIS compact V9.0 OS Software Single Station Redundancy (PO 250) 2 languages (English, Chinese), software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit, single license for 2 installations Goods delivery, license key, USB flash drive	**6ES7652-3AA58-7YA0**


© Siemens 2019

Ordering data Article No. Article No. (continued)

SIMATIC S7 CPU 410SIS Bundle - Single (AC) Comprising: • 1 × CPU 410SIS • 1 × aluminum rack CR3 XTR, 4 slots, conformal coating, for operating temperature up to 70 °C • 1 × power supply module PS 407 4 A XTR, conformal coating, for operating temperature up to 70 °C, 120/230 V UC; 5 V DC/4 A • 1 × system expansion card E4MB • 1 × SIMATIC S7 F Systems Runtime License	**6ES7654-6FD00-7AF0**
SIMATIC S7 CPU 410SIS Bundle – Redundancy (AC) Comprising: • 2 × CPU 410SIS • 2 × aluminum rack CR3 XTR, 4 slots, conformal coating, for operating temperature up to 70 °C • 2 × power supply module PS 407 4 A XTR, conformal coating, for operating temperature up to 70 °C, 120/230 V UC; 5 V DC/4 A • 2 × system expansion card E4MB • 4 × sync module V8 XTR • 2 × sync cable, length 1 m • 1 × SIMATIC S7 F Systems Runtime License	**6ES7656-6FD30-7AF0**
SIMATIC S7 CPU 410SIS Bundle – Single (DC) Comprising: • 1 × CPU 410SIS • 1 × aluminum rack CR3 XTR, 4 slots, conformal coating, for operating temperature up to 70 °C • 1 × Power supply module PS 405 4 A XTR, conformal coating; for operating temperature up to 70 °C, 24/48/60 V DC; 5 V DC/4 A, 24 V DC/1 A • 1 × system expansion card E4MB • 1 × SIMATIC S7 F Systems Runtime License	**6ES7654-6FD00-7FF0**
SIMATIC S7 CPU 410SIS Bundle – Redundancy (DC) Comprising: • 2 × CPU 410SIS • 2 × aluminum rack CR3 XTR, 4 slots, conformal coating, for operating temperature up to 70 °C • 2 × Power supply module PS 405 4 A XTR, conformal coating; for operating temperature up to 70 °C, 24/48/60 V DC; 5 V DC/4 A, 24 V DC/1 A • 2 × system expansion card E4MB • 4 × sync module V8 XTR • 2 × sync cable, length 1 m • 1 × SIMATIC S7 F Systems Runtime License	**6ES7656-6FD30-7FF0**
SIMATIC Modbus/TCP PN-CPU Single license, on CD	**6AV6676-6MB20-3AX0**
SIMATIC Modbus/TCP PN Red for S7-400 PN-(H) systems Single license, on CD	**6AV6676-6MB10-0AX0**
Spare parts	
CPU 410SIS as spare part Conformal coating; for operating temperature up to 70 °C RAM 4 MB (2 MB each for program and data); module occupies 2 slots; can only be operated with system expansion card E4MB	**6ES7410-5FM08-0AB0**

© Siemens 2019

Overview

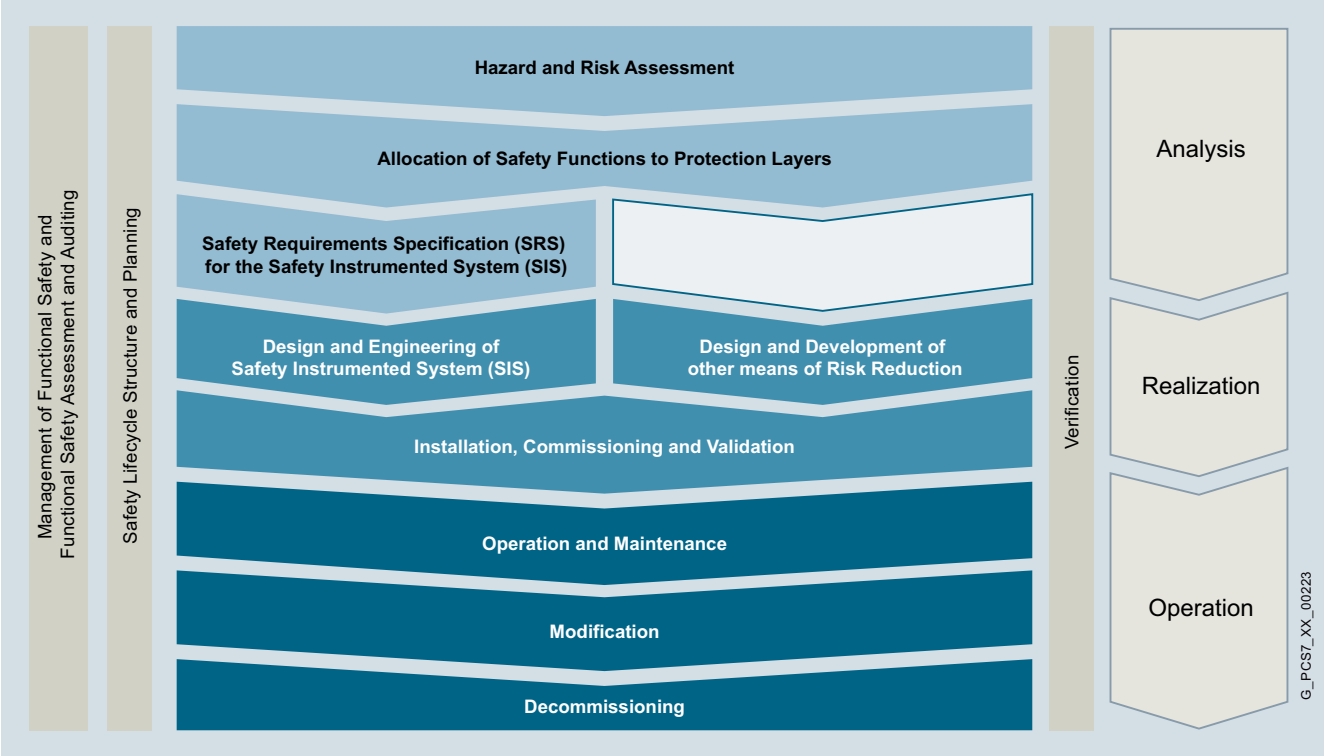

Simplified representation of the safety lifecycle (IEC 61511)

Safety lifecycle services for the process industry in accordance with IEC 61511

The area of functional safety covers much more than just the Installation SIL-certified hardware and software components. It requires expert knowledge, always aware of latest directives and technologies.

Plant operators, PLT protective devices for risk reduction - this includes operators of almost all chemical plants, refineries, distillation and combustion plants - must implement a system for management of functional safety. Operators are obliged to verify sufficient risk reduction.

In addition to the correct hardware and software, applied planning, operating, and change processes are decisive in ensuring that these systems effectively maintain their intended function throughout the complete lifecycle of the plant.

The basis for these processes are:

- Safety Life Cycle (SLC)
- Safety Integrity Level (SIL)

The safety lifecycle reflects the lifecycle of process plants and is divided into separate phases: Risk assessment, specification of the safety requirements, planning, installation and commissioning, operation, change as well as decommissioning. Errors in the early stages of the project can be often only be corrected later at great effort and cost. We systematically prevent errors in all project phases using our standardized engineering guidelines and verification templates.

© Siemens 2019

Benefits

- Standardized processes for faster and safer project implementation and commissioning
- Uniform verification and validation documents
- Reduction of development time and costs through interdisciplinary team of experts with process and automation expertise
- Acceleration of the acceptance of plants by means of customized safety concepts

Application

- Plant operators that use PLT protective equipment to reduce risks - this includes the operators of almost all chemical plants, all refineries, distillation and combustion plants.
- SIMATIC PCS 7 plants with integrated safety technology using S7 F systems and SIMATIC Safety Matrix, in which processing must be performed according to IEC 61511 or a specific safety integrity level (SIL).

Design

Our service offer

- Management and evaluation of functional safety and audits
- Planning and configuration of the SLC (Safety Plan)
- Hazard and safety assessment
- Assignment of the safety functions to the protection levels
- Safety Requirement Specification (SRS)
- Verification and validation, e.g. SIL verification, hardware/software audit
- Modification (Management of Change)
- Training (see also http://www.sitrain.com)

More information

Siemens AG

Engineering & Consulting

Team-ec.industry@siemens.com
Tel.: +49 (69) 797-84500

Additional information is available on the Internet at:
www.siemens.com/processsafety

© Siemens 2019

Industrial Security




15/2 Network Security

15/6 Industrial Security Services

15/8 SIMATIC Logon

© Siemens 2019

Overview

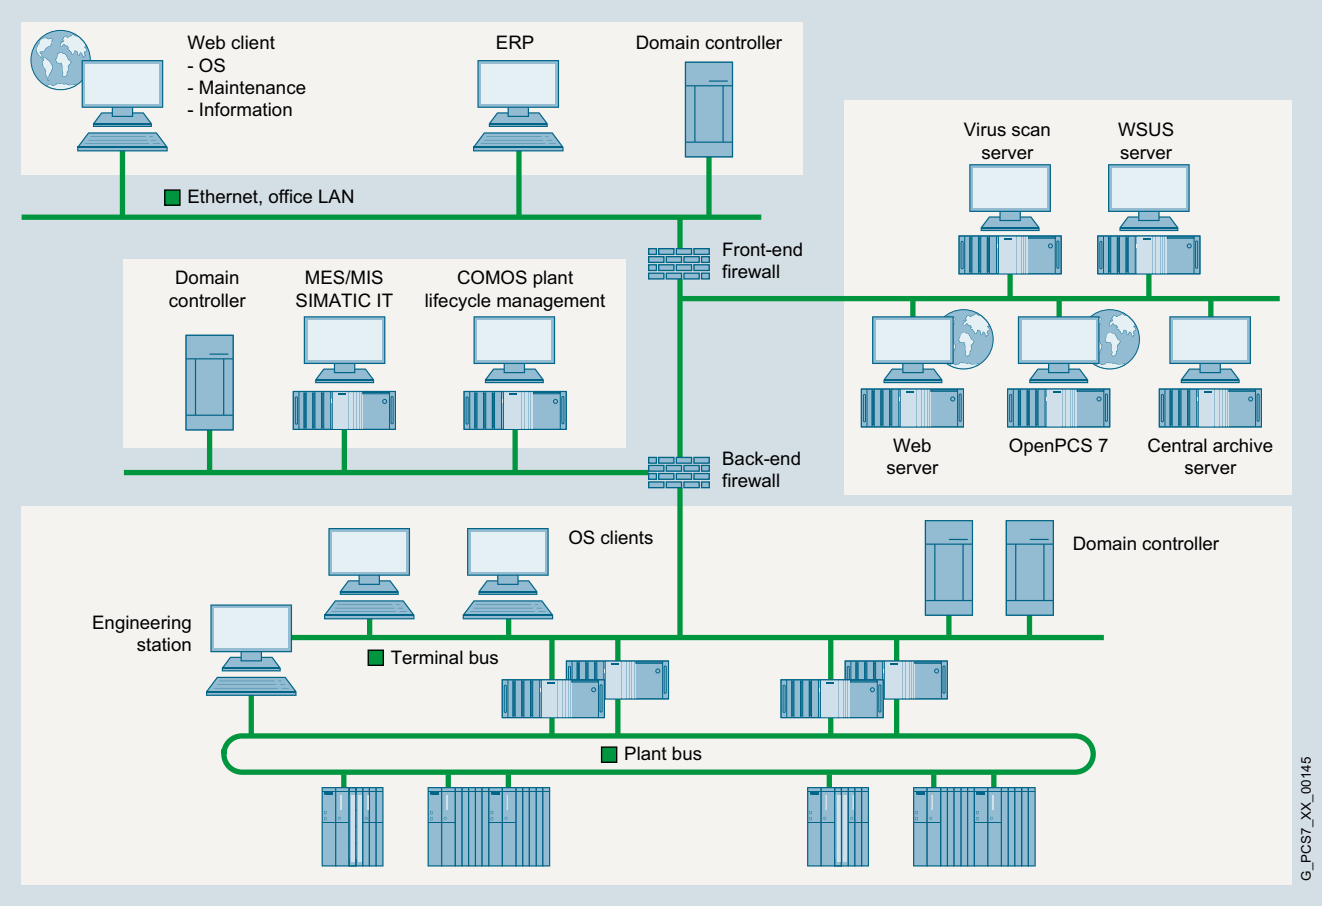

Example of a defense-in-depth security architecture

With advancing standardization, openness and networking, the security risks for process control systems have risen significantly. The danger potential arising from malicious programs such as computer viruses, worms and trojans or from access by unauthorized personnel ranges from network overloads or failures and theft of passwords and data to unauthorized interventions in the process automation. Apart from property damage, targeted sabotage can also have dangerous consequences for personnel and the environment.

With the security concept developed for SIMATIC PCS 7 you have comprehensive protection for your process control system against these various dangers. Siemens supports you with additional services as needed, including security assessment, security implementation and security management during operation (for details see section "Industrial Security Services").

SIMATIC PCS 7 security concept

The SIMATIC PCS 7 security concept, which is described in the "Security concept PCS 7 & WinCC (Basic)" manual and in detail in other documents, provides far-reaching recommendations (best practices) for safeguarding process plants based on a defense-in-depth security architecture. It is not restricted to the use of individual security methods (e.g. encryption) or devices (e.g. firewalls).

The strengths of this holistic concept lie rather in the interaction of a host of security measures in the plant network:

- Formation of a network architecture with defense-in-depth security, combined with segmenting of the plant into security cells
- Network administration, assignment of IP addresses, and division into subnetworks
- Operation of plants in Windows domains (active directory)
- Administration of Windows operator authorizations and SIMATIC PCS 7 operator authorizations; integration of SIMATIC PCS 7 operator authorizations into the Windows administration
- Reliable control of time synchronization
- Management of security patches for Microsoft products
- Use of virus scanners, whitelisting software and firewalls
- Establishment and operation of support access and remote access (VPN, IPSec)

The manual "PCS 7 & WinCC security concept, basic document" is available from the Siemens Industry Online Support:


https://support.industry.siemens.com/cs/ww/en/view/26462131

© Siemens 2019

Design

On the system side, SIMATIC PCS 7 supports implementation of guidelines and recommendations of the security concept by:

- Compatibility with current versions of the antivirus software McAfee Endpoint Security, Trend Micro OfficeScan and Symantec Endpoint Protection
- Use of the local Windows firewall
- Automatic setting of safety-related parameters during setup, e.g. in DCOM, registry and Windows firewall
- Operator administration and authentication using SIMATIC Logon (for details, see "SIMATIC Logon" section, see page 15/8)
- CP 1628 communication module with integrated security features (firewall, VPN) as an alternative to the Industrial Ethernet connection of SIMATIC PCS 7 Industrial Workstations
- Integration of the SCALANCE S602, S612, S623 and S627-2M industrial security appliances
- Automation firewall
- Application whitelisting

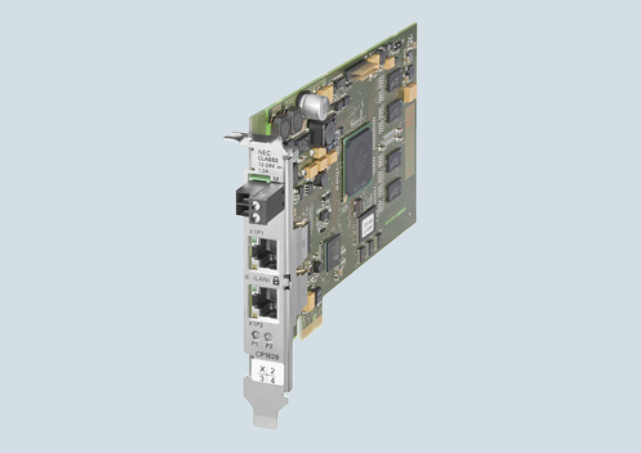

CP 1628 communication module

CP 1628 communication module

The CP 1628 is a PCI Express card (PCIe x1) with its own microprocessor and integrated 2-port switch (2 x RJ45 connection, 10/100/1000 Mbps) for the connection of SIMATIC PCS 7 workstations to Industrial Ethernet.

In contrast to the comparable CP 1623, it has additional security features:

- Stateful Inspection Firewall for filtering communication based on their IP/port addresses
- Limiting bandwidth to avoid communication overload
- Secure communication through virtual private network (VPN) over IPsec tunnel
- Secure transmission of network analysis information to the network management system (SNMP V3)
- Secure transfer of the time (NTP V3)
- Monitoring through log files and their analysis using a syslog server

With the built-in security mechanisms, the CP 1628 can protect PCS 7 stations as well as their data communication within an automation network and remote access over the Internet. It enables secure access to individual stations or entire automation cells that are protected by security modules. Different security measures, such as firewall and VPN over IPsec tunnel, can also be combined.

For more information and technical specifications for the CP 1628 communication module, refer to the Catalog IK PI, section Industrial Ethernet, under System Utilities, System connection for PG/PC/IPC.



SCALANCE S industrial security appliances

SCALANCE S industrial security appliances

The SCALANCE S industrial security appliances provide scalable security features, such as firewall, port filter, NAT, NAPT address translation and DHCP server (S602, S612, S623 and S627-2M) as well as authentication and data encryption with virtual private network (VPN) over IPsec tunnel (S612, S623 and S627-2M). They can be used, for example, to safeguard the cross-cell data exchange between components of automation and process control systems. Since they can be operated in bridge mode as well as router mode, they can therefore also be used directly at IP subnet boundaries.

The SCALANCE S industrial security appliances have a rugged industrial design. For connection to Industrial Ethernet, they have 2 (S602 and S612) or 3 (S623 and S627-2M) 10/100/1000 Mbps ports (RJ45). The S627-2M also has two slots for optional 2-port media modules (electrical or optical; for ordering data, see SCALANCE X-300).

© Siemens 2019

Design (continued)

Product versions:

- SCALANCE S602 industrial security appliances
  - Uses the Stateful Inspection Firewall to protect network segments against unauthorized access
  - "Ghost mode" for protection of individual, even alternating, devices by dynamically taking over the IP address
- SCALANCE S612 industrial security appliances
  - Uses the Stateful Inspection Firewall and VPN (Virtual Private Network) functionality to protect network segments against unauthorized access, data manipulation and espionage
  - Up to 128 IPsec tunnels can be operated simultaneously
- SCALANCE S623 industrial security appliances
  - Uses the Stateful Inspection Firewall and VPN (Virtual Private Network) functionality to protect network segments against unauthorized access, data manipulation and espionage
  - Up to 128 IPsec tunnels can be operated simultaneously
  - Additional RJ45 DMZ port (yellow) for setting up a "Demilitarized Zone" (DMZ), which can terminate VPNs and is secured by firewalls to the red and green port
  - Redundant protection of automation cells by means of router and firewall redundancy as well as stand-by linking of the redundant device via the yellow port
- SCALANCE S627-2M industrial security appliances
  - Uses the Stateful Inspection Firewall and VPN (Virtual Private Network) functionality to protect network segments against unauthorized access, data manipulation and espionage
  - Up to 128 IPsec tunnels can be operated simultaneously
  - Additional RJ45 DMZ port (yellow) for setting up a "Demilitarized Zone" (DMZ), which can terminate VPNs and is secured by firewalls to the red and green port
  - Redundant protection of automation cells by means of router and firewall redundancy as well as stand-by mode of the redundant device; status matching of the firewall by means of a synchronization cable between the yellow ports
  - Two additional slots for one 2-port media module each (see SCALANCE X-300) for direct integration in ring structures and FO networks with two additional switched red or green ports per module
  - Bridging of longer cable runs; use of existing 2-wire cables by deploying MM992-2VD (variable distance) media modules

Note:

Using the supplied Security Configurations Tool (SCT), it is easy to create and configure the industrial security appliances that can communicate securely with one another. You do not require any special IT knowledge.

The complete configuration can be saved on the optional swap medium C-PLUG (order separately) and transmitted to another industrial security appliance. This permits easy and fast replacement of modules in the event of a fault.

For more information and technical specifications of the SCALANCE S security appliances, see Catalog IK PI, section "Industrial Ethernet", "Industrial Ethernet Security".

Automation firewall

The automation firewall (see Catalog ST PCS 7 AO, "Architecture and Configuration" section) features Stateful Inspection packet filter, application layer firewall, VPN gateway functionality, URL filtering, Web proxy and intrusion prevention. Depending on the plant size, it can be used as a front and back firewall or in a three-homed configuration. It thus protects the access point to the production environment, e.g. from the office or intranet networks. The automation firewall is supplied preinstalled.

The value of the Automation Firewall is increased even further by integrated services, e.g.:

- Hotline support
- Replacement service
- Software Update Service

Additive services complete the offerings, for example, customized firewall solutions or integration of firewalls in customer systems.

© Siemens 2019

Ordering data	Article No.
SCALANCE S Industrial Security Appliances	
SCALANCE S602 Industrial Security appliance with Stateful Inspection Firewall; 2 ports 10/100/1000 Mbps	**6GK5602-0BA10-2AA3**
SCALANCE S612 Industrial Security appliance with Stateful Inspection Firewall and VPN (Virtual Private Network); up to 128 simultaneous IPsec tunnels; 2 ports 10/100/1000 Mbps	**6GK5612-0BA10-2AA3**
SCALANCE S623 Industrial Security appliance with Stateful Inspection Firewall and VPN (Virtual Private Network); up to 128 simultaneous IPsec tunnels; 3 ports 10/100/1000 Mbps of which 1 is a DMZ port	**6GK5623-0BA10-2AA3**
SCALANCE S627-2M Up to 128 VPN tunnels simultaneously; additional RJ45 DMZ port; two additional slots for one 2-port media module each	**6GK5627-2BA10-2AA3**
Communication module	
CP 1628 PCI Express x1 card for connecting to Industrial Ethernet (10/100/1000 Mbps), with 2-port switch (RJ45) and integrated security functions (firewall, VPN)	**6GK1162-8AA00**


	Article No.
Accessories	
C-PLUG Swap medium for simple replacement of devices in event of fault; for saving of configuration and application data, can be used in SIMATIC NET products with C-PLUG slot	**6GK1900-0AB00**
SITOP compact 24 V/0.6 A Single-phase power supply with wide-range input 85 to 264 V AC; 110 to 300 V DC; stabilized output voltage 24 V, rated output current value 0.6 A, slim design	**6EP1331-5BA00**
Automation firewall NG	
Order data for automation firewall and service contracts, see Catalog ST PCS 7 AO (add-ons for the SIMATIC PCS 7 process control system), "Architecture and configuration"	

Note:

For further components and accessories, especially cable material and connectors as well as tools and supplementary material for assembly, see "Communication - Industrial Ethernet - Passive network components" in the Sections "FastConnect", "ITP cables and connectors" and "Fiber-optic cables" as well as Catalog IK PI.

© Siemens 2019

Overview

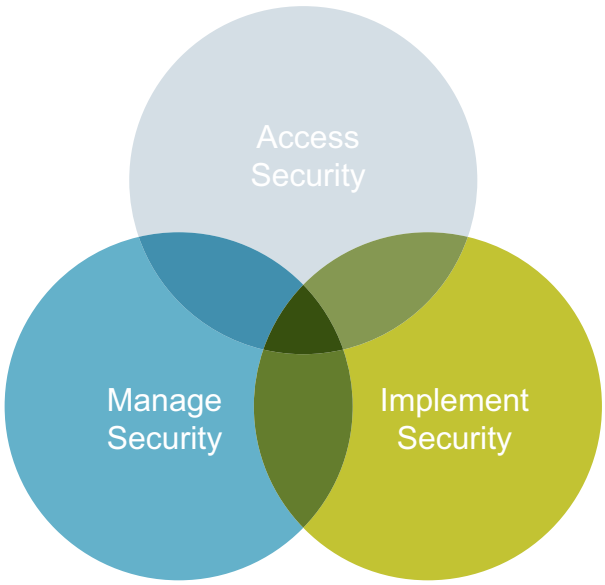

Siemens Industrial Security Services offer industry-specific concepts for reliable protection against cyber attacks and maximum service integrity of industrial plants.

Infected devices, unauthorized personnel, unauthorized access via networks and the Internet now threaten more than just the administrative level. Even production facilities are exposed to constant danger from disruptions, integrity impairment and know-how loss.

Many weak spots in security are not obvious at first glance. That is why continuous analysis and optimization of security in existing plants is advisable. Only in this way can plant availability be kept at a consistently high level.

Siemens offers you wide-ranging support with integrated Industrial Security Services for a holistic solution.

Assess Security

Assess Security includes comprehensive analysis of threats, identification of risks and the recommendation of specific security measures. Your benefit: A plant-specific and risk-based security map ensures an integrated and optimal security level.

Implement Security

Implement Security means the implementation of security measures to increase the security level of plants and production sites. Your benefit: Avoid security vulnerability and profit from better protection from cyber threats thanks to technical and organizational measures.

Manage Security

Manage Security means regular monitoring and updating of the implemented measures. Your benefit: You get maximum transparency on the security status of your plants and proactive prevention of potential threat scenarios.

Ordering data

Assess Security	
Industrial Security Check Quick overview about the current security status of the plant without a deep time investment	**9AS1411-4AA11-1AA1**
IEC 62443 Assessment Available for systems from Siemens and third-party suppliers	**9AS1411-3AA11-1AA1**
• Additional cell for IEC 62443 assessment	**9AS1411-3AA11-2AA1**
ISO 27001 Assessment Available for systems from Siemens and third-party suppliers	**9AS1411-1AA11-1AA1**
Risk & Vulnerability Assessment • Data-based analysis of threats, weaknesses and gaps • Risk classification and evaluation taking system criticality into consideration	**9AS1431-1AA11-1AB1**
Scanning Services - Asset Identification Scan Rapid transparency on implemented assets and software versions in automation environment	**9AS1411-5AA11-1AA1**
Scanning Services - Vulnerability Detection Scan Rapid transparency over current vulnerabilities with mitigation proposals in automation environments	**9AS1411-6AA11-1AA1**
Implement Security	
Security awareness training • Web-based SITRAIN training courses • Heighten security awareness of plant personnel regarding current situation and in handling threats and risks, detection of security incidents	**9AS1432-1AA11-1AB0**
Security policy consulting Introduction of new and tested security-relevant standards, guidelines and processes for plant security	**9AS1432-1AA11-1AB1**
Automation firewall installation Installation, configuration and testing of the firewall as well as the firewall rules	**9AS1433-1AA11-1AB3**
Antivirus installation Installation and configuration of McAfee VirusScan Enterprise antivirus software; compatibility consideration for SIMATIC PCS 7	**9AS1432-1AA11-1AB7**
Whitelisting installation Installation and configuration of McAfee Application Control whitelisting software; compatibility consideration for SIMATIC PCS 7	**On request**
ePO Management server deployment Installation of a McAfee ePO central management console (recommended by more than 10 antivirus or whitelisting agents)	**9AS1433-1AA11-1AB1**

© Siemens 2019

Ordering data

	Article No.
McAfee	
McAfee Application Control (AC) client bundle - LTS[1]	**9AS1425-2AA11-1BG1**
Whitelisting license for Windows client operating system, e.g. Windows 10; incl. updates by McAfee and long-term support from Siemens	
McAfee Application Control (AC) server bundle - LTS[1]	**9AS1425-2AA11-1BH1**
Whitelisting license for Windows Server operating system, e.g. Windows Server 2016; incl. updates by McAfee and long-term support from Siemens	
McAfee Virus Scan Enterprise (VSE) client bundle - LTS[1]	**9AS1425-2AA11-1CA1**
Antivirus license (earlier version, standalone) for Windows client operating system, e.g. Windows 7; incl. updates by McAfee and long-term support from Siemens	
McAfee Virus Scan Enterprise (VSE) server bundle - LTS[1]	**9AS1425-2AA11-1CC1**
Antivirus license (earlier version, standalone) for Windows Server operating system, e.g. Windows Server 2012; incl. updates by McAfee and long-term support from Siemens	
McAfee Endpoint Security (ENS) client bundle - LTS[1]	**9AS1425-2AA11-1CE1**
Antivirus license (included in the new software suite) for Windows client operating system, e.g. Windows 10; incl. updates by McAfee and long-term support from Siemens	
McAfee Endpoint Security (ENS) server bundle - LTS[1]	**9AS1425-2AA11-1CF1**
Antivirus license (included in the new software suite) for Windows Server operating system, e.g. Windows Server 2016; incl. updates by McAfee and long-term support from Siemens	
Industrial Anomaly Detection	**On request** (industrialsecurity@siemens.com)
Detecting all assets in industrial environments, in combination with oversight of all communications. Identification of anomalies.	

	Article No.
Manage Security	
Industrial security monitoring • Continuous monitoring of plant security • Continuous analysis and correlation of the log files as well as synchronization with "Global Threat Intelligence" databases • Recognition, classification as well as notification upon detection of security threats and potential incidents	**On request**
Remote incident handling Quick response as well as cause and criticality analysis by Siemens Industrial Security experts	**9AS1433-1AA11-1AC3**
Industrial Vulnerability Manager (IVM) Automatic security notifications and bulletins for the monitored components and devices	**9AS1433-1AA13-1AA1**
Patch management Central WSUS server with information about Microsoft Security patches released for SIMATIC PCS 7	**9AS1433-1AA11-1AB5**

[1] In addition to the software licenses, the bundles also include updates as long as provided by McAfee and long-term support (LTS) through the Siemens Hotline without annual maintenance fees. ENS is the successor of VSE and includes the antivirus functionality.

More information


You can find further information on the Industrial Security Services on the Internet:
http://www.siemens.com/industrial-security-services

If you have any further questions, please contact:

Email: industrialsecurity.i@siemens.com

© Siemens 2019

Overview

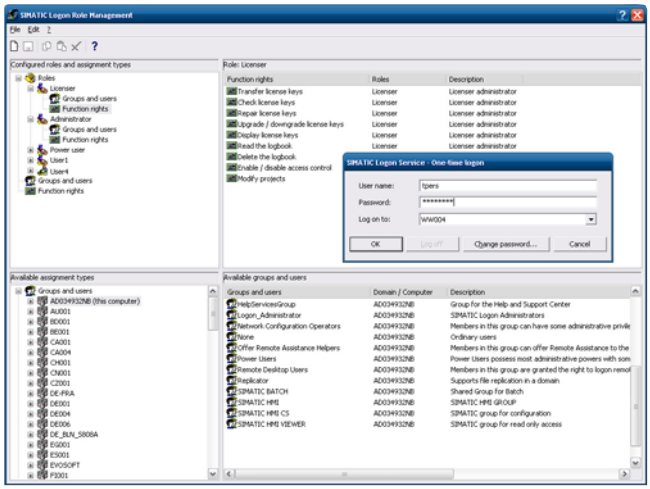

SIMATIC Logon role management

Centralized user administration with access control and electronic signature

SIMATIC Logon is a centralized user administration system with access control that also supports an electronic signature. It is in a position to work with applications in which roles have already been created or can be defined.

SIMATIC Logon facilitates the validation of plants in compliance with FDA 21 CFR Part 11.

Application

The SIMATIC Logon V1.6 software package is released for the following systems:

- SIMATIC PCS 7 Process Control System V8.0, V8.1, V8.2 and V9.0
- SIMATIC WinCC V7.0+SP3, V7.2, V7.3 and V7.4
- SIMATIC WinCC Runtime Professional Edition V13

Further application examples in the SIMATIC environment include:

- SIMATIC STEP 7 V5.5+SP4
- SIMATIC WinCC flexible from Version 2007 in conjunction with Logon Remote Access
- SIMATIC WinCC Runtime Advanced Edition V13 in conjunction with Logon Remote Access

SIMATIC Logon can also easily be integrated in other applications based on a programming example (Development Kit).

Note:

The products listed here in the ordering data are not relevant for SIMATIC PCS 7 V8.2 or V9.0. SIMATIC Logon software and licenses are already integrated in the system software of SIMATIC PCS 7 Process Control System V8.2 and V9.0.

Design

Logon devices

The following logon devices are supported by SIMATIC Logon:

- Keyboard
- Smart card reader (see "SIMATIC Industrial Workstation/IPC" under "Expansion components"), see page 3/52.
- Logon devices which can be operated with a Microsoft device driver for the respective operating system, e.g. logon devices on a USB interface


Number of licenses

If SIMATIC Logon is not integrated on the system side, you require the same number of SIMATIC Logon licenses as the number of clients/single stations accessing the application for which the SIMATIC Logon is used as access protection.

SIMATIC Logon Upgrade

All previous versions can be upgraded to the current version.

Function

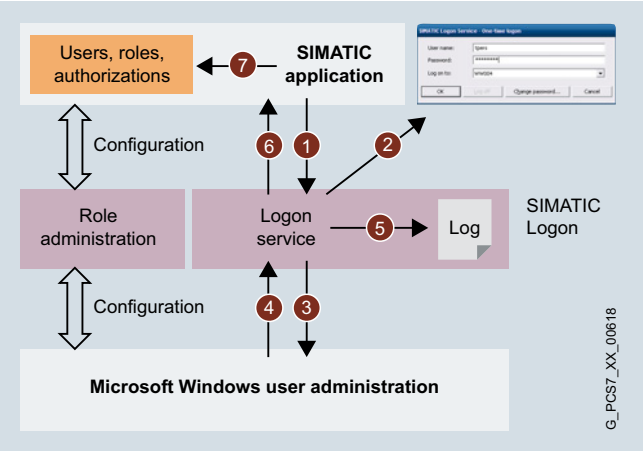

User logon procedure using the SIMATIC Logon Service.

SIMATIC Logon can be used to configure the associated roles and functional authorizations (role management) for a SIMATIC application. This configuration is stored in the database of the SIMATIC application.

SIMATIC Logon performs Windows user authentication during application runtime; the procedure is as follows:

- When prompted by a SIMATIC application (1), the SIMATIC Logon Service opens a logon dialog (2). The user enters his or her name, password and domain. The logon data are sent to the user administration of the operating system (3), which then reports the authentication attempt event to the logon service (4).
- The logon service records all events in an event log (5), for example successful logon, failed logon attempts, logoff by the user, automatic logoff and password change.
- If authentication is successful, the SIMATIC Logon Service sends this information, including the Windows group membership, to the SIMATIC application (6), which maps the roles and associated functional rights within the application (7).

© Siemens 2019

Function (continued)

Electronic signature

The electronic signature means that operations cannot be performed until enabled by a previously authorized user. Authorization is assigned in the application by associating the users grouped at operating system level with the group with the operations.

Note:

At the moment this function is implemented as a system function only on SIMATIC BATCH. The electronic signature can, however, also be flexibly implemented for specific applications.

Development Kit

The Development Kit uses an example to show the programmer how to embed SIMATIC Logon into a customer application.

Ordering data

	Article No.
For TIA applications only	
SIMATIC Logon V1.6 Single license for 1 installation, 7 languages (English, German, French, Italian, Spanish, Chinese, Japanese), software class A Runs with the following operating systems: • Windows Vista (Business/ Enterprise/Ultimate) up to SP2 32/64-bit • Windows 7 (Professional/ Enterprise/Ultimate) up to SP1 32/64-bit • Windows 8.0 (Standard/Pro/ Enterprise) 32/64-bit • Windows 8.1 (Standard/Pro/ Enterprise) 32/64-bit • Windows 10 (Professional/ Enterprise) 2016 LTSB 64-bit • Windows Server 2003 SP1/SP2 32-bit • Windows Server 2003 R2/2003 R2 SP2 32-bit • Windows Server 2008 (Standard/ Enterprise/Datacenter) up to SP2 32/64-bit • Windows Server 2008 R2 (Standard/Enterprise/Datacenter) up to SP1 64-bit • Windows Server 2012 (Foundation/ Essentials/Standard/Datacenter) 64-bit • Windows Server 2012 R2 (Essentials/Standard/Datacenter) 64-bit Delivery form: Software and electronic documentation on CD, license key on USB flash drive, certificate of license Note: This product is not intended for SIMATIC PCS 7 applications!	**6ES7658-7BX61-0YA0**
SIMATIC Logon upgrade to V1.6 Single license for 1 installation, 7 languages (English, German, French, Italian, Spanish, Chinese, Japanese), software class A For operating systems, see above Physical delivery: Software and electronic documentation on CD, license key on USB flash drive, certificate of license Note: This product is not intended for SIMATIC PCS 7 applications!	**6ES7658-7BX61-0YE0**

	Article No.
Supplementary components for SIMATIC Logon with SIMATIC WinCC flexible	
SIMATIC Logon Remote Access (3 clients) Remote access for 3 clients (configured with WinCC flexible Version 2007 and higher or WinCC TIA Portal), single license for 1 installation Physical delivery: License key USB flash drive, certificate of license	**6ES7658-7BA00-2YB0**
SIMATIC Logon Remote Access (10 clients) Remote access for 10 clients (configured with WinCC flexible Version 2007 and higher or WinCC TIA Portal), single license for 1 installation Physical delivery: License key USB flash drive, certificate of license	**6ES7658-7BB00-2YB0**

© Siemens 2019

Notes

© Siemens 2019

Update/Upgrade Packages



16/2 Upgrades for SIMATIC PCS 7 V8.x to V9.0

16/2 Upgrades for Engineering System and Management Console
16/3 Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS
16/5 Upgrades for Process Historian and Information Server
16/6 Upgrades for Maintenance Station
16/7 Upgrades for SIMATIC BATCH
16/8 Upgrades for SIMATIC Route Control

16/9 Upgrades from SIMATIC PCS 7 V8.0/V8.1 to V8.2

16/9 Upgrades for Engineering System and Management Console
16/10 Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS
16/12 Upgrades for Process Historian and Information Server
16/13 Upgrades for Maintenance Station
16/14 Upgrades for SIMATIC BATCH
16/15 Upgrades for SIMATIC Route Control

16/16 Upgrades from SIMATIC PCS 7 V7.1 to V8.2

16/16 Upgrades for Engineering System and Management Console
16/18 Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS
16/21 Upgrades for Maintenance Station
16/22 Upgrades for SIMATIC BATCH
16/23 Upgrades for SIMATIC Route Control

16/24 Upgrades from SIMATIC PCS 7 V7.1/V8.0 to V8.1

16/24 Upgrades for Engineering System and Management Console
16/26 Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS
16/30 Upgrades for Process Historian and Information Server
16/31 Upgrades for Maintenance Station
16/32 Upgrades for SIMATIC BATCH
16/33 Upgrades for SIMATIC Route Control

16/34 Updates/Upgrades Asynchronous to the PCS 7 Version

16/34 Upgrades for SIMATIC Logon
16/35 Upgrades for SIMATIC PDM
16/37 Upgrades for Safety Integrated for Process Automation
16/38 Upgrades for S7-PLCSIM Simulation Software
16/39 System Communication via Industrial Ethernet

© Siemens 2019

Upgrades for Engineering System and Management Console

Overview

Engineering Upgrade Package AS/OS V8.x to V9.0

The SIMATIC PCS 7 Engineering System with Engineering Software V8.x and Management Console V8.x can be upgraded to Version 9.0 using the SIMATIC PCS 7 Engineering Upgrade Package AS/OS.

The licenses included in the Engineering Upgrade Package AS/OS V8.x to V9.0 apply to the following SIMATIC PCS 7 software products:

- PCS 7 ES Single Station, PCS 7 AS Engineering Software, PCS 7 AS/OS Engineering Software
- PCS 7 Import-Export Assistant
- SIMATIC Version Cross Manager
- SIMATIC Version Trail
- PCS 7 SFC Visualization
- PCS 7 BCE
- PCS 7 Management Console
- Industrial Ethernet communication software for CP

SIMATIC PCS 7 ES Single Station SN ASIA Upgrade Package V8.x to V9.0

The ASIA regional product version "SIMATIC PCS 7 ES Single Station SN ASIA" that comes with communication software SOFTNET-REDCONNECT can be upgraded to V9.0 with the SIMATIC PCS 7 ES single station SN ASIA Upgrade Package specifically designed for this purpose.

SIMATIC PCS 7 Logic Matrix upgrade

A separate upgrade is available for upgrading the SIMATIC PCS 7 Logic Matrix Viewer to V9.0.

SIMATIC Version Cross Manager Upgrade

The further developed SIMATIC Version Cross Manager V9.0 is available for use in SIMATIC PCS 7 V9.0. The upgrade to SIMATIC Version Cross Manager V9.0 is part of the Engineering Upgrade Package AS/OS V8.x to V9.0.

Advanced Engineering System Upgrade

The SIMATIC PCS 7 Advanced Engineering System V8.0 (incl. SP) can be used in SIMATIC PCS 7 V8.0, V8.1, V8.2 and V9.0. Consequently, there is no need to offer a SIMATIC PCS 7 Advanced Engineering System Upgrade Package for upgrading to V9.0.

Ordering data

Engineering software

	Article No.
Engineering Software Upgrade from V8.x to V9.0, based on the existing number of POs	
SIMATIC PCS 7 Engineering Upgrade Package AS/OS V8.x to V9.0 Software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2008 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), floating license for 1 user	
5 languages (English, German, French, Italian, Spanish)	
With SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7651-5AX58-0YE5**
• Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7651-5AX58-0YK5**
ASIA, 2 languages (English, Chinese)	
With SIMATIC PCS 7 Software Media Package ASIA	
• Goods delivery ASIA license key on USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7651-5AX58-0CE5**
SIMATIC PCS 7 ES Single Station SN ASIA Upgrade Package V8.x to V9.0 (including SOFTNET REDCONNECT) 2 languages (English, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2008 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation	**6ES7651-5AA58-6CE0**
Without SIMATIC PCS 7 Software Media Package ASIA	
• Goods delivery ASIA license key on USB hardlock, certificate of license	
SIMATIC PCS 7 Logic Matrix upgrade from V8.2 to V9.0	
SIMATIC PCS 7 Logic Matrix Viewer upgrade from V8.2 to V9.0 Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2008 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation	**6ES7658-1JB58-2YE0**
Without SIMATIC PCS 7 Software Media Package	
Goods delivery License key on USB flash drive and certificate of license	

© Siemens 2019

Overview

Upgrades combined in packages allow existing Operator Systems to be upgraded from V8.x to V9.0 in line with the number of existing process objects and archive tags.

OS Software upgrades from V8.x to V9.0

The following upgrade packages for upgrading to V9.0 will be offered for SIMATIC PCS 7 operator stations with OS Software V8.x:

- SIMATIC PCS 7 OS Single Station Upgrade Package
- SIMATIC PCS 7 OS Server Upgrade Package
- SIMATIC PCS 7 OS Client/SFC Visualization Upgrade Package

The ASIA product versions "SIMATIC PCS 7 OS Single Station SN ASIA" and "SIMATIC PCS 7 OS Server SN ASIA" that come with communication software SOFTNET-REDCONNECT can be upgraded to V9.0 with specific upgrade packages:

- SIMATIC PCS 7 OS Single Station SN ASIA Upgrade Package
- SIMATIC PCS 7 OS Server SN ASIA Upgrade Package

Two Upgrade Packages of type OS Single Station or OS Server are required in each case for redundant SIMATIC PCS 7 Operator Stations.

In addition to the licenses for the PCS 7 OS Software Single Station or Server, the Upgrade Packages for OS Single Station and OS Server include upgrade licenses for:

- SIMATIC PCS 7 SFC Visualization
- SIMATIC PCS 7 BCE
- Industrial Ethernet communication software for CP
- SIMATIC PCS 7 OpenPCS 7 and SIMATIC PCS 7 OpenPCS 7/OS Client

The upgrade license for SIMATIC PCS 7 SFC Visualization is also part of the Upgrade Package SIMATIC PCS 7 OS Client/SFC Visualization.

With a SIMATIC PCS 7 OS Server Upgrade Package, only one SIMATIC PCS 7 OS Server can be upgraded.

Upgrade of the Web Option for OS

Using the SIMATIC PCS 7 OS Web Server Upgrade Package, you can upgrade the SIMATIC PCS 7 Web server, SIMATIC PCS 7 Web diagnostics server and SIMATIC PCS 7 Web diagnostics clients from V8.x to V9.0.

Ordering data

OS software

	Article No.
OS Software upgrade from V8.x to V9.0, based on the existing number of POs	
SIMATIC PCS 7 OS single station Upgrade Package V8.x to V9.0 For OS single station, software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation	
5 languages (English, German, French, Italian, Spanish)	
With SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-5AX58-0YE0**
• Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7652-5AX58-0YK0**
ASIA, 2 languages (English, Chinese)	
With SIMATIC PCS 7 Software Media Package ASIA	
• Goods delivery ASIA license key on USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7652-5AX58-0CE0**

	Article No.
SIMATIC PCS 7 OS Single Station SN ASIA Upgrade Package V8.x to V9.0 (including SOFTNET REDCONNECT) For OS Single Station	
2 languages (English, Chinese), software class A, runs with Windows 7 Ultimate 64-bit or Windows 10 Enterprise 2015 LTSB 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package ASIA	
• Goods delivery ASIA license key on USB hardlock, certificate of license	**6ES7658-2AA58-6CE0**
SIMATIC PCS 7 OS Server Upgrade Package V8.x to V9.0 For OS Server	
Software class A, runs with Windows Server 2012 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation	
With SIMATIC PCS 7 Software Media Package	
5 languages (English, German, French, Italian, Spanish)	
With SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-5BX58-0YE0**
• Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7652-5BX58-0YK0**

© Siemens 2019

Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS

Ordering data	Article No.
ASIA, 2 languages (English, Chinese)	
With SIMATIC PCS 7 Software Media Package ASIA	
• Goods delivery ASIA license key on USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7652-5BX58-0CE0**
SIMATIC PCS 7 OS Server SN ASIA Upgrade Package V8.x to V9.0 For OS Server	
2 languages (English, Chinese), software class A, runs with Windows Server 2012 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package ASIA	
• Goods delivery ASIA license key on USB hardlock, certificate of license	**6ES7658-2BA58-6CE0**
SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package V8.x to V9.0 Software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), floating license for 1 user	
5 languages (English, German, French, Italian, Spanish)	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7652-5CX58-0YF5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-5CX58-0YK5**
ASIA, 2 languages (English, Chinese)	
Without SIMATIC PCS 7 Software Media Package ASIA	
• Goods delivery ASIA license key on USB hardlock, certificate of license	**6ES7652-5CX58-0CF5**

Web Option for OS

	Article No.
PCS 7 Web Server Upgrade from V8.x to V9.0	
SIMATIC PCS 7 Web Server Upgrade Package V8.x to V9.0 For SIMATIC PCS 7 Web Server, SIMATIC PCS 7 Web Diagnostics Server, SIMATIC PCS 7 Web Diagnostics client	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A	
Runs with the following operating systems (see SIMATIC PCS 7 V9.0 Readme for latest information): • Windows Server 2012 R2 Standard 64-bit (Web server/Web diagnostics server) • Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit (Web diagnostics client)	
Single license for 1 installation, without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7652-5DX58-0YF0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-5DX58-0YK0**

16

© Siemens 2019

Overview

You can upgrade the following products from V8.x to version V9.0 with the SIMATIC PCS 7 PH/IS Upgrade Package:

- Process Historian and Information Server V8.0/V8.1/V8.2 (bundle license)
- Process Historian Archive - BATCH V8.0/V8.1/V8.2
- Process Historian Server Redundancy V8.0/V8.1/V8.2 (bundle license, upgrade package is required 2×)
- Information Server V8.0
- Process Historian Server V8.0

Ordering data

Ordering data	Article No.
PCS 7 Process Historian and Information Server upgrade from V8.x to V9.0	
SIMATIC PCS 7 PH/IS Upgrade Package V8.x to V9.0 5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows Server 2012 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for latest information), single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7652-7AX58-2YE0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-7AX58-2YK0**

© Siemens 2019

Upgrades for Maintenance Station

Overview

Maintenance Station Upgrade Package

Using the SIMATIC PCS 7 Maintenance Station Upgrade Package, you can upgrade the SIMATIC PCS 7 Maintenance Station Runtime Basic Package and the SIMATIC PCS 7 Maintenance Station Engineering from V8.x to V9.0. The SNMP OPC server license is also taken into account for the upgrade.

The cumulative SIMATIC PCS 7 Maintenance Station Runtime licenses are independent of the version. Existing asset TAGs of these licenses are therefore completely available following the upgrade.

Ordering data

	Article No.
PCS 7 Maintenance Station upgrade from V8.x to V9.0	
SIMATIC PCS 7 Maintenance Station Upgrade Package V8.x to V9.0 For installation on SIMATIC PCS 7 BOX, single station or server 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7652-5FX58-0YF0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-5FX58-0YK0**

© Siemens 2019

Overview

SIMATIC BATCH Upgrade Packages

Upgrades combined in packages allow you to upgrade existing SIMATIC BATCH systems from V8.x to V9.0:

SIMATIC BATCH Server Upgrade Package

With upgrade licenses for:

- SIMATIC BATCH Server
- SIMATIC BATCH Basic
- SIMATIC BATCH Single Station User
- SIMATIC BATCH Single Station System
- SIMATIC BATCH API
- PCS 7 BCE
- Industrial Ethernet communication software for CP

SIMATIC BATCH Client upgrade package

With upgrade licenses for:

- SIMATIC BATCH Client
- SIMATIC BATCH Recipe System

The cumulative SIMATIC BATCH UNITs are independent of the version. Existing UNITs are completely available following the upgrade.

Ordering data

	Article No.
SIMATIC BATCH upgrade from V8.x to V9.0	
SIMATIC BATCH Server Upgrade Package V8.x to V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64 Bit or Windows Server 2012 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7657-5XX58-0YF0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-5XX58-0YK0**
SIMATIC BATCH Client Upgrade Package V8.x to V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64 Bit or Windows Server 2012 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), floating license for 1 user	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7657-5XX58-0YF5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-5XX58-0YK5**

© Siemens 2019

Upgrades for SIMATIC Route Control

Overview

SIMATIC Route Control upgrade packages

With SIMATIC Route Control Upgrade Packages, you can upgrade Route Control Engineering, Route Control Server and Route Control Center from V8.x to V9.0. The number of existing "Routes" (quantity option for number of simultaneous material transports) is fully available again after the upgrade.

SIMATIC Route Control Center upgrades, which are only available for online delivery, allow you to upgrade the Route Control Center software separately from V8.x to V9.0.

Ordering data

	Article No.
SIMATIC Route Control upgrade from V8.x to V9.0	
SIMATIC Route Control Upgrade Package V8.x to V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64 Bit or Windows Server 2012 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), single license for 1 installation	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7652-5XX58-0YF0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-5XX58-0YK0**
SIMATIC Route Control Center upgrade V8.x to V9.0 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64 Bit or Windows Server 2012 R2 Standard 64-bit (see SIMATIC PCS 7 V9.0 Readme for the latest information), floating license for 1 user	
Without SIMATIC PCS 7 Software Media Package	
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-7EX58-0YK0**

© Siemens 2019

Overview

Engineering Upgrade Package AS/OS V8.0/V8.1 to V8.2

SIMATIC PCS 7 Engineering System with Engineering Software V8.0/V8.1 and Management Console V8.0/V8.1 can be upgraded to Version 8.2 using the SIMATIC PCS 7 Engineering Upgrade Package AS/OS.

The licenses included in the Engineering Upgrade Package AS/OS V8.0/V8.1 to V8.2 apply to the following software products of SIMATIC PCS 7:

- PCS 7 ES Single Station, PCS 7 AS Engineering Software, PCS 7 AS/OS Engineering Software
- PCS 7 Import-Export Assistant
- SIMATIC Version Cross Manager
- SIMATIC Version Trail
- PCS 7 SFC Visualization
- PCS 7 BCE
- PCS 7 Management Console
- Industrial Ethernet communication software for CP

SIMATIC PCS 7 ES Single Station SN ASIA Upgrade Package V8.1 to V8.2

The ASIA regional product variant "SIMATIC PCS 7 ES Single Station SN ASIA V8.1" that comes with communication software SOFTNET-REDCONNECT can be upgraded to V8.2 with the SIMATIC PCS 7 ES Single Station SN ASIA Upgrade Package specifically intended for this purpose.

SIMATIC Version Cross Manager Upgrade

The SIMATIC Version Cross Manager was last offered in Version 7.1, which is suitable for use in SIMATIC PCS 7 V7.1, V8.0 and V8.1. The further developed SIMATIC Version Cross Manager V8.2 is available for use in SIMATIC PCS 7 V8.2. The upgrade from SIMATIC Version Cross Manager V7.1 to V8.2 is a component of the Engineering Upgrade Package AS/OS V8.0/V8.1 to V8.2.

Advanced Engineering System Upgrade

The SIMATIC PCS 7 Advanced Engineering System V8.0 (incl. SP) can be used in SIMATIC PCS 7 V8.0, V8.1 and V8.2. Consequently there is no need to offer a SIMATIC PCS 7 Advanced Engineering System Upgrade Package for upgrading from V8.0/V8.1 to V8.2.

Ordering data

	Article No.
Engineering software	
Engineering Software Upgrade from V8.0/8.1 to V8.2, based on the existing number of POs	
SIMATIC PCS 7 Engineering Upgrade Package AS/OS V8.0/8.1 to V8.2 Software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
5 languages (English, German, French, Italian, Spanish)	
With SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7651-5AX28-0YE5**
• Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7651-5AX28-0YK5**
ASIA, 2 languages (English, Chinese)	
With SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7651-5AX28-0CE5**
SIMATIC PCS 7 ES Single Station SN ASIA Upgrade Package V8.1 to V8.2 (including SOFTNET REDCONNECT) 2 languages (English, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation	**6ES7651-5AA28-6CE0**
No SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license	
SIMATIC Version Cross Manager Upgrade from V7.1 to V8.2 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Professional/Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license and TIA Engineering Toolset CD	**6ES7658-1CX28-2YE5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-1CX28-2YK5**

© Siemens 2019

Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS

Overview

Upgrades combined in packages enable upgrading of existing Operator Systems V8.0/V8.1 to V8.2 with consideration of the number of existing process objects and archive tags.

OS software Upgrades V8.0/V8.1 to V8.2

The following Upgrade Packages for upgrading to V8.2 will be offered for SIMATIC PCS 7 Operator Stations with OS Software V8.0/8.1 as a matter of course:

- SIMATIC PCS 7 OS Single Station Upgrade Package
- SIMATIC PCS 7 OS Server Upgrade Package
- SIMATIC PCS 7 OS Client/SFC Visualization Upgrade Package

The ASIA product variants "SIMATIC PCS 7 OS Single Station SN ASIA V8.1" and "SIMATIC PCS 7 OS Server SN ASIA V8.1" that come with communication software SOFTNET-REDCONNECT can be upgraded to V8.2 with specific upgrade packages:

- SIMATIC PCS 7 OS Single Station SN ASIA Upgrade Package
- SIMATIC PCS 7 OS Server SN ASIA Upgrade Package

Two Upgrade Packages of type OS Single Station or OS Server are required in each case for redundant SIMATIC PCS 7 Operator Stations.

In addition to the licenses for the PCS 7 OS Software Single Station or Server, the Upgrade Packages for OS Single Station and OS Server include upgrade licenses for:

- SIMATIC PCS 7 SFC Visualization
- SIMATIC PCS 7 BCE
- Industrial Ethernet communication software for CP
- SIMATIC PCS 7 OpenPCS 7 and SIMATIC PCS 7 OpenPCS 7/ OS Client

The upgrade license for SIMATIC PCS 7 SFC Visualization is also part of the Upgrade Package SIMATIC PCS 7 OS Client/ SFC Visualization.

The upgrade licenses for Process Historian and Information Server are also embedded in the SIMATIC PCS 7 OS Server Upgrade Package. With a SIMATIC PCS 7 OS Server Upgrade Package, only one SIMATIC PCS 7 OS Server or one SIMATIC PCS 7 Process Historian (with/without Information Server) can be upgraded (for details see table in section "Upgrades for Process Historian and Information Server").

Upgrade of the Web Option for OS

Using the SIMATIC PCS 7 OS Web Server Upgrade Package, you can upgrade the SIMATIC PCS 7 Web Server, SIMATIC PCS 7 Web Diagnostics Server and SIMATIC PCS 7 Web Diagnostics Clients from V8.0 or V8.1 to V8.2.

Ordering data

OS software

	Article No.
OS Software Upgrade from V8.0/ 8.1 to V8.2, based on the existing number of POs	
SIMATIC PCS 7 OS Single Station Upgrade Package V8.0/8.1 to V8.2 For OS Single Station, software class A, runs with Windows 7 Ultimate 32/64-bit or Windows 10 Enterprise 2015 LTSB 64-bit, single license for 1 installation	
5 languages (English, German, French, Italian, Spanish)	
With SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-5AX28-0YE0**
• Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7652-5AX28-0YK0**
ASIA, 2 languages (English, Chinese)	
With SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7652-5AX28-0CE0**
SIMATIC PCS 7 OS Single Station SN ASIA Upgrade Package V8.1 to V8.2 (including SOFTNET RED-CONNECT) For OS Single Station	
2 languages (English, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows 10 Enterprise 2015 LTSB 64-bit, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license	**6ES7658-2AA28-6CE0**

© Siemens 2019

Ordering data	Article No.
SIMATIC PCS 7 OS Server Upgrade Package V8.0/8.1 to V8.2 For OS Server	
Software class A, runs with Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
With SIMATIC PCS 7 Software Media Package	
5 languages (English, German, French, Italian, Spanish)	
With SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-5BX28-0YE0**
• Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: Email address required!	**6ES7652-5BX28-0YK0**
ASIA, 2 languages (English, Chinese)	
With SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7652-5BX28-0CE0**
SIMATIC PCS 7 OS Server SN ASIA Upgrade Package V8.1 to V8.2 For OS Server	
2 languages (English, Chinese), software class A, runs with Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license	**6ES7658-2BA28-6CE0**
SIMATIC PCS 7 OS Client/SFC Visualization Upgrade Package V8.0/8.1 to V8.2 Software class A, runs with Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, floating license for 1 user	
5 languages (English, German, French, Italian, Spanish)	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-5CX28-0YF5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-5CX28-0YK5**
ASIA, 2 languages (English, Chinese)	
No SIMATIC PCS 7 Software Media Package ASIA	
• Physical delivery ASIA license key on USB hardlock, certificate of license	**6ES7652-5CX28-0CF5**

Web Option for OS

PCS 7 Web Server Upgrade from V8.0/8.1 to V8.2	
SIMATIC PCS 7 Web Server Upgrade Package V8.0/8.1 to V8.2 For SIMATIC PCS 7 Web Server, SIMATIC PCS 7 Web Diagnostics Server, SIMATIC PCS 7 Web Diagnostics client	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows Server 2008 R2 Standard 64-bit, Windows Server 2012 R2 Standard 64-bit (Web server/Web diagnostics server) or Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit (Web diagnostics client), single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-5DX28-0YF0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-5DX28-0YK0**

16

© Siemens 2019

Upgrades for Process Historian and Information Server

Overview

The upgrade licenses for Process Historian and Information Server are embedded in the SIMATIC PCS 7 OS Server Upgrade Package V8.0/V8.1 to V8.2. The following table shows the number of SIMATIC PCS 7 OS Server Upgrade Packages required for upgrading the various types of station.

Upgrade Package	Single Server				Server Redundancy	
	OS Server	Process Historian plus Information Server	Information Server	Process Historian	OS Server	Process Historian
PCS 7 OS Server Upgrade Package V8.0/V8.1 to V8.2	1	1	–	1	2	2

A separate upgrade package is not required for a separate Information Server.

© Siemens 2019

Overview

Maintenance Station Upgrade Package

With the SIMATIC PCS 7 Maintenance Station Upgrade Package, you can upgrade the SIMATIC PCS 7 Maintenance Station Runtime Basic Package as well as the SIMATIC PCS 7 Maintenance Station Engineering from V8.0 or V8.1 to V8.2. The SNMP OPC server license is also taken into account for the upgrade.

The cumulative SIMATIC PCS 7 Maintenance Station Runtime licenses are independent of the version. Existing asset TAGs of these licenses are therefore completely available following the upgrade.

Ordering data

	Article No.
PCS 7 Maintenance Station Upgrade from V8.0/8.1 to V8.2	
SIMATIC PCS 7 Maintenance Station Upgrade Package V8.0/8.1 to V8.2 For installation on SIMATIC PCS 7 BOX, single station or server	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-5FX28-0YF0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-5FX28-0YK0**

© Siemens 2019

Upgrades for SIMATIC BATCH

Overview

SIMATIC BATCH Upgrade Packages

Upgrades combined in packages enable upgrading of existing SIMATIC BATCH systems from V8.0 or V8.1 to V8.2:

SIMATIC BATCH Server Upgrade Package

With upgrade licenses for:

- SIMATIC BATCH Server
- SIMATIC BATCH Basic
- SIMATIC BATCH Single Station User
- SIMATIC BATCH Single Station System
- SIMATIC BATCH API
- PCS 7 BCE
- Industrial Ethernet communication software for CP

SIMATIC BATCH Client Upgrade Package

With upgrade licenses for:

- SIMATIC BATCH Client
- SIMATIC BATCH Recipe System

The cumulative SIMATIC BATCH UNITs are independent of the version. Existing UNITs are completely available following the upgrade.

Ordering data

	Article No.
SIMATIC BATCH Upgrade from V8.0/8.1 to V8.2	
SIMATIC BATCH Server Upgrade Package V8.0/8.1 to V8.2 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7657-5XX28-0YF0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-5XX28-0YK0**
SIMATIC BATCH Client Upgrade Package V8.0/8.1 to V8.2 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7657-5XX28-0YF5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7657-5XX28-0YK5**

© Siemens 2019

Overview

SIMATIC Route Control Upgrade Packages

With SIMATIC Route Control Upgrade Packages you can upgrade Route Control Engineering, Route Control Server and Route Control Center from V8.0 or V8.1 to V8.2. The number of existing "Routes" (quantity option for number of simultaneous material transports) is fully available again after the upgrade.

SIMATIC Route Control Center Upgrades, which are only available only as an online delivery, allow separate upgrading of the Route Control Center software from V8.0 or V8.1 to V8.2.

Ordering data

	Article No.
SIMATIC Route Control Upgrade from V8.0/8.1 to V8.2	
SIMATIC Route Control Upgrade Package V8.0/8.1 to V8.2 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7652-5XX28-0YF0**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7652-5XX28-0YK0**
SIMATIC Route Control Center Upgrade V8.0/8.1 to V8.2 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7658-7EX28-0YK0**

© Siemens 2019

Upgrades for Engineering System and Management Console

Overview

Engineering Upgrade Package V7.1 to V8.2

SIMATIC PCS 7 Engineering System with Engineering Software V7.1 can be upgraded in two steps, initially to V8.0 and then to V8.2. Depending on the starting point, one of the two following versions of the SIMATIC PCS 7 Engineering Upgrade Package can be used:

- SIMATIC PCS 7 Engineering Upgrade Package AS/OS, unlimited POs
  (without OS Runtime license for productive operation), for classic engineering station without limitation of engineering.
- SIMATIC PCS 7 Engineering Upgrade Package AS/OS, 250 to 2 000 POs
  (with OS Runtime license for productive operation), for combined engineering/operator station in small applications

Any existing OS Runtime license is converted to a cumulative "Count Relevant License" during the upgrade from V7.1 to V8.0. The number of OS Runtime POs is retained.

The licenses included in the Engineering Upgrade Package V7.1 to V8.2 apply to the following software products:

- PCS 7 Engineering AS, OS, AS/OS (250 to 2 000 POs or unlimited POs)
- PCS 7 Import-Export Assistent
- SIMATIC Version Cross Manager
- SIMATIC Version Trail
- PCS 7 SFC Visualization
- PCS 7 BCE
- PCS 7 Management Console
- Industrial Ethernet communication software for CP

Advanced Engineering System Upgrade

The SIMATIC PCS 7 Advanced Engineering System Upgrade is offered as a separate product in addition to the SIMATIC PCS 7 Engineering Upgrade Package.

Since the SIMATIC PCS 7 Advanced Engineering System V8.0 (incl. service pack) can be used in SIMATIC PCS 7 V8.0 as well as in SIMATIC PCS 7 V8.1 and V8.2, this upgrade is only available for the upgrade from V7.1 to V8.0 (incl. SP1).

Ordering data

Engineering software

	Article No.
Engineering Software Upgrade from V7.1 to V8.2, based on the existing number of POs	
SIMATIC PCS 7 Engineering Upgrade Package AS/OS (250 to 2 000 POs) V7.1 to V8.2 Software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
5 languages (English, German, French, Italian, Spanish)	
comprising: • SIMATIC PCS 7 Engineering Upgrade Package AS/OS (250 to 2 000 POs) V7.1 to V8.0 • SIMATIC PCS 7 Engineering Upgrade Package AS/OS V8.0/8.1 to V8.2 • SIMATIC PCS 7 OS Single Station Upgrade Package V8.0/8.1 to V8.2 • SIMATIC PCS 7 Software Media Package V8.2	
- Delivery form package License key USB stick, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7651-7AC28-0YE5**
- Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: E-mail address required!	**6ES7651-7AC28-0YK5**

	Article No.
ASIA, 2 languages (English, Chinese),	
comprising: • SIMATIC PCS 7 Engineering Upgrade Package AS/OS ASIA (250 to 2 000 POs) V7.1 to V8.0 • SIMATIC PCS 7 Engineering Upgrade Package AS/OS ASIA V8.0/8.1 to V8.2 • SIMATIC PCS 7 OS Single Station Upgrade Package ASIA V8.0/8.1 to V8.2 • SIMATIC PCS 7 Software Media Package ASIA V8.2	
- Delivery form package ASIA license key USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7651-7AC28-0CE5**

© Siemens 2019

Ordering data

	Article No.
SIMATIC PCS 7 Engineering Upgrade Package AS/OS (unlimited POs) V7.1 to V8.2 Software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license für 1 user	
5 languages (English, German, French, Italian, Spanish) comprising: • SIMATIC PCS 7 Engineering Upgrade Package AS/OS (unlimited POs) V7.1 to V8.0 • SIMATIC PCS 7 Engineering Upgrade Package AS/OS V8.0/8.1 to V8.2 • SIMATIC PCS 7 Software Media Package V8.2	
- Delivery form package License key USB stick, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7651-7AF28-0YE5**
- Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: E-mail address required!	**6ES7651-7AF28-0YK5**

	Article No.
ASIA, 2 languages (English, Chinese), comprising: • SIMATIC PCS 7 Engineering Upgrade Package AS/OS ASIA (unlimited POs) V7.1 to V8.0 • SIMATIC PCS 7 Engineering Upgrade Package AS/OS ASIA V8.0/8.1 to V8.2 • SIMATIC PCS 7 Software Media Package ASIA V8.2	
- Delivery form package ASIA license key USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7651-7AF28-0CE5**

© Siemens 2019

Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS

Overview

Upgrades combined in packages enable upgrading of existing Operator Systems V7.1 to V8.2 with consideration of the number of existing process objects and archive variables.

SIMATIC PCS 7 Operator Stations with OS Software V7.1 can be upgraded in two steps, initially to V8.0 and then to V8.2. Depending on the starting point, the following Upgrade Packages are available:

- SIMATIC PCS 7 OS Single Station Upgrade Package
- SIMATIC PCS 7 OS Single Station Redundancy Upgrade Package
- SIMATIC PCS 7 OS Server Upgrade Package
- SIMATIC PCS 7 OS Server Redundancy Upgrade Package
- SIMATIC PCS 7 OS Client/SFC Visualization Upgrade Package

The OS Runtime licenses are converted to cumulative "Count Relevant Licenses" during the upgrade. The number of existing OS Runtime POs is retained.

In addition to the licenses for the PCS 7 OS Software Single Station or Server, the Upgrade Packages for OS Single Station and OS Server include upgrade licenses for:

- SIMATIC PCS 7 SFC Visualization
- SIMATIC PCS 7 BCE
- Industrial Ethernet communication software for CP
- SIMATIC PCS 7 OpenPCS 7 and SIMATIC PCS 7 OpenPCS 7/ OS Client

The upgrade license for SIMATIC PCS 7 SFC Visualization is also part of the Upgrade Package SIMATIC PCS 7 OS Client/ SFC Visualization.

The upgrade licenses for Process Historian and Information Server are also embedded in SIMATIC PCS 7 OS Server Upgrade Package V8.0/8.1 to V8.2 (part of SIMATIC PCS 7 OS Server Upgrade Package V7.1 to V8.2). With a SIMATIC PCS 7 OS Server Upgrade Package V8.0/8.1 to V8.2, only one SIMATIC PCS 7 OS Server or one SIMATIC PCS 7 Process Historian (with/without Information Server) can be upgraded.

Upgrade of the Web Option for OS

Using the SIMATIC PCS 7 OS Web Server Upgrade Package, you can upgrade the SIMATIC PCS 7 Web server, SIMATIC PCS 7 Web diagnostics server and SIMATIC PCS 7 Web diagnostics clients from V7.1 to V8.2. It is first necessary to upgrade to V8.0 and subsequently to V8.2.

Ordering data

OS software

	Article No.
OS Software Upgrade from V7.1 to V8.2, based on the existing number of POs	
SIMATIC PCS 7 OS Single Station Upgrade Package V7.1 to V8.2 for OS Single Station, software class A, runs with Windows 7 Ultimate 32/64-bit or Windows 10 Enterprise 2015 LTSB 64-bit, single license for 1 installation	
5 languages (English, German, French, Italian, Spanish), comprising: • SIMATIC PCS 7 OS Single Station Upgrade Package V7.1 to V8.0 • SIMATIC PCS 7 OS Single Station Upgrade Package V8.0/8.1 to V8.2 • SIMATIC PCS 7 Software Media Package V8.2	
- Delivery form package License key USB stick, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-8AX28-0YE0**
- Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: E-mail address required!	**6ES7652-8AX28-0YK0**

	Article No.
ASIA, 2 languages (English, Chinese), comprising: • SIMATIC PCS 7 OS Single Station Upgrade Package ASIA V7.1 to V8.0 • SIMATIC PCS 7 OS Single Station Upgrade Package ASIA V8.0/8.1 to V8.2 • SIMATIC PCS 7 Software Media Package ASIA V8.2	
- Delivery form package ASIA license key USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7652-8AX28-0CE0**

© Siemens 2019

Ordering data

	Article No.
SIMATIC PCS 7 OS Single Station Redundancy Upgrade Package V7.1 to V8.2 for redundant OS Single Stations, software class A, runs with Windows 7 Ultimate 32/64-bit or Windows 10 Enterprise 2015 LTSB 64-bit, single license for 2 installations	
5 languages (English, German, French, Italian, Spanish),	
comprising:	
• SIMATIC PCS 7 OS Single Station Redundancy Upgrade Package V7.1 to V8.0	
• 2 x SIMATIC PCS 7 OS Single Station Upgrade Package V8.0/8.1 to V8.2	
• SIMATIC PCS 7 Software Media Package V8.2	
- Delivery form package License key USB stick, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-3AX28-2YE0**
- Online delivery License key Ddownload, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: E-mail address required!	**6ES7652-3AX28-2YK0**
ASIA, 2 languages (English, Chinese),	
comprising:	
• SIMATIC PCS 7 OS Single Station Redundancy Upgrade Package ASIA V7.1 to V8.0	
• 2 x SIMATIC PCS 7 OS Single Station Upgrade Package ASIA V8.0/8.1 to V8.2	
• SIMATIC PCS 7 Software Media Package ASIA V8.2	
- Delivery form package ASIA license key USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7652-3AX28-2CE0**

	Article No.
SIMATIC PCS 7 OS Server Upgrade Package V7.1 to V8.2 for OS Server, software class A, runs with Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license für 1 installation	
5 languages (English, German, French, Italian, Spanish),	
comprising:	
• SIMATIC PCS 7 OS Server Upgrade Package V7.1 to V8.0	
• SIMATIC PCS 7 OS Server Upgrade Package V8.0/8.1 to V8.2	
• SIMATIC PCS 7 Software Media Package V8.2	
- Delivery form package License key USB stick, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-8BX28-0YE0**
- Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: E-mail address required!	**6ES7652-8BX28-0YK0**
ASIA, 2 languages (English, Chinese),	
comprising:	
• SIMATIC PCS 7 OS Server Upgrade Package ASIA V7.1 to V8.0	
• SIMATIC PCS 7 OS Server Upgrade Package ASIA V8.0/8.1 to V8.2	
• SIMATIC PCS 7 Software Media Package ASIA V8.2	
• Delivery form package ASIA license key USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7652-8BX28-0CE0**

© Siemens 2019

Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS

Ordering data	Article No.
SIMATIC PCS 7 OS Server Redundancy Upgrade Package V7.1 to V8.2 for redundant OS server pair, software class A, runs with Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 2 installations 5 languages (English, German, French, Italian, Spanish), comprising: • SIMATIC PCS 7 OS Server Redundancy Upgrade Package V7.1 to V8.0 • 2 x SIMATIC PCS 7 OS Server Upgrade Package V8.0/8.1 to V8.2 • SIMATIC PCS 7 Software Media Package V8.2	
- Delivery form package License key USB stick, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package per order item	**6ES7652-3BX28-2YE0**
- Online delivery License key download, online certificate of license, combined with SIMATIC PCS 7 Software Media Package (software download and online certificate of license) Note: E-mail address required!	**6ES7652-3BX28-2YK0**
ASIA, 2 languages (English, Chinese), comprising: • SIMATIC PCS 7 OS Server Redundancy Upgrade Package ASIA V7.1 to V8.0 • 2 x SIMATIC PCS 7 OS Server Upgrade Package ASIA V8.0/8.1 to V8.2 • SIMATIC PCS 7 Software Media Package ASIA V8.2	
- Delivery form package ASIA license key USB hardlock, certificate of license, bundled with 1 × SIMATIC PCS 7 Software Media Package ASIA per order item	**6ES7652-3BX28-2CE0**

Ordering data	Article No.
SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package V7.1 to V8.2 Software class A, runs with Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, floating license for 1 user 5 languages (English, German, French, Italian, Spanish), without SIMATIC PCS 7 Software Media Package, comprising: • SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package V7.1 to V8.0 • SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package V8.0/8.1 to V8.2	
- Delivery form package License key USB stick, certificate of license	**6ES7652-8CX28-0YF5**
- Online delivery License key download, online certificate of license Note: E-mail address required!	**6ES7652-8CX28-0YK5**
ASIA, 2 languages (English, Chinese), without SIMATIC PCS 7 Software Media Package ASIA, comprising: • SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package ASIA V7.1 to V8.0 • SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package ASIA V8.0/8.1 to V8.2	
- Delivery form package ASIA license key USB hardlock, certificate of license	**6ES7652-8CX28-0CF5**

Web Option for OS

PCS 7 Web Server Upgrade from V7.1 to V8.2	
SIMATIC PCS 7 Web Server Upgrade Package V7.1 to V8.2 for SIMATIC PCS 7 Web Server, SIMATIC PCS 7 Web Diagnose Server, SIMATIC PCS 7 Web Diagnose Client, 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows Server 2008 R2 Standard 64-bit, Windows Server 2012 R2 Standard 64-bit (Web Server/ Web Diagnose Server) oder Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit (Web Diagnose Client), single license for 1 installation; without SIMATIC PCS 7 Software Media Package, comprising: • SIMATIC PCS 7 Web Server Upgrade Package V7.1 to V8.0 • SIMATIC PCS 7 Web Server Upgrade Package V8.0/8.1 to V8.2	
- Delivery form package License key USB stick, certificate of license	**6ES7652-8DX28-0YF0**
- Online delivery License key download, online certificate of license Note: E-mail address required!	**6ES7652-8DX28-0YK0**

© Siemens 2019

Overview

Maintenance Station Upgrade Package

Using the SIMATIC PCS 7 Maintenance Station Upgrade Package, you can upgrade the SIMATIC PCS 7 Maintenance Station Runtime Basic Package as well as the SIMATIC PCS 7 Maintenance Station Engineering from V7.1 to V8.2. It is first necessary to upgrade to V8.0 and subsequently to V8.2.

The SNMP OPC server license is also taken into account for the upgrade.

The cumulative SIMATIC PCS 7 Maintenance Station Runtime licenses are independent of the version. Existing asset TAGs of these licenses are therefore completely available following the upgrade.

Ordering data

	Article No.
PCS 7 Maintenance Station Upgrade from V7.1 to V8.2	
SIMATIC PCS 7 Maintenance Station Upgrade Package V7.1 to V8.2 for installation on SIMATIC PCS 7 BOX, single station or server 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation without SIMATIC PCS 7 Software Media Package, comprising: • SIMATIC PCS 7 Maintenance Station Upgrade Package V7.1 to V8.0 • SIMATIC PCS 7 Maintenance Station Upgrade Package V8.0/8.1 to V8.2	
- Delivery form package License key USB stick, certificate of license	**6ES7652-8FX28-0YF0**
- Online delivery License key download, online certificate of license Note: E-mail address required!	**6ES7652-8FX28-0YK0**

© Siemens 2019

Upgrades for SIMATIC BATCH

Overview

SIMATIC BATCH Upgrade Packages

Upgrades combined in packages enable upgrading of existing SIMATIC BATCH systems from V7.1 to V8.2:

SIMATIC BATCH Server Upgrade Package

With upgrade licenses for:

- SIMATIC BATCH Server
- SIMATIC BATCH Basic
- SIMATIC BATCH Single Station User
- SIMATIC BATCH Single Station System
- SIMATIC BATCH API
- PCS 7 BCE
- Industrial Ethernet communication software for CP

SIMATIC BATCH Client Upgrade Package

With upgrade licenses for:

- SIMATIC BATCH Client
- SIMATIC BATCH Recipe System

It is first necessary to upgrade to V8.0 and subsequently to V8.2.

The cumulative SIMATIC BATCH UNITs are independent of the version. Existing UNITs are completely available following the upgrade.

Ordering data

	Article No.
SIMATIC BATCH Upgrade from V7.1 to V8.2	
SIMATIC BATCH Server Upgrade Package V7.1 to V8.2 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
without SIMATIC PCS 7 Software Media Package, comprising: • SIMATIC BATCH Server Upgrade Package V7.1 to V8.0 • SIMATIC BATCH Server Upgrade Package V8.0/8.1 to V8.2 • SIMATIC BATCH Client Upgrade Package V8.0/8.1 to V8.2	
- Delivery form package License key USB stick, certificate of license	**6ES7657-8XX28-0YF0**
- Online delivery License key Ddownload, online certificate of license Note: E-mail address required!	**6ES7657-8XX28-0YK0**
SIMATIC BATCH Client Upgrade Package V7.1 to V8.2 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, floating license for 1 user	
without SIMATIC PCS 7 Software Media Package, comprising: • SIMATIC BATCH Client Upgrade Package V7.1 to V8.0 • SIMATIC BATCH Client Upgrade Package V8.0/8.1 to V8.2	
- Delivery form package License key USB stick, certificate of license	**6ES7657-8XX28-0YF5**
- Online delivery License key download, online certificate of license Note: E-mail address required!	**6ES7657-58XX28-0YK5**

© Siemens 2019

Overview

SIMATIC Route Control Upgrade Packages

With SIMATIC Route Control Upgrade Packages you can upgrade Route Control Engineering, Route Control Server and Route Control Center from V7.1 to V8.2. The number of existing "Routes" (quantity option for number of simultaneous material transports) is fully available again after the upgrade.

It is first necessary to upgrade to V8.0 and subsequently to V8.2. When upgrading to V8.0, the "Routes" are converted into cumulative "Count Relevant Licenses".

Ordering data

	Article No.
SIMATIC Route Control Upgrade from V7.1 to V8.2	
SIMATIC Route Control Upgrade Package V7.1 to V8.2 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
without SIMATIC PCS 7 Software Media Package, comprising: • SIMATIC Route Control Upgrade Package V7.1 to V8.0 • SIMATIC Route Control Upgrade Package V8.0/8.1 to V8.2	
- Delivery form package License key USB stick, certificate of license	**6ES7652-8XX28-0YF0**
- Online delivery License key download, online certificate of license Note: E-mail address required!	**6ES7652-8XX28-0YK0**

© Siemens 2019

Upgrades for Engineering System and Management Console

Overview

Engineering Upgrade Package V8.0 to V8.1

SIMATIC PCS 7 Engineering System with Engineering Software V8.0 and Management Console V8.0 can be upgraded to Version 8.1 using the SIMATIC PCS 7 Engineering Upgrade Package.

The licenses included in the Engineering Upgrade Package V8.0 to V8.1 apply to the following software products of SIMATIC PCS 7 Version 8.0:

- PCS 7 ES Single Station, PCS 7 AS Engineering Software, PCS 7 AS/OS Engineering Software
- PCS 7 Import-Export Assistant
- SIMATIC Version Trail
- PCS 7 SFC Visualization
- PCS 7 BCE
- PCS 7 Management Console
- Industrial Ethernet communication software for CP

Engineering Upgrade Package V7.1 to V8.1

SIMATIC PCS 7 Engineering System with Engineering Software V7.1 can be upgraded in two steps, initially to V8.0 and then to V8.1. Depending on the starting point, one of the two following versions of the SIMATIC PCS 7 Engineering Upgrade Package can be used:

- SIMATIC PCS 7 Engineering Upgrade Package AS/OS, unlimited POs
  (without OS Runtime license for productive operation), for classic engineering station without limitation of engineering.
- SIMATIC PCS 7 Engineering Upgrade Package AS/OS, 250 to 2 000 POs
  (with OS Runtime license for productive operation), for combined engineering/operator station in small applications

Any existing OS Runtime license is converted to a cumulative "Count Relevant License" during the upgrade from V7.1 to V8.0. The number of OS Runtime POs is retained.

The licenses included in the Engineering Upgrade Package V7.1 to V8.1 apply to the following software products of SIMATIC PCS 7 Version 7.1:

- PCS 7 Engineering AS, OS, AS/OS (250 POs to 2 000 POs) or PCS 7 Engineering AS, OS, AS/OS (unlimited POs), each including redundancy
- PCS 7 Import-Export Assistant
- SIMATIC Version Trail
- PCS 7 SFC Visualization
- PCS 7 BCE
- Industrial Ethernet communication software for CP

SIMATIC Version Cross Manager Upgrade

SIMATIC Version Cross Manager V7.1 can be used in both SIMATIC PCS 7 V7.1 and in SIMATIC PCS 7 V8.0 and V8.1. As a result, there is no need for this upgrade when upgrading from SIMATIC PCS 7 V7.1 to V8.0 or V8.1. Consequently, SIMATIC Version Cross Manager is not included in the SIMATIC PCS 7 Engineering Upgrade Packages AS/OS for upgrading from V7.1 to V8.0 or V8.1.

Advanced Engineering System Upgrade

The SIMATIC PCS 7 Advanced Engineering System Upgrade is offered as a separate product in addition to the SIMATIC PCS 7 Engineering Upgrade Package.

Since the SIMATIC PCS 7 Advanced Engineering System V8.0 (incl. service pack) can be used both in SIMATIC PCS 7 V8.0 and SIMATIC PCS 7 V8.1, this upgrade is only available for the upgrade from V7.1 to V8.0 (incl. SP1).

© Siemens 2019

Ordering data

Engineering software

	Article No.
Engineering Software Upgrade from V8.0 auf V8.1, based on the existing number of POs	
SIMATIC PCS 7 Engineering Upgrade Package AS/OS V8.0 to V8.1 Software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package V8.1	**6ES7651-5AX18-0YE5**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7651-5AX18-0YK5**
ASIA, 2 languages (English, Chinese)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package ASIA): ASIA license key USB hardlock, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package ASIA V8.1	**6ES7651-5AX18-0CE5**

	Article No.
Engineering Software Upgrade from V7.1 to V8.1	
SIMATIC PCS 7 Engineering Upgrade Package AS/OS V7.1 to V8.1 Software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user; comprising: • SIMATIC PCS 7 Engineering Upgrade Package AS/OS V7.1 to V8.0 • SIMATIC PCS 7 Engineering Upgrade Package AS/OS V8.0 to V8.1	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package V8.1	
- 250 to 2 000 POs (with OS Runtime license for productive operation)	**6ES7651-7AC18-0YE5**
- Unlimited POs (without OS Runtime license for productive operation)	**6ES7651-7AF18-0YE5**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	
- 250 to 2 000 POs (with OS Runtime license for productive operation)	**6ES7651-7AC18-0YK5**
- Unlimited POs (without OS Runtime license for productive operation)	**6ES7651-7AF18-0YK5**

Advanced Engineering

	Article No.
SIMATIC PCS 7 Advanced Engineering System Upgrade V7.1 to V8.0 (incl. SP) 2 languages (English, German), software class A, runs with Windows XP Professional 32-bit, Windows 7 Ultimate 32/64-bit, Windows Server 2003 R2 Standard 32-bit, or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7658-1GX08-2YE5**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7658-1GX08-2YK5**

© Siemens 2019

Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS

Overview

Upgrades combined in packages enable upgrading of existing Operator Systems V7.1/V8.0 to V8.1 with consideration of the number of existing process objects and archive variables.

OS Software Upgrades V8.0 from V8.1

The following Upgrade Packages for upgrading to V8.1 are offered for SIMATIC PCS 7 operator stations with OS Software V8.0:

- SIMATIC PCS 7 OS Single Station Upgrade Package
- SIMATIC PCS 7 OS Server Upgrade Package
- SIMATIC PCS 7 OS Client/SFC Visualization Upgrade Package

Two Upgrade Packages of type OS single station or OS server are required in each case for redundant SIMATIC PCS 7 operator stations.

OS Software Upgrades V7.1 from V8.1

SIMATIC PCS 7 Operator Stations with OS Software V7.1 can be upgraded in two steps, initially to V8.0 and then to V8.1. Depending on the starting point, the following Upgrade Packages are available:

- SIMATIC PCS 7 OS Single Station Upgrade Package
- SIMATIC PCS 7 OS Single Station Redundancy Upgrade Package
- SIMATIC PCS 7 OS Server Upgrade Package
- SIMATIC PCS 7 OS Server Redundancy Upgrade Package
- SIMATIC PCS 7 OS Client/SFC Visualization Upgrade Package

The OS Runtime licenses are converted to cumulative "Count Relevant Licenses" during the upgrade. The number of existing OS Runtime POs is retained.

The following table shows the number of Upgrade Packages required for upgrading the individual types of station.

Upgrade Package	Version	OS Single Station		OS server		OS Client
		Separate	Redundant	Separate	Redundant	
PCS 7 OS Single Station	V8.0 to V8.1	**1**	**2**	–	–	–
	V7.1 to V8.1	**1**	–	–	–	–
PCS 7 OS Single Station Redundancy	V7.1 to V8.1	–	**1**	–	–	–
PCS 7 OS Server	V8.0 to V8.1	–	–	**1**	**2**	–
	V7.1 to V8.1	–	–	**1**	–	–
PCS 7 OS Server Redundancy	V7.1 to V8.1	–	–	–	**1**	–
PCS 7 OS Client/SFC Visualization	V8.0 to V8.1	–	–	–	–	**1**
	V7.1 to V8.1	–	–	–	–	**1**

In addition to the licenses for the PCS 7 OS Software Single Station or Server, the Upgrade Packages for OS Single Station and OS Server include upgrade licenses for:

- SIMATIC PCS 7 SFC Visualization
- SIMATIC PCS 7 BCE
- Industrial Ethernet communication software for CP
- SIMATIC PCS 7 OpenPCS 7 and SIMATIC PCS 7 OpenPCS 7/ OS Client

The upgrade license for SIMATIC PCS 7 SFC Visualization is also part of the Upgrade Package SIMATIC PCS 7 OS Client/ SFC Visualization.

The upgrade licenses for Process Historian and Information Server are also embedded in SIMATIC PCS 7 OS Server Upgrade Package V8.0 to V8.1. With a SIMATIC PCS 7 OS Server Upgrade Package V8.0 to V8.1, only one SIMATIC PCS 7 OS Server or one SIMATIC PCS 7 Process Historian (with/ without Information Server) can be upgraded (for details see table in section "Upgrades for Process Historian and Information Server").

Upgrade of the Web Option for OS

Using the SIMATIC PCS 7 OS Web Server Upgrade Package, you can upgrade the SIMATIC PCS 7 Web server, SIMATIC PCS 7 Web diagnostics server and SIMATIC PCS 7 Web diagnostics clients from V7.1 or V8.0 to V8.1. When upgrading from V7.1 to V8.1 it is first necessary to upgrade to V8.0 and subsequently to V8.1.

© Siemens 2019

Ordering data

OS Software

	Article No.
OS Software Upgrade from V8.0 auf V8.1, based on the existing number of POs	
SIMATIC PCS 7 OS Single Station Upgrade Package V8.0 to V8.1 For OS Single Station, software class A, runs with Windows 7 Ultimate 32/64-bit; single license for 1 installation	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package V8.1	**6ES7652-5AX18-0YE0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-5AX18-0YK0**
ASIA, 2 languages (English, Chinese)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package ASIA) ASIA license key USB hardlock, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package ASIA V8.1	**6ES7652-5AX18-0CE0**
SIMATIC PCS 7 OS Server Upgrade Package V8.0 to V8.1 For OS Server, software class A, runs with Windows Server 2008 R2 Standard 64-bit; single license for 1 installation	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package V8.1	**6ES7652-5BX18-0YE0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-5BX18-0YK0**
ASIA, 2 languages (English, Chinese)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package ASIA) ASIA license key USB hardlock, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package ASIA V8.1	**6ES7652-5BX18-0CE0**
SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package V8.0 to V8.1 Software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7652-5CX18-0YF5**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-5CX18-0YK5**
ASIA, 2 languages (English, Chinese)	
• Delivery form package (without SIMATIC PCS 7 Software Media Package ASIA) ASIA license key USB hardlock, certificate of license	**6ES7652-5CX18-0CF5**
OS Software Upgrade from V7.1 auf V8.1, based on the existing number of POs	
SIMATIC PCS 7 OS Single Station Upgrade Package V7.1 to V8.1 For OS Single Station, software class A, runs with Windows 7 Ultimate 32/64-bit; single license for 1 installation; comprising: • SIMATIC PCS 7 OS Single Station Upgrade Package V7.1 to V8.0 • SIMATIC PCS 7 OS Single Station Upgrade Package V8.0 to V8.1	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package V8.1	**6ES7652-8AX18-0YE0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-8AX18-0YK0**

© Siemens 2019

Upgrades for Operator System incl. OpenPCS 7 and Web Option for OS

Ordering data	Article No.
SIMATIC PCS 7 OS Single Station Redundancy Upgrade Package V7.1 to V8.1 For OS Single Station Redundancy, software class A, runs with Windows 7 Ultimate 32/64-bit; single license for 2 installations; comprising: • SIMATIC PCS 7 OS Single Station Redundancy Upgrade Package V7.1 to V8.0 • 2 x SIMATIC PCS 7 OS Single Station Upgrade Package V8.0 to V8.1	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package V8.1	**6ES7652-3AX18-2YE0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-3AX18-2YK0**
SIMATIC PCS 7 OS Server Upgrade Package V7.1 to V8.1 For OS Server, software class A, runs with Windows Server 2008 R2 Standard 64-bit; single license for 1 installation; comprising: • SIMATIC PCS 7 OS Server Upgrade Package V7.1 to V8.0 • SIMATIC PCS 7 OS Server Upgrade Package V8.0 to V8.1	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package V8.1	**6ES7652-8BX18-0YE0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-8BX18-0YK0**

Ordering data	Article No.
SIMATIC PCS 7 OS Server Redundancy Upgrade Package V7.1 to V8.1 For OS Redundancy Server, software class A, runs with Windows Server 2008 R2 Standard 64-bit; single license for 2 installations; comprising: • SIMATIC PCS 7 OS Server Redundancy Upgrade Package V7.1 to V8.0 • 2 x SIMATIC PCS 7 OS Server Upgrade Package V8.0 to V8.1	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (with SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license, software DVDs and certificate of license for SIMATIC PCS 7 Software Media Package V8.1	**6ES7652-3BX18-2YE0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-3BX18-2YK0**
SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package V7.1 to V8.1 Software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user; comprising: • SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package V7.1 to V8.0 • SIMATIC PCS 7 OS Client/ SFC Visualization Upgrade Package V8.0 to V8.1	
5 languages (English, German, French, Italian, Spanish)	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7652-8CX18-0YF5**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-8CX18-0YK5**

© Siemens 2019

Ordering data

Web option for OS

	Article No.
PCS 7 Web Server Upgrade from V8.0 to V8.1	
SIMATIC PCS 7 Web Server Upgrade Package V8.0 to V8.1 For SIMATIC PCS 7 Web Server, SIMATIC PCS 7 Web Diagnostics Server, SIMATIC PCS 7 Web Diagnostics Client, 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows Server 2008 R2 Standard 64-bit (Web Server/Web Diagnostics Server) or Windows 7 Ultimate 32/64-bit (Web Diagnostics Client), single license for 1 installation	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7652-5DX18-0YF0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-5DX18-0YK0**

	Article No.
PCS 7 Web Server Upgrade from V7.1 to V8.1	
SIMATIC PCS 7 Web Server Upgrade Package V7.1 to V8.1 For SIMATIC PCS 7 Web Server, SIMATIC PCS 7 Web Diagnostics Server, SIMATIC PCS 7 Web Diagnostics Client, 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows Server 2008 R2 Standard 64-bit (Web Server/Web Diagnostics Server) or Windows 7 Ultimate 32/64-bit (Web Diagnostics Client), single license for 1 installation; comprising:	
• SIMATIC PCS 7 Web Server Upgrade Package V7.1 to V8.0	
• SIMATIC PCS 7 Web Server Upgrade Package V8.0 to V8.1	
- Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7652-8DX18-0YF0**
- Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-8DX18-0YK0**

© Siemens 2019

Upgrades for Process Historian and Information Server

Overview

The upgrade licenses for Process Historian and Information Server are embedded in the SIMATIC PCS 7 OS Server Upgrade Package V8.0 to V8.1. The following table shows the number of SIMATIC PCS 7 OS Server Upgrade Packages required for upgrading the various types of station.

Upgrade Package	Single Server				Server Redundancy	
	OS Server	Process Historian plus Information Server	Information Server	Process Historian	OS Server	Process Historian
PCS 7 OS Server Upgrade Package V8.0 to V8.1	1	1	–	1	2	2

A separate upgrade package is not required for a separate information server.

© Siemens 2019

Overview

Maintenance Station Upgrade Package

Using the SIMATIC PCS 7 Maintenance Station Upgrade Packages, you can upgrade the SIMATIC PCS 7 Maintenance Station Runtime Basic Package as well as the SIMATIC PCS 7 Maintenance Station Engineering from V7.1 or V8.0 to V8.1. The SNMP OPC server license is also taken into account for the upgrade.

When upgrading from V7.1 to V8.1 it is first necessary to upgrade to V8.0 and subsequently to V8.1.

The cumulative SIMATIC PCS 7 Maintenance Station Runtime licenses are independent of the version. Existing asset TAGs of these licenses are therefore completely available following the upgrade.

Ordering data

	Article No.
PCS 7 Maintenance Station Upgrade from V8.0 to V8.1	
SIMATIC PCS 7 Maintenance Station Upgrade Package V8.0 to V8.1 For installation on SIMATIC PCS 7 BOX, single station or server 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7652-5FX18-0YF0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-5FX18-0YK0**
PCS 7 Maintenance Station Upgrade from V7.1 to V8.1	
SIMATIC PCS 7 Maintenance Station Upgrade Package V7.1 to V8.1 For installation on SIMATIC PCS 7 BOX, single station or server 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7652-8FX18-0YF0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-8FX18-0YK0**

© Siemens 2019

Upgrades for SIMATIC BATCH

Overview

SIMATIC BATCH Upgrade Packages

Upgrades combined in packages enable upgrading of existing SIMATIC BATCH systems from V7.x or V8.0 to V8.1:

SIMATIC BATCH Server Upgrade Package

With upgrade licenses for:

- SIMATIC BATCH Server
- SIMATIC BATCH Basic
- SIMATIC BATCH Single Station User
- SIMATIC BATCH Single Station System
- SIMATIC BATCH API
- PCS 7 BCE
- Industrial Ethernet communication software for CP

SIMATIC BATCH Client upgrade package

With upgrade licenses for:

- SIMATIC BATCH Client
- SIMATIC BATCH Recipe System

SIMATIC BATCH V7.0 and SIMATIC BATCH V7.1 are identical in their functions. When upgrading from V7.0/V7.1 to V8.1 it is first necessary to upgrade to V8.0 and subsequently to V8.1.

The cumulative SIMATIC BATCH UNITs are independent of the version. Existing UNITs are completely available following the upgrade.

Ordering data

	Article No.
SIMATIC BATCH Upgrade from V8.0 to V8.1	
SIMATIC BATCH Server Upgrade Package V8.0 to V8.1 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7657-5XX18-0YF0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7657-5XX18-0YK0**
SIMATIC BATCH Client Upgrade Package V8.0 to V8.1 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7657-5XX18-0YF5**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7657-5XX18-0YK5**

	Article No.
SIMATIC BATCH Upgrade from V7.0 or V7.1 to V8.1	
SIMATIC BATCH Server Upgrade Package V7.x to V8.1 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7657-8XX18-0YF0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7657-8XX18-0YK0**
SIMATIC BATCH Client Upgrade Package V7.x to V8.1 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7657-8XX18-0YF5**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7657-8XX18-0YK5**

© Siemens 2019

Overview

SIMATIC Route Control Upgrade Package

With SIMATIC Route Control Upgrade Packages you can upgrade Route Control Engineering, Route Control Server and Route Control Center from V7.x or V8.0 to V8.1. The number of existing "Routes" (quantity option for number of simultaneous material transports) is fully available again after the upgrade.

SIMATIC Route Control V7.0 and SIMATIC Route Control V7.1 are identical in their functions. When upgrading from V7.0/V7.1 to V8.1 it is first necessary to upgrade to V8.0 and subsequently to V8.1. When upgrading to V8.0, the "Routes" are converted into cumulative "Count Relevant Licenses".

SIMATIC Route Control Center Upgrades, which are only available as an online delivery, allow separate upgrading of the Route Control Center software from V7.0 or V7.1 to V8.0 and V8.0 to V8.1.

Ordering data

	Article No.
SIMATIC Route Control Upgrade from V8.0 to V8.1	
SIMATIC Route Control Upgrade Package V8.0 to V8.1 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7652-5XX18-0YF0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-5XX18-0YK0**
SIMATIC Route Control Center Upgrade V8.0 to V8.1 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7658-7EX18-0YK0**

	Article No.
SIMATIC Route Control Upgrade from V7.0 or V7.1 to V8.1	
SIMATIC Route Control Upgrade Package V7.x to V8.1 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation	
• Delivery form package (without SIMATIC PCS 7 Software Media Package) License key USB stick, certificate of license	**6ES7652-8XX18-0YF0**
• Delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7652-8XX18-0YK0**
SIMATIC Route Control Center Upgrade 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user	
• V7.x to V8.0, delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7658-7EX08-0YK5**
• V8.0 to V8.1, delivery form online (without SIMATIC PCS 7 Software Media Package) License key download, online certificate of license Note: E-mail address required!	**6ES7658-7EX18-0YK0**

© Siemens 2019

Upgrades for SIMATIC Logon

Overview

SIMATIC Logon is a central user administration system with access control which was introduced into the process control system as of SIMATIC PCS 7 V6.0. Up to and including V6.1, SIMATIC Logon was offered in the form of separate products whose version cycle was asynchronous to the version cycle of SIMATIC PCS 7.

As of SIMATIC PCS 7 V7.0, the SIMATIC Logon software and licenses are fully integrated in the process control system. Since then, updating is carried out synchronous with SIMATIC PCS 7.

With the online compatibility tool, you can determine the SIMATIC Logon versions that are suitable for the various SIMATIC PCS 7 versions:

https://support.industry.siemens.com/cs/de/en/view/64847781

Ordering data

	Article No.
SIMATIC Logon Upgrade to V1.6 7 languages (English, German, French, Italian, Spanish, Chinese and Japanese), software class A Runs with the following operating systems • Windows Vista (Business/ Enterprise/Ultimate) up to SP2 32/64-bit • Windows 7 (Professional/ Enterprise/Ultimate) up to SP1 32/64-bit • Windows 8.0 (Standard/Pro/ Enterprise) 32/64-bit • Windows 8.1 (Standard/Pro/ • Enterprise) 32/64-bit • Windows 10 Enterprise 2015 LTSB 64-bit • Windows Server 2003 SP1/SP2 32-bit • Windows Server 2003 R2/2003 R2 SP2 32-bit • Windows Server 2008 (Standard/ Enterprise/Datacenter) up to SP2 32/64-bit • Windows Server 2008 R2 (Standard/Enterprise/Datacenter) up to SP1 64-bit • Windows Server 2012 (Foundation/Essentials/Standard/ Datacenter) 64-bit • Windows Server 2012 R2 (Essentials/Standard/Datacenter) 64-bit Single license for 1 installation Physical delivery: License key on USB flash drive, certificate of license, software and electronic documentation on CD	**6ES7658-7BX61-0YE0**

© Siemens 2019

Overview

SIMATIC PDM can be integrated in the engineering system, i.e. in the configuration environment of SIMATIC PCS 7, or operated in stand-alone mode. The version cycle of SIMATIC PDM is asynchronous to the version cycle of SIMATIC PCS 7:

The following overview shows some of the SIMATIC PDM versions and the compatible SIMATIC PCS 7 versions:

SIMATIC PDM version	Compatible SIMATIC PCS 7 version
V9.0	V8.2 V8.1, V8.1+SP1 V8.0+SP2 (without Communication FOUNDATION Fieldbus)
V8.2	V8.0+SP2, V8.1, V8.1+SP1
V8.1	V8.0, V8.0+SP1/SP2
V6.1	V6.1, V7.1 and V8.0

The compatibility tool on the Internet provides detailed information on how the various SIMATIC PCS 7 versions correlate with the versions of SIMATIC PDM:

https://support.industry.siemens.com/cs/de/en/view/64847781

Existing installations with SIMATIC PDM V7.0 can only be upgraded to version 9.0 by first upgrading to version 8.0. Projects based on SIMATIC PDM V6.x or V8.x (including SP in each case) can be upgraded directly to V9.0 with upgrade packages. Alternatively, an upgrade is also possible via the Software Update Service (for details, see "Software Media and Logistics" chapter, "Software Update Service" section).

Two upgrade packages are offered for SIMATIC PDM V8.x:

- SIMATIC PDM Upgrade Package Basic[1)] (with/without SIMATIC PDM HART Server) for configurations based on:
  - SIMATIC PDM Basic
  - SIMATIC PDM Service
  - SIMATIC PDM S7
  - SIMATIC PDM PCS 7
- SIMATIC PDM Upgrade Package Complete[1)] for configurations based on:
  - SIMATIC PDM PCS 7 Server
  - SIMATIC PDM PCS 7-FF

1) Optional product components for SIMATIC PDM such as PDM Extended, PDM Integration in STEP 7/PCS 7, PDM Routing, PDM Server and PDM Communication FOUNDATION Fieldbus are each included in a product package listed in the SIMATIC PDM Upgrade Package Basic or SIMATIC PDM Upgrade Package Complete and are implicitly authorized to be updated via the corresponding license. The SIMATIC PDM Upgrade Package Complete is required for use of the product components PDM Server or PDM Communication FOUNDATION Fieldbus.

Ordering data

	Article No.
SIMATIC PDM upgrade/update service	
SIMATIC PDM Upgrade Package V6.x to V9.1 For product packages and optional product components of SIMATIC PDM V6.0/V6.1	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive and certificate of license, bundled with 1? × SIMATIC PDM Software Media Package per order item	**6ES7651-5CX68-0YE5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7651-5CX68-0YK5**
SIMATIC PDM Upgrade Package Basic from V8.x/V9.0 to V9.1 For configurations based on SIMATIC PDM Basic, Service, S7, PCS 7 (with/without SIMATIC PDM HART Server)	
6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs on Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit, or Windows Server 2012 R2 Standard 64-bit (see SIMATIC PDM V9.1 Readme for latest information), floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive and certificate of license, bundled with 1? × SIMATIC PDM Software Media Package per order item	**6ES7651-5EX68-0YE5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7651-5EX68-0YK5**

© Siemens 2019

Upgrades for SIMATIC PDM

Ordering data	Article No.
SIMATIC PDM Upgrade Package Complete from V8.x/V9.0 to V9.1 For configurations based on SIMATIC PDM PCS 7 Server, PCS 7-FF 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit (see SIMATIC PDM V9.1 Readme for latest information), single license for 1 installation No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive and certificate of license, bundled with 1? × SIMATIC PDM Software Media Package per order item	**6ES7651-5FX68-0YE5**
• Online delivery License key download and online certificate of license combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required!	**6ES7651-5FX68-0YK5**

Ordering data	Article No.
SIMATIC PDM Upgrade from V7.0 to V8.0 For product configurations based on SIMATIC PDM PCS 7, SIMATIC PDM PCS 7-FF or SIMATIC PDM S7 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2003 R2 Standard 32-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user No SIMATIC PCS 7 Software Media Package	
• Physical delivery SIMATIC PDM V8.0 software and device library on DVD, license key on USB flash drive, certificate of license	**6ES7651-5DX08-0YE5**
• Online delivery Software image download (SIMATIC PDM and device library), license key download, online certificate of license Note: Email address required!	**6ES7651-5DX08-0YK5**

© Siemens 2019

Overview

SIMATIC S7 F Systems and SIMATIC S7 Safety Matrix software products can be optionally integrated in the process control system for the implementation and operation of safety applications.

The version cycle of these software components is not synchronous with that of SIMATIC PCS 7, however.

SIMATIC PCS 7 version	Compatible versions	
	SIMATIC S7 F Systems	SIMATIC S7 Safety Matrix Tool, SIMATIC Safety Matrix Viewer
V8.1, V8.2, V9.0	V6.1 SP2 or higher V6.2	V6.2 SP2 or higher

Compatibility tool

With the compatibility tool on the Internet you can determine which SIMATIC S7 F Systems and SIMATIC S7 Safety Matrix versions are currently suitable for the various SIMATIC PCS 7 versions:

https://support.industry.siemens.com/cs/de/de/view/64847781

Ordering data

	Article No.
SIMATIC S7 F Systems	
SIMATIC S7 F Systems V6.2 Upgrade Package For SIMATIC S7 F Systems upgrade from V6.0/V6.1 to V6.2 2 languages (English, German), software class A, runs on the engineering station under Windows 7 SP1 64-bit (Professional, Enterprise, Ultimate) or Windows Server 2008 R2 SP1 Standard 64-bit; on the operator station additionally under Windows 7 SP1 32-bit (Enterprise, Ultimate), Windows 10 Enterprise 2015 LTSB 64-bit or Windows Server 2012 R2 Standard 64-bit (see SIMATIC S7 F Systems V6.2 Readme for latest information), floating license for 1 user Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and Certificate of License, bundled with 1 × SIMATIC S7 F Systems Software Media Package per order item	**6ES7833-1CC26-0YE5**
• Online delivery License key download and online Certificate of License combined with SIMATIC S7 F Systems Software Media Package (software download and online Certificate of License) Note: Email address required!	**6ES7833-1CC26-0YK5**

	Article No.
SIMATIC S7 Safety Matrix Tool	
SIMATIC S7 Safety Matrix Tool V6.3 Upgrade Package V6.x -> V6.3 2 languages (English, German), software class A, runs on Windows 7 SP1 (Enterprise/Ultimate), Windows 10 Enterprise LTSB 2015, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016 Floating license for 1 user Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and Certificate of License, bundled with 1 × SIMATIC S7 Safety Matrix Software Media Package per order item	**6ES7833-1SM03-0YE5**
• Online delivery License key download and online Certificate of License, combined with SIMATIC S7 Safety Matrix Software Media Package (software download and online Certificate of License) Note: Email address required!	**6ES7833-1SM03-0YK5**
SIMATIC S7 Safety Matrix Viewer	
SIMATIC S7 Safety Matrix Viewer V6.3 Upgrade Package V6.x -> V6.3 2 languages (English, German), software class A, Runs on Windows 7 SP1 (Enterprise/Ultimate), Windows 10 Enterprise LTSB 2015, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016 Floating license for 1 user Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive and Certificate of License, bundled with 1 × SIMATIC S7 Safety Matrix Software Media Package per order item	**6ES7833-1SM63-0YE5**
• Online delivery License key download and online Certificate of License, combined with SIMATIC S7 Safety Matrix Software Media Package (software download and online Certificate of License) Note: Email address required!	**6ES7833-1SM63-0YK5**

© Siemens 2019

Upgrades for S7-PLCSIM Simulation Software

Overview

The S7-PLCSIM software used for simulation of SIMATIC PCS 7 automation systems when debugging CFC/SFC user programs can be integrated into the engineering system, i.e. into the configuration environment of SIMATIC PCS 7. The version cycle of S7-PLCSIM is asynchronous to the version cycle of SIMATIC PCS 7.

S7-PLCSIM as of V5.4+SP5 is compatible with SIMATIC PCS 7 V8.1 and V8.2.

With the compatibility tool on the Internet you can determine which S7-PLCSIM versions are suitable for the various SIMATIC PCS 7 versions:

https://support.industry.siemens.com/cs/ww/en/view/64847781

Ordering data

	Article No.
S7-PLCSIM upgrade from V3.x, V4.x, V5.0, V5.2 or V5.3 to V5.4 5 languages (English, German, French, Italian, Spanish), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2003/2003 R2 Standard 32-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user No SIMATIC PCS 7 Software Media Package Physical delivery License key on USB flash drive, certificate of license, software and electronic documentation on CD	**6ES7841-0CC05-0YE5**

© Siemens 2019

Overview

With SIMATIC PCS 7, communications software and licenses of SIMATIC NET are used for the system communication via Industrial Ethernet. Their version cycle is not usually synchronous with that of SIMATIC PCS 7.

The SIMATIC PCS 7 versions correspond to the SIMATIC NET products as follows:

- SIMATIC PCS 7 V9.0 with SIMATIC NET products V14
- SIMATIC PCS 7 V8.2 with SIMATIC NET products V13
- SIMATIC PCS 7 V8.1 with SIMATIC NET products V12
- SIMATIC PCS 7 V8.0 with SIMATIC NET products:
  - V8.1 (Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit operating system)
  - V7.1 (Windows XP Professional 32-bit or Windows Server 2003 R2 Standard 32-bit operating system)

When upgrading SIMATIC PCS 7, a separate upgrade is only required for the S7-REDCONNECT and SOFTNET-IE RNA communication software. For the other SIMATIC NET products, the version upgrade is implemented for the SIMATIC PCS 7 upgrade with SIMATIC PCS 7 Upgrade Packages.

Ordering data

Communication products for SIMATIC PCS 7 V9.0

	Article No.
SIMATIC NET HARDNET-IE S7 V14 Software for S7, open communication, OPC, PG/OP communication Configuration software; up to 120 connections; floating license Runtime software, software and electronics manual on DVD; license key, 2 languages (German, English) for 32/64-bit: Windows 7 SP1 Professional/Ultimate, 64-bit: Windows 8.1 Professional, Windows 10, Server 2008 R2 SP1, Server 2012 R2 For max. 4 CP 1623, CP 1628	
• Goods delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-1CB14-0AA0**
• Online delivery Software and license key download Note: Email address required!	**6GK1716-1CB14-0AK0**
SIMATIC NET HARDNET-IE S7-REDCONNECT V14 S7 communication software for failsafe S7 communication over redundant networks with license for up to 4 Industrial Ethernet CPs Runtime software, 2 languages (English, German); for 32/64-bit: Windows 7 SP1 Professional/Ultimate, 64-bit: Windows 8.1 Professional; Windows 10, Server 2008 R2 SP1, Server 2012 R2 For max. 4 CP 1623, CP 1628	
• Goods delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-0HB14-0AA0**
• Online delivery Software and license key download Note: Email address required!	**6GK1716-0HB14-0AK0**
SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack V14 For expansion of HARDNET-IE S7 communication software to HARDNET-IE S7-REDCONNECT, with license for up to 4 Industrial Ethernet CPs 2 languages (English, German) for 32/64-bit: Windows 7 SP1 Professional/Ultimate, 64-bit: Windows 8.1 Professional, Windows 10, Server 2008 R2 SP1, Server 2012 R2 For max. 4 CP 1623, CP 1628	
• Goods delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-0HB14-0AC0**
• Online delivery Software and license key download Note: Email address required!	**6GK1716-0HB14-0AK1**
SIMATIC NET SOFTNET-IE RNA V14 Software for connecting PCS 7 stations to PRP-enabled networks with integrated SNMP Runtime software, 2 languages (English, German), software class A, for 32/64-bit: Windows 7 SP1 Professional/Ultimate, 64-bit: Windows 8.1 Professional; Windows 10, Server 2008 R2 SP1, Server 2012 R2 Single license for 1 installation Without SIMATIC PCS 7 Software Media Package Goods delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1711-1EW14-0AA0**

© Siemens 2019

Ordering data	Article No.
Upgrades for communication software	
SIMATIC NET HARDNET-IE S7-REDCONNECT Upgrade Software upgrade for S7-REDCONNECT	
Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
Physical delivery Software and electronic manual on CD, license key on USB flash drive	
No SIMATIC PCS 7 Software Media Package	
• As of 2006 edition (V6.4)	**6GK1716-0HB00-3AE0**
• For V6.0, V6.1, V6.2, and 2005 edition (V6.3)	**6GK1716-0HB00-3AE1**
SIMATIC NET SOFTNET-IE RNA Upgrade Upgrade for SIMATIC NET SOFTNET-IE RNA as of V8.1	**6GK1711-1EW00-3AE0**
Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
Physical delivery Software and electronic manual on CD, license key on USB flash drive	
No SIMATIC PCS 7 Software Media Package	

Ordering data	Article No.
SIMATIC PCS 7 BCE V9.0 Runtime license for plant bus communication via standard network adapter and Basic Communication Ethernet; already integrated with SIMATIC PCS 7 Industrial Workstations	
3 languages (English, German, French), software class A, runs with Windows 7 Ultimate 64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, or Windows Server 2012 R2 Standard 64-bit, floating license for 1 user	
Without SIMATIC PCS 7 Software Media Package	
• Goods delivery License key on USB flash drive, certificate of license	**6ES7650-1CD58-2YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7650-1CD58-2YH5**

© Siemens 2019

Ordering data

Communication products for SIMATIC PCS 7 V8.2

	Article No.
SIMATIC NET HARDNET-IE S7 V13 S7 communication software with license for up to 4 Industrial Ethernet CPs, e.g. CP 1613 A2, CP 1623, CP 1628	
Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit, or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-1CB13-0AA0**
• Online delivery Software and license key download Note: Email address required!	**6GK1716-1CB13-0AK0**
SIMATIC NET HARDNET-IE S7-REDCONNECT V13 S7 communication software for failsafe S7 communication over redundant networks with license for up to 4 Industrial Ethernet CPs, e.g. CP 1613 A2, CP 1623, CP 1628	
Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-0HB13-0AA0**
• Online delivery Software and license key download Note: Email address required!	**6GK1716-0HB13-0AK0**
SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack V13 For expansion of HARDNET-IE S7 communication software to HARDNET-IE S7-REDCONNECT, with license for up to 4 Industrial Ethernet CPs, e.g. CP 1613 A2, CP 1623, CP 1628	
Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery Software and electronic manual on CD, license key on USB flash drive	**6GK1716-0HB13-0AC0**
• Online delivery Software and license key download Note: Email address required!	**6GK1716-0HB13-0AK1**
SIMATIC NET SOFTNET-IE RNA V13 Software for linking of PCS 7 stations to PRP-enabled networks with integrated SNMP	**6GK1711-1EW13-0AA0**
Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
Physical delivery Software and electronic manual on CD, license key on USB flash drive	
No SIMATIC PCS 7 Software Media Package	
Upgrades for communication software	
SIMATIC NET HARDNET-IE S7-REDCONNECT Upgrade Software upgrade for S7-REDCONNECT	
Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
Physical delivery Software and electronic manual on CD, license key on USB flash drive	
No SIMATIC PCS 7 Software Media Package	
• As of 2006 edition (V6.4)	**6GK1716-0HB00-3AE0**
• For V6.0, V6.1, V6.2, and 2005 edition (V6.3)	**6GK1716-0HB00-3AE1**
SIMATIC NET SOFTNET-IE RNA Upgrade Upgrade for SIMATIC NET SOFTNET-IE RNA as of V8.1	**6GK1711-1EW00-3AE0**
Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, single license for 1 installation	
Physical delivery Software and electronic manual on CD, license key on USB flash drive	
No SIMATIC PCS 7 Software Media Package	
SIMATIC PCS 7 BCE V8.2 Runtime license for plant bus communication via standard network adapter and Basic Communication Ethernet; already integrated with SIMATIC PCS 7 Industrial Workstations	
3 languages (English, German, French), software class A, runs with Windows 7 Ultimate 32/64-bit, Windows 10 Enterprise 2015 LTSB 64-bit, Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, floating license for 1 user	
No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7650-1CD28-2YB5**
• Online delivery License key download, online certificate of license Note: Email address required!	**6ES7650-1CD28-2YH5**

16

© Siemens 2019

Ordering data	Article No.
Communication products for SIMATIC PCS 7 V8.1	
SIMATIC NET HARDNET-IE S7 V12 S7 communication software with license for up to 4 Industrial Ethernet CPs, e.g. CP 1613 A2, CP 1623, CP 1628 Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	**6GK1716-1CB12-0AA0**
SIMATIC NET HARDNET-IE S7-REDCONNECT V12 S7 communication software for fail-safe S7 communication over redundant networks with license for up to 4 Industrial Ethernet CPs, e.g. CP 1613 A2, CP 1623, CP 1628 Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	**6GK1716-0HB12-0AA0**
SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack V12 For expansion of HARDNET-IE S7 communication software to HARDNET-IE S7-REDCONNECT, with license for up to 4 Industrial Ethernet CPs, e.g. CP 1613 A2, CP 1623, CP 1628 Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	**6GK1716-0HB12-0AC0**
SIMATIC NET SOFTNET-IE RNA V12 Software for linking of PCS 7 stations to PRP-enabled networks with integrated SNMP Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	**6GK1711-1EW12-0AA0**
Upgrades for communication software	
SIMATIC NET HARDNET-IE S7-REDCONNECT Upgrade Software upgrade for S7-REDCONNECT Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	
• As of 2006 edition (V6.4)	**6GK1716-0HB00-3AE0**
• For V6.0, V6.1, V6.2, and 2005 edition (V6.3)	**6GK1716-0HB00-3AE1**
SIMATIC NET SOFTNET-IE RNA Upgrade Upgrade for SIMATIC NET SOFTNET-IE RNA as of V8.1 Runtime software, 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	**6GK1711-1EW00-3AE0**
BCE license	
SIMATIC PCS 7 BCE V8.1 Runtime license for plant bus communication via standard network adapter and Basic Communication Ethernet; already integrated with SIMATIC PCS 7 Industrial Workstations 3 languages (English, German, French), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7650-1CD18-2YB5**
• Online delivery License key download, online certificate of license Note: E-mail address required!	**6ES7650-1CD18-2YH5**

16

© Siemens 2019

Ordering data	Article No.
Communication products for SIMATIC PCS 7 V8.0	
SIMATIC NET HARDNET-IE S7 V8.1 S7 communication software for CP 1613 A2/CP 1623/CP 1628, runtime software 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	**6GK1716-1CB08-1AA0**
SIMATIC NET HARDNET-IE S7-REDCONNECT V8.1 Software for fail-safe S7 communication via redundant networks, for CP 1613 A2/CP 1623/CP 1628, runtime software 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	**6GK1716-0HB08-1AA0**
SIMATIC NET HARDNET-IE S7-REDCONNECT PowerPack V8.1 For expansion of HARDNET-IE S7 communication software to HARDNET-IE S7-REDCONNECT, runtime software 2 languages (English, German), software class A, runs with Windows 7 Ultimate 32/64-bit or Windows Server 2008 R2 Standard 64-bit, single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	**6GK1716-0HB08-1AC0**
Upgrade of S7-REDCONNECT communication software	
SIMATIC NET HARDNET-IE S7-REDCONNECT Upgrade Software upgrade for S7-REDCONNECT, runtime software 2 languages (English, German), single license for 1 installation Physical delivery Software and electronic manual on CD, license key on USB flash drive No SIMATIC PCS 7 Software Media Package	
• As of 2006 edition (V6.4)	**6GK1716-0HB00-3AE0**
• For V6.0, V6.1, V6.2, and 2005 edition (V6.3)	**6GK1716-0HB00-3AE1**
BCE license	
PCS 7 BCE V8.0 Runtime license for plant bus communication via standard network adapter and Basic Communication Ethernet; already integrated with SIMATIC PCS 7 Industrial Workstations 3 languages (English, German, French), software class A, runs with Windows XP Professional 32-bit, Windows 7 Ultimate 32/64-bit, Windows Server 2003 R2 Standard 32-bit or Windows Server 2008 R2 Standard 64-bit, floating license for 1 user No SIMATIC PCS 7 Software Media Package	
• Physical delivery License key on USB flash drive, certificate of license	**6ES7650-1CD08-2YB5**
• Online delivery License key download, online certificate of license Note: E-mail address required!	**6ES7650-1CD08-2YH5**

16

© Siemens 2019

Notes

© Siemens 2019

Services for SIMATIC PCS 7




17/2 Lifecycle Services
17/3 Lifecycle Management Suite
17/4 Managed System Services
17/5 Remote Services
17/6 Inventory Baseline Services
17/7 SIMATIC System Audit
17/8 Lifecycle Information Services
17/9 Asset Optimization Services
17/10 Legacy System Services
17/11 DCS Application Services
17/12 Lifecycle Service Contracts

17/14 Technology Services
17/14 SIMATIC Virtualization as a service
17/16 SIMATIC DCS / SCADA infrastructure
17/17 SIMATIC Software Platform as a Service
17/18 Power Control Integration Services

© Siemens 2019

Lifecycle Services

Overview

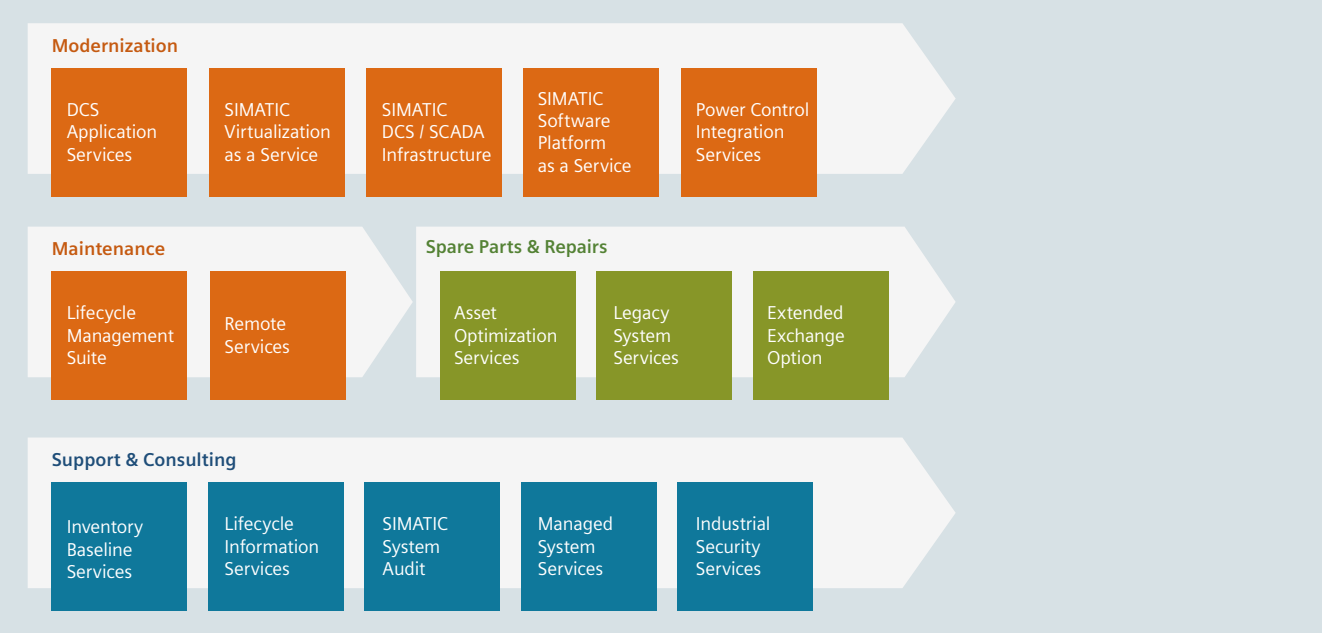

The service capability of your process control system is the key success criterion when it comes to making operating costs predictable and optimizing them continuously, to protect investments and thus ensure plant availability.

Reactive, proactive and preventive lifecycle services therefore ensure the service capability of the process control system in modern plants at optimized costs throughout the entire lifecycle.

The high pressure for innovation, especially through the use of IT systems that are constantly being upgraded, requires regular modernizations - even in automation. Only process control systems that can be updated/upgraded throughout their entire lifecycle can keep pace with the ongoing development of system technology at reasonable costs.

The requirements and specifications for operation of a plant are very specific, especially with a service life of 15 years and more. The service requirements are just as diverse. The SIMATIC PCS 7 Lifecycle Services provide an efficient service program for everything to do with the SIMATIC PCS 7 control system. These services can be easily integrated into individual service contracts that are customized to meet your specific requirements.

The standardized yet still flexible structure of the SIMATIC PCS 7 Lifecycle Services offers a future-proof basis for:

- Protection of your investments
- Securing plant availability
- Ability to calculate long-term maintenance costs
- Cost-optimized modernizations

More information


More information is available on the Internet at:

http://www.siemens.com/PCS7LCS

http://www.siemens.com/pils

© Siemens 2019

Overview

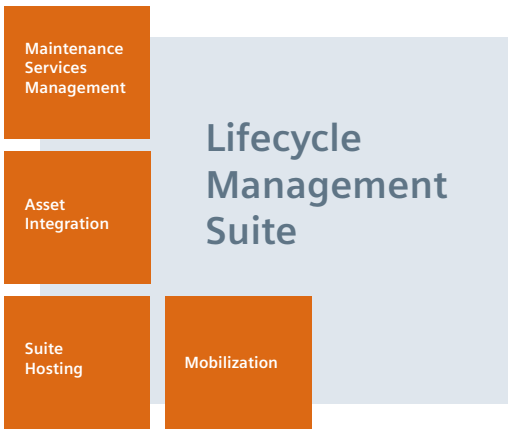

The Lifecycle Management Suite optimizes plant maintenance with regard to the planning, execution and documentation of all service activities. The pre-configured, COMOS MRO-based system provides standard operating procedures (SOP) which are assigned to the SIMATIC PCS 7 system components already entered.

"Mobilization" module – Initial setup is performed in the Mobilization module to precisely determine

- the products and systems used and their lifecycle status
- the existing maintenance processes and plant documentation

The execution of this module is a prerequisite and therefore an integral component for all further configuration modules.

"Suite Hosting" module – This module contains the COMOS MRO hosting – cloud-based or on-premises – with support and Software Update Service.

Option: Integration of the SIPIX Service Tablet

"Asset Integration" module – In addition to the "Suite Hosting" module, this module contains

- the integration of the installed base (iBase)
- the product master data entered
- the availability of obsolescence information

Option: Analyzer integration (automatic checkpoints) Reports: Lifecycle Information Services | Trends

"Maintenance Services Management" module – In addition to the "Asset Integration" module, this module contains the integration of standard operation procedures for lifecycle services, for instance, service checkpoints that have to be performed regularly. Together with the imported project data and parts lists from SIMATIC PCS 7 installations, service work schedules can be automatically generated on this basis.

Reports: Service SOP Reports | Trends

Benefits

- Pre-configured CMMS system with assets and service checkpoints entered
- Consistent data maintenance through integration in a data platform creates transparency and traceability
- Mobile data access on site with maintenance information and documentation in real time

Ordering data

Ordering data	Article No.
Modules	
Suite Hosting	**9LA1110-5CA00-0AA0**
Asset Integration	**9LA1110-5CA00-0BA0**
• Maintenance Services Management	**9LA1110-5CA00-0CA0**
• Product Data Integration	**9LA1110-5CA00-1AA0**
• Installed Base Integration	**9LA1110-5CA00-1AB0**
• Service Standards Integration	**9LA1110-5CA00-1AC0**
• Obsolescence Check	**9LA1110-5CA00-1AD0**
System Status Integration	**9LA1110-5CA00-1AE0**
Mobilization – Suite Hosting	**9LA1110-5CA00-1CA0**
Mobilization – Asset Integration	**9LA1110-5CA00-1CB0**
Mobilization – Maintenance Services Management	**9LA1110-5CA00-1CC0**
Additional COMOS MRO floating license	**9LA1110-5CA00-1BA0**
Additional COMOS MRO named user	**9LA1110-5CA00-1BB0**
Additional 10-hour technical support / subscription cycle	**9LA1110-5CA00-1CD0**
Mobile Integration	**9LA1110-5CA00-1MA0**

More information


More information is available online at:

www.siemens.com/lms

© Siemens 2019

Managed System Services

Overview

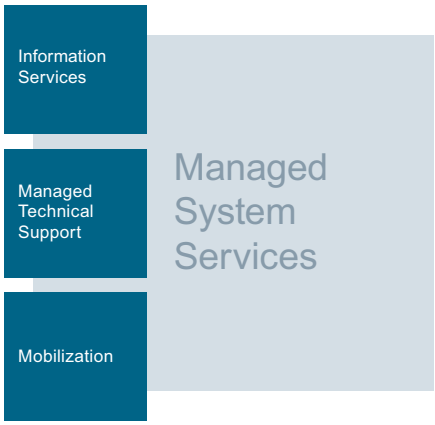

Managed System Services offer competent and efficient support through a dedicated support manager. This central contact person ensures an efficient exchange of information between all parties involved.

The dedicated support manager brings together, coordinates and prioritizes all activities, is familiar with the customer's plant, knows the maintenance processes and the installed base and, if necessary, uses remote access for diagnostic and trouble-shooting purposes.

Benefits

- Quicker processing and resolution of complex support requests
- Simplification of requests by means of central coordination and an exclusive "incoming" channel
- Higher “first-time-fix-rate"
- Prevents more expensive on-site service calls
- Greater transparency through active support management and regular status reports

Ordering data

You can choose from three different product versions for 5, 20 or 50 systems (number of utilized PLC and HMI systems). When ordering, the minimum contractual term is always at least one year.

	Article No.
Managed System Services for SIMATIC PCS 7	
• 6 months – DCS Starter, recommended for 20 systems	**9LA1110-1BG00**
• 1 year – DCS Small, recommended for 5 systems	**9LA1110-1BH00**
• 1 year – DCS Medium, recommended for 20 systems	**9LA1110-1BJ00**
• 1 year – DCS Large, recommended for 50 systems	**9LA1110-1BK00**
• 25-hour MSS support extension	**9LA1110-1BL00**


More information

More information is available online at:

http://www.siemens.com/mss

© Siemens 2019


Overview

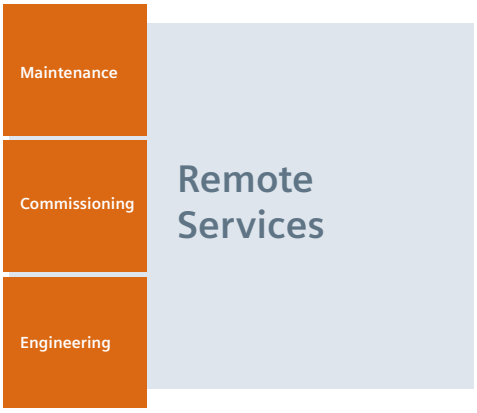

The engineering, commissioning and maintenance of automation systems involves significant amounts of both time and personnel resources, regardless of whether in a hazardous area or not. It is precisely these service tasks which can be optimally supported and even carried out remotely using powerful, modern communication media. It is imperative here that the growing IT safety requirements are met and that remote activities can be accounted for.

With our offering of platform-based remote services, our customers around the world can access centrally available expert knowledge of product manufacturers 24/7.

The 'Remote Access Services' (so-called 'connectivity packages') are required once per installation and enable communication between the customer system and Siemens IT infrastructure (cRSP = common Remote Service Platform); they consist of different hardware and software components. You can obtain detailed information from the Siemens representative in your region.

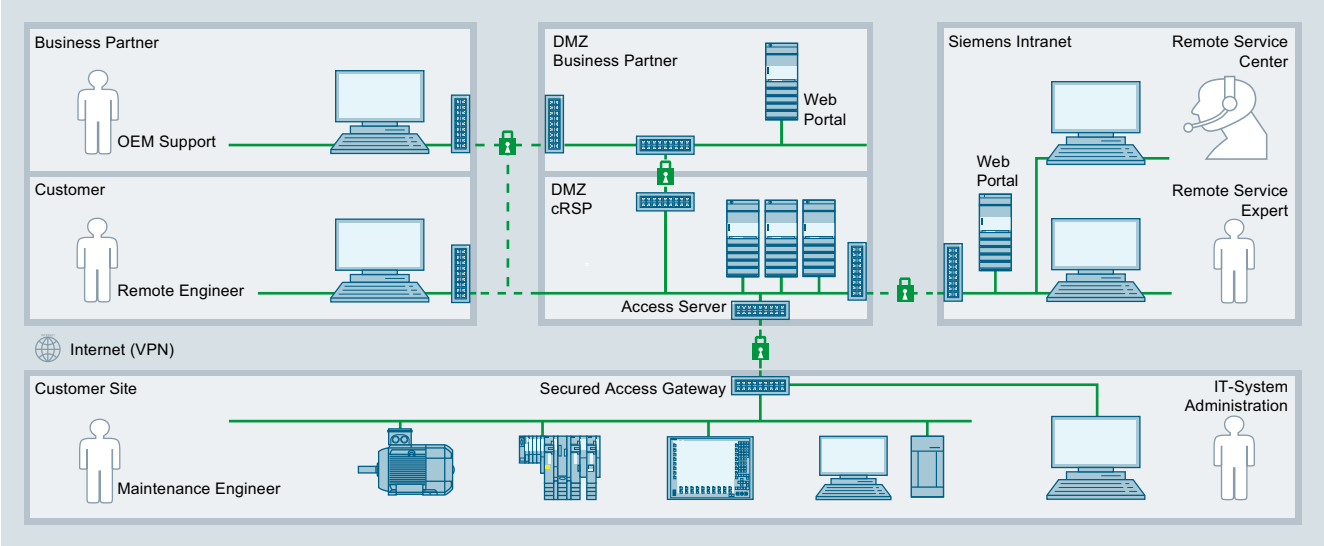

Siemens Remote Service platform

Benefits

- Secure remote connection of your automation system to the SIMATIC TechSupport IT infrastructure
- Global, direct connection to the network of the Siemens system experts
- Provision of the remote infrastructure including support and maintenance
- Complete transparency due to central administration of all system accesses
- Compatible with generally valid Industrial Security concepts
- TÜV/CERT certification of the Siemens cRSP infrastructure

Ordering data

	Article No.
Modules	
Reactive services over cRSP , with max. 5 solved service requests	**9LA1110-1AA00**
Remote services for field devices – Reactive Services 1	**9LA1110-1PB00-0AA0**
Remote services for field devices – Reactive Services 5	**9LA1110-1PC00-0AA0**

More information

More information is available online at:

http://www.siemens.com/siremote

© Siemens 2019

Inventory Baseline Services

Overview



The correct decisions have to be made when planning modernization measures or when budgeting necessary maintenance measures. The basis for such decisions is an in-depth knowledge of the installed system base. The requirements in this context are:

- Uniform and complete inclusion of all installed automation components
- Implement inclusion in a relatively short time and at low costs
- Make the result available through standardized reports

With its Inventory Baseline Services, Siemens offers modern data-driven services that use new methods and tools to help you plan the maintenance of machines and plants even more efficiently.

Performing an inventory provides an overview of the currently installed plant equipment and the spare parts inventory. The result of the inventory is used as a decision-making tool when planning future measures for maintenance and modernization.

Inventory Baseline Services offer transparency with regard to the installed automation components of machines and plants and provide the data for additional lifecycle services such as SIMATIC System Audit, Lifecycle Information Services and Asset Optimization Services.

Benefits

- Cost-efficient and standardized inventory of all of the installed automation components
- Valid decision aid for planned plant expansions, modernizations as well as preparation for updates/upgrades
- Solid basis for planning and implementation of additional lifecycle services

Ordering data

Ordering data	Article No.
Complete order processing	**9LA1110-8AJ00-1AA0**
Partial processing evaluation of SDT data	**9LA1110-8AJ00-2AA0**
Expanded data volume for large plants	**9LA1110-8AJ00-4AA0**


More information

More information is available online at:

http://www.siemens.com/sibs

© Siemens 2019

Overview

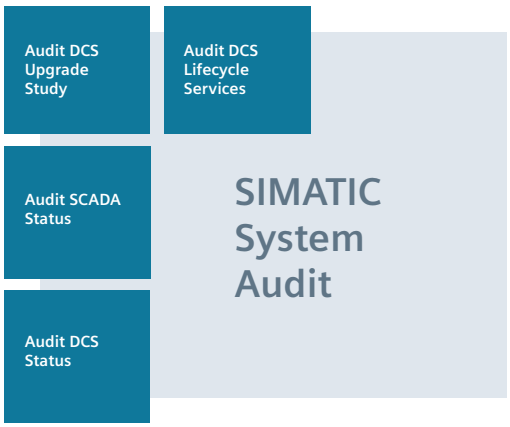

SIMATIC System Audit is used to analyze and evaluate the system status of SIMATIC PCS 7 systems or SIMATIC WinCC-based SCADA systems with lower SIMATIC S7 levels with regard to service capability, upgrade capability or lifecycle service contract compliance.

The modular structure allows for selective evaluation of the system status (assessment) as well as a detailed, comprehensive system analysis with fundamental statements on the current plant status and recommendations for restoration of the service and upgrade capability (audit).

Benefits

SIMATIC System Audit not only provides you with a comprehensive overview of the status of your automation system and the utilized components, it also offers a number of additional benefits:

- Competent analysis of weak points and risks with recommendations
- Avoidance or minimization of system risks for service and upgrade capability
- Reduction of standstill and downtimes by ensuring service capability
- Valid basis for the preparation of long-term lifecycle service contracts

SIMATIC System Audit is available for physical as well as virtual system configurations.


Ordering data

	Article No.
SIMATIC System - Assessment DCS	**9LA1110-8AC10-0AA1**
SIMATIC System Audit - DCS Status	**9LA1110-8AC10-4AA1**
SIMATIC System DCS - Upgrade Study	**9LA1110-8AC10-4AA2**
SIMATIC System Audit - DCS Lifecycle Services	**9LA1110-8AC10-4AA3**
SIMATIC System Audit DCS - Special Configurations	**9LA1110-8AC10-3AA1**
SIMATIC System - Assessment SCADA	**9LA1110-8AD10-0AA1**
SIMATIC System Audit - SCADA Status	**9LA1110-8AD10-1AA1**

More information

More information is available online at:


http://www.siemens.com/ssaa

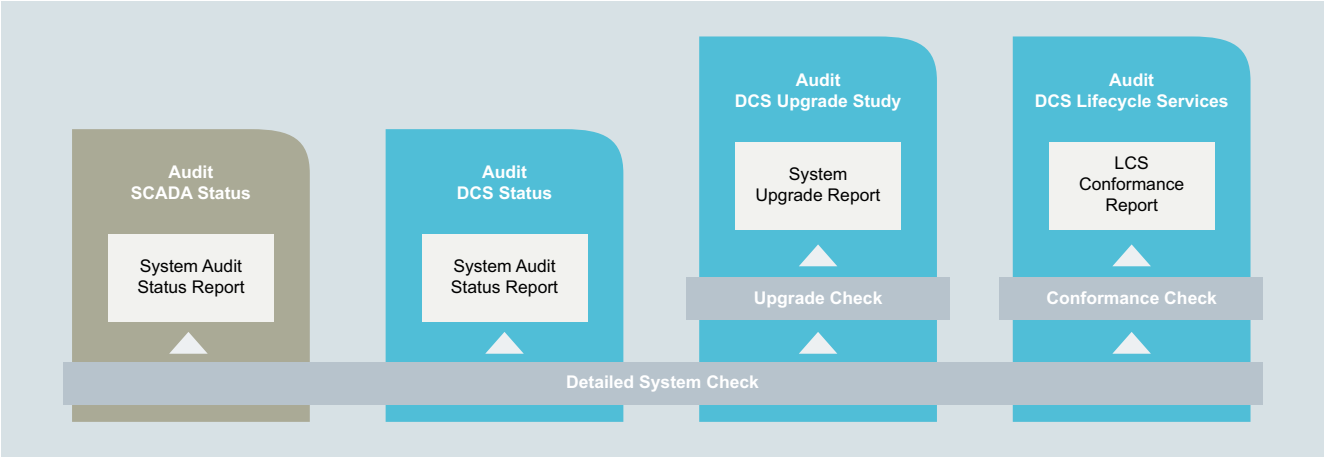

© Siemens 2019

Lifecycle Information Services

Overview

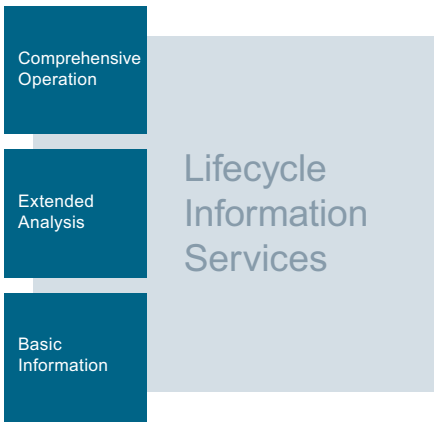

To plan your maintenance strategy, Lifecycle Information Services provide you regularly with detailed information on the product lifecycle of the utilized components.

The Lifecycle Information Services have a modular structure so that you need only request information that you actually require. Each of the following three methods returns a plant-specific report as result. You can decide for yourself how comprehensive you want this report to be.

- **Basic Information**
  Product Lifecycle Status focusing on analysis of functional obsolescence
- **Extended Analysis**
  "Basic Information" module and analysis of product-related statistical mean time between failures (MTBF)
- **Comprehensive Operation**
  "Extended" module supplemented with plant-specific information on updates/upgrades and general recommendations

Benefits

- Proactive, regular service information on the reduction of obsolescence risks
- Securing plant availability by means of specific service recommendations
- Prevention of unscheduled downtimes or cost-intensive supply bottlenecks
- Evaluation of new technological innovations

Ordering data

	Article No.
Basic Information	
• Up to 50 article numbers	
- One-time service	**9LA1110-8AG10-1AA0**
- Cyclically 1 × per year	**9LA1110-8AG10-1AB0**
- Cyclically 2 × per year	**9LA1110-8AG10-1AC0**
- Cyclically 4 × per year	**9LA1110-8AG10-1AD0**
• 50 to 150 article numbers	
- One-time service	**9LA1110-8AG10-1BA0**
- Cyclically 1 × per year	**9LA1110-8AG10-1BB0**
- Cyclically 2 × per year	**9LA1110-8AG10-1BC0**
- Cyclically 4 × per year	**9LA1110-8AG10-1BD0**
• 150 to 300 article numbers	
- One-time service	**9LA1110-8AG10-1CA0**
- Cyclically 1 × per year	**9LA1110-8AG10-1CB0**
- Cyclically 2 × per year	**9LA1110-8AG10-1CC0**
- Cyclically 4 × per year	**9LA1110-8AG10-1CD0**
Extended Analysis	
• Up to 50 article numbers	
- One-time service	**9LA1110-8AG10-2AA0**
- Cyclically 1 × per year	**9LA1110-8AG10-2AB0**
- Cyclically 2 × per year	**9LA1110-8AG10-2AC0**
- Cyclically 4 × per year	**9LA1110-8AG10-2AD0**
• 50 to 150 article numbers	
- One-time service	**9LA1110-8AG10-2BA0**
- Cyclically 1 × per year	**9LA1110-8AG10-2BB0**
- Cyclically 2 × per year	**9LA1110-8AG10-2BC0**
- Cyclically 4 × per year	**9LA1110-8AG10-2BD0**
• 150 to 300 article numbers	
- One-time service	**9LA1110-8AG10-2CA0**
- Cyclically 1 × per year	**9LA1110-8AG10-2CB0**
- Cyclically 2 × per year	**9LA1110-8AG10-2CC0**
- Cyclically 4 × per year	**9LA1110-8AG10-2CD0**
Comprehensive Operation	
• Up to 50 article numbers	
- One-time service	**9LA1110-8AG10-3AA0**
- Cyclically 1 × per year	**9LA1110-8AG10-3AB0**
- Cyclically 2 × per year	**9LA1110-8AG10-3AC0**
- Cyclically 4 × per year	**9LA1110-8AG10-3AD0**
• 50 to 150 article numbers	
- One-time service	**9LA1110-8AG10-3BA0**
- Cyclically 1 × per year	**9LA1110-8AG10-3BB0**
- Cyclically 2 × per year	**9LA1110-8AG10-3BC0**
- Cyclically 4 × per year	**9LA1110-8AG10-3BD0**
• 150 to 300 article numbers	
- One-time service	**9LA1110-8AG10-3CA0**
- Cyclically 1 × per year	**9LA1110-8AG10-3CB0**
- Cyclically 2 × per year	**9LA1110-8AG10-3CC0**
- Cyclically 4 × per year	**9LA1110-8AG10-3CD0**


More information

More information is available online at:

http://www.siemens.com/lis

© Siemens 2019


Overview

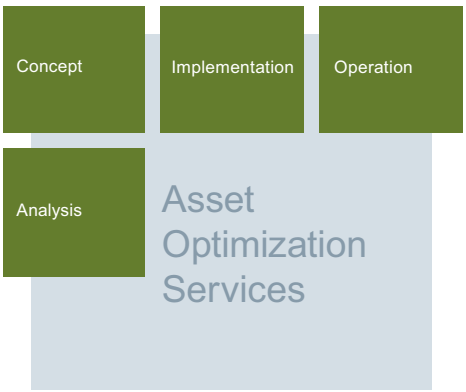

High plant availability with optimal spare part supply - Asset Optimization Services provide a structured and systematic procedure for the holistic optimization of the supply of spare parts.

The four phases of Asset Optimization Services are coordinated with each other but can also be used independently:

- Phase I: **Analysis**
  Determine the current spare part situation on site: Availability, product lifecycle, spare part delivery times
- Phase II: **Concept**
  The concept phase consists of an analysis of the actual requirements and the development of a spare part concept.
- Phase III: **Implementation**
  Based on the results of the concept phase, necessary inventory structures and inventory locations are established and spare parts procured.
- Phase IV: **Operation**
  The optimized and continuous supply of spare parts is an essential contribution to high plant availability. Depending on the specific contractual agreements, cyclic inventory analysis and a regular exchange of information also take place.

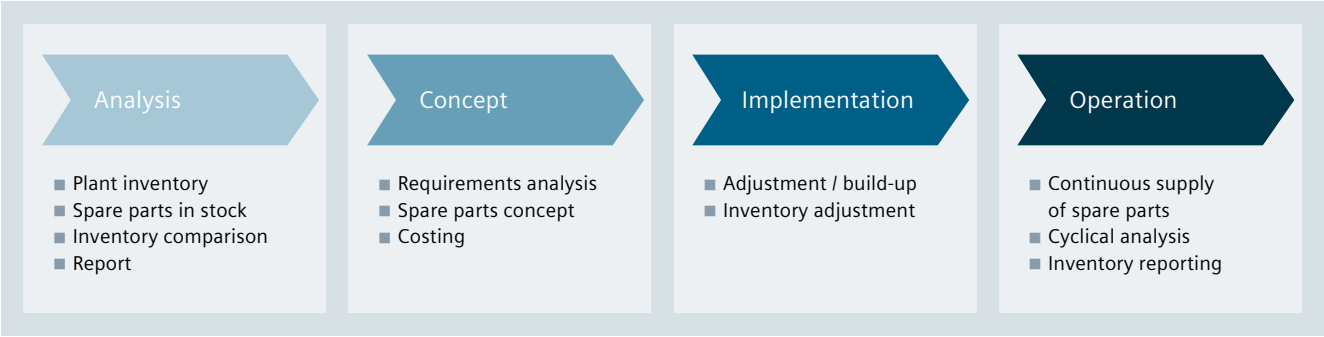

Benefits

- Creates transparency about the actual spare part requirements
- Ensures spare part availability across the entire lifecycle of the machine or plant and therefore fulfills an important prerequisite for improved service capability
- Shift to external inventory keeping and continuous supply with necessary spare parts

Ordering data

Ordering data	Article No.
Analysis	**9LA1110-8AE10-1AA0**
Concept	**9LA1110-8AE10-2AA0**
Implementation	**9LA1110-8AE10-3AA0**
Operation - Spare Parts Supply	**9LA1110-8AE10-4AA0**
Operation - Spare Part Management	**9LA1110-8AE10-4BA0**
Additional options	
Product Extension Including 500 additional article numbers in the analysis phase	**9LA1110-8AE10-8AA0**
Time Extension 1 additional day for analysis and concept phase	**9LA1110-8AE10-8BA0**

More information


More information is available online at:

http://www.siemens.com/aos

© Siemens 2019

Legacy System Services

Overview

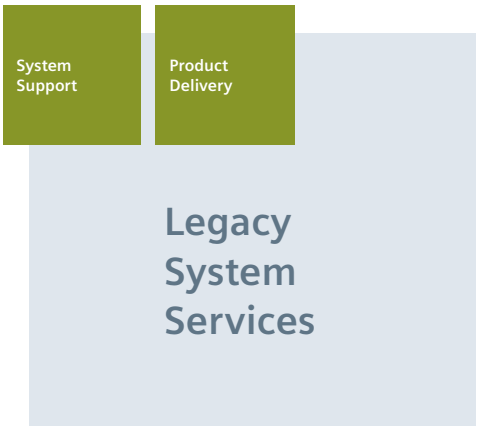

Legacy System Services bridge the time until a planned plant modernisation of instrumentation and control based on SIMATIC PCS 7. Selected component from the product range of obsolete SIMATIC PCS 7 versions together with technical support ensure the continued operation of an exisiting plant for the agreed time.

System Support module

- Contractually guaranteed access to technical support for obsolete SIMATIC PCS 7 V(n-2) components
- Specialists with the relevant technological expertise who coordinate all queries.
- System support as a necessary option for the purchase of selected discontinued system components

Product Delivery module

- Guaranteed access to components of product version SIMATIC PCS 7 V(n-2)
- Purchase using standard ordering processes and regular article numbers
- This module is only available in combination with the "System Support" module

Benefits

- **Proactive support**
  Contractually guaranteed support for obsolete SIMATIC PCS 7 components – for operators and maintenance engineers – ensures continued plant operation.
- **Investment protection**
  Legacy System Services give you the necessary time and financial leeway until you can implement plant modernisation.
- **Cost transparency**
  Far more reliable maintenance cost planning ensures the cost-effective operation of the plant.

Ordering data

	Article No.
LSS System Support Starter	**9LA1110-8LA11-1AS0**
LSS System Support S	**9LA1110-8LA11-1AA0**
LSS System Support M	**9LA1110-8LA11-1AB0**
LSS System Support L	**9LA1110-8LA11-1AC0**
LSS Extension	**9LA1110-8LA11-1AX0**

More information

More information is available online at:

http://www.siemens.com/lss

© Siemens 2019

Overview



Holistic DCS system modernization not only requires updating the system software, but also modernizing and standardizing the individual applications. "DCS Library Services" offers you the ideal solution for library exchange to APL:

- Standardized library exchange at a fixed price and project-specific implementation of AS and OS components
- AS/OS analysis creates transparency
- More flexible blocks and higher-level control algorithms
- Swift and secure implementation with short test phase

Benefits

Innovative – The modernization of libraries enables participation in current and future DCS innovations.

Cost-efficient – The use of a standardized library leads to reduced maintenance costs and thereby avoids unplanned service costs.

Effective – System-oriented, customized processing in accordance with a standardized procedure results in efficient solutions, even for complex tasks.

Ordering data

Ordering data	Article No.
Block Exchange AS Basic Package/MP	9LA1110-8DA00-3AA0
Block Exchange AS per AS 417	9LA1110-8DA00-3AD0
Block Exchange AS per AS 416	9LA1110-8DA00-3AC0
Block Exchange AS per AS 414	9LA1110-8DA00-3AB0
AS Option – Reposition CFC Blocks	9LA1110-8DA00-8AA0
AS Option – SFC Plan Parameter Exchange	9LA1110-8DA00-8AB0
AS Option – Dissolve Chart-in-Chart	9LA1110-8DA00-8AC0
Block Exchange AS Analysis 5AS	9LA1110-8DA00-1AA0
Block Exchange AS Analysis 10AS	9LA1110-8DA00-1AB0
Block Exchange AS Analysis 20AS	9LA1110-8DA00-1AC0
Block Exchange AS Analysis 30AS	9LA1110-8DA00-1AD0
Block Exchange AS Analysis 50AS	9LA1110-8DA00-1AE0
Block Exchange OS Analysis	9LA1110-8DA00-1BA0
Block Exchange OS Analysis Option Detail	9LA1110-8DA00-6BA0
DCS Modernization Flexible Use	9LA1110-8DA00-0CA0
DCS Modernization Travel Costs	9LA1110-8DA00-0CB0

More information

More information is available online at:

https://www.siemens.com/das

© Siemens 2019

Lifecycle Service Contracts

Overview




The service elements introduced in the preceding sections form the basis for customized SIMATIC PCS 7 Lifecycle Service Contracts. Additional specific contract parameters, so-called service KPIs (e.g. terms of payment) can be agreed upon individually.

A prerequisite for entering into a Lifecycle Service Contract is an in-depth knowledge of the installed system base.

More information

More information is available online at:

www.siemens.com/pcs7lcs

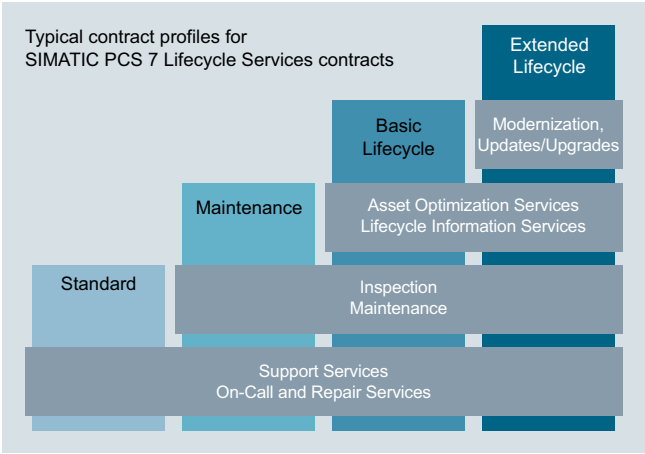

Typical variants of a Lifecycle Service contract are:

- **Standard**
  mainly contains reactive service elements, such as Technical Support, on-call or even repair services
- **Maintenance**
  includes the "Standard" profile with added services such as preventive inspection and maintenance
- **Basic Lifecycle**
  includes the "Maintenance" profile with added Lifecycle Information Services and Asset Optimization Services
- **Extended Lifecycle**
  includes the "Basic Lifecycle" profile with added comprehensive modernizations as well as updates and upgrades


© Siemens 2019

Overview (continued)

Long-term investment protection with predictable costs

A **reactive service concept** increases the risk of obsolescence – operating expenses and unplanned standstills can fluctuate and are hard to predict. The investment pressure increases until an upgrade becomes necessary. Long-term maintenance planning is extremely difficult, the risks are difficult to assess and the overall costs cannot be clearly calculated.

With a **proactive service concept**, however, the management of obsolescence risks and modernizations can be planned consistently. The continuous maintenance of the plant keeps the obsolescence risk low; the optimized costs for maintenance and modernization (OPEX) are mostly consistent and therefore predictable.

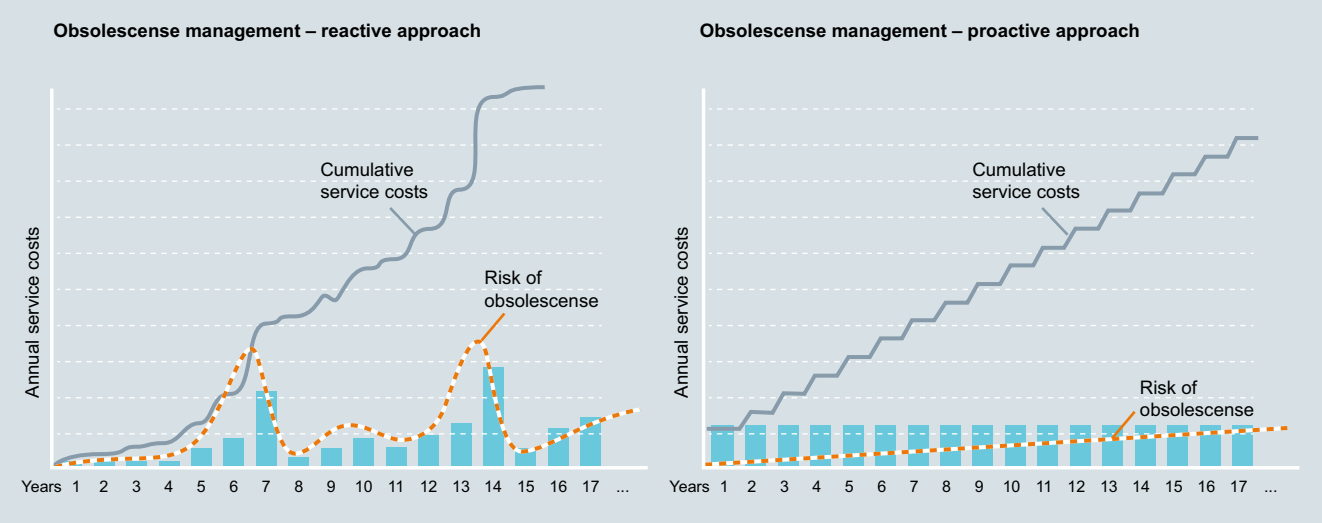


Benefits

- Long-term investment protection
- Planning capability for modernization and maintenance costs at the time of the investment across the entire lifetime of up to 15 years (TCO)
- Increased plant availability, for example, through guaranteed arrival times for service, secured spare part supply and preventive maintenance measures
- Ensure service capability through active obsolescence management for hardware and software components
- Securing system manufacturer know-how
- Professional project management from a single source for the entire duration of the contract

© Siemens 2019

SIMATIC Virtualization as a service

Overview

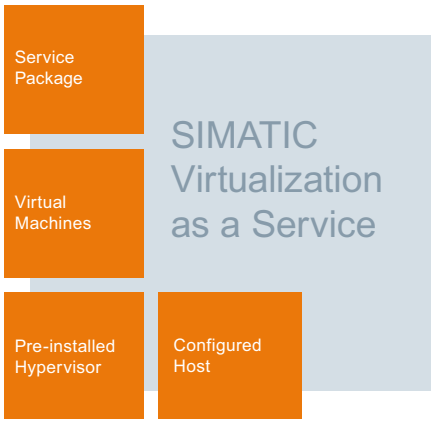

In addition to maintenance of the hardware platform, service and maintenance of the installed software components is decisive for the lifecycle costs of a PC-based control system. Together with IT technologies, innovative concepts, such as visualization, have been introduced to the industrial environment.

A virtual system needs less hardware, space and energy. It can also be serviced and maintained from a central location. The advantages are clear: greater flexibility at lower costs.

With SIMATIC Virtualization as a Service, you receive the lifecycle service for the virtual system including the matching hardware and software components directly from a single source and perfectly coordinated with each other.

SIMATIC Virtualization as a Service includes:

- Setup of a complete virtualization host
- Configuration of the virtual machines
- Installation and configuration of the operating systems
- Installation of the SIMATIC software
- Comprehensive service package

You have the option to supplement this offer with Managed Support Services and SIMATIC Remote Services.

Benefits

- Comprehensive lifecycle services for the virtual system including hardware and software – all from a single source
- Preconfigured, ready-to-use operator and engineering stations
- Optimal use of existing hardware resources
- Simple and cost-effective system expansions and updates

Ordering data

The offer comprises:

- Basic system (host hardware and installed Hypervisor software)
- Thin Client for system management
- Service package
- Range of different virtual machines (virtual machines can only be ordered in combination with a host)

You also have the option of ordering additional hardware and software components such as the VM vCenter server, the SIMATIC Batch SSD kit, additional thin clients as well as supplementary lifecycle services.

Virtual machines are subject to sliding-scale pricing.

	Article No.
Basic system for virtual machines with Windows Server 2012	
HP ProLiant DL380 GEN10 with VMware Hypervisor	
• 12Cx1P HP Host System	**9LA1110-6SV00-1HB3**
• 16Cx1P HP Host System	**9LA1110-6SV00-1HC3**
• 12Cx2P HP Host System	**9LA1110-6SV00-1HE3**
• 16Cx2P HP Host System	**9LA1110-6SV00-1HF3**
Basic system for virtual machines with Windows Server 2016	
HP ProLiant DL380 GEN10 with VMware Hypervisor + 10x Microsoft Windows Server 2016 standard licenses 12Cx1P HP Host System	**9LA1110-6SV00-1HB4**
HP ProLiant DL380 GEN10 with VMware Hypervisor + Microsoft Windows Server 2016 Datacenter license	
• 16Cx1P HP Host System	**9LA1110-6SV00-1HC4**
• 12Cx2P HP Host System	**9LA1110-6SV00-1HE4**
• 16Cx2P HP Host System	**9LA1110-6SV00-1HF4**
Management Console	
HP T630 Flexible Thin Client dual screen – international Win10 Emb operating system, international localization	**9LA1110-6SV00-1TA5**
HP T630 Flexible Thin Client dual screen – German Win10 Emb operating system, German localization	**9LA1110-6SV00-1TD5**
vSAN system for virtual machines with Windows Server 2016	
16Cx1P HP vSAN system HP ProLiant DL380 GEN10 with VMware Hypervisor + vSAN software + Microsoft Windows Server 2016 Datacenter license	**9LA1110-6SV00-1HL4**
12Cx2P HP vSAN system HP ProLiant DL380 GEN10 with VMware Hypervisor + vSAN software + Microsoft Windows Server 2016 Datacenter license	**9LA1110-6SV00-1HM4**

© Siemens 2019

Ordering data

	Article No.
vSAN switches	
HPE 5130 24G switch 24x1Gbit + 6x10Gbit network switch + 1x HPE242 10Gbit DAC cable 7m	**9LA1110-6SV00-1SW0**
Thin Clients	
Win10 Emb operating system, international localization	
• HP T730 Flexible Thin Client quad screen	**9LA1110-6SV00-1TB0**
• HP T630 Flexible Thin Client dual screen	**9LA1110-6SV00-1TA2**
Win10 Emb operating system, German localization	
• HP T730 Flexible Thin Client quad screen	**9LA1110-6SV00-1TD0**
• HP T630 Flexible Thin Client dual screen	**9LA1110-6SV00-1TD1**
Options	
SSD Batch kit For SIMATIC PCS 7 Batch server database	**9LA1110-6SV00-1BA0**
DIGI Anywhere USB 19" (for SIMIT Dongles)	**9LA1110-6SV00-0SM0**
Extension Service for additional virtual machines For maximum 10 VMs	**9LA1110-6SV06-0AA0**
Service contract for Basic SIVaaS System	
2 year service contract	
• For 12Cx1P host	**9LA1110-6SV00-1AB4**
• For 16Cx1P host	**9LA1110-6SV00-1AC4**
• For 12Cx2P host	**9LA1110-6SV00-1AE4**
• For 16Cx2P host	**9LA1110-6SV00-1AF4**
5 year service contract	
• For 12Cx1P host	**9LA1110-6SV00-1AB5**
• For 16Cx1P host	**9LA1110-6SV00-1AC5**
• For 12Cx2P host	**9LA1110-6SV00-1AE5**
• For 16Cx2P host	**9LA1110-6SV00-1AF5**
3 year service contract extension[1]	
• For 8Cx1P, 10Cx1P host	**9LA1110-6SV00-1EB3**
• For 12Cx1P, 14Cx1P host	**9LA1110-6SV00-1EC3**
• For 8Cx2P, 10Cx2P, 16Cx1P host	**9LA1110-6SV00-1EE3**
• For 12Cx2P, 14Cx2P, 16Cx2P host	**9LA1110-6SV00-1EF3**
Service contracts for vSAN system	
2 year service contract	
• For 16Cx1P vSAN host	**9LA1110-6SV00-1AL4**
• For 12Cx2P vSAN host	**9LA1110-6SV00-1AM4**
• For HPE 5130 24G switch	**9LA1110-6SV00-1SW1**
5 year service contract	
• For 12Cx2P vSAN host	**9LA1110-6SV00-1AM5**
• For 16Cx1P vSAN host	**9LA1110-6SV00-1AL5**
• For HPE 5130 24G switch	**9LA1110-6SV00-1SW3**

	Article No.
VMware software	
VMware vCenter Server Foundation Appliance with license	**9LA1110-6SV05-0VF0**
VMware vCenter Server Standard Appliance with license	**9LA1110-6SV05-0VS0**
VMware software service contract	
2 year service contract	
• For vCenter Server Foundation	**9LA1 110-6SV00-1VF0**
• For vCenter Server Standard	**9LA1 110-6SV00-1VS0**
5 year service contract	
• For vCenter Server Foundation	**9LA1110-6SV00-1VF1**
• For vCenter Server Standard	**9LA1110-6SV00-1VS1**
Virtual machines	
VM with W2012 Server R2, 64-bit	**9LA1110-6SV05-0AA2**
VM with PCS 7 V8.2 SP1 W2012 Server R2 operating system, 64-bit	
• OS server	**9LA1110-6SV05-1AB2**
• ES/OS client	**9LA1110-6SV05-1GB3**
• OS client	**9LA1110-6SV05-1HB2**
• BATCH server	**9LA1110-6SV05-1LB2**
• BATCH client and OS client	**9LA1110-6SV05-1JB2**
VM with WinCC V7.5 W2016 Server operating system, 64-bit	
• Server	**9LA1110-6SV05-2AA3**
• Client	**9LA1110-6SV05-2BA4**
VM with W2016 Server, 64-bit	**9LA1110-6SV05-0AA3**
VM with W2016 Server, 64-bit Integrate Windows license For 12Cx1P and 16Cx1P	**9LA1110-6SV05-0AA4**
VM with PCS 7 V9.0 SP2 W2016 Server operating system, 64-bit	
• OS server	**9LA1110-6SV05-1AB5**
• ES/OS client	**9LA1110-6SV05-1GB7**
• ES/OS client + SIPaaS account	**9LA1110-6SV05-1GC0**
• OS client	**9LA1110-6SV05-1HB5**
• BATCH server	**9LA1110-6SV05-1LB5**
• BATCH client and OS client	**9LA1110-6SV05-1JB5**
• Route control server	**9LA1110-6SV05-1MB5**
• Route control client	**9LA1110-6SV05-1NB5**
VM with SIMIT V10 W2016 Server operating system, 64-bit	
• Simulation software	**9LA1110-6SV05-0SM4**
• Virtual controller	**9LA1110-6SV05-0SM5**

[1] Extension of an existing 2-year service contract


More information

More information is available online at:

http://www.siemens.com/sivaas

© Siemens 2019

Overview

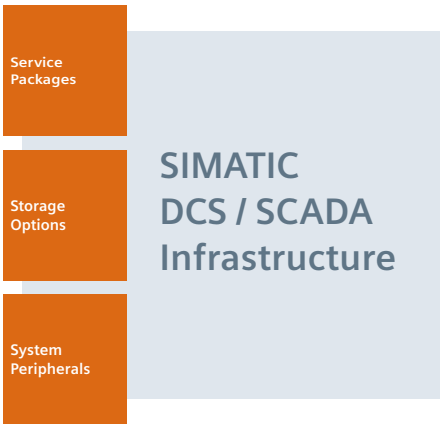

Historical data from the plant provides a central key to increased productivity. Tapping into the considerable volume of data for plant optimization requires a powerful archiving and reporting system. Siemens Industry Services supplies a comprehensive solution: an archiving system comprising server hardware and software, and process control keyboard, together with the necessary services – all from a single source.

SIMATIC DCS/SCADA infrastructure is a powerful, preconfigured IT infrastructure with preinstalled SIMATIC automation software. The hardware system is preconfigured in line with the specific requirements of the given application. The fully integrated archiving system comprises:

- A high-performance hardware platform
- Microsoft Windows Server installations and licenses
- Installation and configuration of Process Historian/Information Server software
- Optional: individual configuration for process control keyboard

This offer includes a 5-year comprehensive service package. A dedicated service contact person will provide you with professional assistance throughout the term of the contract and coordinate all support activities.

Benefits

- System configuration as required and preinstallation of software (Siemens and third-party software)
- Fully integrated long-term archiving solution for large volumes of data without additional engineering
- Plant expansion without disruption to operation
- Fast and easy access to historical plant data from an Office environment and rapid reporting
- Technical support for all components installed and for the complete system

Ordering data

The offer comprises:

- Basic server hardware, pre-installed and pre-configured
- Service package

	Article No.
Basic systems	
HP standard host for Process Historian (6Cx1P)	
• Small	**9LA1110-6PH11-0DA6**
• Large	**9LA1110-6PH11-0CA4**
Five-year service contract for the standard host	**9LA1110-6PH02-0DA6**
System peripherals	
Process control keyboard for SIMATIC PCS 7	**9AE4270-1AA00**
SIDSI Process Historian	
SIDSI PH Size XS HPE Host System ProLiant DL380 Gen 10 with Windows Server Standard 2016	**9LA1110-6PH13-0EA0**
SIDSI PH Size S HPE Host System ProLiant DL380 Gen 10 with Windows Server Standard 2016	**9LA1110-6PH13-0EB1**
SIDSI PH Size M HPE Host System ProLiant DL380 Gen 10 with Windows Server Standard 2016	**9LA1110-6PH13-0DB4**
SIDSI PH Size L HPE Host System ProLiant DL380 Gen 10 with Windows Server Standard 2016	**9LA1110-6PH13-0CA8**
SIDSI PH Size BTO HPE "build to order" Host for Process Historian Configuration	**9LA1110-6PH91-xxxx**
SIDSI Storage Systems	
SIDSI Backup & Restore Appliance 32 TB Storage incl. SIVaaS Backup & Restore software	**9LA1110-6SP10-0AA0**
Service package	
5 Year Service Agreement for SIDSI Standalone PH Hosts	**9LA1110-6PH13-1SV5**
5 Year Service Agreement for SIDSI Redundant PH Hosts	**9LA1110-6PH13-2SV5**
5 Year Service Agreement for SIDSI Backup & Restore	**9LA1110-6SP10-0SV5**


More information

More information is available online at:

http://www.siemens.com/sidsi

© Siemens 2019

Overview

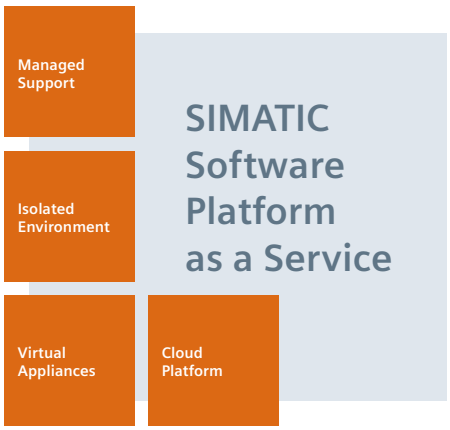

SIMATIC Software Platform as a Service provides a cloud-based IT infrastructure with preinstalled and preconfigured SIMATIC software. This engineering environment for the SIMATIC PCS 7 Process Control System allows short-term and flexible use for a limited period.

The virtual IT infrastructure in the data center of the cloud service provider provides all necessary resources such as computing power, memory, networks, etc. Fully configured and preinstalled virtual machines are provided in the cloud. These can also be adapted to individual need during use, for example by installing additional software.

Benefits

- Thanks to the standardized testing and development environment, there are no costs for infrastructure design or configuration
- Location-independent multi-project/multi-user engineering allows the flexible use of distributed engineering resources
- A needs-based pricing model allows investment costs to be tailored to actual use


Ordering data

	Article No.
SIMATIC PCS 7 Virtual Appliance	
• V8.1 SP1 ES / 30 days	**9LA1110-5SP10-1BA0**
• V8.2 ES / 30 days	**9LA1110-5SP10-1BB0**
• V9.0 ES / 30 days	**9LA1110-5SP10-1BC0**
• V9.0 SP1 ES / 30 days	**9LA1110-5SP11-1DA0**
Isolated security zone	**9LA1110-5SP10-1XA0**
Virtual Appliance – Suspend and Resume option After 30 days, the virtual appliance can be suspended for a defined period.	**9LA1110-5SP11-1XB0**

More information

More information is available online at:


www.siemens.com/sicbs

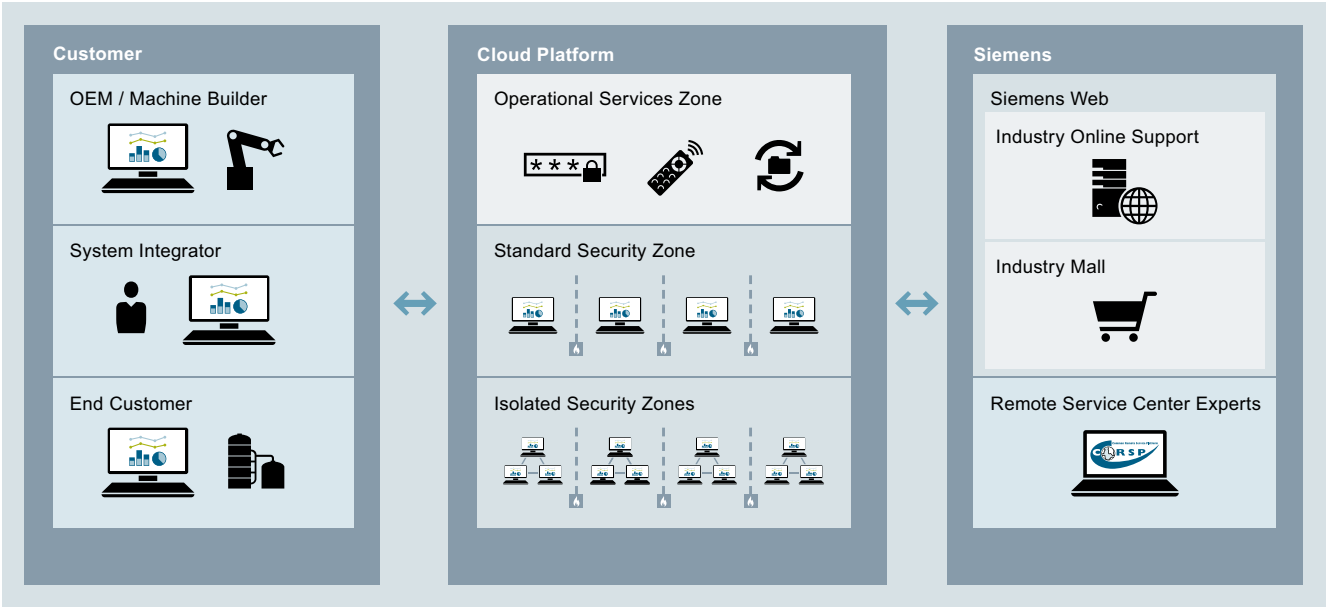

© Siemens 2019

Power Control Integration Services

Overview

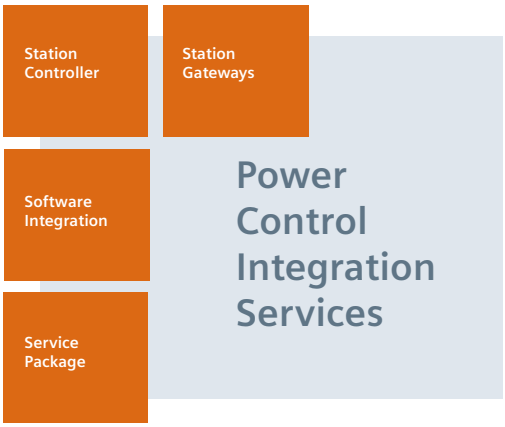

In many process plants, large electrical loads with high levels of energy consumption are in use, e.g. large drives, heavy blowers, pumps, etc. They are integrated via medium-voltage switchgear which controls, switches and automates the individual loads via devices for protection and control functions (IEDs) on the basis of the IEC 61850 standard.

SIMATIC PCS 7 PowerControl allows the homogeneous integration of switchgear in the SIMATIC PCS 7 process control system, thus creating a uniform system platform for process and energy. This platform is freely scalable – from simple visualization of the protection devices in small plants to high-availability integration of electrical loads in large plants.

Benefits

- Efficient – Cost-effective solution based on standard components (Industrial Ethernet)
- Flexible – Scalable and flexible from just a few to several hundred devices
- Lifecycle-oriented – Long-term preservation of service capability through assured spare parts availability and technical support

Ordering data

Ordering data	Article No.
IEC61850 Station Gateway Hardware/Software Package for 64 IEDs	**9LA1110-6BC10-0AA0**
IEC61850 Station Gateway Hardware/Software Package for 128 IEDs	**9LA1110-6BC10-0AA1**
5 year service contract Technical support, hardware replacement parts, software updates	**9LA1110-6BC10-0AX0**
IEC61850 Station Gateway Single Upgrade 128 IEDs	**9LA1110-6BC10-0AU0**
IEC61850 Station Gateway Extension Package	**9LA1110-6BC10-0AE0**
System architecture, feasibility study	**9LA1110-6BC10-0AS0**
Headquarters project support 4-hour extended support when 2-hour standard support limit exceeded	**9LA1110-6BC10-0AS1**

More information

More information is available online at:

www.siemens.com/pcis

© Siemens 2019

Appendix



18/2 **SITRAIN – Digital Industry Academy**

18/3 **Partner**
18/3 Partner

18/4 **Partners at Siemens**
18/4 Siemens Partner Program

18/5 **Industry Services**
18/6 Industry Services – Portfolio
18/7 Online Support

18/8 **Software licenses**


18/10 **Conditions of sale and delivery**

© Siemens 2019



Time for learning

Today's demands on our knowledge are every bit as diverse and dynamic as our profession itself. We keep learning more and longer – for our work, for our career and for ourselves. Advancing digitalization entails new topics and is also changing the way we absorb and process knowledge. SITRAIN – Digital Industry Academy offers the right source of knowledge here, which we can use anytime in just the way we need it. The time for learning is now.

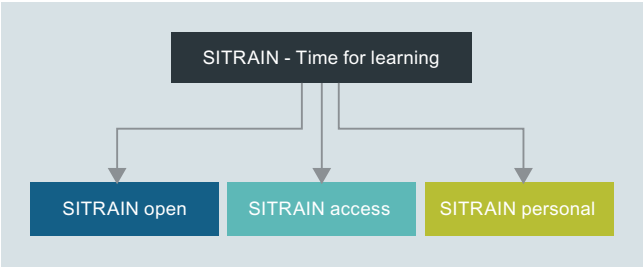

Knowledge for every need

With its three areas – SITRAIN open, SITRAIN access and SITRAIN personal – SITRAIN offers you an all-encompassing range of options for an ongoing expansion of your knowledge and skills, suited for every type of learner. And SITRAIN uses advancing digitalization to continuously expand content and offer new training methods.

Find your local offer here

SITRAIN – Digital Industry Academy Customer Support Germany

Tel.: +49 911 895-7575
E-Mail: sitrain.digital.industry.academy.de@siemens.com

Knowledge you can always find

SITRAIN open bundles useful information, worthwhile data and up-to-date expert knowledge about Siemens products for industry. Search it anytime, find anything – and always the right stuff.

Knowledge that gets you ahead

SITRAIN access is learning in the digital age. It offers you individualized ways to build your knowledge and access to exclusive digital training courses. Take advantage of sustainable learning success with a wide range of learning methods. Improve your skills – whether working in groups with others, or by yourself. Whenever, wherever and however you need to.

Knowledge you can experience

We all want to learn from the best. And SITRAIN personal's training courses let you benefit from our well-practiced trainers' expert knowledge, along with direct access to our training equipment. That's the best way to convey knowledge – whether at your company or in our training classrooms.


SITRAIN – Digital Industry Academy

www.siemens.com/sitrain

- SITRAIN open: www.siemens.com/sitrain-open
- SITRAIN access: www.siemens.com/sitrain-access
- SITRAIN personal: www.siemens.com/sitrain-personal

© Siemens 2019

Partner at Siemens

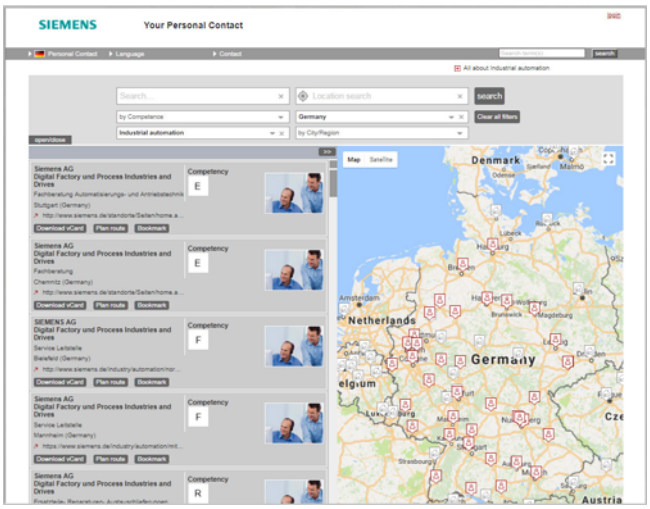

At your service locally, around the globe for consulting, sales, training, service, support, spare parts on the entire portfolio of Digital Industries.

Your partner can be found in our Personal Contacts Database at:
www.siemens.com/automation-contact

You start by selecting

- the required competence,
- products and branches,
- a country and a city

or by a

- location search or free text search.

© Siemens 2019

Siemens Partner Program

Overview

Siemens Solution and Approved Partner – Partners for your success



Highest competence in automation and drive technology

Siemens works closely together with selected partner companies around the world in order to ensure that customer requirements for all aspects of automation and drives are fulfilled as best as possible – wherever you are, and whatever the time.

We place great value on our customers acting in accordance with the same ideals which characterize Siemens as a whole: Competence, professionalism and quality. That is why continuous development through qualification and certification measures in line with global standards is a central aspect of our Partner Program. This means that with our partners, you benefit from the same high quality standards all over the world.
The partner emblem is the symbol for tried and tested quality.

The partner network for industry

The Siemens Partner Program offers you expertise and experience close at hand.


Within our global network, we distinguish between Solution Partners and Approved Partners. We currently work with more than 1,500 Solution Partners around the world. Our network of over 150 Approved Partners continues to grow. In more than 80 countries worldwide

Siemens Solution Partner – Automation Drives



At present we are working with more than 1,500 Solution Partners worldwide. They are characterized by extensive application, system and sector knowledge, as well as proven project experience, and are able to implement future-proof tailored solutions of the highest quality, based on our product and system portfolio.

Siemens Approved Partner – Value Added Reseller



With their detailed technical knowledge, Siemens Approved Partners – Value Added Resellers offer a combination of products and services that range from specialist technologies and customized modifications to the provision of high-quality system and product packages. They also provide qualified technical support and assistance.


Siemens Approved Partner – Industry Services



Siemens Approved Partner – Industry Services put their unique expertise entirely at the service of enhancing your productivity and can be instrumental in ensuring the availability of your plants.

Partner Finder

The ideal partner for your task is just a mouse click away!

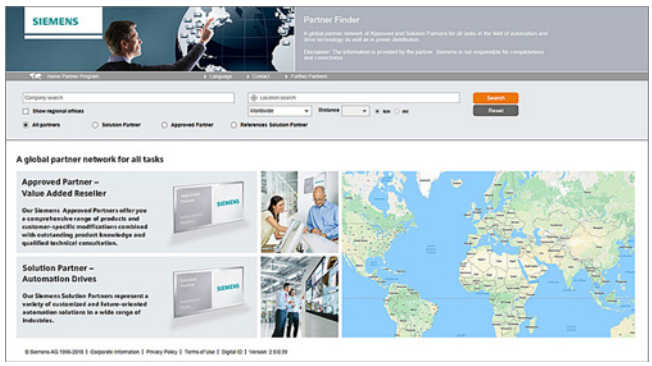

In the Siemens global Solution Partner program, customers are certain to find the optimum partner for their specific requirements – with no great effort. The Partner Finder is basically a comprehensive database that showcases the profiles of all our partners.

Easy selection:
Set filters in the search screen form according to the criteria that are relevant to you. You can also directly enter the name of an existing partner.

Skills at a glance:
Gain a quick insight into the specific competencies of any particular partner with the reference reports.

Direct contact option:
Use our electronic query form:


www.siemens.com/partnerfinder

Additional information of the Siemens Parners for industry is available online at:

www.siemens.com/partnerprogram

© Siemens 2019

Overview

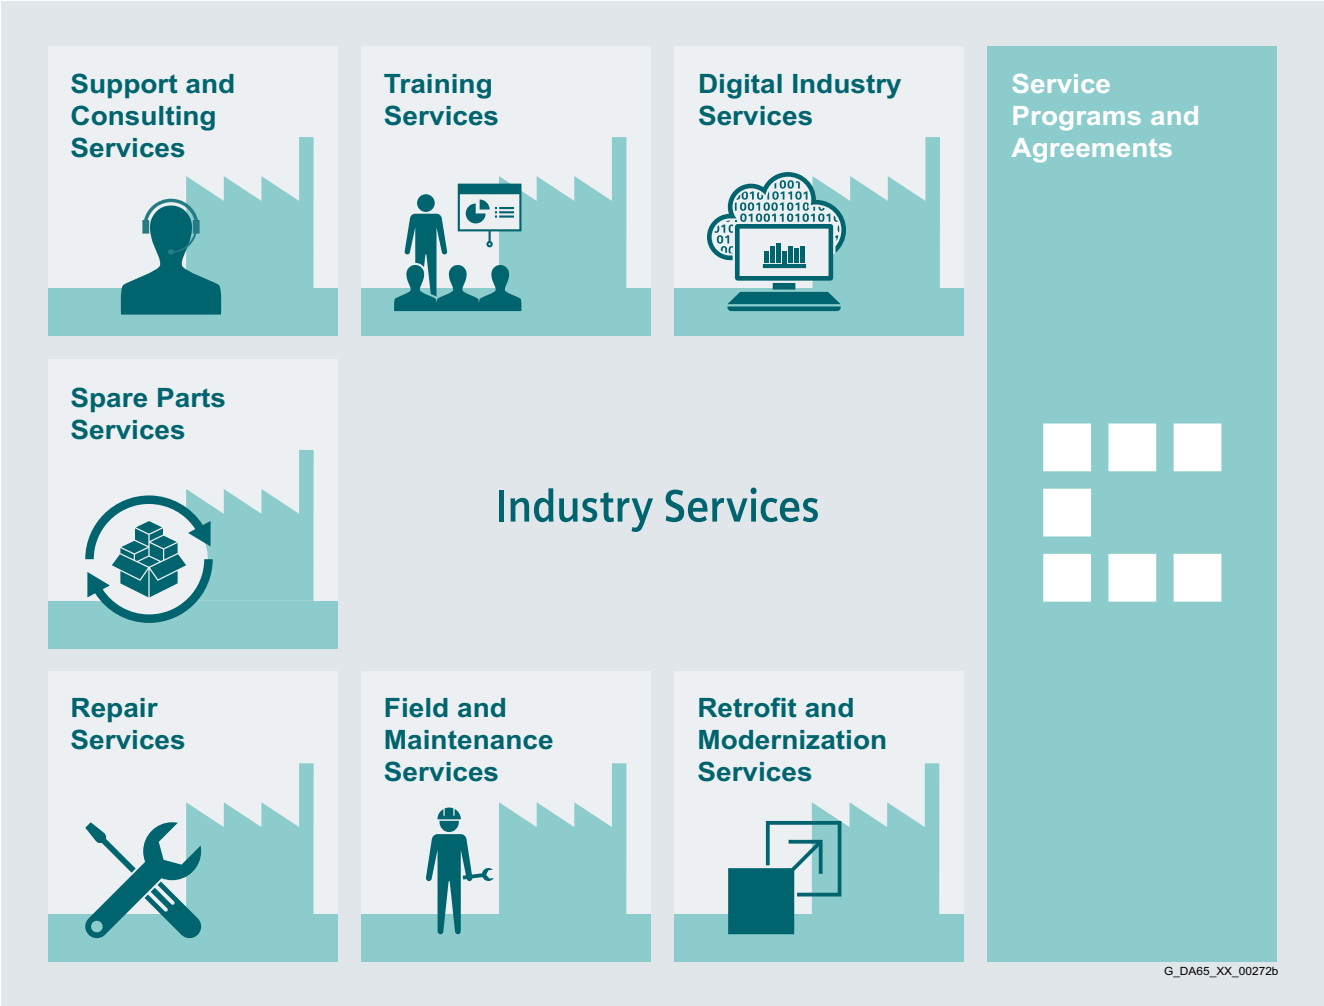

Keep your business running and shaping your digital future – with Industry Services

Optimizing the productivity of your equipment and operations can be a challenge, especially with constantly changing market conditions. Working with our service experts makes it easier. We understand your industry's unique processes and provide the services needed so that you can better achieve your business goals.

You can count on us to maximize your uptime and minimize your downtime, increasing your operations' productivity and reliability. When your operations have to be changed quickly to meet a new demand or business opportunity, our services give you the flexibility to adapt. Of course, we take care that your production is protected against cyber threats. We assist in keeping your operations as energy and resource efficient as possible and reducing your total cost of ownership. As a trendsetter, we ensure that you can capitalize on the opportunities of digitalization and by applying data analytics to enhance decision making: You can be sure that your plant reaches its full potential and retains this over the longer lifespan.

You can rely on our highly dedicated team of engineers, technicians and specialists to deliver the services you need – safely, professionally and in compliance with all regulations. We are there for you, where you need us, when you need us.

www.siemens.com/industryservices

© Siemens 2019

Industry Services – Portfolio overview

Overview



Digital Industry Services

Digital Industry Services make your industrial processes transparent to gain improvements in productivity, asset availability, and energy efficiency.

Production data is generated, filtered and translated with intelligent analytics to enhance decision-making.

This is done whilst taking data security into consideration and with continuous protection against cyber-attack threats.
https://www.siemens.com/global/en/home/products/services/industry/digital-services.html



Training Services

From the basics and advanced to specialist skills, SITRAIN courses provide expertise right from the manufacturer – and encompass the entire spectrum of Siemens products and systems for the industry.

Worldwide, SITRAIN courses are available wherever you need a training course in more than 170 locations in over 60 countries.
https://support.industry.siemens.com/cs/ww/en/sc/2226



Support and Consulting Services

Industry Online Support site for comprehensive information, application examples, FAQs and support requests.

Technical and Engineering Support for advice and answers for all inquiries about functionality, handling, and fault clearance. The Service Card as prepaid support for value added services such as Priority Call Back or Extended Support offers the clear advantage of quick and easy purchasing.

Information & Consulting Services, e.g. SIMATIC System Audit; clarity about the state and service capability of your automation system or Lifecycle Information Services; transparency on the lifecycle of the products in your plants.
https://support.industry.siemens.com/cs/ww/en/sc/2235



Spare Parts

Spare Parts Services are available worldwide for smooth and fast supply of spare parts – and thus optimal plant availability. Genuine spare parts are available for up to ten years. Logistic experts take care of procurement, transport, custom clearance, storage and order management. Reliable logistics processes ensure that components reach their destination as needed.

Since not all spare parts can be kept in stock at all times, Siemens offers a preventive measure for spare parts provisioning on the customer's premises with optimized **Spare Parts Packages** for individual products, custom-assembled drive components and entire integrated drive trains – including risk consulting.

Asset Optimization Services help you design a strategy for parts supply where your investment and carrying costs are reduced and the risk of obsolescence is avoided.
https://support.industry.siemens.com/cs/ww/en/sc/2110



Repair Services

Repair Services are offered on-site and in regional repair centers for fast restoration of faulty devices' functionality.

Also available are extended repair services, which include additional diagnostic and repair measures, as well as emergency services.
https://support.industry.siemens.com/cs/ww/en/sc/2154



Field and Maintenance Services

Siemens specialists are available globally to provide expert field and maintenance services, including commissioning, functional testing, preventive maintenance and fault clearance.

All services can be included in customized service agreements with defined reaction times or fixed maintenance intervals.
https://support.industry.siemens.com/cs/ww/en/sc/2265



Retrofit and Modernization Services

Provide a cost-effective solution for the expansion of entire plants, optimization of systems or upgrading existing products to the latest technology and software, e.g. migration services for automation systems.

Service experts support projects from planning through commissioning and, if desired over the entire extended lifespan, e.g. Retrofit for Integrated Drive Systems for an extended lifetime of your machines and plants.
https://support.industry.siemens.com/cs/ww/en/sc/2286



Service Programs and Agreements

A technical Service Program or Agreement enables you to easily bundle a wide range of services into a single annual or multi-year agreement.

You pick the services you need to match your unique requirements or fill gaps in your organization's maintenance capabilities.

Programs and agreements can be customized as KPI-based and/or performance-based contracts.
https://support.industry.siemens.com/cs/ww/en/sc/2275

© Siemens 2019

Overview



Siemens Industry and Online Support with some 1.7 million visitors per month is one of the most popular web services provided by Siemens. It is the central access point for comprehensive technical know-how about products, systems and services for automation and drives applications as well as for process industries.

In connection with the challenges and opportunities related to digitalization you can look forward to continued support with innovative offerings.

© Siemens 2019

Software licenses

Overview

Software types

Software requiring a license is categorized into types.
The following software types have been defined:

- Engineering software
- Runtime software

Engineering software

This includes all software products for creating (engineering) user software, e.g. for configuring, programming, parameterizing, testing, commissioning or servicing.

Data generated with engineering software and executable programs can be duplicated for your own use or for use by third-parties free-of-charge.

Runtime software

This includes all software products required for plant/machine operation, e.g. operating system, basic system, system expansions, drivers, etc.

The duplication of the runtime software and executable programs created with the runtime software for your own use or for use by third-parties is subject to a charge.

You can find information about license fees according to use in the ordering data (e.g. in the catalog). Examples of categories of use include per CPU, per installation, per channel, per instance, per axis, per control loop, per variable, etc.

Information about extended rights of use for parameterization/configuration tools supplied as integral components of the scope of supply can be found in the readme file supplied with the relevant product(s).

License types

Siemens Industry Automation & Drive Technologies offers various types of software license:

- Floating license
- Single license
- Rental license
- Rental floating license
- Trial license
- Demo license
- Demo floating license

Floating license

The software may be installed for internal use on any number of devices by the licensee. Only the concurrent user is licensed. The concurrent user is the person using the program. Use begins when the software is started.
A license is required for each concurrent user.

Single license

Unlike the floating license, a single license permits only one installation of the software per license.

The type of use licensed is specified in the ordering data and in the Certificate of License (CoL). Types of use include for example per instance, per axis, per channel, etc.

One single license is required for each type of use defined.

Rental license

A rental license supports the "sporadic use" of engineering software. Once the license key has been installed, the software can be used for a specific period of time (the operating hours do not have to be consecutive).
One license is required for each installation of the software.

Rental floating license

The rental floating license corresponds to the rental license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

Trial license

A trial license supports "short-term use" of the software in a non-productive context, e.g. for testing and evaluation purposes. It can be transferred to another license.

Demo license

The demo license support the "sporadic use" of engineering software in a non-productive context, for example, use for testing and evaluation purposes. It can be transferred to another license. After the installation of the license key, the software can be operated for a specific period of time, whereby usage can be interrupted as often as required.

One license is required per installation of the software.

Demo floating license

The demo floating license corresponds to the demo license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

Certificate of License (CoL)

The CoL is the licensee's proof that the use of the software has been licensed by Siemens. A CoL is required for every type of use and must be kept in a safe place.

Downgrading

The licensee is permitted to use the software or an earlier version/release of the software, provided that the licensee owns such a version/release and its use is technically feasible.

Delivery versions

Software is constantly being updated.
The following delivery versions

- PowerPack
- Upgrade

can be used to access updates.

Existing bug fixes are supplied with the ServicePack version.

PowerPack

PowerPacks can be used to upgrade to more powerful software. The licensee receives a new license agreement and CoL (Certificate of License) with the PowerPack. This CoL, together with the CoL for the original product, proves that the new software is licensed.
A separate PowerPack must be purchased for each original license of the software to be replaced.

Upgrade

An upgrade permits the use of a new version of the software on the condition that a license for a previous version of the product is already held.
The licensee receives a new license agreement and CoL with the upgrade. This CoL, together with the CoL for the previous product, proves that the new version is licensed.
A separate upgrade must be purchased for each original license of the software to be upgraded.

© Siemens 2019

Overview

ServicePack

ServicePacks are used to debug existing products. ServicePacks may be duplicated for use as prescribed according to the number of existing original licenses.

License key

Siemens Industry Automation & Drive Technologies supplies software products with and without license keys.

The license key serves as an electronic license stamp and is also the "switch" for activating the software (floating license, rental license, etc.).

The complete installation of software products requiring license keys includes the program to be licensed (the software) and the license key (which represents the license).

Software Update Service (SUS)

As part of the SUS contract, all software updates for the respective product are made available to you free of charge for a period of one year from the invoice date. The contract will automatically be extended for one year if it is not canceled three months before it expires.

The possession of the current version of the respective software is a basic condition for entering into an SUS contract.

You can download explanations concerning license conditions from www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

© Siemens 2019

1. General Provisions

By using this catalog you can purchase products (hardware, software and services) described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as "T&C"). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

1.1 For customers with a seat or registered office in Germany

For customers with a seat or registered office in Germany, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for installation work the "General Conditions for Erection Works – Germany"[1] ("Allgemeine Montagebedingungen – Deutschland" (currently only available in German)) and/or
- for stand-alone software products and software products forming a part of a product or project, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany"[1] and/or
- for consulting services the "General Terms and Conditions for Consulting Services of the Division DF – Germany"[1] and/or
- for other supplies and/or services the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"[1].
  In case such supplies and/or services should contain Open Source Software, the conditions of which shall prevail over the " General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry "[1], a notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

1.2 For customers with a seat or registered office outside Germany

For customers with a seat or registered office outside Germany, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for services the "International Terms & Conditions for Services"[1] supplemented by "Software Licensing Conditions"[1] and/or
- for consulting services the "General Terms and Conditions for Consulting Services of the Division DF – Germany"[1] and/or
- for other supplies of hard- and software the "International Terms & Conditions for Products"[1] supplemented by "Software Licensing Conditions" [1]

1.3 For customers with master or framework agreement

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

2. Prices

The prices are in € (Euro) ex point of delivery, exclusive of packaging.

The sales tax (value added tax) is not included in the prices. It shall be charged separately at the respective rate according to the applicable statutory legal regulations.

Prices are subject to change without prior notice. We will charge the prices valid at the time of delivery.

To compensate for variations in the price of raw materials (e.g. silver, copper, aluminum, lead, gold, dysprosium and neodym), surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The metal factor of a product indicates the basic official price (for those raw materials concerned) as of which the surcharges on the price of the product are applied, and with what method of calculation.

An exact explanation of the metal factor can be downloaded at:

www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

To calculate the surcharge (except in the cases of dysprosium and neodym), the official price from the day prior to that on which the order was received or the release order was effected is used.

To calculate the surcharge applicable to dysprosium and neodym ("rare earths"), the corresponding three-month basic average price in the quarter prior to that in which the order was received or the release order was effected is used with a one-month buffer (details on the calculation can be found in the explanation of the metal factor).

3. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

[1] The text of the Terms and Conditions of Siemens AG can be downloaded at
www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

© Siemens 2019

4. Export Regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with "ECCN" unequal "N") and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels "AL" and "ECCN" indicated on order confirmations, delivery notes and invoices are authoritative.

Products labeled with "AL" unequal "N" are subject to European / national export authorization. Products without label, with label "AL:N" / "ECCN:N", or label "AL:9X9999" / "ECCN: 9X9999" may require authorization from responsible authorities depending on the final end-use, or the destination.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you must comply with all applicable national and international (re-)export control regulations.

If required for the purpose of conducting export control checks, you (upon request by us) shall promptly provide us with all information pertaining to the particular end customer, final disposition and intended use of goods delivered by us respectively works and services provided by us, as well as to any export control restrictions existing in this relation.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities.


Errors excepted and subject to change without prior notice.

© Siemens 2019

Notes

© Siemens 2019

Easy product selection and ordering: Industry Mall and Interactive Catalog CA 01

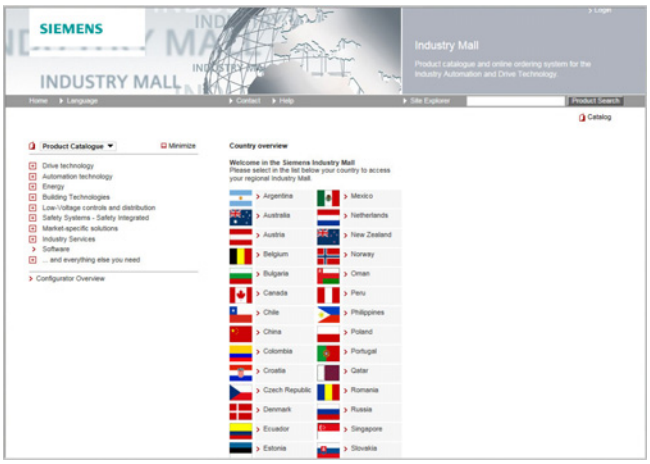

Industry Mall

The Industry Mall is a Siemens AG Internet ordering platform. It provides you with online access to a comprehensive product spectrum that is presented in an informative, well-organized way.

Powerful search functions help you select the required products, while configurators enable you to configure complex product and system components quickly and easily. CAx data are also available for you to use.

Data transfer allows the entire procedure, from selection through ordering to tracking and tracing, to be carried out online. Availability checks, individual customer discounting, and quotation preparation are also possible.

www.siemens.com/industrymall




Interactive Catalog CA 01 – Products for automation and drives

The Interactive Catalog CA 01 combined with the Siemens Industry Mall unites the benefits of offline and online media in one application – the performance of an offline catalog with the availability of a wide range of up-to-date information on the Internet.
Select products and assemble orders using the CA 01, determine the availability of the selected products, and track and trace them via the Industry Mall.

Information and download:
www.siemens.com/automation/ca01

Downloading catalogs

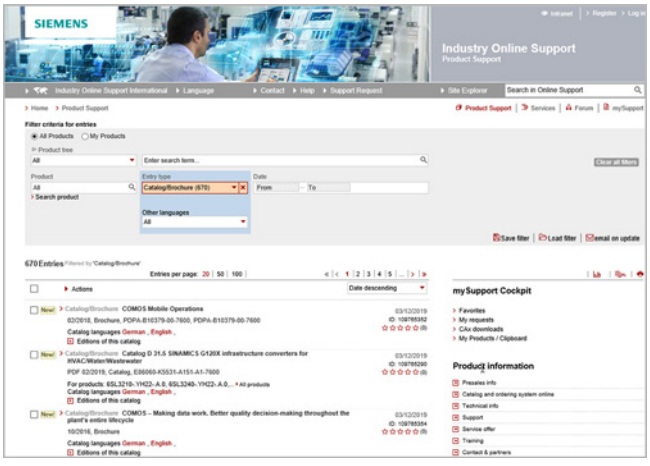

Siemens Industry Online Support

You can download catalogs and brochures in PDF format from Siemens Industry Online Support without having to register.

The filter box makes it possible to perform targeted searches.

www.siemens.com/industry-catalogs

Ordering printed catalogs



Please contact your local Siemens branch if you are interested in ordering printed catalogs.
Addresses can be found at
www.siemens.com/automation-contact

© Siemens 2019

Get more information

Comprehensive information concerning the SIMATIC PCS 7 process control system:
www.siemens.com/simatic-pcs7

Digital Industries
Process Automation
Östliche Rheinbrückenstr. 50
76187 Karlsruhe, Germany

Published by
Siemens

PDF (E86060-K4678-A111-C6-7600)
KG 0619 626 En
© Siemens 2019

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit
https://www.siemens.com/industrialsecurity

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under
https://www.siemens.com/industrialsecurity