


**SIEMENS**  
*Ingenuity for life*

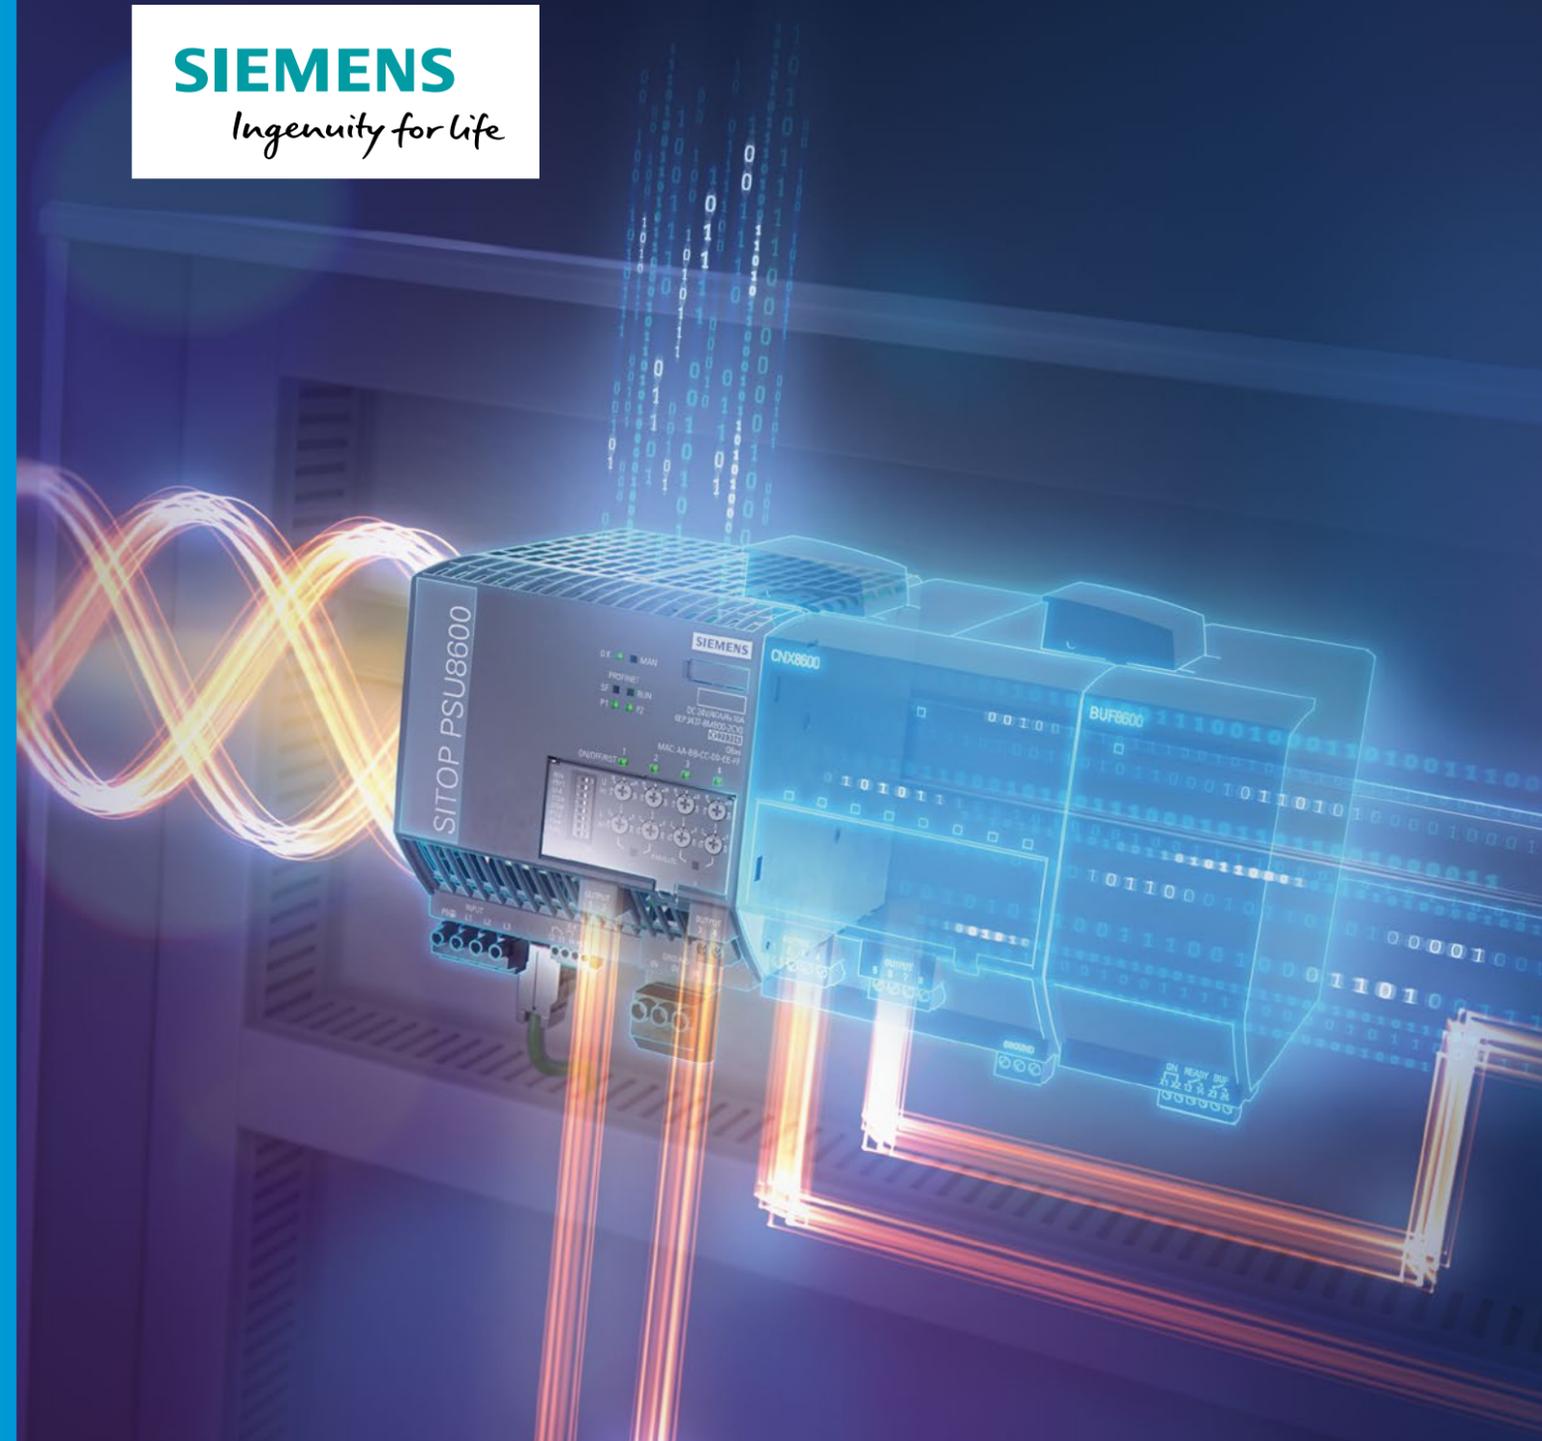

Published by  
Siemens AG

Digital Industries  
Process Automation  
Östliche Rheinbrückenstr. 50  
76187 Karlsruhe, Germany

Article No.: DIPA-B10104-00-7600  
Dispo 10001  
WS 05200.0  
Printed in Germany  
© Siemens 2020

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.


# SITOP PSU8600

Ask you power supply

[siemens.com/sitop-psu8600](https://www.siemens.com/sitop-psu8600)

# SITOP PSU8600 – the power supply system for digitalization and Industrie 4.0

Complex facilities place high demands on the efficiency, flexibility, and reliability of their components. Thanks to its unique functionality, diagnostic capability, modular expandability, full integration in TIA and in many other systems via an OPC UA server, the innovative SITOP PSU8600 power supply system meets all of these needs.

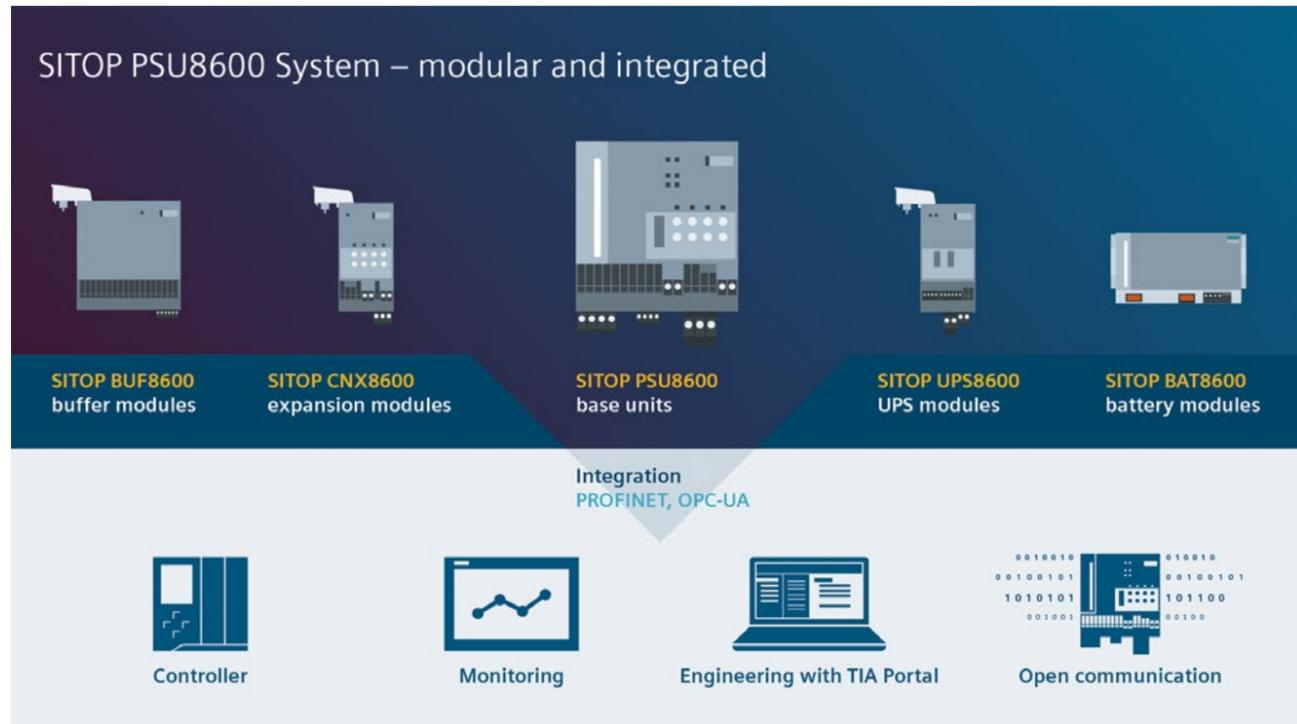

## The SITOP system at a glance

The SITOP power supply system includes the SITOP PSU8600 base units, the SITOP CNX8600 expansion modules, the SITOP BUF8600 buffer modules, and the SITOP UPS8600 UPS module with BAT8600 battery modules. SITOP PSU8600 can be fully integrated into automation landscapes and the Totally Integrated Automation Portal (TIA Portal). Engineering in the TIA Portal is very user-friendly, thanks in part to prefabricated SIMATIC S7 function


blocks for data analysis and free WinCC faceplates for operating and monitoring. The Ethernet/PROFINET interface makes integration in networked machines and systems easy. SITOP PSU8600 also communicates with systems from other manufacturers via the OPC UA interface. In addition to its operating and monitoring processes, the user-friendly SITOP Manager can be used to set parameters. The integrated web server enables remote access.

# SITOP PSU8600 – benefits of the power supply system



### Quick and easy integration into automation

The SITOP PSU8600 power supply system can be seamlessly integrated into the TIA Portal, SIMATIC PCS 7, and WinCC. It can easily be implemented in the automation environment via two industrial PROFINET/Ethernet ports. And multi-vendor data exchange is also possible thanks to the OPC UA open communication interface. In addition to its operating and monitoring processes, the SITOP Manager engineering and diagnostic software can also be used for setting parameters.

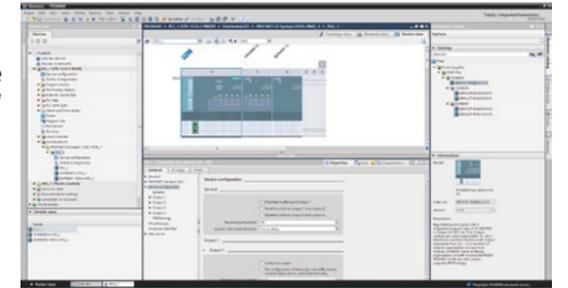

### Extreme flexibility thanks to a varied functionality

The compact base unit of the SITOP PSU8600 power supply system provides one or four individually configurable outputs, which means up to four power supplies in one device. Each output can be flexibly set to 4–28 volts, including dynamically during operation and with selective monitoring for overcurrent.



### Time savings with a modular system

The power supply system can be supplemented with various modules without additional wiring effort using the "System Clip Link" connection system, which makes it possible to add up to 36 outputs or protect against power outages. Both data and power are transferred.




### High plant availability

The comprehensive diagnostic options offered by SITOP PSU8600 provide the basis for predictive maintenance. To prevent a short circuit or overload on a single consumer from causing an outage in the entire plant, all outputs are selectively monitored and individually switched off in the event of failure. Power interruptions lasting from seconds to hours can be bridged and plant downtimes prevented with the aid of suitable buffer and battery modules.

# Power supplies and more

## SITOP Manager

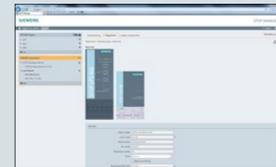

### Commissioning, engineering, and monitoring of SITOP power supply systems

With the SITOP Manager software, all power supply systems in a network can be parameterized and diagnosed using a PC with the Windows 7 or 10 operating system. This is ideal, especially if the system configuration and programming doesn't take place via the TIA Portal or SIMATIC STEP 7. Communication takes place via OPC UA, the open, manufacturer-independent, and Ethernet-based communication standard. Thanks to the web browser-based user interface, the application can also run on mobile devices and automatically adapts to the display size. SITOP Manager makes it easy to parameterize the SITOP PSU8600 power supply system and SITOP uninterruptible power supplies – for example, in order to define output voltages and current thresholds or shut down PCs safely in the event of a power outage.

## TIA Selection Tool – quick, easy, and smart configuration



### Product selection and configurator for automation technology

Thanks to the use of intelligent configurators and selection assistants, the TIA Selection Tool makes error-free configuration possible even without expert knowledge – and is a reliable assistant when it comes to selecting a power supply system, add-on modules, or a DC UPS. After you enter the relevant parameters – and if multiple solutions are possible – an overview is provided in the form of a table that compares several devices. Once you've selected a power supply unit, you can also select the suitable redundancy, selectivity, and DC UPS modules with very little effort. The resulting product configuration can be transferred for further use in different CAD, CAE, and engineering systems (for example, the TIA Portal). With just one click, the selected products are moved to your Industry Mall shopping cart for easy ordering. In addition, the 24 V DC Load View in the TIA Selection Tool makes it easy to choose a power supply system for a project by automatically calculating the power needs of the automation products supplied.

## SITOP PSU8600 basic devices with one or four outputs



### Additional diagnostics and setting options via Industrial Ethernet/PROFINET interface with 2 ports



#### Setting options in the TIA Portal, via STEP 7 or SITOP Manager:

- Switch-on and switch-off of individual outputs for direct control of consumers or to save energy, for example via PROFinergy protocol
- Program-controlled change of the voltage of each output from 4 to 28 volts for the variable supply of consumers such as DC motors (for example in fans or belt drives)
- Threshold below the tripping current for messages for preventive maintenance



#### Diagnostics options in the TIA Portal, via STEP 7 or SITOP Manager:

- Early detection of dynamic, continuous, or recurring overload states with the aid of the latest current values
- Status message for outputs (ON, OFF, overload)
- Outputs can be freely configured for messages for preventive maintenance
- Detection and logging of short-term power and phase failures for the purpose of analyzing mains quality
- Advance warning of the overload of individual outputs, system overload, and excessive temperature
- Acquisition of energy data (current, voltage) for each output to determine possible energy savings

Technical data	1-phase	3-phase			
Output current, outputs	20 A, 4 x 5 A	20 A, 4 x 5 A	40 A, 4 x 10 A	20 A, 1 x 20 A	40 A, 1 x 40 A
Article No.	6EP3336-8MB00-2CY0	6EP3436-8MB00-2CY0	6EP3437-8MB00-2CY0	6EP3436-8SB00-2AY0	6EP3437-8SB00-2AY0
Rated input voltage value/range, frequency	100–240 V AC, 110–220 V DC/AC 85 to 275 V, 93 to 275 V DC, 50/60 Hz	3 400–500 V AC/3 320 to 575 V AC, 50/60 Hz			
Mains buffering	> 20 ms (at 100 V), extendable via buffer modules or UPS module	> 15 ms (at 400 V), extendable via buffer modules and UPS module			
Rated input current value	5.4–2.4 A, 4.8–2.4 A	1.4–1.1 A	2.75–2.2 A	1.4–1.1 A	2.75–2.2 A
Inrush current, required MCB	10–32 A Char. C or slow-acting fuses	< 14 A, 6–16 A Char. C 3-ph. coupled or 3RV2011-1DA10 (setting 3 A) or 3RV2711-1DD10			
EMC	Line harmonics limitation (EN 61000-3-2), radio suppression level (EN 55022) Class B				
Efficiency at rated values, approx.	92%	93%	94%	93%	94%
Output voltage, rated value	24 V DC ± 3%, setting range 4 to 28 V DC				
Setting range threshold value overload protection	0.5 to 5 A	0.5 to 5 A	2 to 10 A	2 to 20 A	4 to 40 A
Output current, overload (extra power)	30 A for 5 s/min	30 A for 5 s/min	60 A for 5 s/min	30 A for 5 s/min	60 A for 5 s/min
Ambient temperature	–25 to +60 °C				
Dimensions (W x H x D) in mm	125 x 125 x 150	125 x 125 x 150	125 x 125 x 150	80 x 125 x 150	125 x 125 x 150
Weight, approx.	2.65 kg	2.0 kg	2.65 kg	1.8 kg	2.65 kg
Certifications	CE, cULus, CB (additional pending)				
	CE, cULus, CB, cCSAus, IECEX, ATEX, cCSAus Class I Div 2, SEMI F47, DNV GL, ABS				

## CNX8600 expansion modules (max. 4)



### Diagnosis and setting options on the modules

#### 1 Status displays on basic devices

- 3-color LED for status of power supply system
- Display for manual or remote operation
- 4 LEDs for PROFINET status

#### 2 Mode selector on basic devices

- Control via IE/PN (settings on device are disabled)
- Prioritized buffering output 1 on power failure, i.e. buffering of the first output for as long as possible, remaining outputs switched off after approx. half of buffering time
- Selectable overload behavior: electronic shutdown or constant current
- On delay between the outputs, also of expansion modules CNX8600: 0 ms, 25 ms, 100 ms, load-optimized
- PSU8600 with 4 outputs: parallel operation of outputs 1 + 2 or 3 + 4; with 1 output: characteristic curve can be switched for symmetrical load distribution in parallel operation
- Approval of web server

## CNX8600 expansion modules

4 x 5 A	4 x 10 A	8 x 2.5 A
6EP3436-8SB00-2AY0	6EP3437-8SB00-2AY0	6EP3436-8MB00-2CY0
Brief description: Distribution of DC supply to additional load feeders and monitoring for overload; selective switch-off of faulty feeders, response threshold can be set individually. A total of 4 modules can be used in the system network.		
97%	97%	97%
24 V DC ± 3%, setting range: 4 to 28 DC V		
0.5 to 5 A	0.5 to 10 A	0.5 to 2.5 A
–25 to +60 °C		
60 x 125 x 150	60 x 125 x 150	100 x 125 x 150
1.15 kg	1.15 kg	1.29 kg
CE, cULus, CB, cCSAus, IECEX, ATEX, cCSAus Class I Div 2, DNV GL, ABS		
CE, cULus, CB, cCSAus, IECEX, ATEX, ABS, DNV GL, NEC Class 2		

## Buffer components BUF8600 and UPS8600 (max. 2)



#### 3 Settings and displays per output (manual operation for commissioning and servicing)

- LED button for ON/OFF/reset with status display
- Output voltage setting: 4 to 28 V DC
- Response threshold setting: See table
- Overload behavior at 101 to 149% of setpoint: switch-off after 5 s
- Overload behavior at over 149%: current limitation to 150% and switch-off after 200 ms
- PSU8600 with 4 outputs: LED displays with parallel operation of outputs 1 + 2, 3 + 4

#### 4 Contacts on basic devices

- Signaling contact (changeover contact) "DC OK"
- Remote reset

#### 5 Status displays on expansion and buffer modules

- 3-color LED

#### 6 Contacts on buffer modules

- Remote ON/OFF (for disabling buffering, e.g. on shutdown of plant)
- Signaling contact (normally open) "Charge status > x %" (can be set via software)
- Signaling contact (normally open) "Buffer mode"

#### 7 Status displays on UPS/battery module

- a) 3-color LED UPS module
- b) 3-color LED battery circuit

#### 8 Mode selector on UPS module

- Charging capacity 120 W/60 W
- Preferred charging mode
- Buffer time limit 1 to 88 min.

#### 9 Contacts on UPS module

- Remote ON/OFF (for disabling buffering)
- Start from the battery (standalone mode)
- Signaling contact (normally open) "Charge status > x %"
- Signaling contact (normally open) "Buffer mode"
- Signaling contact (normally open) "Battery circuit fault"

## Technical data

Type/buffer times with rated current	BUF8600 buffer modules				BAT8600 battery modules	
Article No.	100 ms/40 A	300 ms/40 A	4 s/40 A	10 s/40 A	BAT8600 Pb	BAT8600 LiFePO4
6EP4297-8HB00-0XY0	6EP4297-8HB10-0XY0	6EP4297-8HB00-0XY0	6EP4295-8HB00-0XY0	6EP4295-8HB00-0XY0	6EP4145-8GB00-0XY0	6EP4143-8JB00-0XY0
Brief description: Extension of buffer time on power interruptions. A total of two buffer components (BUF8600, UPS8600) can be used in the system network.						
Storage technology	Electrolytic capacitors (internal)		Double-layer capacitors (internal)		Lead (Pb), 380 Wh, 48 V	Lithium-iron-phosphate (LiFePO4), 264 Wh, 48 V
Buffer time at 120 W (24 V/5 A)	800 ms	2.4 s	40 s	80 s	2 h 4 min	1 h 56 min
Buffer time at 240 W (24 V/10 A)	400 ms	1.2 s	20 s	40 s	57 min	60 min
Buffer time at 480 W (24 V/20 A)	200 ms	600 ms	10 s	20 s	25 min	29 min
Buffer time at 960 W (24 V/40 A)	100 ms	300 ms	4 s	10 s	10 min	14 min
Typical charging time	19 s	54 s	5 min	10 min	2 h 45 min (120 W)	2 h 40 min (120 W)
Output current, overload (extra power)	60 A for 5 s/min	60 A for 5 s/min	40 A	60 A for 5 s/min	60 A for 5 s/min via UPS8600	
Ambient temperature	–25 to +60 °C					
Dimensions (W x H x D) in mm	60 x 125 x 150	125 x 125 x 150	60 x 125 x 150	125 x 125 x 150	322 x 187 x 110 (for wall mounting)	
Weight, approx.	1.33 kg	2.26 kg	1.25 kg	1.95 kg	13 kg	6.5 kg
Certifications	CE, cULus, CB, cCSAus, IECEX, ATEX, cCSAus Class I Div 2, SEMI F47, DNV GL, ABS					
	CE, cULus, CB, cCSAus, IECEX, ATEX, pending: DNV GL and ABS					

## Technical data

Type	BUF8600 buffer modules
Article No.	6EP4197-8AB00-0XY0
Brief description:	Buffering in case of power failures. The Energy Storage Link enables diagnostics and temperature-controlled charging to maximize the service life of the battery modules. A total of two buffer components (BUF8600, UPS8600) can be used in the system network.
External energy storage	BAT8600 battery module
Charging capacity	120 W, 60 W (switchable)
Buffer power	960 W (40 A at 24 V)
Ambient temperature	–25 to +60 °C
Dimensions (W x H x D) in mm	60 x 125 x 150
Weight, approx.	0.9 kg
Certifications	CE, cULus, CB, cCSAus, IECEX, ATEX, pending: DNV GL, and ABS